
INTEC
LIGHT





BRIGHT SOLUTIONS

iN.TEC LIGHT

Quando la ricerca trova risposte alle esigenze, vecchie e nuove.
Quando la tecnologia risolve problemi.
Quando tecnica ed estetica si fondono armoniosamente.

Lì, nascono le soluzioni più brillanti.

When research finds solutions to needs, both old and new.
When technology solves problems.
When technology and aesthetic appeal harmoniously merge.

That's when the bright solutions are born.

faneurope

STORIA / HISTORY



Un'evoluzione lunga oltre 100 anni

La nostra storia comincia a Napoli agli inizi del '900. È una storia di impegno, di evoluzione, di coraggio. Una storia che corre lungo il filo del tempo intrecciandosi costantemente con quella del vetro.
Generazione dopo generazione, **FAN Europe Lighting** evolve, cambia forma, sviluppa la sua idea di prodotto e di servizio, con l'obiettivo di diventare un punto di riferimento per tutto il settore dell'illuminazione.

La nostra azienda, oggi

Oggi **FAN Europe Lighting** è una grande squadra di persone e di risorse. Alla ricerca dell'eccellenza nella qualità dei prodotti, abbiniamo un ecosistema di servizi e garanzie che abbiamo sviluppato e strutturato a misura di esigenza e di cliente.
La nostra italian heritage non ci fa dimenticare l'importanza dell'originalità e della cura nel prodotto.
La nostra voglia di crescere ci spinge ad essere sempre al passo con la luce di oggi e di domani, una luce sempre più smart, sempre più green, sempre in evoluzione.

An evolution spanning more than 100 years

Our history began in Naples in the early 1900s. It's a history of commitment, evolution and courage. A history that follows the thread of time, constantly intertwining with that of glass.
Generation after generation, **FAN Europe Lighting** has evolved, changing shape, developing its concept of products and services to become a benchmark for the entire lighting industry.

Our company, today

Today, **FAN Europe Lighting** is a vast team of people and resources. In addition to pursuing excellence in product quality, we combine an ecosystem of services and guarantees, which we have developed and tailored to our customers' needs.
Our Italian heritage does not allow us to forget the importance of originality and product care. Our desire to grow motivates us to always keep up with the lighting of today and tomorrow, lighting that is always smarter, more eco-friendly and evolving.

UNA SINERGIA DI RISORSE E GARANZIE / A SYNERGY OF RESOURCES AND GUARANTEES

Un'assistenza sempre attiva

Noi ci siamo, sempre!
Con disponibilità, professionalità e un obiettivo chiaro: semplificare la vita dei nostri clienti. È una promessa che facciamo a chi non ci conosce. E' una garanzia consolidata per chi lavora con noi da anni!

We are always here for you!
With our helpfulness, professionalism and a clear goal: to make life easier for our customers. It's a promise we make to those who don't know us. It's an established guarantee for those who have worked with us for years!

Assistance always available

Massima disponibilità di prodotti

Abbiamo a disposizione una delle più vaste gamme di articoli sul mercato ma riusciamo ad assicurare in ogni momento il 98% di disponibilità. Garantiamo che il restante 2% torni disponibile in 30 giorni!

We have one of the widest ranges of items on the market, but we can guarantee 98% availability at all times. We guarantee that the remaining 2% will be available in 30 days!

Maximum product availability

Spedizioni Veloci e sicure

Abbiamo sviluppato negli anni un sistema logistico efficiente in grado di garantire consegne in 24h per l'Italia e 48 per l'Europa, assicurando la massima cura nel trasporto. Un team multilingua è inoltre al servizio dei clienti per offrire supporto e assistenza.

Over the years, we have developed an efficient logistics system that guarantees deliveries within 24h in Italy and 48h in Europe, ensuring maximum care during transport.
Our multilingual team also provides customers with support and assistance.

Quick and safe shipments

La qualità, al primo posto

Componenti di qualità, controlli multipli, collaudi in fase di realizzazione: per la qualità non scendiamo mai a compromessi. Grazie a un team di esperti riusciamo a garantire la tecnologia più avanzata, finiture ogni anno più curate e nuovi design a prova di tempo!

Quality components, multiple checks, testing during the manufacturing process: we never compromise on quality. With our team of experts, we can guarantee cutting-edge technology, new improved finishes every year and new designs that will stand the test of time!

Quality comes first

La gamma più completa di prodotti

Siamo una delle poche aziende al mondo a coprire così tanti settori di destinazione: dall'illuminazione industriale al prodotto decorativo. Siamo "appassionati ricercatori" e ogni anno arricchiamo la gamma con collezioni di tendenza e le innovazioni più efficienti in materia di tecnologia e sostenibilità.

We are one of the few companies in the world to cover so many target sectors: from industrial lighting to decor products. As "passionate researchers" every year we enrich our range with trend-setting collections and the most efficient innovations in terms of technology and sustainability.

The most comprehensive range of products

Illuminazione su misura

L'evoluzione stilistica e tecnologica dell'illuminazione ha indirizzato la ricerca illuminotecnica verso progetti di illuminazione su misura, in cui i corpi illuminanti sono strumenti al servizio del progetto architettonico. Questa fase evolutiva ci ha spinto ad ampliare la nostra divisione Project ed Illuminotecnica dedicata ai progetti su misura. La divisione esegue già servizi di progettazione, realizzazione prototipi, test e controllo di produzione per ogni prodotto presente sul nostro catalogo.
Quando i prodotti non incontrano le esigenze del cliente, realizziamo prodotti "customizzati" su misura per le esigenze del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico. Grazie a strumenti informatici e software di calcolo fotometrico possiamo fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.

The stylistic and technological evolution of lighting has steered lighting research towards custom-made lighting projects, in which luminaires are used to support architectural design.
This evolutionary phase encouraged us to expand our Project and Lighting department focusing on custom-made projects. The department already provides design, prototyping, testing and production monitoring services for all the products in our catalogue. When products don't meet the customer's needs, we make bespoke products to meet project requirements and fully enhance lighting design contexts. Using computer tools and photometric calculation software, we can provide photometric calculations for each new product thereby appropriately developing the lighting design project.

Custom-made lighting

SOSTENIAMO IL GREEN / WE ARE ECO-FRIENDLY

Abbiamo eliminato la plastica dai nostri packaging. Selezioniamo e prediligiamo materiali provenienti da risorse sostenibili. Ricerchiamo le tecnologie con miglior efficienza energetica abbinati a sistemi smart in grado di ridurre ulteriormente i consumi. Questi e molti altri sono i nostri impegni a sostegno della sostenibilità!

We no longer use plastic in our packaging. We select and prefer materials from sustainable resources. We research the most energy-efficient technologies combined with smart systems that further reduce consumption. All this, and much more, shows our commitment to sustainability!



GUIDA ALLA LETTURA DELLE TABELLE /
GUIDE TO READING THE TABLES

Ogni collezione è accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto
Every collection will be distinguished by a symbol for intended use

Nome e caratteristiche collezione
Collection name and characteristics



Certificazione e normative
Certification and regulations

Caratteristiche prodotto
Product characteristics

Codice prodotto e codice ean
Product code and EAN code

Potenza Power
Per i prodotti senza LED integrato, dati attacco lampadina con potenza massima certificata /
For the products without built-in LED max lamp holder power as required by CE certificate

Classe energetica
Energy class
ove esistente / where existing

Temperatura colore LED espressa in Kelvin + lumen
Colour temperature in Kelvin + lumen
ove esistente / where existing

Variante colore
Colour variance
ove esistente / where existing

Accessori
Accessories
ove esistente / where existing

Fotometria del prodotto
Photometric curve
ove esistente / where existing

indoor use
uso domestico / domestic use

outdoor use
esterno / outdoor use

accommodation areas use
strutture ricettive / accommodation areas use

office use
uffici / office use

commercial areas use
aree commerciali / commercial areas

urban areas use
aree urbane / urban use

industrial areas use
aree industriali / industrial use

bathroom use
ambiente bagno / bathroom use

APP INTEC
GOOD SOLUTION FOR YOUR SMART LIFE!

EASY DOMOTICA | WI-FI SMART INTEC | SMART INTEC BLUETOOTH SIG MESH

Sistemi di controllo per i nostri prodotti SMART / Control system easy installation




Smart Intec WIFI



RF 2.4G control system



Alexa e Google Home voice control

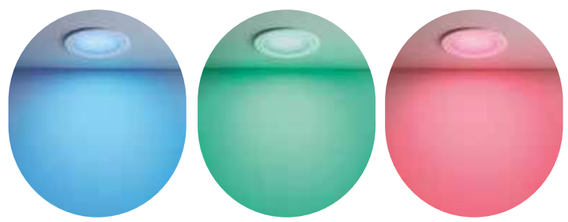

EASY DOMOTICA Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless. I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Buetooth. Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

EASY DOMOTICA With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.
The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups low voltage products that can be connected with constant voltage power supply in parallel connection system and are characterized by extreme flexibility and modularity as they are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units. The control units can be controlled by wifi, bluetooth devices or can be controlled via a wall pad or remote control.

SMART INTEC

È possibile controllare da remoto tutti gli apparecchi luminosi, con le APP INTEC e SMART LIFE / All luminaires can be remotely controlled with INTEC and SMART LIFE APPs.

Scarica l'app Smart Intec su / Download App Smart Intec on:

Download on the App Store | GET IT ON Google Play

SMART INTEC | SMART LIFE | Powered by tuya

APP INTEC WI-FI Ogni momento della vita quotidiana richiede la giusta luce. Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-fi e Bluetooth. Tramite la **nostra app Smart INTEC** è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene. Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step. Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

APP INTEC WI-FI Every moment of everyday life require the right light. Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection. **With our APP Smart Intec** it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions. To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection. Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App. The smart lamps can be controlled also with Wifi voice control devices.

SMART INTEC Bluetooth Sig Mesh La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligente più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo. La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google. Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornendo un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.

SMART INTEC Bluetooth Sig Mesh Bluetooth mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices. Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m.
The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls. For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs. In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.

CARATTERISTICHE PRODOTTO / PRODUCT FEATURES

LED integrato SMD /
Built-in SMD LED

LED integrato COB /
Built-in COB LED

Prodotto ad alta efficienza luminosa /
High luminous efficiency product

Prodotto RGB /
RGB product

Prodotto CCT (bianco dinamico) /
Adjustable white

Attacco sorgente /
Light source

Misura lampadina consigliata /
Recommended bulb size

Selectable color temperature (3000K 4000K 6000K)
Interruttore interno per la personalizzazione dei Kelvin /
Internal switch for customization of Kelvin

Selectable color temperature (3000K 4000K)
Interruttore interno per la personalizzazione dei Kelvin /
Internal switch for customization of Kelvin

3 step CCT
Regolazione luce calda, naturale, fredda
Memory function tramite interruttore a parete /
Warm, natural and cold light control
Memory function by means of a wall switch

Interruttore touch integrato /
Built-in touch switch

Luce emergenza /
Emergency light

Prodotto ad energia solare /
Solar energy product

Calpestabile /
Walkable

max 2000kg

Prodotto indoor e outdoor /
Indoor e outdoor product

Connessione bluetooth /
Bluetooth connection

Touch dimmer
Intensità di luce regolabile /
Dimmable light intensity

Dimming
Intensità di luce regolabile a taglio di fase /
Adjustable light intensity by phase cut-out dimmer

3 step DIM
I prodotti 3 step dimmer permettono di regolare l'intensità luminosa utilizzando l'interruttore di casa /
3 step dimming function: modulation of light intensity by wall switch

Touch step dimming
Interruttore touch
3 luminosità /
Step - 3 step brightness touch switch

Gesso verniciabile /
Gypsun paintable

Cemento /
Concrete

Prodotto gallegiante /
Floating product

Prodotto anticorrosione /
Corrosion-free

Prodotto UGR /
Unified glare rating

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30: più basso è il valore, minore è l'abbagliamento.**

UGR is an international unified data, developped by CIE (commission international de l'Enclairage) for the avaluation of the glaning degree of the light sources. The European norme for the lighting of te specifical working place **UNI-EN 12464-1** requires a value UGR for every application, included between **10 and 30: lower is the value, lower is the anti glare ratee.**

Indice resa cromatica /
Colour rendering index

Incassi: direzione fascio di luce assimetrica /
Recessed lamps: description of asymmetrical light emission type

Plafoniere: direzione fascio di luce /
Ceiling lamps: description of light emission type

Applique: direzione fascio di luce /
Wall lamps: description of light emission type

Incassi e segnapassi: direzione fascio di luce /
Inground and walk lights: description of light emission type

GRADI DI PROTEZIONE / IP PROTECTION RATE



Classe IP / IP Class

Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono IP20.
All items in the catalogue without IP rating specific are IP20.



Potezione da corpi solidi
Protection against solid bodies

0
Nessuna protezione /
No protection

1
Protetto contro corpi solidi di dimensioni superiori a 50 mm /
Protected against solid bodies larger than 50 mm

2
Protetto contro corpi solidi di dimensioni superiori a 12 mm /
Protected against solid bodies larger than 12 mm

3
Protetto contro corpi solidi di dimensioni superiori a 2,5 mm /
Protected against solid bodies larger than 2,5 mm

4
Protetto contro corpi solidi di dimensioni superiori a 1 mm /
Protected against solid bodies larger than 1 mm

5
Protetto dalla polvere senza deposito dannoso /
Protected against dust no harmful deposit

6
Completamente protetto dalla polvere /
Completely protected against dust

Potezione da liquidi
Protection against liquids

0
Nessuna protezione /
No protection

1
Protetto contro le gocce d'acqua a caduta verticale /
Protected against vertically-falling drops of water

2
Protetto contro le gocce d'acqua che cadono fino a 15° dalla verticale /
Protected against drops of water falling at up to 15° from the vertical

3
Protetto contro le gocce d'acqua che cadono fino a 60° dalla verticale /
Protected against drops of water falling at up to 60° from the vertical

4
Protetto contro le gocce d'acqua da tutte le direzioni /
Protected against projections of water from all directions

5
Protetto da getti d'acqua da tutte le direzioni /
Protected against jets of water from all directions

6
Protetto da getti d'acqua con una forte forza d'impatto /
Protected against jets of water of similar force heavy seas

7
Protetto dagli effetti dell' immersione /
Protected against the effects of immersion

8
Protetto contro gli effetti prolungati dell'immersione sotto pressione /
Protected against pro-longed the effects of immersion under pressure



Classe IK / IK Class

Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni.
Degrees of protection for enclosures for electrical equipment against external mechanical impacts.

IK	Energia d'impatto (in Joules) / Impact energy (in Joules)
00	0
01	0,15
02	0,2
03	0,35
04	0,5
05	0,7
06	1
07	2
08	5
09	10
10	20

LEGENDA SIMBOLI / LEGEND OF SYMBOLS

Classe isolamento elettrico / Appliance class

Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.
The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

I	Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato / These appliance must have their chassis connected to electrical earth by a separate earth conductor
II	Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra / These appliance are designed in such a way that it does not require a safety connection to electrical earth
III	Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata di sicurezza / These appliance are designed to be supplied from a separated/safety extra-low voltage power source

Certificazione e normative / Certification and regulations

Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea / All our products comply with CE norms and current European standards

EMC - Direttiva Europea sulla compatibilità elettromagnetica / EMC - European electromagnetic compatibility directive

Prodotto dimmerabile / Product dimmable

Prodotto non dimmerabile / Product not dimmable

DALI - Digital Addressable Lighting Interface
Sistema di controllo domotico della luce / DALI - Digital Addressable Lighting Interface
Domotic lightingh control system

Dimensione foro quadrato per incasso a soffitto / Square cut-out size for ceiling recessed lamps

Dimensione foro rotondo per incasso a soffitto / Round cut-out size for ceiling recessed lamps

Dimensione foro quadrato per incasso a parete / Square cut-out size for wall recessed lamps

Dimensione foro rotondo per incasso a parete / Round cut-out size for wall recessed lamps

INDICE PER CATEGORIE / INDEX BY CATEGORY

Indoor:

033 SISTEMA BINARI / TRACK LIGHTS

117 INCASSI / RECESSED LAMPS

221 SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM

253 APPLIQUE E PLAFONIERE / WALL LAMP AND CEILING LAMPS

373 SPOT E FARETTI / SPOT LIGHTS

393 SOTTOPENSILI E BARRE LED / CABINETS AND LEDBARS

419 PROFILI E STRIP LED / PROFILES AND STRIP LED

Emergency:

461 LAMPADE D'EMERGENZA / EMERGENCY LAMPS

Outdoor:

471 APPLIQUE / WALL LAMPS

559 PLAFONIERE / CEILING LAMPS

591 APPLIQUE, SOSPENSIONI E PALETTI CORRELATI / WALL, SUSPENSION AND FLOOR LAMPS COMBINED

695 INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

733 SOLARI / SOLAR LAMPS

751 PROIETTORI / FLOOD LIGHTS

781 STRADALI / STREET LIGHTS

Industrial:

793 HIGH BAY & TRI-PROOF

Decorative:

805 EASY DOMOTIC 24V /

815 LUCI DECORATIVE TECNICHE DMX / DMX TECHNICAL DECORATION LIGHTING

Accessories:

835 COMPONENTISTICA / LIGHTING COMPONENTS

Indoor:
SISTEMA BINARI /
TRACK LIGHTS


SHOT
46


GOAL
47


FANS
48


TEMA
50


LINE
52


SLIDE
54


TUBO
55



CYMBAL
56


DA VINCI
accessories
58-63


BERNINI LINE
66


BERNINI FANS
68

BERNINI TUBO
69


BERNINI
accessories
70


JET
76


EXPLORER
78


KONE
80-83


KONE FOOD
84


ACTION
86


ROCKET
88


ROCKET applique
89


SQUIB
90



EXPRESS
91


OBOE
92



CLOCK
93


MAXWELL
94


HELP TRACK
96


TRACK
accessories
98-105


BUSBAR
110-113


BUSBAR
accessories
114

Indoor:
INCASSI /
RECESSED LAMPS


APOLLO
118-121


OUTSIDER
122-125


DELTA INC
126


LYBRA
128


FIBRA OTTICA
129


STARLIGHT
130


STARLIGHT30
130


ASSO KIT 3
132


ASSO
134


DOT
136


DAMA
137


HYDE
138


SINKRO
140


ELITE
142


QUARK
144


XANTO
146-149


XANTO-INT
150


MACK
152


TRON
154


BLINK-EYES
156


SLIM-INT
158


SLIM
160


SLIM CCT
162


FLAP CCT
163


FLAP
164


TOTAL
166


PLUS
168


SNIPER
170


POLARIS
172


ORIONE
173


FUSION
174


BLITZ
176


NEMO
177


RAINBOW
178



ZENIT
179


QUANTUM
180


HORUS
182


MATRIX
184-187


TUBEX
188


STARRY
190


GHOST
191


VULKAN
192


ENTITY
193


GOBLET
194


SHADOW
195


PHANTOM
196


SPETTRO
197


MINI
198



HIVE
199


SPIRIT
200


SNOW
201


MORGANA
202


SENSO
203


BRICK
204


EVA
205


SKILIFT
206


ARIEL
208


ANIMA
210


STENOS
212


VIPER
214


AYRIS
216


REFLEX
218

Indoor:
SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE /
MULTI-FUNCTION LIGHTING SYSTEM


SEGMENTO
222-225


METRO
226


EUCLID
227


BUILD
228-231


PANEL BK
233


PANEL SCH
233


PANEL 5Y
235


PANEL 60×120
236


PANEL UGR
238


PANEL IP65
239


PANEL SENS
241


PANEL DIM
241


PANEL CCT
243


PANEL RGBW
243


PANEL FR
244


PANEL EDG
244


PANEL SM
245


PANEL BIS
246


PANEL
accessories
248-249


PANEL DJ
250

Indoor:
APPLIQUE E PLAFONIERE /
WALL LAMPS AND CEILING LAMPS


KLIO
254-257


MIG
258


GENESIS
260


TOWN
262


XICO
264


VORTEX
266


ATHEN
268


SPACE
270


SPACE S
271


BANJIE
272-275


FOSTER
276-279


HAPIS
280


LIVING
282


GABRIEL
284


ROCK
286


ALOHA
288


ORTISEI
290


ROLLER
292


MOOD
294


SOUL
295


SPIRAL
296


ORIGAMI
297


LEIRON
298


MONTBLANC
299


CLEPSYDRA
300


SHINE
302


ASTRON
304


CERVINIA
304


SCOTT
305


RUBIK
306


MOSES
308


PIROETTE
310


CORTINA
312


CANDIDA
314


FLOW
316


GATSBY
318


STONE
319


SANTORINI
320


MYKONOS
321


SOLEIL
322

OLYMPIA
323

ABEL
324

SESTRIERE
325

MORITZ
326

LIVIGNO
328

ALMA
330

AILERON
332

SIGMA
334

ANDROMEDA
334

ATLAS
335

OMEGA
335

LAMBDA
336

ALCOR
337

GRADO
338

KITE
339

MUSTANG
340

TWILIGHT
342

OMNIA
343

BOREA
349

SKYRON
349

ALISEO
351

FOEHN
351

GRECALE
344

LEVANTE
347

SCIROCCO
347

ETESIA
352

PONENTE
353

ESPERO
355

NASHI
355

MOON
356

MOON INT
356

STREAM
358

DOMO
360

BLASTER
362

CRUISE
363

LANCER
364

SACS
366

RIVA
367

AQA
368

SCARAB
369

WALLY
369

F1
370

ROBY
370

Q1
371

Indoor:
SPOT E FARETTI /
SPOT LIGHTS

ZERO
374

PUNTO
376

TECHNO
378-381

SUNNY
382

MIAMI
384

COOPER
386

CADILLAC
388

MITO
388

CARRERA
390

DOUBLEU
390

Indoor:
SOTTOPENSILI E BARRE LED /
CABINETS AND LEDBARS

UNIX
394-397

T8
398

BATTEN
400

HABILIS
402

T5
404

MOVIE
406

LINE
408

ZAK
410

GTO
412

AURIKA
412

BLAM
413

CLOSET
414

TRIGGER
414

SHELF
415


SONAR
416

YOUNG
416

VISTA
417

Indoor:
PROFILI E STRIP LED /
PROFILES AND STRIP LED


PROFILO GORIZIA **421**


PROFILO EDGE **421**


PROFILO RIDGE **423**


PROFILO TRIM **423**



PROFILO MOP **423**


PROFILO GASH **423**


PROFILO STEPWAY **425**


PROFILO DRIVEWAY **425**


PROFILO BERLINO **426**


PROFILO ROMA **427**


PROFILO MICRO **429**


PROFILO INCRO **429**


PROFILO LOOP **431**


PROFILO TUBE **431**


PROFILO DORIK **432**


PROFILO IONIK **432**


PROFILO NEWYORK **433**


PROFILO CAMELOT **434**


PROFILO ULTRA **434**


PROFILO LINEA **435**


PROFILO MILANO **435**


PROFILO DUAL **436**


PROFILO VEIL **436**


PROFILO PIANO **436**


STRIP24V COB **440**


STRIP24V COB IP67 **440**


STRIPLED CC30 **441**


STRIP24V 2835 3D **441**


STRIP24V 2835 60 **442**


STRIP24V 2835 IP67 60 **442**


STRIP24V SLIM **443**


STRIP24V 2835 120 **443**


STRIP24V 2835 IP68 120 **444**


STRIP24V 2835 CCT **444**



STRIP24V 2835 240 **445**


STRIP24V 5050 60 **445**


STRIP24V 5050 IP67-60 **446**


STRIPLED CC15 RGB **446**


STRIP24V 5050 RGB **447**


STRIP24V 5050 RGB IP67 **447**

STRIP24V 5050 RGBW **448**

STRIP24V 5050 RGBW IP68 **448**

STRIP24V 5050 3D RGBW **449**

STRIP24V 5050 RGB CCT **450**

STRIP24V 3838 168 RGB **450**

STRIP24V 5050 RGBW INT **452**

STRIP24V 2835 INT **453**

STRIP24V 2835 KIT **455**

STRIP24V 5050 RGBW KIT **455**

NEON FLEX **457**

LED INSIGN LENS **458**

LED INSIGN **458**

STRIP SURROUND **459**

STRIP SURROUND 2M **459**

Indoor:
LAMPADE D'EMERGENZA /
EMERGENCY LAMPS

LED-ETERNA **463**

HELP INC **464**

HELP TRACK **465**

HELP EXIT **466**

BOLT HELP **467**

HELP 503 **468**

HELP 511 **469**

Outdoor:
APPLIQUE /
WALL LAMPS

COMPASS **472**

COMPACT **474**

DETROIT **475**

AMON **476**

ZODIAC **478**

STEALTH **480**

MERCURY **482**

GAMMA **483**

MIURA **484**

TUNNEL **485**

VEYRON **486**

BIOME **488**

GOLF **490**

POLO **492**

RAY **494**

TWIN **496-499**

DUBAI **500**

WEISS **502**

BORDER **504**

LUXON **506**

GRIS **508**

AGERA **510**

BOXTER **512**

BEETLE **514**

RIBBON **516**

LASER **518**

ALFA **520-523**

DELTA **524**

GHIBLI **526**

PARKER **528-531**

PORTLAND **532**

OAKLAND **533**

JUMP **534**

ONE **536**

QUBO **538**

TUCSON **540**

HURACAN **542**

SEATTLE **543**

AUSTIN **544**

BOSTON **546**

ATLANTA **547**

DENVER **547**

MONDRIAN **548**

GAETA **549**

GRUBB **550**

AKRON **551**

PEG **552**

TOGO **554-557**

Outdoor:
PLAFONIERE /
CEILING LAMPS


ZOOM
560


TUTOR
562


VERTIGO
564


CITIZEN
566


ISCHIA
568



CAPRI
569


SENSITIVE
570


EXTRA
572


SHELLY
574-577



EVER Q
578


EVER LP
580


EVER XL
582


EVER XL
582


PICNIC INT
584


PICNIC
586-587


PICNIC COLOR
588

Outdoor:
APPLIQUE SOSPENSIONI E PALETTI CORRELATI /
WALL SUSPENSION AND FLOOR LAMPS COMBINED


POLLY
592-597


WIZARD
598


WAMI
600


DISCOVERY
602-605


IDEM
606


REVERSE
608


SINTESI
610


ALYSON
612


BITT
614


NISMO
616


STATION
618


UNDERWOOD
620


TOKYO
622-625


DROP
626


ETNA
628


MASAI
630


PERRET
631


JAMMIN
632


BRIO
634


DRINK
636


COCKTAIL
637


CLIMAX
640


OBERON
642


GECO DJ
644


GECO LED
646


suspension lamp
GECO E27
650


GECO E27
652


floor lamp
GECO E27
654-655


solar
GECO LED
656


MANDALA
658


YORK
660


MIRAGE
662


SKITTLE
664


ORBIT
666


PRISMA
668


CLOE
670


MEGAN
674


ROMA
676


MILANO
680


FIRENZE
682


SANTIAGO
684


VENEZIA
688


PAVIA
690


BRIGHTMAX
692

Outdoor:
INCASSI E SEGNAPASSI /
INGROUND AND WALK LIGHTS


BARRET
696


SUBWAY
697


RIDER
698


RIDER RGB
699


RIDER DIR.
700


IMPACT
701


STEP
702


WALK
704-707


HUMMER
708


DRIVE
710


ELMO
712


GROUND
714


ONYX
716


STRATOS
718


SLAB
720


BREEN
722


SMILE
724


BOLT
726


STEPLIGHT
728


SHELBY
730

Outdoor:
SOLARI /
SOLAR LAMPS


KIOTO
734


ENYA
735


TED
736


ALBERT
737


COSMO
738


COSMO SOLAR
739


ELIOS
740


EOS
741


OPEN
742


SKYP
743


ARGO
745


SHIVA
746


ULYSSE
747


ATHOS SOLAR
748

Outdoor:
PROIETTORI /
FLOOD LIGHTS


VYSOR **752**


BANNER **754**


SAT **756**


KRONOS **758**


ELIOS **760**


ELIOS S **762**


ELIOS P **763**


ATHOS **764**


PLUTONE **766**


PLUTONE S **768**


PLUTONE P **769**


TAURUS **770**


SENSORS **772-773**


GIOVE **774**


MASTER **776**


ENERGY **778**

Outdoor:
STRADALI /
STREET LIGHTS


INVICTUS **782**


IPERION **784**


FEBO **785**


STREETWAY **786**


HIGHWAY **788**


POLIS **790**

Industrial:
HIGH BAY & TRI-PROOF


STARGATE XP **794**


ATLANTIC **795**


SENSORS **796-797**


NAUTILUS **798**


ARTIC **800**


OCEAN **801**


CONCORDE **802**


SUPERIA **803**

Decorative:
EASY DOMOTIC 24V


XANTO-RF **808**


PANEL **809**


STRIP24V 5050 RGBW **810**


STRIP24V 5050 RGBW IP68 **810**


TARGET **811**



SPRINT **812**


RUNNER **813**


Decorative:
LUCI DECORATIVE TECNICHE DMX /
DMX TECHNICAL DECORATION LIGHTING


RAYS **816**


WALLWASHER **818**


IRIDE **820**


IRIDE R **822**


NEPTUNE **824**


CROWN **825**


TREVIS **826**


PAR56 **828**


PELPS **829**


CONTROLLER **830-833**

Accessories:
COMPONENTISTICA /
LIGHTING COMPONENTS


ACCESSORIES **836**


DRIVER MINI-LT **837**


POWER SUPPLY **838-840**


DRIVER LPHC-LPH-LCM **841**


DRIVER HLG **841**


DRIVER MELG-LPV-XLG **842,843**


DRIVER PWM **843**


DRIVER HDR-NDR-SDR **844**


DIMMER **845**


EMERGENCY DRIVER **845**


DRIVER **846**


DIMMER **847**


POWER SUPPLY **847**


REMOTE CONTROL **848-851**


CLAY **852-853**


LAMPHOLDERS ADAPTERS **854-857**


SMART INTEC **858-859**

INDICE ALFABETICO / ALPHABETICAL INDEX

articolo / article	pagina / page
ABEL	324
ACTION	86
AGERA	510
AILERON	332
AKRON	551
ALBERT	737
ALCOR	337
ALFA	520-523
ALISEO	347
ALMA	330
ALOHA	288
ALYSON	612
AMON	476
AMPLIFIER	851
ANDROMEDA	334
ANIMA	210
APOLLO	118-121
AQA	368
ARGO	745
ARIEL	208
ARTIC	800
ASSO	134
ASSO KIT 3	132
ASTRON	303
ATHEN	268
ATHOS	764
ATHOS SOLAR	748
ATLANTA	547
ATLANTIC	795
ATLAS	335
AURIKA	412
AUSTIN	544
AYRIS	216
BANJIE	272-275
BANNER	754
BARRET	696
BATTEN	400
BEETLE	514
BERNINI Accessories	70-71

articolo / article	pagina / page
BERNINI FANS	68
BERNINI LINE	66
BERNINI Project 48V	64-65
BERNINI TUBO	69
BIOME	488
BITT	614
BLAM	413
BLASTER	362
BLINK-EYES	156
BLITZ	176
BOLT	726
BOLT HELP	467
BORDER	504
BOREA	345
BOSTON	546
BOXTER	512
BREEN	723
BRICK	204
BRIGHTMAX	692
BRIO	634
BUILD	228-231
BUSBAR	110-113
BUSBAR Accessories	114-115
BUSBAR Trunking system	106-109
CADILLAC	388
CANDIDA	314
CAPRI	569
CARRERA	390
CERVINIA	304
CITIZEN	566
CLAY	852-853
CLEPSYDRA	300
CLIMAX	640
CLOCK	93
CLOE	670
CLOSET	414
COCKTAIL	637

articolo / article	pagina / page
COMPACT	474
COMPASS	472
CONCORDE	802
CONTROLLER	830-833
COOPER	386
CORTINA	312
COSMO	738-739
CROWN	825
CRUISE	363
CYMBAL	57
DAMA	137
DA VINCI Accessories	58-63
DA VINCI Project 48V	35-45
DELTA	524
DELTA INC	126
DENVER	547
DETROIT	475
DIMMER	845, 847
DISCOVERY	602-605
DOMO	360
DOT	136
DOUBLEU	390
DRINK	636
DRIVE	710
DRIVER	837, 841-846
DROP	626
DUBAI	500
ELIOS	760-763
ELIOS SOLAR	740
ELITE	142
ELMO	712
ENERGY	778
ENTITY	193
ENYA	735
EOS	741
ESPERO	355
ETERNA	462
ETESIA	352

articolo / article	pagina / page
ETNA	628
EUCLID	227
EVA	205
EVER	578-581
EVER XL	582
EXPLORER	78
EXPRESS	91
EXTRA	572
F1	370
FANS	48
FEBO	785
FIBRA OTTICA	129
FIRENZE	682
FLAP	164
FLAP CCT	163
FLOW	316
FOEHN	347
FOSTER	276-279
FUSION	174
GABRIEL	284
GAETA	549
GAMMA	483
GATSBY	318
GECO DJ	644
GECO E27	648-655
GECO LED	646
GECO LED SOLAR	657
GENESIS	260
GHIBLI	526
GHOST	191
GIOVE	774
GOAL	47
GOBLET	194
GOLF	490
GRADO	338
GRECALE	348
GRIS	508
GROUND	714
GRUBB	550
GTO	412

articolo / article	pagina / page
HABILIS	402
HAPIS	280
HELP 503	468
HELP 511	469
HELP EXIT	466
HELP INC	464
HELP TRACK Emergency lamps	465
HELP TRACK	96
HIGHWAY	788
HIVE	199
HORUS	182
HUMMER	708
HURACAN	542
HYDE	138
IDEM	606
IMPACT	701
INSIGN	458
INVICTUS	782
IPERION	784
IRIDE	820-823
ISCHIA	568
JAMMIN	632
JET	76
JUMP	534
KIOTO	734
KITE	339
KLIO	254-257
KONE	80-83
KONE FOOD	84
KRONOS	758
LAMBDA	336
LAMPHOLDER Accessories	854-855
LAMPHOLDER Adapters	856-857
LANCER	364
LASER	518
LEIRON	298
LEVANTE	351

articolo / article	pagina / page
LINE	408
LINE DAVINCI	52
LIVIGNO	328
LIVING	282
LUXON	506
LYBRA	128
MACK	152
MANDALA	659
MASAI	630
MASTER	776
MATRIX	184-187
MAXWELL	94
MEGAN	674
MERCURY	482
METRO	226
MIAMI	384
MIG	258
MILANO	680
MINI	198
MIRAGE	662
MITO	388
MIURA	484
MONDRIAN	548
MONTBLANC	299
MOOD	294
MOON	356
MORGANA	202
MORITZ	326
MOSES	308
MOVIE	406
MUSTANG	340
MYKONOS	321
NASHI	355
NAUTILUS	798
NEMO	177
NEON FLEX	456
NEPTUNE	824
NISMO	616
OAKLAND	533
OBERON	643

INDICE ALFABETICO / ALPHABETICAL INDEX

articolo / article	pagina / page
OBOE	92
OCEAN	801
OLYMPIA	323
OMEGA	335
OMNIA	343
ONE	536
ONYX	716
OPEN	742
ORBIT	666
ORIGAMI	297
ORIONE	173
ORTISEI	290
OUTSIDER	122-125
PANEL	236
PANEL 5Y	235
PANEL Accessories	248-249
PANEL BIS	247
PANEL BK	233
PANEL CCT	243
PANEL DIM	241
PANEL DJ	250
PANEL Easy domotic 24V	809
PANEL EDG	244
PANEL FR	244
PANEL IP65	239
PANEL RGB	243
PANEL SCH	233
PANEL SENS	241
PANEL SM	245
PANEL UGR	238
PAR56	828
PARKER	528-531
PAVIA	690
PEG	552
PELPS	829
PERRET	631
PHANTOM	196
PICNIC	586-587

articolo / article	pagina / page
PICNIC COLOR	588
PICNIC INT	584
PIROETTE	310
PLUS	168
PLUTONE	766-769
POLARIS	172
POLIS	790
POLLY	592-597
POLO	492
PONENTE	353
PORTLAND	532
POWER SUPPLY	838-840, 847
PRISMA	668
PROFILE Accessories	437
PROFILE Aluminum	421-436
PROFILE Gypsum	438
PUNTO	376
Q1	371
QUANTUM	180
QUARK	144
QUBO	538
RAINBOW	178
RAY	494
RAYS	816
REFLEX	218
REMOTE CONTROL	848-851
REVERSE	608
RIBBON	516
RIDER	698
RIDER DIR	700
RIDER RGB	699
RIVA	367
ROBY	370
ROCK	286
ROCKET	88
ROCKET	89

articolo / article	pagina / page
ROLLER	292
ROMA	676
RUBIK	306
RUNNER Easy domotic 24V	813
SACS	366
SANTIAGO	684
SANTORINI	320
SAT	756
SCARAB	369
SCIROCCO	351
SCOTT	305
SEATTLE	543
SEGMENTO	222-225
SENSITIVE	570
SENSO	203
SENSORS High bay & tri-proof	796
SENSORS Flood lights	773
SESTRIERE	325
SHADOW	195
SHELBY	730
SHELF	415
SHELLY	574-577
SHINE	302
SHIVA	746
SHOT	46
SIGMA	334
SINKRO	140
SINTESI	610
SKILIFT	206
SKITTLE	664
SKYP	743
SKYRON	345
SLAB	720
SLIDE	54
SLIM-INT	158
SLIM	160
SLIM CCT	162

articolo / article	pagina / page
SMART HUB Smart Intec	858
SMART PLUG Smart Intec	858-859
SMART SENSOR Smart Intec	859
SMART SWITCH Smart Intec	859
SMILE	724
SNIPER	170
SNOW	201
SOLEIL	322
SONAR	416
SOUL	295
SPACE	270
SPETTRO	197
SPIRAL	296
SPIRIT	200
SPRINT Easy domotic 24V	812
SQUIB	90
STARGATE XP	794
STARLIGHT	130
STARLIGHT30	130
STARRY	190
STATION	619
STEALTH	480
STENOS	212
STEP	702
STEPLIGHT	728
STONE	319
STRATOS	718
STREAM	358
STREETWAY	786
STRIP24V 2835 3D 60	441
STRIP24V 2835 60	442
STRIP24V 2835 120C	443
STRIP24V 2835 240	445
STRIP24V 2835 CCT	444
STRIP24V 2835C INT	453

articolo / article	pagina / page
STRIP24V 2835C KIT	455
STRIP24V 2835 IP68 120	444
STRIP24V 3838 168 RGB	450
STRIP24V 5050 3D RGBW	449
STRIP24V 5050 60	445
STRIP24V 5050 60	446
STRIP24V 5050 RGB	447
STRIP24V 5050 RGB CCT	450
STRIP24V 5050RGB KIT	455
STRIP24V 5050 RGBW	448
STRIP24V 5050RGBW INT	452
STRIP24V COB	440
STRIP24V SLIM 120	443
STRIPLED CC	441
STRIPLED CC15 RGB	446
STRIP SURROUND	459
STRIP Easy domotic 24V	810
SUBWAY	697
SUNNY	382
SUPERIA	803
T5	404
T8	398
TARGET Easy domotic 24V	811
TAURUS	770
TECHNO	378-381
TED	736
TEMA	50
TOGO	554
TOKYO	622-625
TOTAL	166
TOWN	262
TRACK Accessories	98-105
TRACK Three-phase	72-75
TREVIS	826
TRIGGER	414
TRON	154


articolo / article	pagina / page
TUBEX	188
TUBO	55
TUCSON	540
TUNNEL	485
TUTOR	562
TWILIGHT	342
TWIN	496
TWIN	498
ULYSSE	747
UNDERWOOD	620
UNIX	394-397
VENEZIA	688
VERTIGO	564
VEYRON	486
VIPER	214
VISTA	417
VORTEX	266
VULKAN	192
VYSOR	752
WALK	704-707
WALLWASHER	818
WALLY	369
WAMI	600
WEISS	502
WIZARD	598
XANTO-INT	150
XANTO-RF Easy domotic 24V	808
XANTO	146-149
XICO	264
YORK	661
YOUNG	416
ZAK	410
ZENIT	179
ZERO	374
ZODIAC	478
ZOOM	560



SISTEMA BINARI

TRACK LIGHTS

DA VINCI PROJECT **48V**

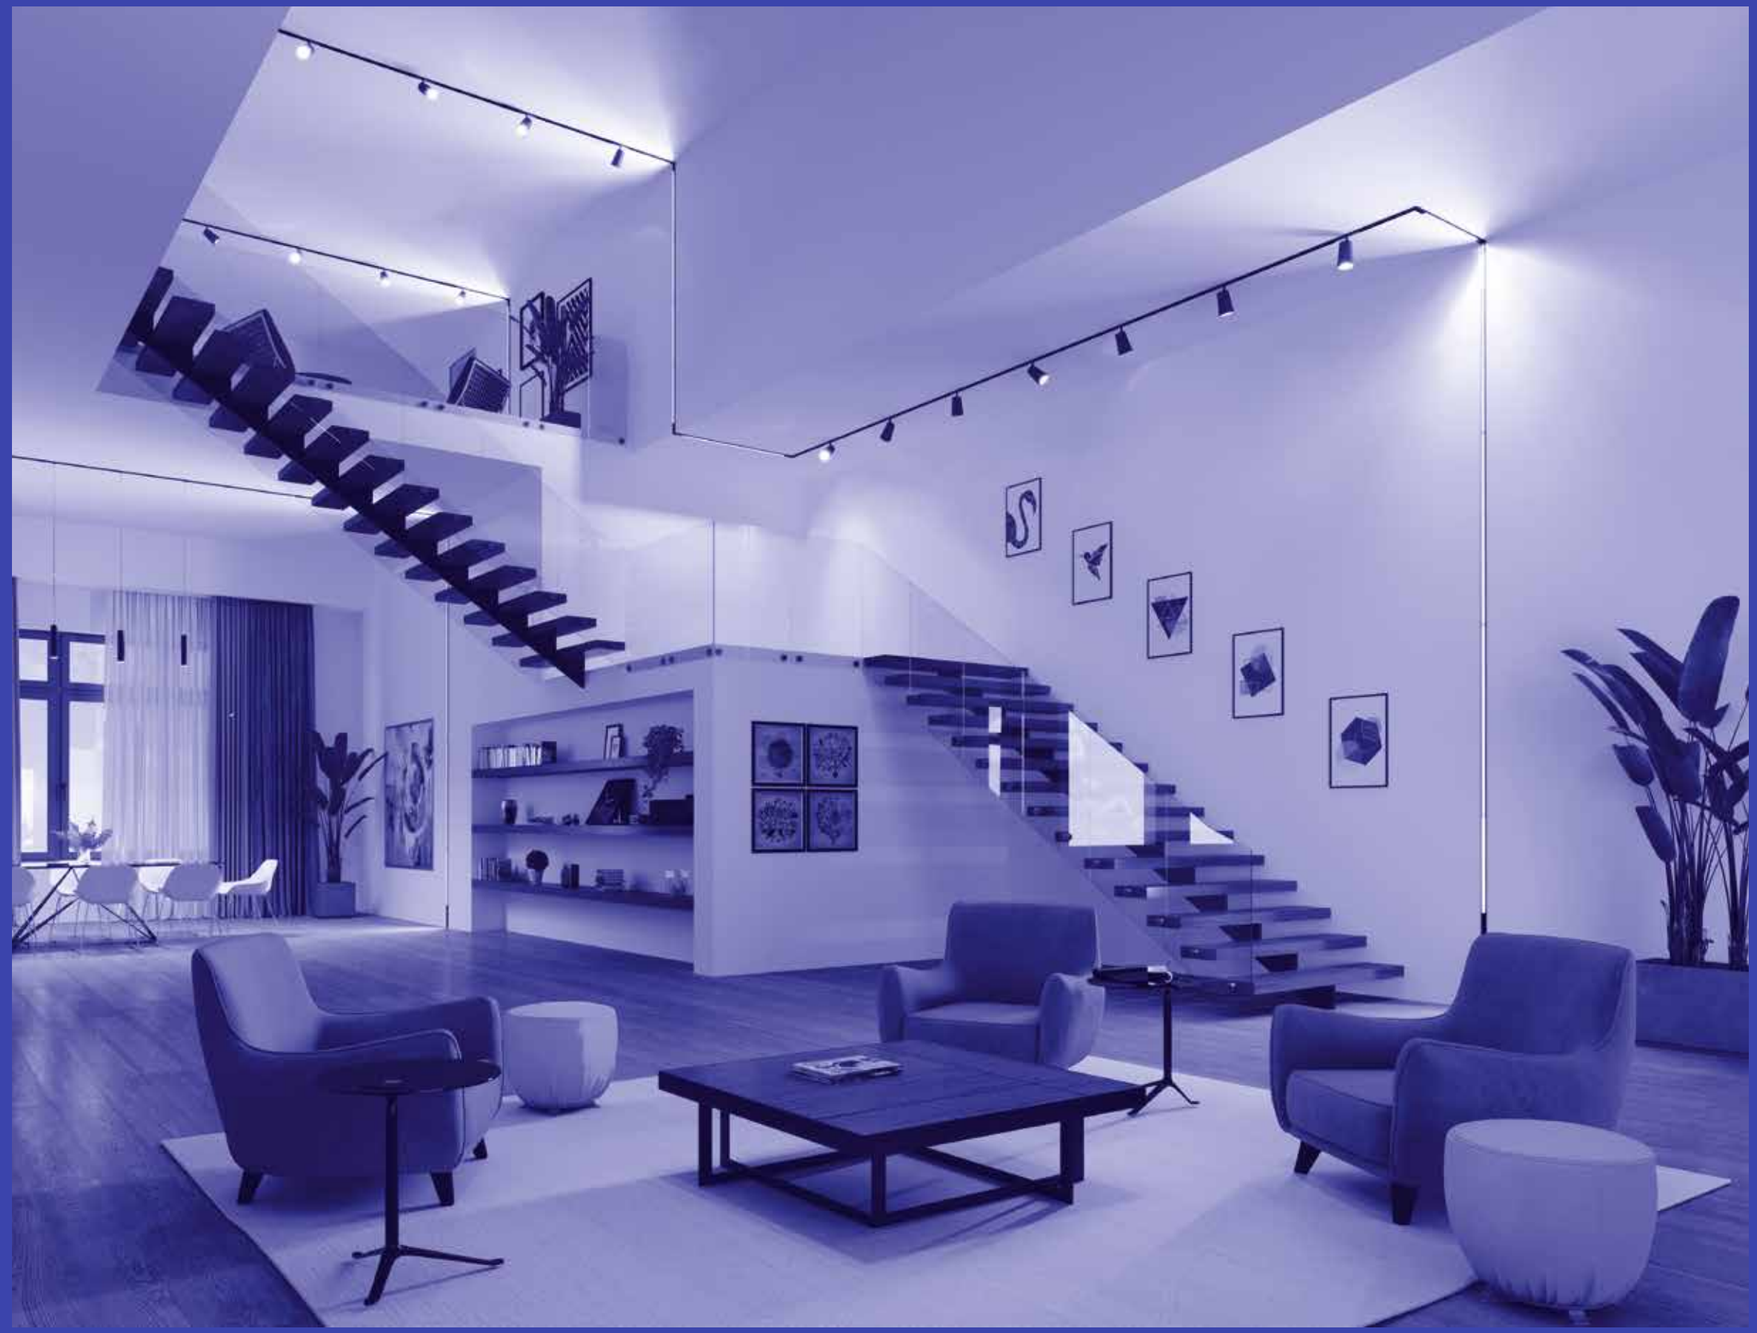

DA VINCI
PROJECT
48V

INTEC fa un salto nel futuro con il sistema Da Vinci, sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.

Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi.

INTEC leap forward into the future with the Da Vinci system, system designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, Inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, position which can be modified with maximum versatility at any time thanks to the simple insertion of the led luminous bodies inside the track by means of the fluid ball bearings.

A

RECESSED TRACK TRIMLESS

Sistema di montaggio a incasso a filo / Recess mount system trimless



B

RECESSED TRACK


Sistema di montaggio a incasso con cornice / Recess mount system with external trim



C

SURFACE MOUNTED

Sistema di montaggio a plafoniera o a sospensione a vista / Ceiling or suspension mounting system



D

PENDANT

Sistema di montaggio a sospensione biemissione / Biemission suspension mounting system







DA VINCI
PROJECT
48V



In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click. Il sistema Da Vinci a sfere volventi è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici. Ogni corpo illuminante Da Vinci ha solo bisogno di essere posizionato, inserito ed acceso.

Depending on the space to be illuminated, it is possible to add, remove or orient the appliances when and where necessary thanks to a simple click. The Da Vinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Da Vinci luminaire just needs to be positioned, inserted and switched on.

All'interno del binario Da Vinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o movibili.

Inside the track Da Vinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with led linear lamps fixed or movable.

A
LINE

Lampada lineare orientabile a led / Led adjustable linear lamp

B
SLIDE

Lampada lineare orientabile a led / Led adjustable linear lamp

C
GOAL

Faro luce spot orientabile / Spot orientable track light

D
SHOT

Faro luce spot orientabile / Spot orientable track light

E
FANS

Faro luce spot orientabile / Spot orientable track light

F
TEMA

Faro luce spot orientabile / Spot orientable track light

G
CYMBAL

Lampada sospensione led / Suspension led light

H
TUBO

Lampada sospensione led / Suspension led light





Schema di montaggio sistema binari.
Assembling technical sheet track rail system.

DA VINCI
PROJECT
48V

Il binario Da Vinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a led inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso.
La diversificata gamma di corpi illuminanti Da Vinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

Da Vinci track is a fully electrified low voltage track system and it is completed with led light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path.
The diversified range of lighting fixtures Da Vinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.

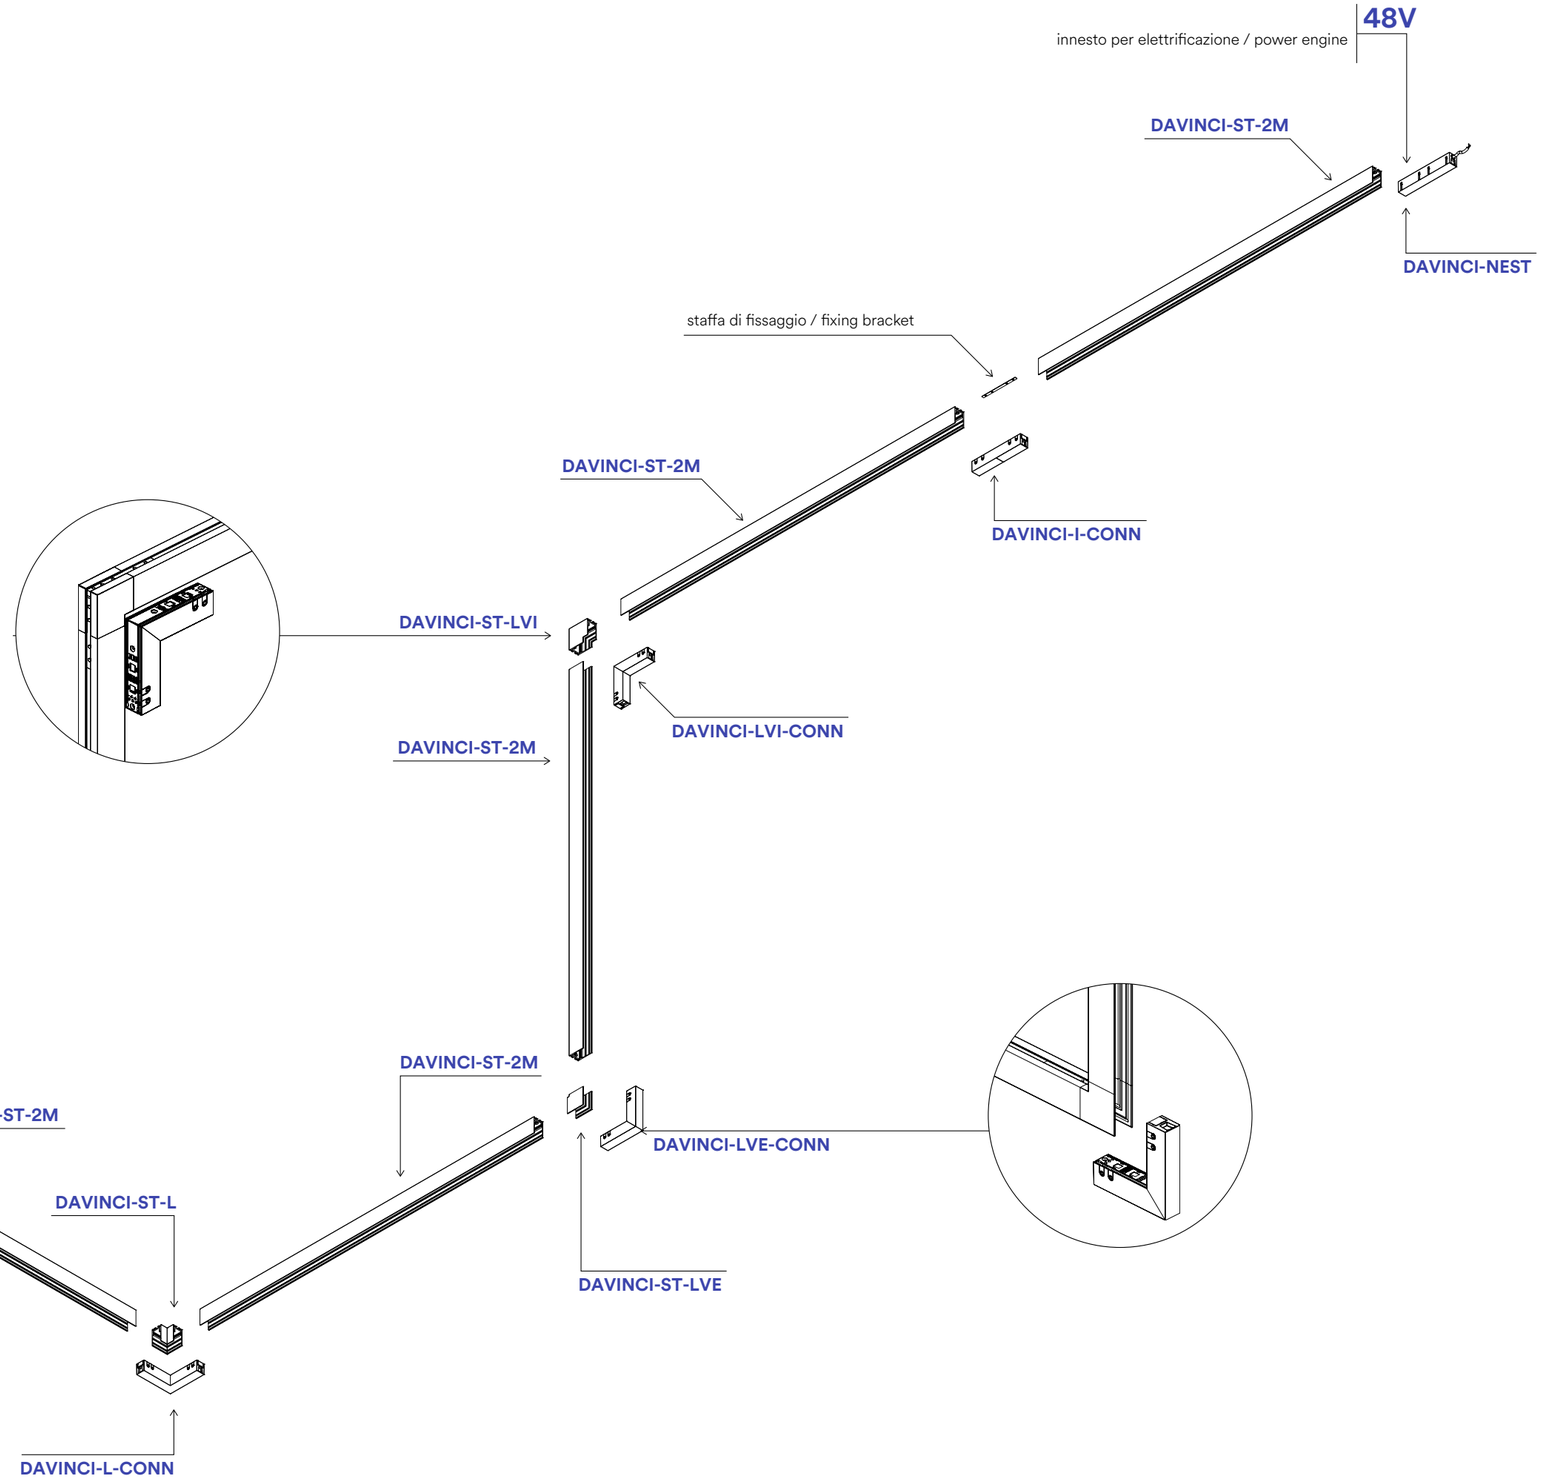




on photo:

TUBO / FANS

Recess mount system trimless



on photo:

CYMBAL / TEMA


Recess mount system with external trim



on photo:

CYMBAL / GOAL

Ceiling or suspension mounting system

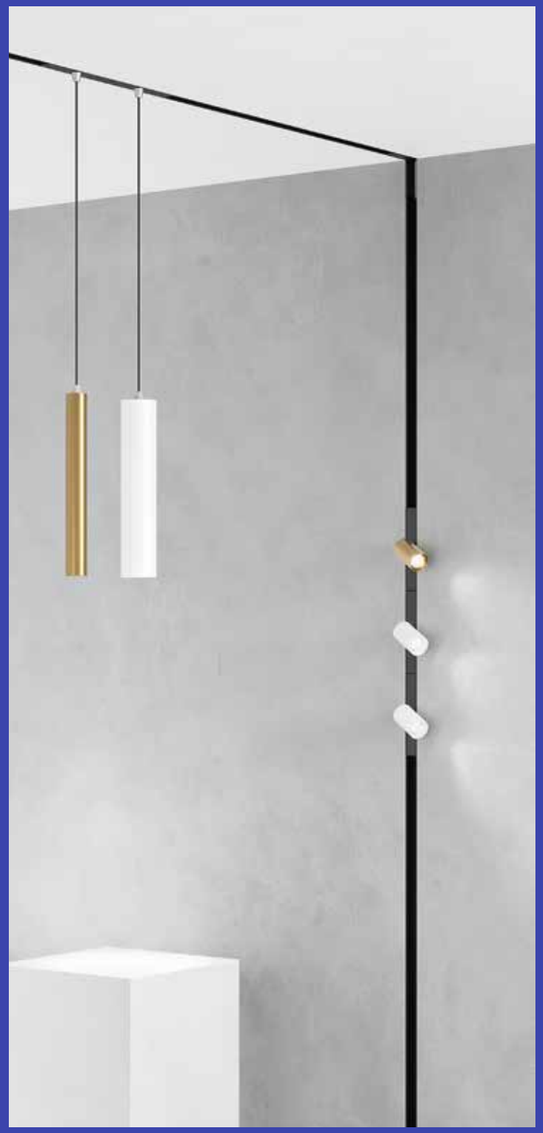








on photo:


LINE UGR / LINE / TEMA
Ceiling or suspension mounting system

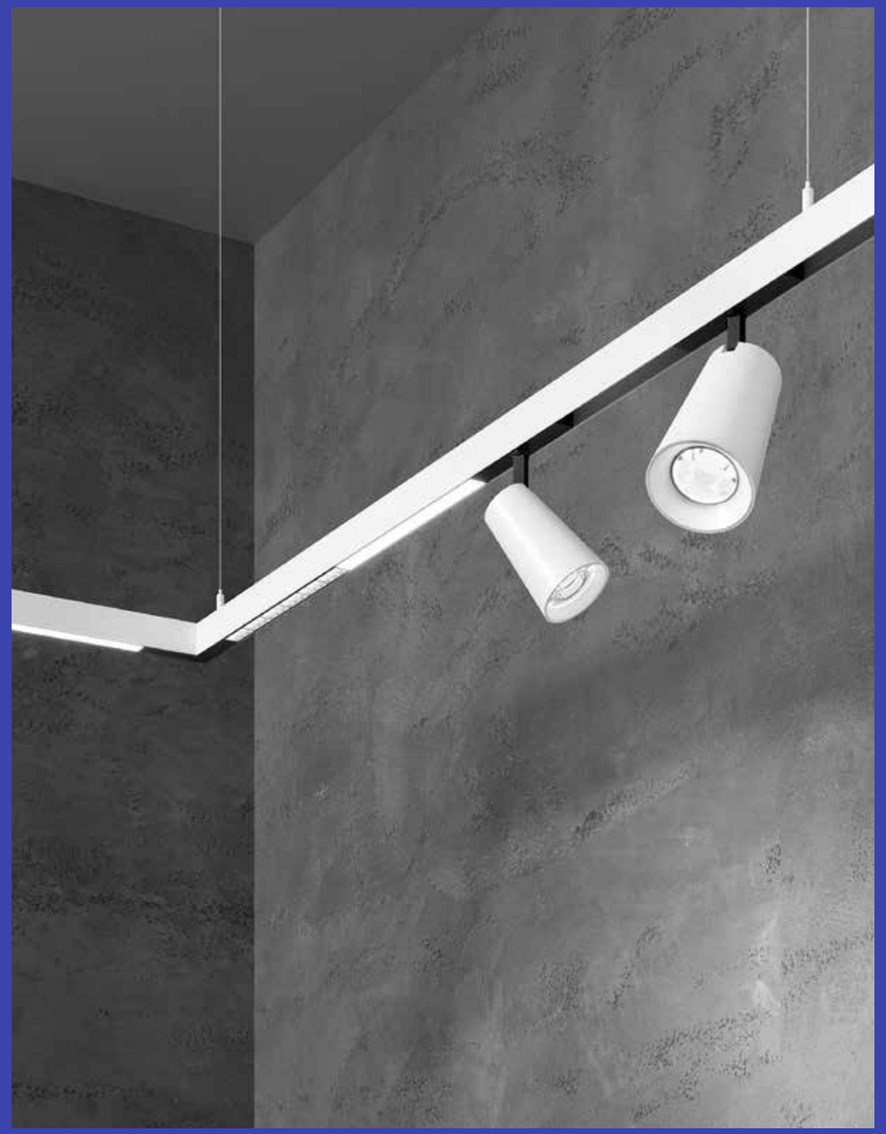



on photo:

SHOT / LINE URG / LINE / SLIDE
Biemission suspension mounting system

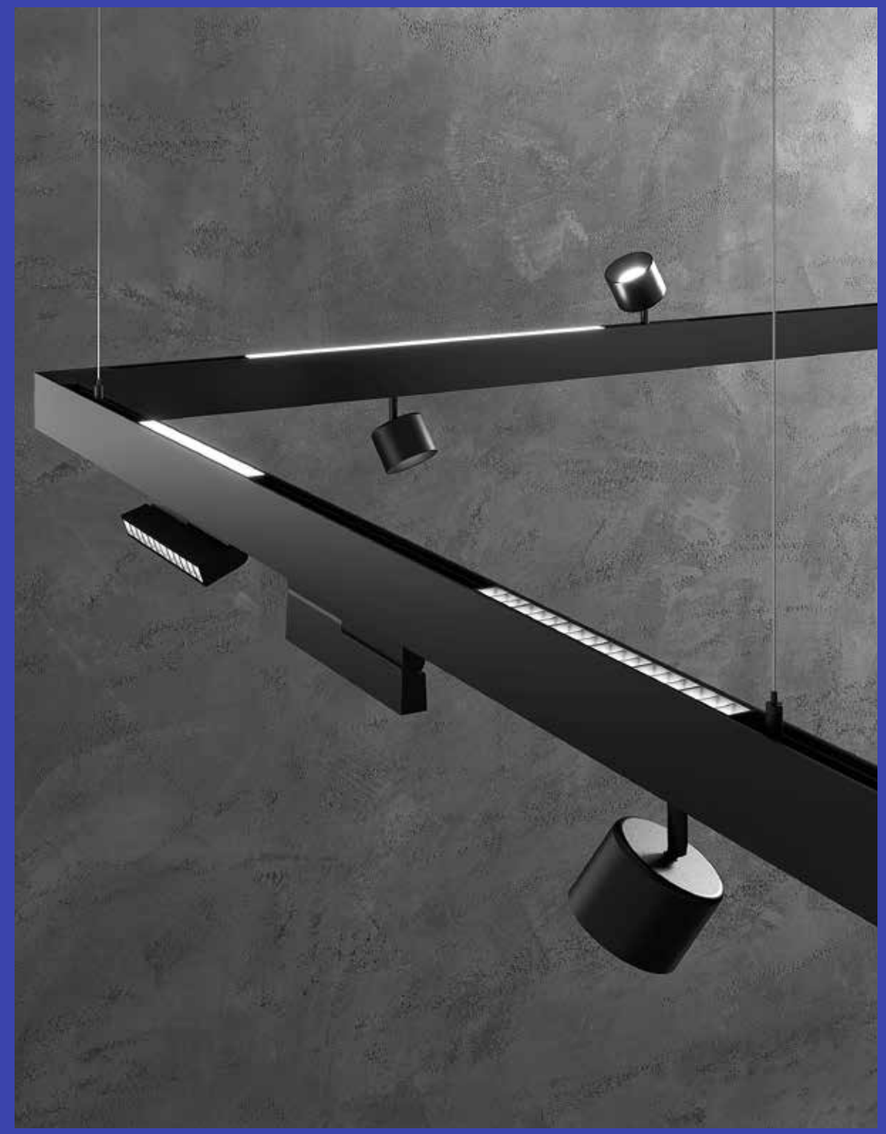

Da Vinci Project 48V
Sfere volventi / Rolling spheres

SHOT

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Colore
nero goffrato

Temperatura colore
3000K / 4000K


Driver
DC 48V
non incluso

Material
aluminum

Colour
embossed black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included



DAVINCI-SHOT-B


CRI 90 · LED COB

CE · EMC

100°
330°



	colour temp.	colour
DAVINCI-SHOT-B-10C		
8031414893911		
lumen	980 lm	
DAVINCI-SHOT-B-10M		
8031414893928		
lumen	980 lm	
watt		10W
beam angle		24°



Da Vinci Project 48V
Sfere volventi / Rolling spheres

GOAL

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Colore
nero goffrato

Temperatura colore
3000K / 4000K


Driver
DC 48V
non incluso

Material
aluminum

Colour
embossed black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included



DAVINCI-GOAL-B


CRI 90 · LED COB

CE · EMC

100°
330°



	colour temp.	colour
DAVINCI-GOAL-B-10C		
8031414893935		
lumen	980 lm	
DAVINCI-GOAL-B-10M		
8031414893942		
lumen	980 lm	
watt		10W
beam angle		24°



FANS

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco opaco
nero opaco
oro

Temperatura colore
3000K / 4000K


Driver
DC48V
non incluso

Material
aluminum

Colour
matt white
matt black
gold

Colour temperature
3000K / 4000K


Driver
DC48V
not included



DAVINCI-FANS

CRI 90 · LED COB

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.











	colour temp.	colour
DAVINCI-FANS-W-5C 8031414893874		
DAVINCI-FANS-W-5M 8031414893881		
lumen	490 lm	
DAVINCI-FANS-B-5C 8031414893850		
DAVINCI-FANS-B-5M 8031414893867		
lumen	490 lm	
DAVINCI-FANS-G-5C 8031414893898		
DAVINCI-FANS-G-5M 8031414893904		
lumen	490 lm	

watt	5W
beam angle	24°

Da Vinci Project 48V
Sfere volventi / Rolling spheres

TEMA

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso. Diffusore in vetro trasparente.
Track projectors with adjustable spot light for Davinci system with die-cast alumi-num structure. Diffuser in clear glass.

indoor use | accommodation areas use | office use | commercial areas use

CRI 90 | LED COB

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body


Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC48V not included



	colour temp.	colour
DAVINCI-TEMA-5C 8031414876976		
lumen	490 lm	
DAVINCI-TEMA-5M 8031414876983		
lumen	490 lm	
watt	5W	
beam angle	38°	



Accessori non inclusi / Not included accessories

Retina antiabbagliamento / Anti-glare retina

LED-KONE-MESH62 8031414870455	per/for	10W
LED-KONE-MESH80 8031414870462	per/for	20W
LED-KONE-MESH100 8031414870431	per/for	30W




Deviatore flusso luminoso / Luminous flux diverter

LED-KONE-DIFF62 8031414870448	per/for	10W
LED-KONE-DIFF80 8031414870417	per/for	20W
LED-KONE-DIFF100 8031414870424	per/for	30W



	colour temp.	colour
DAVINCI-TEMA-W-10C 8031414894031		
lumen	1200 lm	
DAVINCI-TEMA-W-10M 8031414894048		
lumen	1200 lm	
DAVINCI-TEMA-10C 8031414876990		
lumen	1200 lm	
DAVINCI-TEMA-10M 8031414878215		
lumen	1200 lm	
watt	10W	
beam angle	38°	




Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system



	colour temp.	colour
DAVINCI-TEMA-W-20C 8031414894055		
lumen	1930 lm	
DAVINCI-TEMA-W-20M 8031414894062		
lumen	1930 lm	
DAVINCI-TEMA-20C 8031414878222		
lumen	1930 lm	
DAVINCI-TEMA-20M 8031414878239		
lumen	1930 lm	
watt	20W	
beam angle	38°	




Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system



	colour temp.	colour
DAVINCI-TEMA-W-30C 8031414894079		
lumen	3210 lm	
DAVINCI-TEMA-W-30M 8031414894086		
lumen	3210 lm	
DAVINCI-TEMA-30C 8031414878246		
lumen	3210 lm	
DAVINCI-TEMA-30M 8031414878253		
lumen	3210 lm	
watt	30W	
beam angle	38°	




Accessori inclusi / Included accessories




Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system


Fotometria del prodotto / Photometric curve




DAVINCI-TEMA-5



DAVINCI-TEMA-10



DAVINCI-TEMA-20



DAVINCI-TEMA-30

Da Vinci Project 48V
Sfere volventi / Rolling spheres

LINE

Lampada lineare a LED per sistema Davinci con struttura in alluminio pressofuso e finitura in nero goffrato. Disponibile in varie misure.
LED linear lamp for Davinci system with die-cast aluminum structure and embossed black finish. Available in various sizes.

Materiale
corpo in alluminio pressofuso

Colore
nero

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body


Colour
black

Colour temperature
3000K / 4000K

Driver
DC48V not included


indoor use · accommodation areas use · office use · commercial areas use

Fotometria del prodotto / Photometric curve

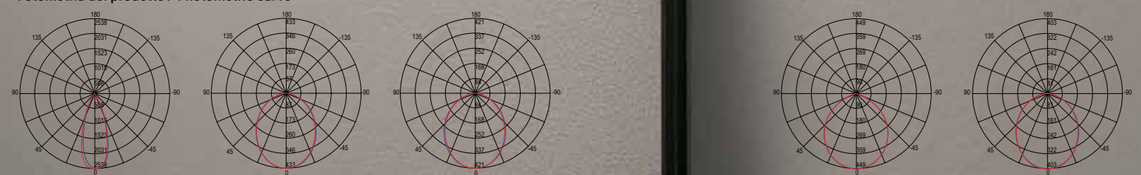


DAVINCI-LINE30 UGR · DAVINCI-LINE30 · DAVINCI-LINE60 · DAVINCI-LINE90 · DAVINCI-LINE120

CRI 90 · LED SMD

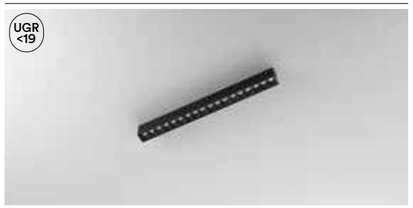


	colour temp.	colour
DAVINCI-LINE30C-UGR 8031414878321		
lumen	1200 lm	
DAVINCI-LINE30M-UGR 8031414878338		
lumen	1200 lm	
watt	10W	
beam angle	30°	






	colour temp.	colour
DAVINCI-LINE30C 8031414878260		
lumen	1150 lm	
DAVINCI-LINE30M 8031414878277		
lumen	1150 lm	
watt	10W	
beam angle	110°	






	colour temp.	colour
DAVINCI-LINE60C 8031414878284		
lumen	2300 lm	
DAVINCI-LINE60M 8031414878291		
lumen	2300 lm	
watt	20W	
beam angle	110°	






	colour temp.	colour
DAVINCI-LINE90C 8031414878666		
lumen	3450 lm	
DAVINCI-LINE90M 8031414878635		
lumen	3450 lm	
watt	30W	
beam angle	110°	





	colour temp.	colour
DAVINCI-LINE120C 8031414878642		
lumen	4600 lm	
DAVINCI-LINE120M 8031414878611		
lumen	4600 lm	
watt	40W	
beam angle	110°	



SLIDE

Lampada lineare orientabile a LED per sistema Davinci con struttura in alluminio pressofuso.
LED adjustable linear lamp for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K


Driver
DC48V non incluso

Material
aluminum die cust body


Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC48V not included

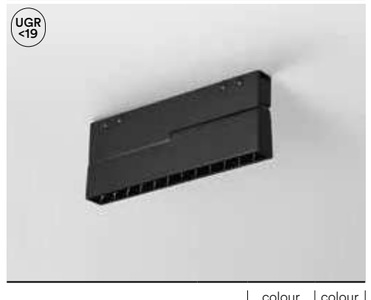


	colour temp.	colour
DAVINCI-SLIDE20C-UGR		
8031414878369		
lumen	1020 lm	
DAVINCI-SLIDE20M-UGR		
8031414878376		
lumen	1020 lm	
watt		10W
beam angle		30°







	colour temp.	colour
DAVINCI-SLIDE20C		
8031414878345		
lumen	980 lm	
DAVINCI-SLIDE20M		
8031414878352		
lumen	980 lm	
watt		10W
beam angle		110°



Fotometria del prodotto / Photometric curve



DAVINCI-SLIDE20 UGR



DAVINCI-SLIDE20

LED SMD

TUBO

Sospensioni tubolari a LED per sistema Davinci con struttura in alluminio pressofuso.
LED tubular suspensions for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco
oro

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body

Colour
matt white
matt black
gold

Colour temperature
3000K / 4000K


Driver
DC48V not included




	colour temp.	colour
DAVINCI-W-S35C		
8031414894093		
lumen	300 lm	
DAVINCI-W-S35M		
8031414894109		
lumen	300 lm	
DAVINCI-S35C		
8031414878390		
lumen	300 lm	
DAVINCI-S35M		
8031414878406		
lumen	300 lm	
DAVINCI-G-S35C		
8031414894116		
lumen	300 lm	
DAVINCI-G-S35M		
8031414894123		
lumen	300 lm	
watt		3W
beam angle		24°




	colour temp.	colour
DAVINCI-S60C		
8031414878680		
lumen	500 lm	
DAVINCI-S60M		
8031414878659		
lumen	500 lm	
watt		5W
beam angle		24°






Fotometria del prodotto / Photometric curve



DAVINCI-S35



DAVINCI-S60

CRI 90 · LED COB



Da Vinci Project 48V
Sfere volventi / Rolling spheres

CYMBAL

Lampada a sospensione LED in alluminio per sistema a binario.
Aluminum LED suspension lamp for track system.

Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC 48V
non incluso

Material
aluminum

Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included


CRI 90 · LED COB

indoor use · accommodation areas use · office use · commercial areas use





	colour temp.	colour
DAVINCI-W-S40C 8031414894017		
lumen	1855 lm	
DAVINCI-W-S40M 8031414894024		
lumen	1855 lm	
DAVINCI-S40C 8031414893997		
lumen	1855 lm	
DAVINCI-S40M 8031414894000		
lumen	1855 lm	




watt	18W
beam angle	38°

	colour temp.	colour
DAVINCI-W-S15C 8031414893973		
lumen	780 lm	
DAVINCI-W-S15M 8031414893980		
lumen	780 lm	
DAVINCI-S15C 8031414893959		
lumen	780 lm	
DAVINCI-S15M 8031414893966		
lumen	780 lm	




watt	8W
beam angle	38°

Fotometria del prodotto / Photometric curve



DAVINCI-S40



DAVINCI-S15

DA VINCI
PROJECT
48V



Da Vinci Project 48V / RECESSED TRACK TRIMLESS

Sistema di montaggio a incasso a filo / Recess mount system trimless


Binari ed accessori / Track rail and components



DAVINCI-TL-2M
8031414878055

Binario sistema Davinci montaggio ad incasso a filo 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail invisible recessed trimeless mount black colour 2 m 48V. Cups and fixing bracket included.






DAVINCI-TL-L
8031414878109

Connettore angolare in alluminio per binario elettrificato incasso a filo (trimeless) sistema sfere volventi.

Angular connection in alluminum for Davinci trimless recessed rail in rolling spheres joint system.






DAVINCI-TL-LVI
8031414878673

Connettore angolare verticale connessione interna per binario elettrificato incasso a filo (trimeless) con sistema sfere volventi.

Vertical anglular connector internal connection for track electrified recessed rail (trimeless) system built in rolling spheres joint system.





DAVINCI-TL-LVE
8031414878147

Connettore angolare verticale con connessione esterna in alluminio per binario elettrificato incasso a filo (trimeless) con sistema sfere volventi.

Angular external emission connection in aluminum for electrified track trimless recessed rail in rolling spheres joint system.





DAVINCI-TL-CAP
8031414878093


Tappo laterale per binario da incasso a filo (trimeless) sistema sfere volventi.

End cap for Davinci trimless recessed rail in rolling spheres joint system.

Da Vinci Project 48V / RECESSED TRACK

Sistema di montaggio a incasso con cornice / Recess mount system with external trim

Binari ed accessori / Track rail and components



DAVINCI-INC-2M-BCO
8031414894130

Binario sistema Da Vinci montaggio ad incasso 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.


Da Vinci system track rail recessed mount white colour 2 m 48V. Cups and fixing bracket included.



DAVINCI-INC-2M
8031414878024

Binario sistema Davinci montaggio ad incasso 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail recessed mount black colour 2 m black 2 m 48V. Cups and fixing bracket included.





DAVINCI-INC-L-BCO
8031414894147

Connettore angolare per binario elettrificato incasso sistema sfere volventi.


Angular connector for electrified track built in rolling spheres joint system.



DAVINCI-INC-L
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi.

Angular connector for electrified track built in rolling spheres joint system.





DAVINCI-INC-LVI-BCO
8031414894154

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.


Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-LVI
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.

Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.





DAVINCI-INC-LVE-BCO
8031414894161

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.


Vertical anglular connector external connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-LVE
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.

Vertical anglular connector external connection for track electrified system built in rolling spheres joint system.





DAVINCI-INC-CAP-BCO
8031414894178

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.



DAVINCI-INC-CAP
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.

Da Vinci Project 48V / PENDANT

Sistema di montaggio a sospensione biemissione/ Biemission suspension mounting system


Binari ed accessori / Track rail and components



DAVINCI-H-2M
8031414878017

Binario sistema Davinci per montaggio a sospensione con doppia emissione; nero da 2 m 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail for suspension mounting with double emission; black 2 m 48V. Cups and fixing bracket included.






DAVINCI-H-L
8031414878048

Connettore angolare in alluminio per binario elettrificato biemissione con sistema sfere volventi.

Aluminum angular connection for double emission electrified track with rolling ball system.





DAVINCI-H-CAP
8031414878451

Tappo laterale per binario biemissione con sistema sfere volventi.


End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.






DAVINCI-S-3
8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 × 3m steel wire.



Da Vinci Project 48V / SURFACE MOUNTED

Sistema di montaggio a plafoniera o a sospensione a vista/ Ceiling or suspension mounting system

Binari ed accessori / Track rail and components



DAVINCI-ST-2M-BCO
8031414894185

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m white 48V. Cups and fixing bracket included.



DAVINCI-ST-2M
8031414878031

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m black 48V. Cups and fixing bracket included.





DAVINCI-ST-L-BCO
8031414894192

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.


Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.



DAVINCI-ST-L
8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.





DAVINCI-ST-LVI-BCO
8031414894208

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.


Angular connector for track electrified internal connection with spheres rolling joint system.



DAVINCI-ST-LVI
8031414878079

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.





DAVINCI-ST-LVE-BCO
8031414894215

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.


Angular connector for external connection electrified track in rolling spheres joint system.



DAVINCI-ST-LVE
8031414878086

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.





DAVINCI-ST-CAP-BCO
8031414894222

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-ST-CAP
8031414878468

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-BOX-BCO
8031414894246

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.


Canopy for driver and connection box for suspension Davinci rail.



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.





DAVINCI-S-3-BCO
8031414894239

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 × 3m steel wire.



DAVINCI-S-3
8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 × 3m steel wire.


Driver 48V per sistema Davinci p. 838
48V drivers for Davinci system p. 838



DAVINCI-NEST
8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di binario del sistema Davinci.

48V power engine for all Davinci rail system models.





DAVINCI-I-CONN
8031414878178

Connettore 48V compatibile con i modelli di binario sistema Davinci.

Connector 48V compatible with all the Davinci rail system models.






DAVINCI-L-CONN
8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema Davinci.

Angular connector 48V compatible with all the Davinci rail system models.






DAVINCI-LVI-CONN
8031414878192

Connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema Davinci.

Internal angular connector 48V compatible with all the Davinci rail system models.






DAVINCI-LVE-CONN
8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema Davinci.

External angular connector 48V compatible with all the Davinci rail system models.






DAVINCI-FLEX
8031414894253

Innesto per elettrificazione 48V flessibile compatibile con tutti i modelli di binario Davinci.

Flexible 48V electrification mount compatible with all Davinci rail models.





DAVINCI-COVER-2M
8031414878154

Cover nera compatibile con tutti i modelli di binario Davinci 200 cm.

Cover in black colour compatible with all the Davinci track rail models 200 cm.



DAVINCI-BRAKE
8031414878383

Kit 2pz fermi per corpi illuminanti sistema con sfere volventi.

Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system.

BERNINI
PROJECT
48V



Bernini Project 48V

BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in nero opaco.
Linear adjustable LED lamp in thermoplastic and aluminum with matt black finish.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio e termoplastica

Colore
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum and thermoplastic

Colour
matt black


Colour temperature
3000K / 4000K

Driver
DC48V not included


CRI >80 · LED SMD



	colour temp.	colour
BERNINI-LINE12C-UGR 8031414897995 lumen	720 lm	
BERNINI-LINE12M-UGR 8031414898008 lumen	720 lm	
watt	6W	
beam angle	30°	



Fotometria del prodotto / Photometric curve




BERNINI-LINE12-UGR

Accessorio non incluso / Not included accessory




BERNINI-LINE-ADAT12
8031414898169
Adattatore per lampada lineare LED / Adapter for linear LED lamp






	colour temp.	colour
BERNINI-LINE12C 8031414897957 lumen	720 lm	
BERNINI-LINE12M 8031414897964 lumen	720 lm	
watt	6W	
beam angle	30°	



Fotometria del prodotto / Photometric curve




BERNINI-LINE12

Accessorio non incluso / Not included accessory




BERNINI-LINE-ADAT12
8031414898169
Adattatore per lampada lineare LED / Adapter for linear LED lamp






	colour temp.	colour
BERNINI-LINE22C-UGR 8031414898015 lumen	1440 lm	
BERNINI-LINE22M-UGR 8031414898022 lumen	1440 lm	
watt	12W	
beam angle	30°	



Fotometria del prodotto / Photometric curve




BERNINI-LINE22-UGR

Accessorio non incluso / Not included accessory




BERNINI-LINE-ADAT22
8031414898176
Adattatore per lampada lineare LED / Adapter for linear LED lamp






	colour temp.	colour
BERNINI-LINE22C 8031414897971 lumen	1500 lm	
BERNINI-LINE22M 8031414897988 lumen	1500 lm	
watt	12W	
beam angle	30°	



Fotometria del prodotto / Photometric curve




BERNINI-LINE22

Accessorio non incluso / Not included accessory



BERNINI-LINE-ADAT22
8031414898176
Adattatore per lampada lineare LED / Adapter for linear LED lamp



Bernini Project 48V

BERNINI FANS

indoor use | accommodation areas use | office use | commercial areas use

Faro luce spot orientabile per sistema a binario in termoplastica con finitura in nero opaco.
Adjustable spot light in thermoplastic and aluminum track system with matt black finish.

Materiale
alluminio e termoplastica

Colore
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum and thermoplastic

Colour
matt black


Colour temperature
3000K / 4000K

Driver
DC48V not included







	colour temp.	colour
BERNINI-FANS-5C 8031414898039		
lumen	550 lm	
BERNINI-FANS-5M 8031414898046		
lumen	550 lm	
watt	5W	
beam angle	24°	




	colour temp.	colour
BERNINI-FANS-15C 8031414898053		
lumen	1750 lm	
BERNINI-FANS-15M 8031414898060		
lumen	1750 lm	
watt	15W	
beam angle	30°	



Fotometria del prodotto / Photometric curve



BERNINI-FANS-5



BERNINI-FANS-15

CRI >80 | LED COB

Bernini Project 48V

BERNINI TUBO

Lampada sospensione LED per sistema binario in termoplastica e alluminio con finitura in nero opaco.
LED suspension lamp in aluminum and thermoplastic rail system with matt black finish.

Materiale
alluminio e termoplastica

Colore
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso


Material
aluminum and thermoplastic

Colour
matt black


Colour temperature
3000K / 4000K

Driver
DC48V not included

	colour temp.	colour
BERNINI-S10C 8031414898077		
lumen	1100 lm	
BERNINI-S10M 8031414898084		
lumen	1100 lm	
watt	9W	
beam angle	24°	



Fotometria del prodotto / Photometric curve



BERNINI-S10

CRI >80 | LED COB

BERNINI

Binari ed accessori.
Track rail and components.

Driver 48V per sistema Bernini p. 838
48V drivers for Bernini system p. 838



BERNINI-2M
8031414897735

Binario Bernini
2 metri nero 48V.
2 Tappi inclusi.

Bernini track rail black
color 2 meters 48V.
2 Cups included.






BERNINI-L
8031414897773

Connettore angolare per
binario elettrificato 48V.

Corner connector
for 48V track.






BERNINI-T
8031414897780

Connettore a T per
binario elettrificato 48V.

T connector for 48V
electrified track.






BERNINI-X
8031414898091

Connettore a croce per
binario elettrificato 48V.

Cross connector for
48V electrified track.






BERNINI-LVI
8031414898107

Connettore angolare per
binario elettrificato 48V.

Angular connector for
48V electrified track.






BERNINI-NEST
8031414898145

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.






BERNINI-NEST
8031414898145

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.





BERNINI-I-CONN
8031414898114

Connettore 48V
compatibile con tutti i
modelli di binario Bernini.

48V connector
compatible with all
Bernini rail models.






BERNINI-TL-2M
8031414897759

Alloggio per sistema binario
montaggio ad incasso
a filo 2 metri.

Housing for recessed
trimeless track rail
system 2 meters.






BERNINI-TL-L
8031414898138

Connettore angolare verticale per
alloggio con montaggio ad incasso
a filo per binario Bernini.

Angular vertical connector
for housing with recessed
trimeless track rail system.






BERNINI-TL-LVI
8031414898121

Connettore angolare verticale
per alloggio con montaggio ad
incasso a filo per binario Bernini.

Angular vertical connector
for housing with recessed
trimeless track rail system.





BERNINI-CAP
8031414897742

Tappo laterale per binario
elettrificato 48V.

Side cup for 48V
electrified track.



BERNINI-COVER-2M
8031414897766

Cover nera compatibile con
i modelli del binario Bernini.


Black cover compatible with
Bernini track rail models.



BERNINI-DR100
8031414898183

Driver 48V 100W
corrente costante.

Driver 48V 100W
constant current.






BERNINI-DR200
8031414897940

Driver 48V 200W
corrente costante.

Driver 48V 200W
constant current.





THREE-PHASE **TRACK**



Schema di montaggio sistema binari.
Assembling technical sheet track rail system.


THREE-PHASE **TRACK**

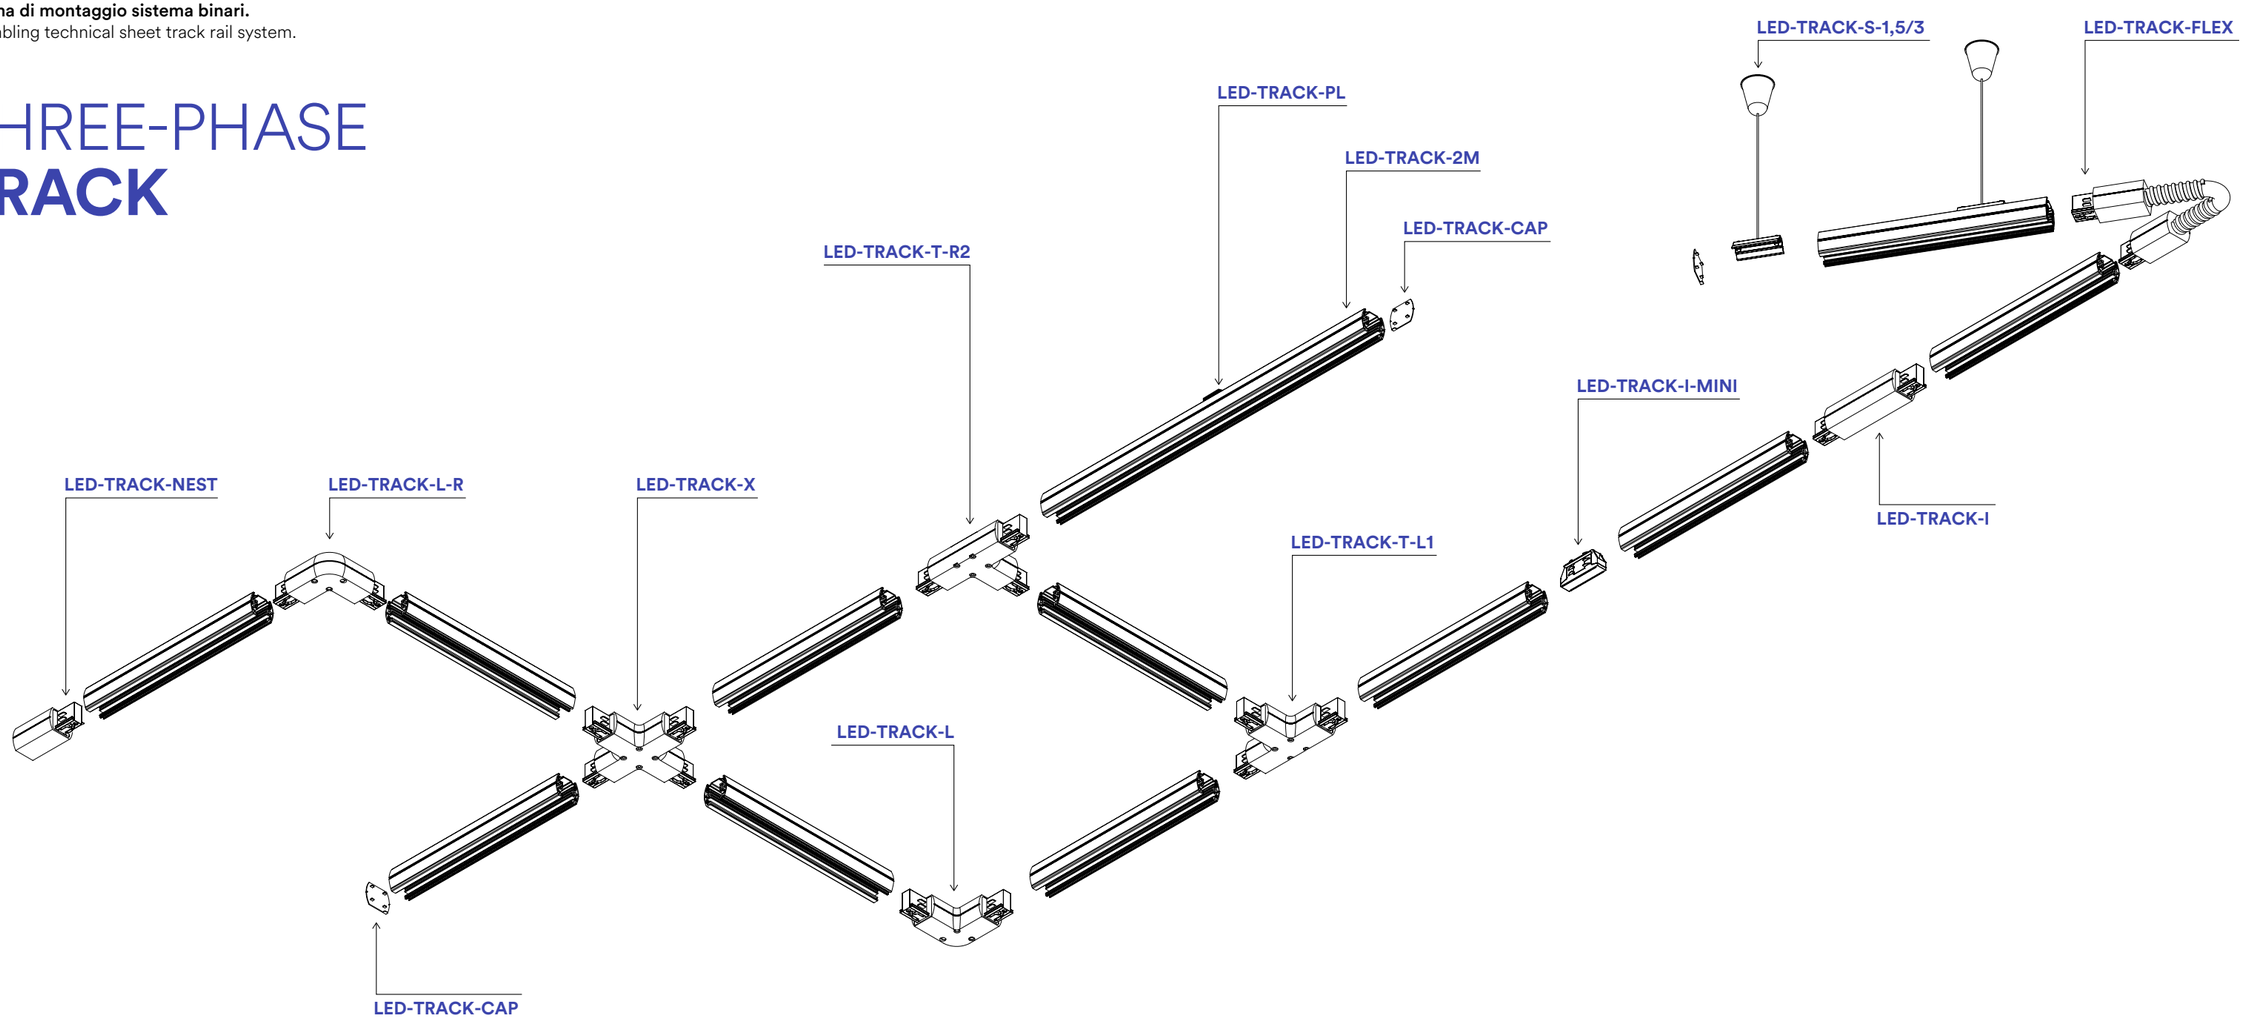




TRACK NEST

Innesto per
collegamento elettrico
/
Connector for
electrical connection




TRACK NEST L

Connettore a L con
collegamento elettrico
/
L connector with
electrical connection




TRACK NEST T

Connettore a T con
collegamento elettrico
/
T connector with
electrical connection



TRACK NEST I

Connettore lineare con
collegamento elettrico
/
Linear connector with
electrical connection




TRACK MINI

Connettore
lineare
/
Linear
connector



TRACK S

Ki sospensione
per binario
/
Kit suspension
for track rail



Trifase / Three-phase

JET

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.



Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum


Colour
matt white
matt black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included




	colour temp.	colour
LED-JET-W-20 8031414893805		
lumen	2100 lm	
LED-JET-B-20 8031414893775		
lumen	2100 lm	
watt	20W	
beam angle	38°	
pf	0.90	







	colour temp.	colour
LED-JET-W-30 8031414893812		
lumen	3235 lm	
LED-JET-B-30 8031414893782		
lumen	3235 lm	
watt	30W	
beam angle	38°	
pf	0.90	




	colour temp.	colour
LED-JET-W-40 8031414893829		
lumen	4300 lm	
LED-JET-B-40 8031414893799		
lumen	4300 lm	
watt	40W	
beam angle	38°	
pf	0.90	




Fotometria del prodotto / Photometric curve



LED-JET 20W



LED-JET 30W



LED-JET 40W

EXPLORER

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
matt white
matt black


Colour temperature
3000K / 4000K

Driver
included

Faro a binario in alluminio con adattatore trifase e angolo di luce regolabile.
Aluminum track light with three-phase adapter and adjustable light angle.








Angolo di luce regolabile /
Adjustable beam angle



	colour temp.	colour
LED-EXPLORER-W-30C 8031414894284		
lumen	2815 lm	
LED-EXPLORER-W-30M 8031414894291		
lumen	2815 lm	
LED-EXPLORER-B-30C 8031414894260		
lumen	2815 lm	
LED-EXPLORER-B-30M 8031414894277		
lumen	2815 lm	

watt	30W
beam angle	10°- 60°
pf	0.90




LED-EXPLORER

CRI 90 · LED COB

KONE

Proiettore a binario in alluminio pressofuso con adattatore trifase invisibile.
Die-cast aluminum track projector with invisible three-phase adapter.



Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco
rosa opaco
verde opaco
giallo opaco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum die cust body

Colour
matt white
matt black
matt pink
matt green
matt yellow

Colour temperature
3000K / 4000K

Driver
included





KONE




















	colour temp.	colour
LED-KONE-ROS-24M 8031414866663		
lumen	2365 lm	
LED-KONE-VER-24M 8031414866687		
lumen	2365 lm	
LED-KONE-GIA-24M 8031414866700		
lumen	2365 lm	
watt	24W	
beam angle	38°	
pf	-	


	colour temp.	colour
LED-KONE-W-13C 8031414867691		
lumen	1175 lm	
LED-KONE-W-13M 8031414867677		
lumen	1175 lm	
LED-KONE-B-13C 8031414867684		
lumen	1175 lm	
LED-KONE-B-13M 8031414867622		
lumen	1175 lm	
watt	13W	
beam angle	38°	
pf	-	


	colour temp.	colour
LED-KONE-W-24C 8031414867745		
lumen	2365 lm	
LED-KONE-W-24M 8031414867714		
lumen	2365 lm	
LED-KONE-B-24C 8031414867721		
lumen	2365 lm	
LED-KONE-B-24M 8031414867707		
lumen	2365 lm	
watt	24W	
beam angle	38°	
pf	-	


	colour temp.	colour
LED-KONE-W-30C 8031414883257		
lumen	3860 lm	
LED-KONE-W-30M 8031414883264		
lumen	3860 lm	
LED-KONE-B-30C 8031414866670		
lumen	3860 lm	
LED-KONE-B-30M 8031414883240		
lumen	3860 lm	
watt	30W	
beam angle	38°	
pf	0.90	


	colour temp.	colour
LED-KONE-W-42C 8031414867783		
lumen	4230 lm	
LED-KONE-W-42M 8031414867752		
lumen	4230 lm	
LED-KONE-B-42C 8031414867769		
lumen	4230 lm	
LED-KONE-B-42M 8031414867738		
lumen	4230 lm	
watt	42W	
beam angle	38°	
pf	0.90	











Accessori non inclusi / Not included accessories

Retina antiabbagliamento / Anti-glare retina


LED-KONE-MESH62 8031414870455	per/for	13W
LED-KONE-MESH80 8031414870462	per/for	24W
LED-KONE-MESH100 8031414870431	per/for	42W




Deviatore flusso luminoso / Luminous flux diverter

LED-KONE-DIFF62 8031414870448	per/for	13W
LED-KONE-DIFF80 8031414870417	per/for	24W
LED-KONE-DIFF100 8031414870424	per/for	42W


Fotometria del prodotto / Photometric curve




LED- 24W




LED- 13W



LED- 24W



LED- 30W



LED- 42W

Trifase / Three-phase

KONE FOOD

indoor use | accommodation areas use | office use | commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
2500K / 3000K / 3100K

Driver
integrato

Material
aluminum die cust body

Colour
matt white
matt black


Colour temperature
2500K / 3000K / 3100K

Driver
built-in

LED COB

Proiettore a binario in alluminio pressofuso on adattatore trifase per l'illuminazione di generi alimentari.
Die-cast aluminum track projector with three-phase adapter for food lighting.





Illuminazione per generi alimentari / Food lighting









	colour temp.	K	CRI	colour
LED-KONE-W-30BR 8031414883370				
LED-KONE-B-30BR 8031414883356				
lumen	2750 lm	2500 K	>90	
LED-KONE-W-30RM 8031414883400				
LED-KONE-B-30RM 8031414883332				
lumen	2760 lm	3100 K	>70	
LED-KONE-W-30FM 8031414883387				
LED-KONE-B-30FM 8031414883349				
lumen	2760 lm	3000 K	>63	
LED-KONE-W-30FR 8031414883394				
LED-KONE-B-30FR 8031414883363				
lumen	2760 lm	3000 K	>93	

watt	30W
beam angle	38°
pf	0.90



Trifase / Three-phase

ACTION

indoor use · accommodation areas use · office use · commercial areas use

Proiettore a binario in alluminio pressofuso con adattatore trifase invisibile.
Die-cast aluminum track projector with invisible three-phase adapter.



Materiale
corpo in alluminio pressofuso

Material
aluminum die cust body

Colore
bianco opaco
nero opaco

Colour
matt white
matt black

Temperatura colore
3000K / 4000K

Colour temperature
3000K / 4000K

Driver
incluso


Driver
included

CRI 90 · LED COB



	colour temp.	colour
LED-ACTION-W-13C 8031414867820		
lumen 1175 lm		
LED-ACTION-W-13M 8031414867790		
lumen 1175 lm		
LED-ACTION-B-13C 8031414867806		
lumen 1175 lm		
LED-ACTION-B-13M 8031414867776		
lumen 1175 lm		


watt	13W
beam angle	38°
pf	-





	colour temp.	colour
LED-ACTION-W-20C 8031414867837		
lumen 1910 lm		
LED-ACTION-W-20M 8031414866724		
lumen 1910 lm		
LED-ACTION-B-20C 8031414867844		
lumen 1910 lm		
LED-ACTION-B-20M 8031414867813		
lumen 1910 lm		


watt	20W
beam angle	38°
pf	-





	colour temp.	colour
LED-ACTION-W-42C 8031414867875		
lumen 4230 lm		
LED-ACTION-W-42M 8031414867882		
lumen 4230 lm		
LED-ACTION-B-42C 8031414867851		
lumen 4230 lm		
LED-ACTION-B-42M 8031414867868		
lumen 4230 lm		

watt	42W
beam angle	38°
pf	0.90



Accessori non inclusi / Not included accessories

Retina antiabbagliamento / Anti-glare retina


LED-ACTION-MESH50 8031414875986	per	13W
LED-ACTION-MESH62 8031414875993	per	20W
LED-ACTION-MESH90 8031414876006	per	42W

Deviatore flusso luminoso / Luminous flux diverter




LED-ACTION-DIFF50 8031414875955	per	13W
LED-ACTION-DIFF62 8031414875962	per	20W
LED-ACTION-DIFF90 8031414875979	per	42W


Fotometria del prodotto / Photometric curve



LED-ACTION 13W



LED-ACTION 20W



LED-ACTION 42W

Trifase / Three-phase

ROCKET

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco
cromo
oro
bronzo

Temperatura colore
3000K / 4000K


Driver
integrato

Material
aluminum die cust body

Colour
matt white
matt black
chrome
gold
bronze


Colour temperature
3000K / 4000K

Driver
built-in



CRI 90 · LED COB · CE · EMC

Proiettore a binario con luce spot in alluminio pressofuso con adattatore trifase.
Track headlamp with spot light in die-cast aluminum with three-phase adapter.







	colour temp.	colour
LED-ROCKET-7C BCO 8031414861972		
LED-ROCKET-7M BCO 8031414864171		
lumen	500 lm	
LED-ROCKET-7C NERO 8031414861965		
LED-ROCKET-7M NERO 8031414864300		
lumen	500 lm	
LED-ROCKET-7C CR 8031414864294		
LED-ROCKET-7M CR 8031414864317		
lumen	500 lm	
LED-ROCKET-7C ORO 8031414864164		
LED-ROCKET-7M ORO 8031414864737		
lumen	500 lm	
LED-ROCKET-7C BRO 8031414864188		
LED-ROCKET-7M BRO 8031414864744		
lumen	500 lm	
watt	7W	
beam angle	38°	

Trifase / Three-phase

ROCKET

indoor use · accommodation areas use · office use · commercial areas use

Spot applique.
Wall spot light.

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
integrato


Material
aluminum die cust body

Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
built-in






CRI 90 · LED COB · CE · EMC





	colour temp.	colour
LED-ROCKET-APC BCO 8031414861996		
lumen	500 lm	
LED-ROCKET-APM BCO 8031414864966		
lumen	500 lm	
LED-ROCKET-APC NERO 8031414861989		
lumen	500 lm	
LED-ROCKET-APM NERO 8031414864980		
lumen	500 lm	
watt	7W	
beam angle	38°	



Trifase / Three-phase

SQUIB

indoor use · accommodation areas use · office use · commercial areas use

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.

Materiale
alluminio

Colore
bianco satinato
nero satinato
oro satinato

Material
aluminum

Colour
satin white
satin black
satin gold





colour

I-SQUIB-BCO
8031414883226

I-SQUIB-NER
8031414883233

I-SQUIB-ORO
8031414895397

1 x GU10 MAX 25W

Lampadina non inclusa / Light bulb not included



Trifase / Three-phase

EXPRESS

indoor use · accommodation areas use · office use · commercial areas use

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.

Materiale
metallo

Colore
bianco satinato
nero satinato

Material
metal

Colour
satin white
satin black






colour

LED-EXPRESS
8031440360470

LED-EXPRESS-B
8031414864676

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included



Trifase / Three-phase

OBOE

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco
nero
cromo
oro
bronzo

Temperatura colore
3000K / 4000K


Driver
integrato

Material
aluminum die cust body

Colour
white
black
chrome
gold
bronze

Colour temperature
3000K / 4000K


Driver
built-in



LED-OBOE-SC

CRI >80 · LED COB

Sospensione in alluminio pressofuso con adattatore trifase.
Die-cast aluminum suspension with three-phase adapter.







	colour temp.	colour
LED-OBOE-SC BCO 8031414865109		
LED-OBOE-SM BCO 8031414862047		
lumen	240 lm	
LED-OBOE-SC NERO 8031414865147		
LED-OBOE-SM NERO 8031414862030		
lumen	240 lm	
LED-OBOE-SC CR 8031414865130		
LED-OBOE-SM CR 8031414862061		
lumen	240 lm	
LED-OBOE-SC ORO 8031414865123		
LED-OBOE-SM ORO 8031414862054		
lumen	240 lm	
LED-OBOE-SC BRO 8031414865116		
LED-OBOE-SM BRO 8031414864287		
lumen	240 lm	
watt	3,5W	
beam angle	40°	

Trifase / Three-phase

CLOCK

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio con cavo in tessuto nero

Colore
cromo
nero anodizzato

Material
aluminum with black fabric cable

Colour
chrome
black anodized



Sospensione in alluminio con adattatore trifase e cavo in tessuto nero.
Pendant lamp in alluminum with three-phase adaptor and black fabric cable.







	colour
I-TRACK-CLOCK-CR 8031414864072	
I-TRACK-CLOCK-NERO 8031414864096	

1 x E27 MAX 60W

Lampadina non inclusa / Light bulb not included



Portalampada incluso / Lampholder included

Trifase / Three-phase

MAXWELL

commercial areas use

industrial areas use

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white
black

Colour temperature
3000K / 4000K

Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

CRI >80


LED SMD

Lampada lineare in alluminio con adattatore trifase.
Linear aluminum lamp with three-phase adapter.






	colour temp.	colour
MAXWELL-W-25C		
8031414884056		
lumen	3300 lm	
MAXWELL-W-25M		
8031414884049		
lumen	3300 lm	
MAXWELL-B-25C		
8031414884070		
lumen	3300 lm	
MAXWELL-B-25M		
8031414884063		
lumen	3300 lm	



Fotometria del prodotto / Photometric curve




MAXWELL-25

watt	25W
beam angle	90°






	colour temp.	colour
MAXWELL-W-48C		
8031414884018		
lumen	6500 lm	
MAXWELL-W-48M		
8031414884001		
lumen	6500 lm	
MAXWELL-B-48C		
8031414884032		
lumen	6500 lm	
MAXWELL-B-48M		
8031414884025		
lumen	6500 lm	



Fotometria del prodotto / Photometric curve




MAXWELL-48


watt	48W
beam angle	90°



Interruttore per regolazione potenza /
Power switchable:
48W - 44W - 40W - 34W
130 LM/W



Accessori non inclusi / Not included accessories



BUSMAX-LENS-25
8031414884117
Lente per doppio fascio luminoso 25° /
Double lens 25°
Per i modelli **MAXWELL 25** occorrono
2 pezzi per l'intera lampada /
2 pieces need for the
whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono
4 pezzi per l'intera lampada /
4 pieces need for the
whole **MAXWELL 48** models




BUSMAX-LENS-RL
8031414884124
Lente fascio di luce asimmetrica 25° sx-dx/
Asymmetric lens 25° sx-dx
Per i modelli **MAXWELL 25** occorrono
2 pezzi per l'intera lampada /
2 pieces need for the
whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono
4 pezzi per l'intera lampada /
4 pieces need for the
whole **MAXWELL 48** models

Trifase / Three-phase

HELP TRACK

Lampade di emergenza LED in policarbonato per sistema binario trifase.
LED emergency lamps in polycarbonate for three-phase track system.





LED SMD

Materiale
policarbonato

Colore
bianco
nero

Temperatura colore
4000K

Material
polycarbonate

Colour
white
black

Colour temperature
4000K








	colour temp.	colour
LED-HELP-W-TRACK 8031414884179		
lumen	250 lm	
LED-HELP-B-TRACK 8031414884162		
lumen	250 lm	

watt	2W
beam angle	140°



LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

TRACK

Binari ed accessori.
Track rail and components.



LED-TRACK-1M
8031439221263

Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-TRACK-2M
8031440360340

Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-TRACK-3M
8031440360357

Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.

3 m track rail in white aluminum with three-phase adaptor and endcap included.



LED-TRACK-PL
8031440358668

Kit 2 pz. Basette bianche per binario guida trifase.

Kit 2 pcs. white base for track rail three-phase.



LED-TRACK-BASE
8031440361668

Base tonda bianca per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).

White round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).

LED-TRACK-CAP
8031414866229

Tappo per binario trifase bianco.

White cap for three-phase track rail.



LED-TRACK-ADAT
8031414866410

Adattatore bianco per binario trifase.

White adapt for three-phase track rail.



LED-TRACK-S-1,5
8031440359061

Sistema sospensione 1,5 m per binari bianco.

White suspension 1,5 m for track rail.

LED-TRACK-S-3
8031440359047

Sistema sospensione 3 m per binari bianco.

White suspension 3 m for track rail.



LED-TRACK-1M NERO
8031440360425

Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-TRACK-2M NERO
8031440360364

Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in black aluminum with three-phase adaptor and endcap included.

LED-TRACK-3M NERO
8031440360371

Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.


3 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-TRACK-PL NERO
8031440358699

Kit 2 pz. basette nere per binario guida trifase.

Kit 2 pcs. black base for track rail three-phase.






LED-TRACK-BASE NERO
8031440361675

Base tonda nera per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).

Black round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE) .





LED-TRACK-CAP NERO
8031414866205

Tappo per binario trifase nero.

Black cap for three-phase track rail.






LED-TRACK-ADAT NERO
8031414866397

Adattatore nero per binario trifase.

Black adapt for three-phase track rail.





LED-TRACK-S-1,5 NERO
8031440359078

Sistema sospensione 1,5 m per binari nero.

Black suspension 1,5 m for track rail.



LED-TRACK-S-3 NERO
8031440359054

Sistema sospensione 3 m per binari nero.

Black suspension 3 m for track rail.



TRACK

Binari ed accessori.
Track rail and components.



LED-TRACK-I-MINI
8031440358705

Connettore lineare mini bianco a scoparsa per sistema binari trifase.

White mini invisible connector for three-phase track rail system.



LED-TRACK-NEST
8031440311564

Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.

LED-TRACK-NEST-R
8031440359009

Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-TRACK-I
8031440311526

Connettore bianco lineare per binari sistema trifase.

White straight connector for three-phase track rail system.



LED-TRACK-FLEX
8031440359085

Connettore bianco flessibile per sistema trifase.

White flexible power connector for three-phase track rail system.



LED-TRACK-X
8031439231262

Connettore a croce bianco per sistema trifase.

White cross connector for three-phase system.



LED-TRACK-L-R
8031440358972

Connettore bianco track destro a L per binari guida trifase.

White L connector right side for three-phase track rail system.

LED-TRACK-L
8031439241261

Connettore bianco track sinistro a L per binari guida trifase.

White L connector left side for three-phase track rail system.



LED-TRACK-I-MINI NERO
8031440357845

Connettore lineare mini nero a scoparsa per sistema binari trifase.

Black mini invisible connector for three phase track rail system.






LED-TRACK-NEST NERO
8031440360418

Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.

Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-TRACK-NEST-R NERO
8031440359016

Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.


Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-TRACK-I NERO
8031440360432

Connettore nero lineare per binari sistema trifase.

Black straight connector for three-phase track rail system.






LED-TRACK-FLEX NERO
8031440359030

Connettore bianco flessibile per sistema trifase.

Black flexible power connector for three-phase track rail system.






LED-TRACK-X NERO
8031440360395

Connettore a croce nero per sistema trifase.

Black cross connector for three-phase system.






LED-TRACK-L-R NERO
8031440359023

Connettore nero track destro a L per binari guida trifase.

Black L connector right side for three-phase track rail system.



LED-TRACK-L NERO
8031440360401

Connettore nero track sinistro a L per binari guida trifase.

Black L connector left side for three-phase track rail system.

TRACK

Binari ed accessori.
Track rail and components.



LED-TRACK-T
8031440311571

Connettore bianco destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right white T connector
for L N input guide
rails + ground cable for
trhree-phase system.

LED-TRACK-T-L1
8031440358989

Connettore bianco sinistro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Left white T connector
for L N input guide
rails + ground cable for
trhree-phase system.

LED-TRACK-T-R1
8031440357449

Connettore bianco destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right white T connector
for L N input guide
rails + ground cable for
trhree-phase system.

LED-TRACK-T-R2
8031440357487

Connettore bianco a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.


White T connector
for L N input guide
rails + ground cable for
three-phase circuit.



LED-TRACK-T NERO
8031440360388

Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
trhree-phase system.



LED-TRACK-T-L1 NERO
8031440358996

Connettore nero sinistro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Left black T connector
for L N input guide
rails + ground cable for
trhree-phase system.

LED-TRACK-T-R1 NERO
8031440357456

Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
trhree-phase system.

LED-TRACK-T-R2 NERO
8031440357661

Connettore nero a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Black T connector
for L N input guide
rails + ground cable for
three-phase circuit.

TRACK

Binari ed accessori.
Track rail and components.



LED-TRACK-1M-INC
8031440361804

Binario trifase ad incasso in alluminio bianco 1 m.

Recessed track light in white aluminum 1 m.

LED-TRACK-2M-INC
8031440361811

Binario trifase ad incasso in alluminio bianco 2 m.

Recessed track light in white aluminum 2 m.



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso

Kit 2pcs metal bracket for recessed track rail



INC-TRACK-NEST
8031414871193

Innesto sinistro per binario ad incasso trifase bianco.

White recess power connector left side for three-phase track rail.



INC-TRACK-NEST-R
8031414871179

Innesto destro per binario ad incasso trifase bianco.

White recess power connector right side for three-phase track rail in back version.



INC-TRACK-I
8031414871254

Connettore bianco lineare ad incasso per binari trifase.

White recess straight connection for three-phase track rail system.

INC-TRACK-L-R
8031414871216

Connettore bianco ad incasso destro a L per binari trifase.

White recess L connector right side for three-phase track rail system.

INC-TRACK-L
8031414871230

Connettore bianco ad incasso sinistro a L per binari trifase.

White recess L connector left side for three-phase track rail system.



LED-TRACK-1M-INC NERO
8031414864836

Binario trifase ad incasso in alluminio nero 1 m.

Recessed track light in black aluminum 1 m.



LED-TRACK-2M-INC NERO
8031414864058

Binario trifase ad incasso nero in alluminio 2 m.

Recessed track light in black aluminum 2 m.



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso

Kit 2pcs metal bracket for recessed track rail






INC-TRACK-NEST NERO
8031414871209

Innesto sinistro per binario ad incasso trifase nero.

Black recess power connector left side for three-phase track rail.



INC-TRACK-NEST-R NERO
8031414871186

Innesto destro per binario ad incasso trifase nero.


Black recess power connector right side for three-phase track rail in back version.



INC-TRACK-I NERO
8031414871261

Connettore nero lineare ad incasso per binari trifase.

Black recess straight connection for three-phase track rail system.






INC-TRACK-L-R NERO
8031414871223

Connettore nero ad incasso destro a L per binari trifase.

Black recess L connector right side for three-phase track rail system.



INC-TRACK-L NERO
8031414871247

Connettore nero ad incasso sinistro a L per binari trifase.


Black recess L connector left side for three-phase track rail system.

TRUNKING SYSTEM **BUSBAR**



Schema di montaggio sistema binari.
Assembling technical sheet track rail system.

TRUNKING SYSTEM **BUSBAR**

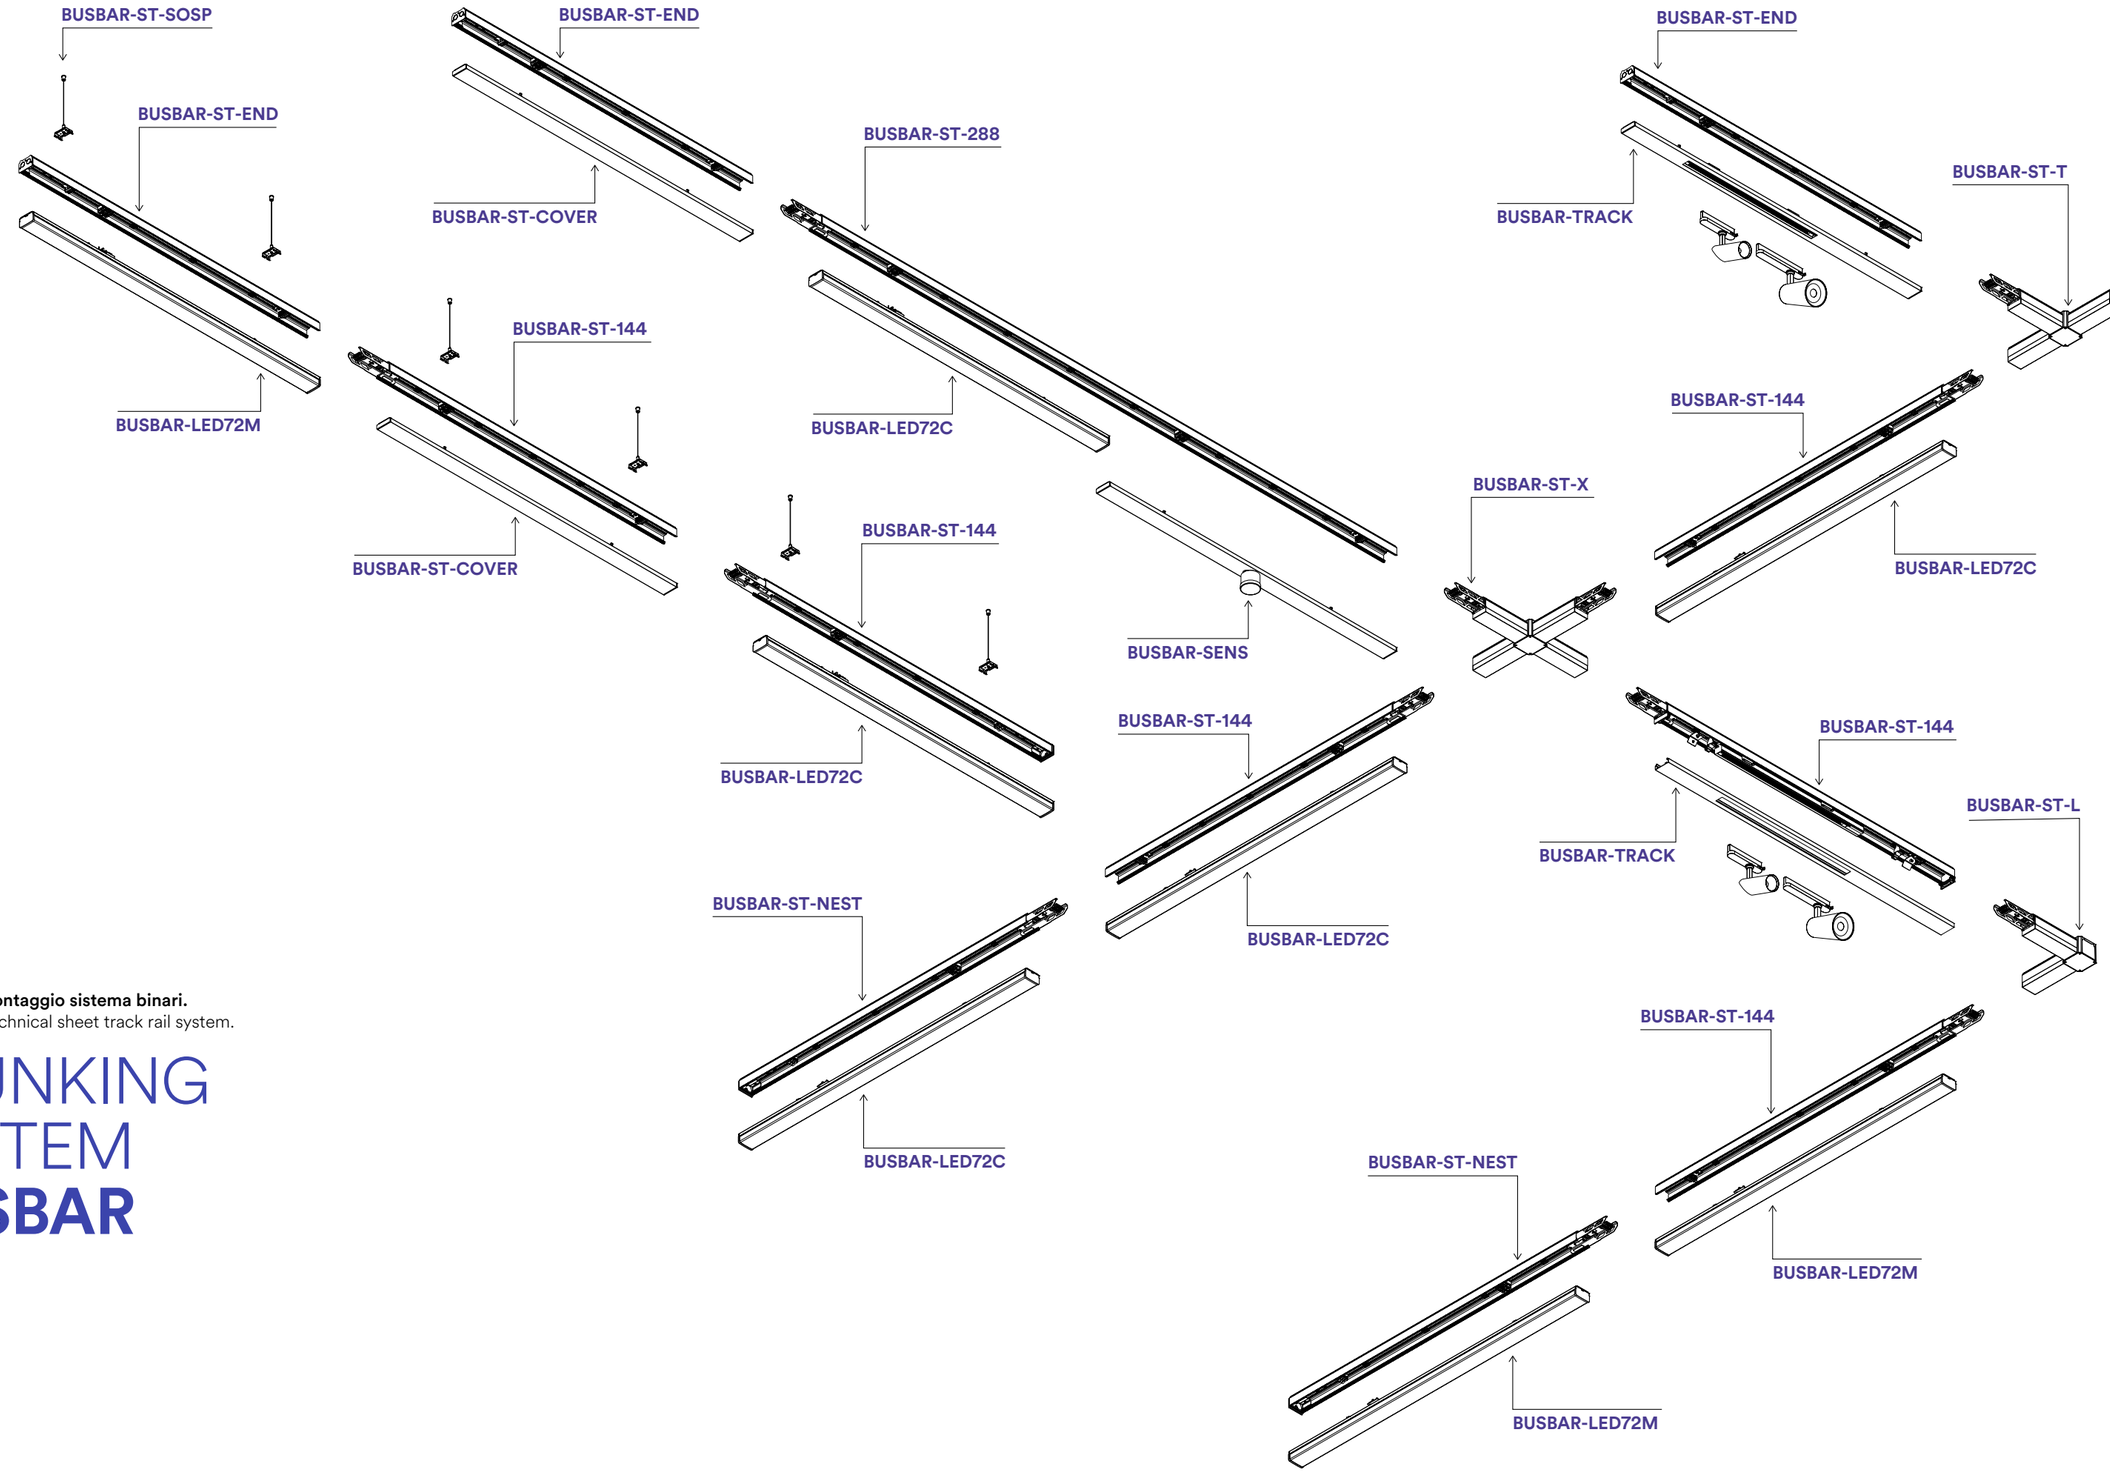

Trunking System

BUSBAR

Sistema trunking lineare.
Trunking linear system.

accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off


Material
aluminum

Colour
white

Colour temperature
3000K / 4000K

Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

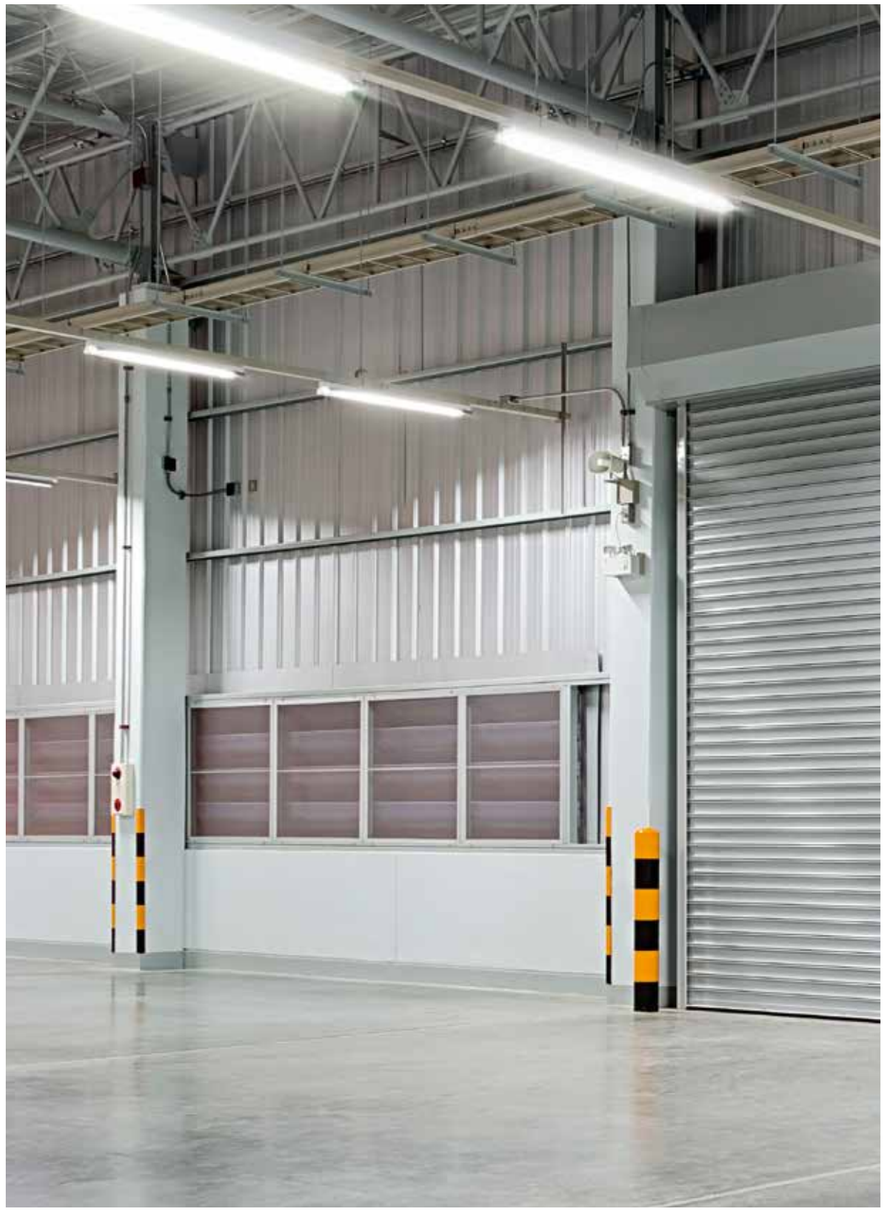

+10-100% · IP54 · degree IK08 · CRI >82 · LED SMD



Antipolvere e antispruzzo / Dustprood and splashproof

Led rivestiti contro le influenze esterne / Coated LEDs against external influences

Montaggio senza attrezzi / Toolless mounting



Sistema di fissaggio a soffitto o a sospensione / Ceiling mount or pendant fixing system



Estensibile grazie ai moduli in 2 misure / Extendable thanks to the extruded aluminum modules



Sistema easy di aggancio binari / Track rail easy connection system




7 cavi L1 L2 L3 N E D+ D- trifase più dimmer / 7 wire connection system L1 L2 L3 N E D+ D- three-phase + dimmer




Sistema easy di fissaggio della lampada / Lamp easy installation system

Lenti per diversi fasci di luce / Different beam angles optional lens



Lente inclusa / Included lens



Lente opzionale doppio fascio luminoso 25°/ **Optional lens** double lens 25°



Lente opzionale fascio di luce asimmetrico 25° sx-dx / **Optional lens** asymmetric lens 25° sx-dx

BUSBAR

Lampada lineare per sistema trunking.
Linear lamp for trunking system.

commercial areas use

industrial areas use

Materiale
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white


Colour temperature
3000K / 4000K

Driver
built-in


Life time and on/off
50.000h
>25.000 on/off



+10-100% IP54 degree IK08 CRI >82 LED SMD

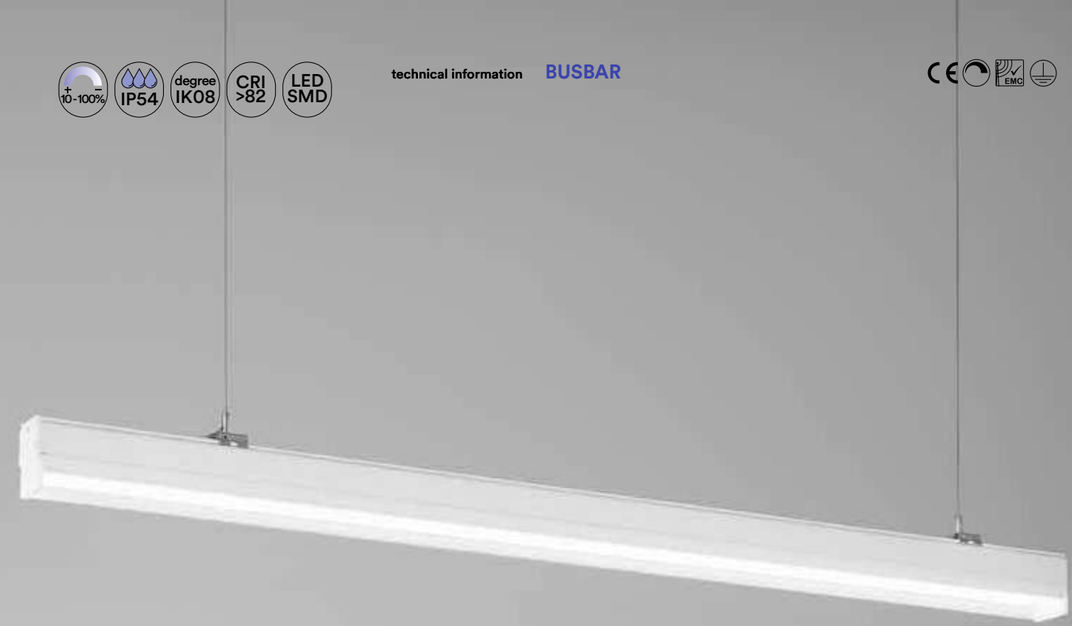

	colour temp.	colour
BUSBAR-LED72C 8031414883936		
lumen	9340 lm	
BUSBAR-LED72M 8031414883929		
lumen	9340 lm	
watt	72W	
beam angle	90°	



	colour temp.	colour
BUSBAR-LED72M-HELP 8031414898367		
lumen	9340 lm	
watt	72W	
emergency light	3 h - 600 lm	
watt	4W	
beam angle	90°	

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT


Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT EMERGENGY LIGHT

Compatibile con altri sistemi trunking in commercio / Compatible with other trunking systems




Fotometria del prodotto / Photometric curve



BUSBAR-LED72

Accessori non inclusi / Not included accessories





BUSMAX-LENS-25
8031414884117

Lente per doppio fascio luminoso 25° / Double lens 25°

Per tutta la lampada **BUSBAR** occorrono 5 pezzi / 5 pieces need for the whole **BUSBAR** lamp

BUSMAX-LENS-RL
8031414884124

Lente fascio di luce asimmetrica 25° sx-dx / Asymmetric lens 25° sx-dx

Per tutta la lampada **BUSBAR** occorrono 5 pezzi / 5 pieces need for the whole **BUSBAR** lamp


BUSBAR

Sistema blindosbarra lineare per installazione a sospensione e plafoniera.
Busways linear system bar for suspended installation and ceiling light.



BUSBAR-ST-NEST
8031414883943


Binario innesto 7 cavi per alimentazione.	Feed trunking with 7 input wire.





BUSBAR-ST-END
8031414883950


Binario terminale 7 cavi con sistema di connessione multipla.	Terminal track rail 7 cables with multiple connection system.





BUSBAR-ST-144
8031414883967


Binario intermedio 7 cavi da 145 cm.	Intermediate trunking with 7 wire of 145 cm.





BUSBAR-ST-288
8031414883974


Binario intermedio 7 cavi da 290 cm.	Intermediate trunking with 7 wire of 290 cm.





BUSBAR-ST-L
8031414884087


Connettore a L 7 cavi.	L connector with 7 wires.





BUSBAR-ST-T
8031414884100


Connettore a T 7 cavi.	T connector with 7 wires.






BUSBAR-ST-X
8031414884094


Connettore a X 7 cavi.	X connector with 7 wires.





BUSBAR-ST-COVER
8031414883981

Cover di alluminio bianco.	White aluminum cover.





LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali.	Industrial sensor remote control.

BUSBAR-SENS
1 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

BUSBAR-SENS
2 / function



Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità.

If there is motion detected, the light will be remained at a low light level all the time.



Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità.

When motion is detected, the sensor will switch on the light to 100% brightness.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.

BUSBAR-SENS
3 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.




Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.

After elapse of standby period, the sensor switches off the light if no motion is detected.



BUSBAR-SENS
8031414884131


Cover elettrificata con sensore di movimento e crepuscolare da 3 funzioni incluso.	Electrified cover with montion and crepuscolar 3 functions sensor.





BUSBAR-TRACK
8031414884148

Cover elettrificata con binario trifase.	Electrified cover with three phase track system.

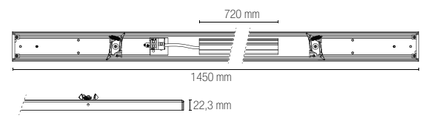




BUSBAR-FIX
8031414884155

Kit 2 pz staffe per fissaggio a plafoniera.	Bracket kit 2 pcs for ceiling mounting.



BUSBAR-ST-SOSP
8031414883998

Kit 2 pz cavi per binario a sospensione con cavo da 5 m.	Kit 2 pcs cables for suspension track with 5 m cable.



INCASSI

RECESSED LAMPS

APOLLO

Faretto ad incasso antiriflesso con struttura in alluminio e finitura con bordo bianco ed interno nero satinato. Luci spot con doppia orientabilità.
Anti-glare recessed spotlight with aluminum structure and finish with white border and satin black interior. Spot lights with double orientability.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bordo bianco e interno nero satinato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
body with white edge and satin black internal

Colour temperature
3000K / 4000K

Driver
included







APOLLO




	colour temp.	colour
INC-APOLLO-1X10C		
8031440360623		
lumen	1000 lm	
INC-APOLLO-1X10M		
8031440360630		
lumen	1000 lm	
watt	1 × 10W	
beam angle	40°	
pf	-	
	100 × 100 mm	




	colour temp.	colour
INC-APOLLO-1X20C		
8031440360692		
lumen	2000 lm	
INC-APOLLO-1X20M		
8031440360708		
lumen	2000 lm	
watt	1 × 20W	
beam angle	40°	
pf	-	
	125 × 125 mm	




	colour temp.	colour
INC-APOLLO-1X30C		
8031440360753		
lumen	2900 lm	
INC-APOLLO-1X30M		
8031440360760		
lumen	2900 lm	
watt	1 × 30W	
beam angle	40°	
pf	0.90	
	175 × 175 mm	





	colour temp.	colour
INC-APOLLO-1X45C		
8031440360777		
lumen	4500 lm	
INC-APOLLO-1X45M		
8031440360784		
lumen	4500 lm	
watt	1 × 45W	
beam angle	40°	
pf	0.90	
	175 × 175 mm	




Fotometria del prodotto / Photometric curve


INC-APOLLO-1X10



INC-APOLLO-1X20


INC-APOLLO-1X30



INC-APOLLO-1X45




	colour temp.	colour
INC-APOLLO-2X10C		
8031440360647		
lumen	2000 lm	
INC-APOLLO-2X10M		
8031440360654		
lumen	2000 lm	
watt	2 × 10W	
beam angle	40°	
pf	-	
	190 × 100 mm	




	colour temp.	colour
INC-APOLLO-2X20C		
8031440360715		
lumen	4000 lm	
INC-APOLLO-2X20M		
8031440360722		
lumen	4000 lm	
watt	2 × 20W	
beam angle	40°	
pf	-	
	245 × 125 mm	





	colour temp.	colour
INC-APOLLO-2X30C		
8031440360791		
lumen	5800 lm	
INC-APOLLO-2X30M		
8031440360807		
lumen	5800 lm	
watt	2 × 30W	
beam angle	40°	
pf	0.90	
	320 × 175 mm	





	colour temp.	colour
INC-APOLLO-2X45C		
8031440360814		
lumen	9000 lm	
INC-APOLLO-2X45M		
8031440360821		
lumen	9000 lm	
watt	2 × 45W	
beam angle	40°	
pf	0.90	
	320 × 175 mm	




INC-APOLLO-2X10*



INC-APOLLO-2X20*


INC-APOLLO-2X30*



INC-APOLLO-2X45*




	colour temp.	colour
INC-APOLLO-3X10C		
8031440360661		
lumen	3000 lm	
INC-APOLLO-3X10M		
8031440360678		
lumen	3000 lm	
watt	3 × 10W	
beam angle	40°	
pf	-	
	290 × 100 mm	




	colour temp.	colour
INC-APOLLO-3X20C		
8031440360746		
lumen	6000 lm	
INC-APOLLO-3X20M		
8031440360739		
lumen	6000 lm	
watt	3 × 20W	
beam angle	40°	
pf	-	
	355 × 125 mm	



	colour temp.	colour
INC-APOLLO-3X30C		
8031440360845		
lumen	8700 lm	
INC-APOLLO-3X30M		
8031440360838		
lumen	8700 lm	
watt	3 × 30W	
beam angle	40°	
pf	0.90	
	475 × 175 mm	





	colour temp.	colour
INC-APOLLO-3X45C		
8031440360852		
lumen	13500 lm	
INC-APOLLO-3X45M		
8031440360869		
lumen	13500 lm	
watt	3 × 45W	
beam angle	40°	
pf	0.90	
	475 × 175 mm	



INC-APOLLO-3X10*

INC-APOLLO-3X20*


INC-APOLLO-3X30*


INC-APOLLO-3X45*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

OUTSIDER

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco opaco e bordatura interna nera. Luci spot con testa estraibile e orientabile a 350°.
Anti-glare recessed spotlight with aluminum structure, matt white finish and black inner border. Spot lights with pull-out head and adjustable to 350.

indoor use
accommodation areas use
office use
commercial areas use







Materiale
alluminio

Colore
bianco opaco con bordatura interna nera

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
matt white color and black internal ring

Colour temperature
3000K / 4000K

Driver
included




OUTSIDER


CRI >80 | LED COB



	colour temp.	colour
INC-OUTSIDER-1X15C		
8031414864225		
lumen	1375 lm	
INC-OUTSIDER-1X15M		
8031414864119		
lumen	1375 lm	
watt	1 × 15W	
beam angle	24°	
pf	-	
	90 × 90 mm	




	colour temp.	colour
INC-OUTSIDER-1X30C		
8031414864256		
lumen	3100 lm	
INC-OUTSIDER-1X30M		
8031414864133		
lumen	3100 lm	
watt	1 × 30W	
beam angle	24°	
pf	0.90	
	116 × 116 x pr. 110 mm	






	colour temp.	colour
INC-OUTSIDER-2X15C		
8031414864232		
lumen	2750 lm	
INC-OUTSIDER-2X15M		
8031414864126		
lumen	2750 lm	
watt	2 × 15W	
beam angle	24°	
pf	-	
	174 × 90 x pr. 96 mm	




	colour temp.	colour
INC-OUTSIDER-2X30C		
8031414864263		
lumen	6200 lm	
INC-OUTSIDER-2X30M		
8031414864140		
lumen	6200 lm	
watt	2 × 30W	
beam angle	24°	
pf	0.90	
	230 × 116 x pr. 110 mm	







	colour temp.	colour
INC-OUTSIDER-3X15C		
8031414864249		
lumen	4125 lm	
INC-OUTSIDER-3X15M		
8031414864102		
lumen	4125 lm	
watt	3 × 15W	
beam angle	24°	
pf	-	
	260 × 90 x pr. 96 mm	




	colour temp.	colour
INC-OUTSIDER-3X30C		
8031414864270		
lumen	9300 lm	
INC-OUTSIDER-3X30M		
8031414864157		
lumen	9300 lm	
watt	3 × 30W	
beam angle	24°	
pf	0.90	
	236 × 116 x pr. 110 mm	

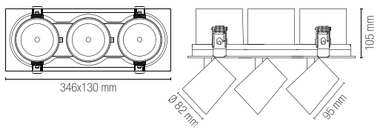


Fotometria del prodotto / Photometric curve




INC-OUTSIDER-1X15




INC-OUTSIDER-1X30




INC-OUTSIDER-2X15



INC-OUTSIDER-2X30



INC-OUTSIDER-3X15



INC-OUTSIDER-3X30

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element



DELTA INC

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco satinato e riflettore silver. Luci spot con testa estraibile e orientabile. Disponibile anche nella colorazione per la linea food.
Anti-glare recessed spotlight with aluminum structure, satin white finish and silver reflector. Spot lights with removable and adjustable head. Also available for lighting food line.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Colore
bianco satinato
e riflettore silver

Temperatura colore
3000K / 4000K

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum

Colour
satin white and silver reflector

Colour temperature
3000K / 4000K

Temperatura colore selezionabile
3000K / 4000K / 6500K


Driver
included




CRI 90 · LED COB



	colour temp.	colour
INC-DELTA-20C		
8031414883523		
lumen	2600 lm	
INC-DELTA-20M		
8031414883530		
lumen	2600 lm	
watt	20W	
beam angle	24°	
pf	-	
	Ø 128 mm	



Fotometria del prodotto / Photometric curve




INC-DELTA-20



	colour temp.	colour
INC-DELTA-30C		
8031414883271		
lumen	3860 lm	
INC-DELTA-30M		
8031414883288		
lumen	3860 lm	
watt	30W	
beam angle	24°	
pf	0.90	
	Ø 150 mm	







INC-DELTA-30



	colour temp.	colour
INC-DELTA-38		
8031414893546		
lumen	4300 lm	
watt	38W	
beam angle	60°	
pf	0.90	
	Ø 160 mm	






INC-DELTA-38

Illuminazione per generi alimentari / Food lighting

CRI >80



	colour temp.	colour
INC-DELTA-30BR		
8031414883417		
lumen	3155 lm	
K	2500 K	
CRI	>60-63	
INC-DELTA-30RM		
8031414883448		
lumen	3155 lm	
K	3100 K	
CRI	>60-63	
INC-DELTA-30FM		
8031414883424		
lumen	3155 lm	
K	3000 K	
CRI	>60-63	
INC-DELTA-30FR		
8031414883431		
lumen	3155 lm	
K	3000 K	
CRI	>60-63	
watt	30W	
beam angle	24°	
pf	0.90	
	Ø 150 mm	



LYBRA

Faretto ad incasso rettangolare con struttura in alluminio e finitura in bianco satinato. Diffusore con orientabilità verticale.
Rectangular recessed spotlight with aluminum structure and satin white finish. Diffuser with vertical orientability.

accommodation areas use · office use · commercial areas use



Materiale
alluminio + PC

Colore
bianco satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included




	colour temp.	colour
INC-LYBRA-38		
8031414893553		
lumen	4400 lm	
watt	38W	
beam angle	120°	
pf	0.90	
	220 × 140 mm	

Fotometria del prodotto / Photometric curve



INC-LYBRA-38



CRI >80 · LED COB

FIBRA OTTICA

Kit fibra ottica traslucente con temperatura colore RGB+4000K.
Translucent fiber optic kit with color temperature RGB + 4000K.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
fibra ottica traslucente

Temperatura colore
RGB + 4000K

Driver
incluso

Dimmer
dimmerabile con radiocomando

Material
translucent optical fiber

Colour temperature
RGB + 4000K

Driver
included

Dimmer
dimmable with remote control






Accessori inclusi / Included accessories



Driver radio controller

	colour temp.
FIBRAOTTICA-LED-RGB	
8031436691236	
100 fiber of Ø 1mm	
watt	16W

RGB



STARLIGHT
STARLIGHT30

indoor use

accommodation areas use

STARLIGHT

Materiale
alluminio

Colore
bianco, argento

Temperatura colore
4000K / BLU

Driver
non incluso

Material
aluminum

Colour
white, silver

Colour temperature
4000K / BLU

Driver
not included

STARLIGHT 30

Materiale
alluminio

Colore
bianco, argento

Temperatura colore
4000K


Driver
12V DC 100mA 6W

Material
aluminum

Colour
white, silver

Colour temperature
4000K

Driver
12V DC 100mA 6W

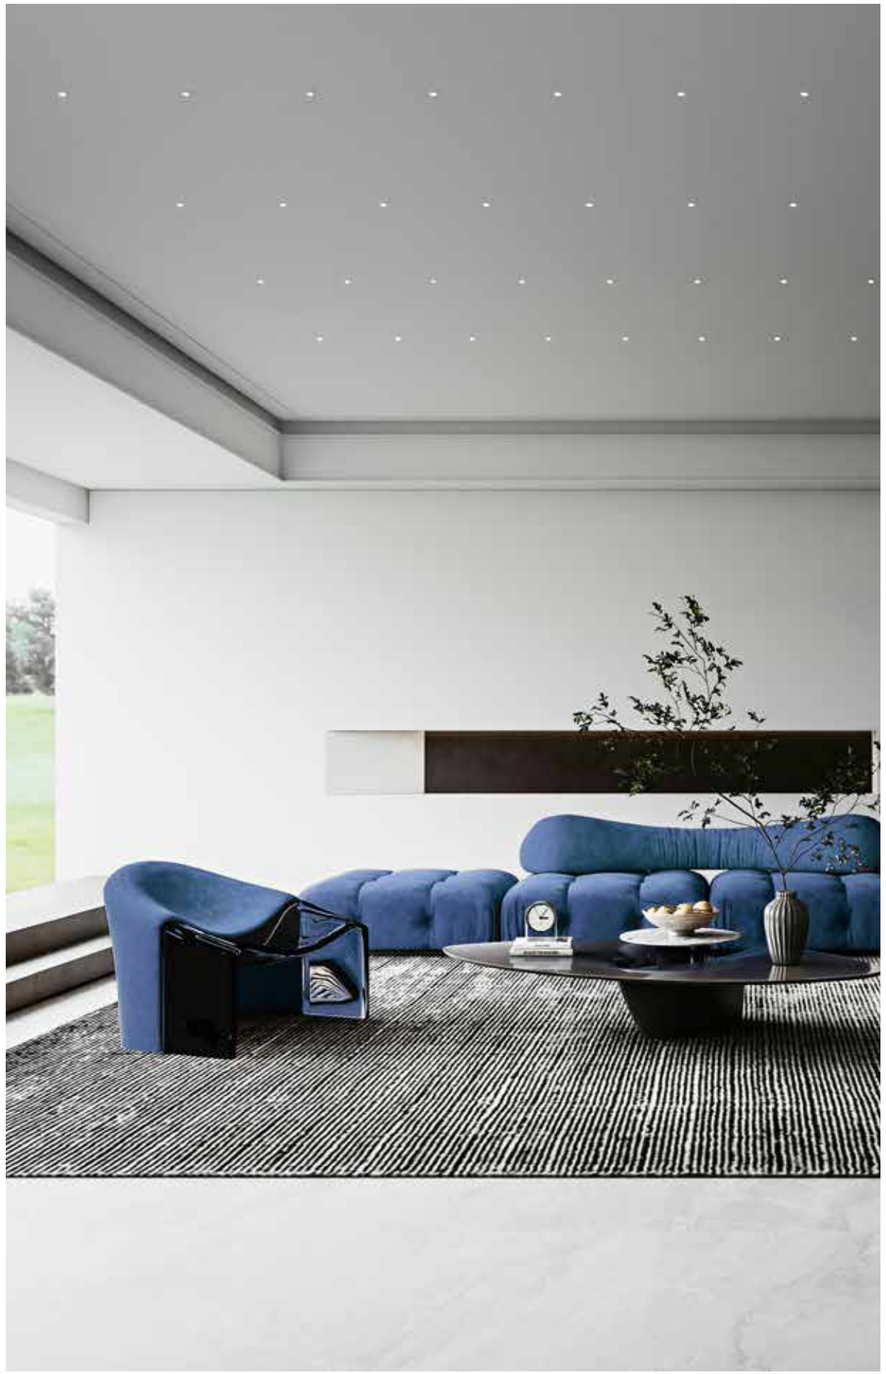

CRI >80



STARLIGHT
Connessione in parallelo / Parallel connection



Mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.
Downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-W 8031440361682		
lumen	11 lm	
LED-STARLIGHT-BLU 8031440361699		
	blu	
with 1 m. cable		
watt	LED 0,2W	
	Ø 14 mm	



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile / White changeable ring



Ghiera silver intercambiabile / Silver changeable ring

Accessori non inclusi / Not included accessories



LED-STARLIGHT-NEX
8031440364430
Scatola connessione per 10 teste 12V DC 1A incl. Cavo 1m. / Box connection for 10 pcs 12V DC 1A with 1m. cable




LED-STARLIGHT-CONN
8031440364843
Connettore con singola entrata 3 uscite per kit cielo stellato 12V DC 1A incl. Cavo 1m. / Connector one input three output for starlight 12V DC 1A with 1m. cable



LED-STARLIGHT-DR
8031440364447
Driver 12V DC 100mA 6W incl. Cavo 1m. / Driver 12V DC 100mA 6W incl. 1m. cable

Fotometria del prodotto / Photometric curve



LED-STARLIGHT 0,2W

STARLIGHT 30



Kit 30 mini faretti a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.
Kit 30 downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-30-W 8031440357692		
lumen	11 lm x 30	
with 1 m. cable		
watt	LED 30 × 0,2W	
	Ø 14 mm	



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile / White changeable ring



Ghiera silver intercambiabile / Silver changeable ring



3 Scatole connessione per 10 teste 12V DC 1A incl. cavo 1m. / 3 Boxes connection for 10 pcs 12V DC 1A with 1m. cable




1 Connettore con singola entrata 3 uscite per kit cielo stellato 12V DC 1A incl. cavo 1m. / 1 Connector one input three output for starlight 12V DC 1A with 1m. cable



1 Driver 12V DC 100mA 6W incl. Cavo 1m. / 1 Driver 12V DC 100mA 6W incl. 1m. cable

Fotometria del prodotto / Photometric curve



LED-STARLIGHT 0,2W

ASSO KIT 3

Kit 3 faretti da incasso con struttura in alluminio disponibile nella versione silver quadrata o rotonda.
Kit 3 recessed spotlights with aluminum structure available in silver square or round.

Materiale
alluminio

Colore
argento

Temperatura colore
4000K

Driver
230V incluso

Material
aluminum

Colour
silver

Colour temperature
4000K

Driver
230V included



indoor use · accommodation areas use · office use · commercial areas use

CRI >80

Kit 3 pz / Kit 3 pcs



INC-ASSO-Q3
8031414881628

	colour temp.	colour
lumen	3×100 lm	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	





Kit 3 pz / Kit 3 pcs




INC-ASSO-R3
8031414881611

	colour temp.	colour
lumen	3×100 lm	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	






Fotometria del prodotto / Photometric curve



INC-ASSO

Accessori inclusi / Included accessories










ASSO

Faretto da incasso con struttura in alluminio disponibile in bianco nero nella forma quadrata o rotonda.
Recessed spotlight with aluminum structure available in black white in square or round shape.



Materiale
alluminio

Colore
bianco
nero

Temperatura colore
3000K / 4000K / BLU

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
white
black

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-Q30C 8031414881642		
lumen	100 lm	
INC-ASSO-Q30M 8031414881659		
lumen	100 lm	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	





1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-Q30C-NER 8031414881666		
lumen	100 lm	
INC-ASSO-Q30M-NER 8031414881673		
lumen	100 lm	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	



1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-R30C 8031414877829		
lumen	100 lm	
INC-ASSO-R30M 8031414877928		
lumen	100 lm	
INC-ASSO-R30-BLU 8031414877935		
	blu	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	






1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-R30C-NER 8031414881635		
lumen	100 lm	
INC-ASSO-R30M-NER 8031414881680		
lumen	100 lm	
watt	LED 1W	
beam angle	30°	
	Ø 25 mm	




Fotometria del prodotto / Photometric curve



INC-ASSO

Accessori inclusi / Included accessories





Connessione in parallelo / Parallel connection system

Driver p. 837-846
Controller pag. 848-851

DOT

Faretto da incasso con struttura in alluminio disponibile in bianco nero.
Recessed spotlight with aluminum structure available in black or white.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K


Driver
incluso

Material
aluminum + PC


Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included



INC-DOT-R5

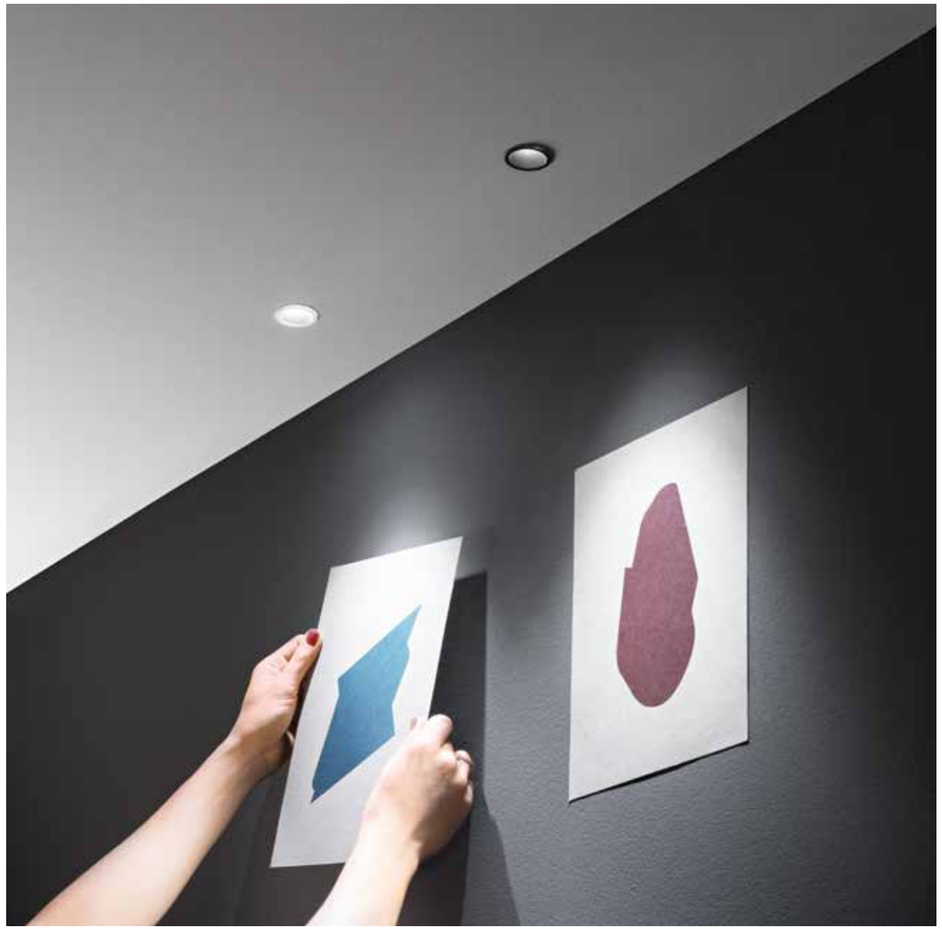

CE · EMC · LED COB · CRI 90



	colour temp.	colour
INC-DOT-R5-BCO 8031414893584		
lumen	480 lm	
INC-DOT-R5-NER 8031414893614		
lumen	480 lm	
watt	5W	
beam angle	24°	
	Ø 37 mm	



DAMA

Faretto da incasso con struttura in policarbonato e doppia ghiera intercambiabile rotonda e quadrata. Disponibile in bianco o nero.
Recessed light with polycarbonate structure and double interchangeable ring round or square. Available in black or white colors.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore
4000K


Driver
incluso

Material
PC

Colour
white
black

Colour temperature
4000K

Driver
included



INC-DAMA-QR44

Accessori inclusi / Included accessories



Cavo 30 cm /
30 cm cable




Ghiere intercambiabili /
Interchangeable ring



CE · EMC · LED COB



	colour temp.	colour
INC-DAMA-QR44-BCO 8031414881581		
lumen	300 lm	
INC-DAMA-QR44-NER 8031414881598		
lumen	300 lm	
watt	LED 3W	
beam angle	100°	
	Ø 35 mm	

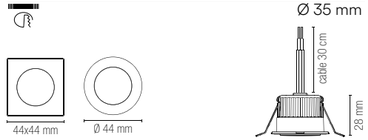

HYDE

Faretto da incasso con struttura in alluminio disponibile in bianco nero.
Recessed spotlight with aluminum structure available in black or white.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
2700K / 3200K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
2700K / 3200K / 4000K / 6500K


Driver
included





colour temp. | colour


INC-HYDE-BCO
8031414893560
lumen 750 lm
watt 8W
beam angle 60°
Ø 70 mm






colour temp. | colour

INC-HYDE-NER
8031414893577
lumen 750 lm
watt 8W
beam angle 60°
Ø 70 mm



Fotometria del prodotto / Photometric curve



INC-HYDE

SINKRO

Faretto da incasso lineare antiriflesso con struttura in alluminio pressofuso, finitura con bordo bianco e interno nero lucido.
Anti-glare linear recessed spotlight with die-cast aluminum structure, finish with white border and glossy black interior.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bordo bianco e interno nero lucido

Temperatura colore
4000K


Driver
incluso

Material
die cast aluminum

Colour
white and glossy black inside

Colour temperature
4000K

Driver
included

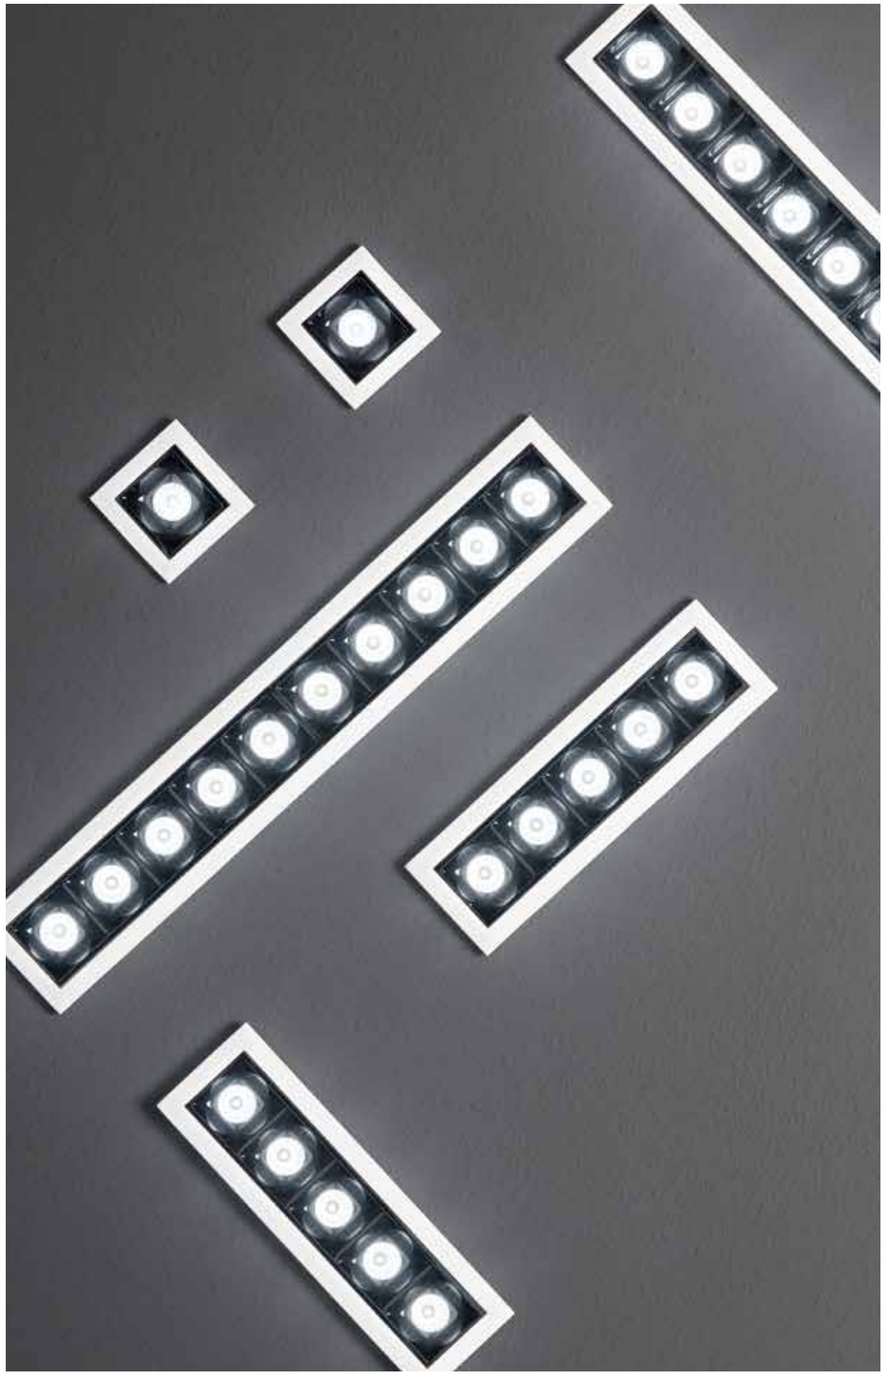


CRI 90 · LED COB



INC-SINKRO-2M
8031440360876


	colour temp.	colour
lumen	230 lm	
watt	2W	
beam angle	45°	
	34 × 34 mm	





INC-SINKRO-10M
8031440360890


	colour temp.	colour
lumen	1130 lm	
watt	5 × 2W	
beam angle	45°	
	136 × 34 mm	






INC-SINKRO-20M
8031440360906


	colour temp.	colour
lumen	2260 lm	
watt	10 × 2W	
beam angle	45°	
	269 × 34 mm	




Fotometria del prodotto / Photometric curve



INC-SINKRO-2M




INC-SINKRO-10M



INC-SINKRO-20M

ELITE

Faretto da incasso antiriflesso con struttura in alluminio e finitura in bianco goffrato. Luce spot orientabile.
Anti-glare recessed spotlight with aluminum frame and embossed white finish. Adjustable spot light.



Materiale
alluminio

Colore
bianco goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
Embossed white

Colour temperature
3000K / 4000K

Driver
included






CRI >80 · LED COB



	colour temp.	colour
INC-ELITE-1X10C		
8031440363396		
lumen	1000 lm	
INC-ELITE-1X10M		
8031440363365		
lumen	1000 lm	
watt	10W	
beam angle	40°	
pf	-	
	Ø 95 mm	






	colour temp.	colour
INC-ELITE-1X20C		
8031440363372		
lumen	2000 lm	
INC-ELITE-1X20M		
8031440363341		
lumen	2000 lm	
watt	20W	
beam angle	40°	
pf	-	
	Ø 107 mm	






	colour temp.	colour
INC-ELITE-1X30C		
8031440363358		
lumen	2900 lm	
INC-ELITE-1X30M		
8031440363327		
lumen	2900 lm	
watt	30W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	








	colour temp.	colour
INC-ELITE-1X45C		
8031440363334		
lumen	4500 lm	
INC-ELITE-1X45M		
8031440363303		
lumen	4500 lm	
watt	45W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	




Fotometria del prodotto / Photometric curve


INC-ELITE-1X10


INC-ELITE-1X20


INC-ELITE-1X30


INC-ELITE-1X45

QUARK

Faretto da incasso con struttura in alluminio antiriflesso e finitura in bianco o nero satinato.
Recessed spotlight with anti-reflective aluminum structure and satin black or white finish.

indoor use · accommodation areas use · office use · commercial areas use



CRI 90 · LED COB

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included



	colour temp.	colour
INC-QUARK-R8-BCO 8031414893621		
lumen	830 lm	
INC-QUARK-R8-NER 8031414893652		
lumen	830 lm	
watt	8W	
beam angle	38°	
	Ø 50 mm	






	colour temp.	colour
INC-QUARK-R12-BCO 8031414893638		
lumen	1300 lm	
INC-QUARK-R12-NER 8031414893669		
lumen	1300 lm	
watt	12W	
beam angle	38°	
	Ø 75 mm	







	colour temp.	colour
INC-QUARK-R18-BCO 8031414893645		
lumen	2000 lm	
INC-QUARK-R18-NER 8031414893676		
lumen	2000 lm	
watt	18W	
beam angle	38°	
	Ø 80 mm	




Fotometria del prodotto / Photometric curve



INC-QUARK-R8




INC-QUARK-R12



INC-QUARK-R18

XANTO

Faretto da incasso con struttura in alluminio pressofuso antiriflesso con finitura in bianco satinato. Disponibile dalla forma quadrata o rotonda in diverse misure.
Recessed spotlight with anti-glare die-cast aluminum structure with satin white finish. Available in square or round shape different sizes.



Materiale
alluminio pressofuso

Colore
bianco satinato

Temperatura colore
3000K / 4000K / 5000K

Driver
incluso

Material
die cast aluminum

Colour
satin white

Colour temperature
3000K / 4000K / 5000K

Driver
included






CRI >80 LED SMD



	colour temp.	colour
INC-XANTO-C-R120		
8031414861101		
lumen	1120 lm	
INC-XANTO-M-R120		
8031414861224		
lumen	1120 lm	
INC-XANTO-F-R120		
8031414861163		
lumen	1120 lm	


watt	12W
beam angle	98°
pf	-
	Ø 110 mm





	colour temp.	colour
INC-XANTO-C-R154		
8031414861118		
lumen	1700 lm	
INC-XANTO-M-R154		
8031414861231		
lumen	1700 lm	
INC-XANTO-F-R154		
8031414861170		
lumen	1700 lm	


watt	18W
beam angle	98°
pf	-
	Ø 145 mm






	colour temp.	colour
INC-XANTO-C-R220		
8031414861125		
lumen	3000 lm	
INC-XANTO-M-R220		
8031414861248		
lumen	3000 lm	
INC-XANTO-F-R220		
8031414861187		
lumen	3000 lm	


watt	30W
beam angle	98°
pf	0.90
	Ø 200 mm




Fotometria del prodotto / Photometric curve



INC-XANTO-F-R120



INC-XANTO-F-R154




INC-XANTO-F-R220



	colour temp.	colour
INC-XANTO-C-Q110		
8031414861071		
lumen	1120 lm	
INC-XANTO-M-Q110		
8031414861194		
lumen	1120 lm	
INC-XANTO-F-Q110		
8031414861132		
lumen	1120 lm	


watt	12W
beam angle	98°
pf	-
	100 × 100 mm





	colour temp.	colour
INC-XANTO-C-Q145		
8031414861088		
lumen	1700 lm	
INC-XANTO-M-Q145		
8031414861200		
lumen	1700 lm	
INC-XANTO-F-Q145		
8031414861149		
lumen	1700 lm	


watt	18W
beam angle	98°
pf	-
	136 × 136 mm






	colour temp.	colour
INC-XANTO-C-Q220		
8031414861095		
lumen	3000 lm	
INC-XANTO-M-Q220		
8031414861217		
lumen	3000 lm	
INC-XANTO-F-Q220		
8031414861156		
lumen	3000 lm	


watt	30W
beam angle	98°
pf	0.90
	200 × 200 mm




Fotometria del prodotto / Photometric curve



INC-XANTO-F-Q120



INC-XANTO-F-Q145



INC-XANTO-F-Q220

XANTO-INT

Faretto da incasso con struttura in alluminio pressofuso con funzione smart Wi-Fi, RF2.4G compatibili con dispositivi VOICE CONTROL.
Diecast aluminum downlight with smart Wi-Fi function,
RF2.4G compatible with VOICE CONTROL devices.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bianco satinato

Temperatura colore
RGB + CCT

Driver
incluso

Material
die cast aluminum

Colour
satin white

Colour temperature
RGB + CCT

Driver
included



+ 10-100% – · CRI >80 · CCT · RGB


WI-FI SMART INTEC



colour temp. | colour

INC-XANTO-R120-INT
8031414872695

lumen	810-900 lm
watt	12W
beam angle	98°
pf	-
	Ø 110 mm






colour temp. | colour

INC-XANTO-R220-INT
8031414868643

lumen	1632-1944 lm
watt	30W
beam angle	98°
pf	0.90
	Ø 200 mm




Accessorio non incluso / Not included accessory




RADIOCOMANDO-RF
8031414872725

Radiocomando RF 2.4G
controllo gruppi /
RF 2.4G remote control
control groups

Fotometria del prodotto / Photometric curve



INC-XANTO-R120-INT



INC-XANTO-R220-INT

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI · RF 2.4G control system · ALEXA e GOOGLE HOME voice control

MACK

Faretto da incasso in policarbonato anti abbagliamento con diffusore bianco e riflettore cromato.
Recessed spotlight in anti-glare polycarbonate with white diffuser and chromed reflector.



Materiale
PC

Colore
bianco con riflettore cromato

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC

Colour
white with chrome reflector

Colour temperature
3000K / 4000K


Driver
built-in

UGR <19 · CRI >80 · LED SMD

technical information **MACK**




	colour temp.	colour
INC-MACK-15C 8031414873913		
lumen	1650 lm	
INC-MACK-15 8031414867974		
lumen	1650 lm	
watt	15W	
beam angle	75°	
	Ø 125 mm	






	colour temp.	colour
INC-MACK-20C 8031414873906		
lumen	2500 lm	
INC-MACK-20 8031414867981		
lumen	2500 lm	
watt	20W	
beam angle	75°	
	Ø 160 mm	







	colour temp.	colour
INC-MACK-25C 8031414873890		
lumen	3050 lm	
INC-MACK-25 8031414867998		
lumen	3050 lm	
watt	25W	
beam angle	75°	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve



INC-MACK 15W




INC-MACK 20W



INC-MACK 25W

TRON

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco con interruttore per regolazione temperatura colore.
Recessed spotlight with aluminum structure and matt white acrylic diffuser with switch for color temperature regulation.



Materiale
struttura in alluminio, diffusore in acrilico

Colore
bianco opaco

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
incluso

Material
aluminum structure, acrylic diffuser

Colour
matt white

Selectable color temperature
3000K / 4000K / 6000K

Driver
included




technical information **TRON**



INC-TRON-7
8031414876198


	colour temp.	colour
lumen	420 lm	
watt	7W	
beam angle	120°	
pf	-	
	Ø 75 mm	





INC-TRON-20
8031414876204


	colour temp.	colour
lumen	1480 lm	
watt	20W	
beam angle	120°	
pf	0.90	
	Ø 175 mm	






INC-TRON-30
8031414876211


	colour temp.	colour
lumen	2140 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	Ø 210 mm	




Fotometria del prodotto / Photometric curve



INC-TRON-7



INC-TRON-20



INC-TRON-30

BLINK-EYES

Faretto da incasso in policarbonato colore bianco opaco e funzione smart bluetooth per selezione temperatura colore.
Recessed spotlight in matt white polycarbonate and smart bluetooth function for selection and colour tempering.

indoor use · accommodation areas use · office use · commercial areas use

CRI >80 · LED SMD · CCT · RGB

technical information **BLINK-EYES**

SMART INTEC BLUETOOTH SIG MESH · WI-FI SMART INTEC

Materiale
policarbonato

Colore
bianco opaco

Temperatura colore
RGB + CCT

CCT

Driver
integrato


Material
polycarbonate

Colour
matt white

Colour temperature
RGB + CCT


CCT

Driver
built-in

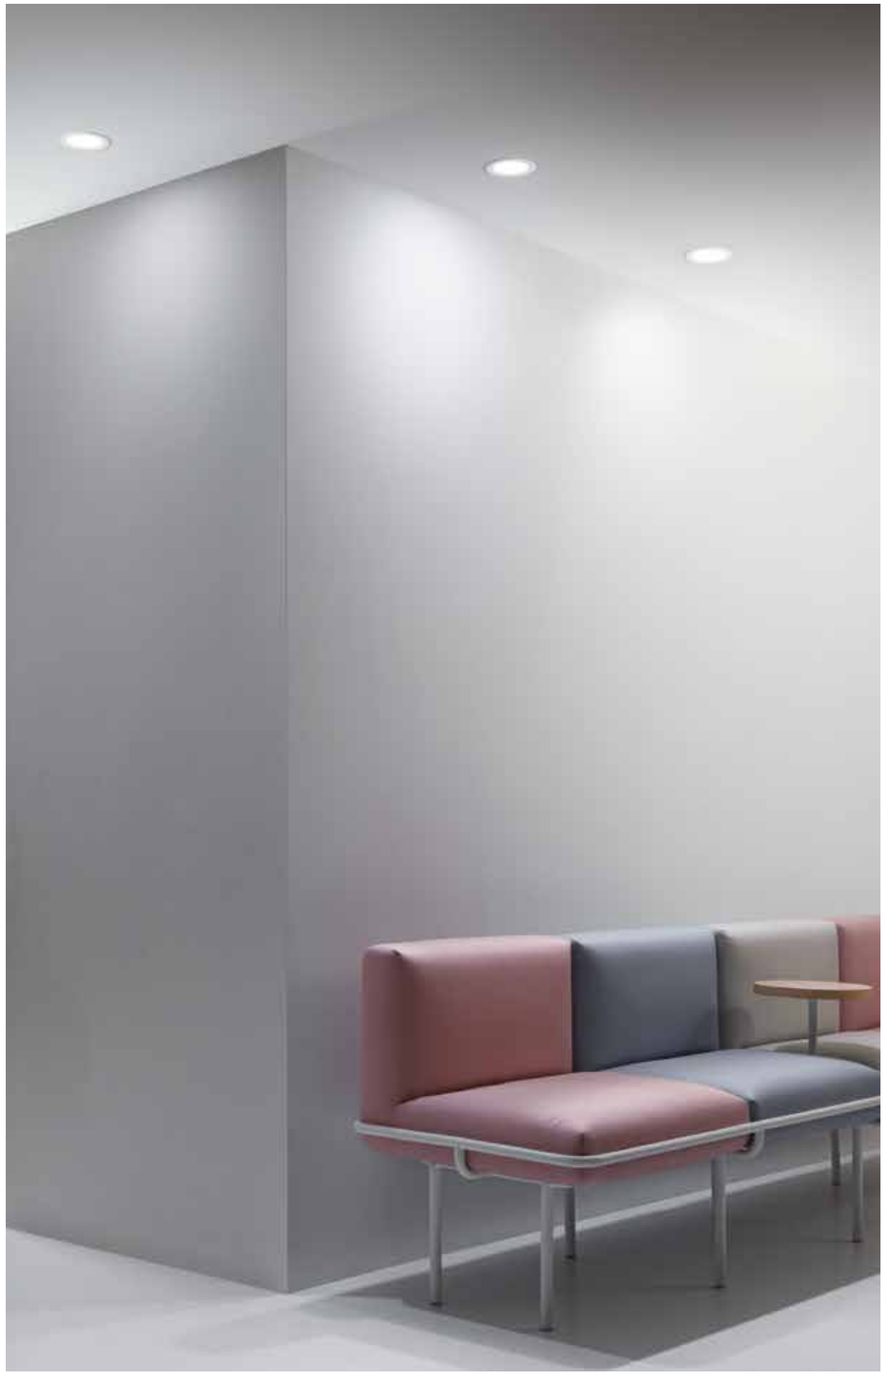




	colour temp.	colour
INC-EYES-BT		
8031414877881		
lumen	700-740-750 lm	
INC-BLINK-BT		
8031414877911		
lumen	700-740-750 lm	
watt	9W	
beam angle	96°	
	Ø 90 mm	



Fotometria del prodotto / Photometric curve

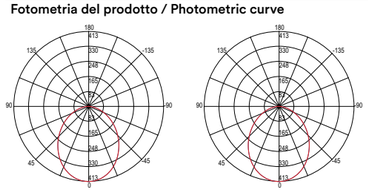

INC-EYES-BT · INC-BLINK-BT

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI

ALEXA e GOOGLE HOME voice control

SLIM-INT

Faretto da incasso in alluminio pressofuso e diffusore in acrilico bianco satinato. Dotato di funzione smart Wi-Fi, RF2,4G compatibili con dispositivi VOICE CONTROL.
Recessed spotlight in die-cast aluminum and diffuser in satin white acrylic. Equipped with smart Wi-Fi function, RF2,4G compatible with VOICE CONTROL devices.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio pressofuso

Colore
struttura in alluminio, diffusore in acrilico

Temperatura colore
RGB + CCT

Driver
incluso

Material
die cast aluminum

Colour
aluminum structure, acrylic diffuser

Colour temperature
RGB + CCT

Driver
included

RF 2.4G CONTROL SYSTEM not included · CRI >80 · CCT · RGB


technical information **SLIM-INT** · WI-FI SMART INTEC · CE EMC



colour temp. | colour

INC-SLIM/6W-INT
8031414872701
lumen 310-350 lm

watt 6W
beam angle 120°
Ø 105 mm






colour temp. | colour

INC-SLIM/18W-INT
8031414868612
lumen 643-794 lm

watt 18W
beam angle 120°
Ø 210 mm




Accessorio non incluso / Not included accessory




RADIOCOMANDO-RF
8031414872725

Radiocomando RF 2.4G controllo gruppi /
RF 2.4G remote control control groups

Fotometria del prodotto / Photometric curve



INC-SLIM/6W-INT



INC-SLIM/18W-INT

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI

RF 2.4G control system not included

ALEXA e GOOGLE HOME voice control

SLIM

Faretto da incasso con struttura rotonda in alluminio pressofuso ultrasottile.
Recessed spotlight with round structure in ultra-thin die-cast aluminum.

Materiale
alluminio pressofuso

Colore
bianco, nikel

Temperatura colore
3000K / 4000K / 6500K

Driver
incluso

Material
Die cast aluminum

Colour
white, nikel


Colour temperature
3000K / 4000K / 6500K

Driver
included




	colour temp.	colour
INC-SLIM/8WC BCO		
8031440357180		
lumen	780 lm	
INC-SLIM/8W BCO		
8031440357203		
lumen	780 lm	
INC-SLIM/8WF BCO		
8031440357197		
lumen	780 lm	

watt 8W
beam angle 120°
Ø 110 mm



Fotometria del prodotto / Photometric curve



INC-SLIM/8W






	colour temp.	colour
INC-SLIM/12WC BCO		
8031440357258		
lumen	1260 lm	
INC-SLIM/12W BCO		
8031431491183		
lumen	1260 lm	
INC-SLIM/12WF BCO		
8031440357234		
lumen	1260 lm	
INC-SLIM/12W NIK		
8031431501189		
lumen	1260 lm	

watt 12W
beam angle 120°
Ø 156 mm






INC-SLIM/12W






	colour temp.	colour
INC-SLIM/18WC BCO		
8031440357227		
lumen	1980 lm	
INC-SLIM/18W BCO		
8031431511188		
lumen	1980 lm	
INC-SLIM/18WF BCO		
8031440357210		
lumen	1980 lm	
INC-SLIM/18W NIK		
8031431521187		
lumen	1980 lm	

watt 18W
beam angle 120°
Ø 205 mm






INC-SLIM/18W






	colour temp.	colour
INC-SLIM/24WC BCO		
8031440364706		
lumen	2700 lm	
INC-SLIM/24W BCO		
8031440364720		
lumen	2700 lm	
INC-SLIM/24WF BCO		
8031440364713		
lumen	2700 lm	
INC-SLIM/24W NIK		
8031440364775		
lumen	2700 lm	

watt 24W
beam angle 120°
Ø 220 mm





INC-SLIM/24W

SLIM CCT

Faretto da incasso con struttura rotonda in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.
Recessed spotlight with round structure in ultra-thin die-cast aluminum with switch for color temperature regulation.

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
die cast aluminum

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included



INC-SLIM-8CCT
8031414892310


	colour temp.	colour
lumen	780 lm	
watt	8W	
beam angle	120°	
	Ø 110 mm	





INC-SLIM-12CCT
8031414892280


	colour temp.	colour
lumen	1260 lm	
watt	12W	
beam angle	120°	
	Ø 160 mm	





INC-SLIM-18CCT
8031414892297

	colour temp.	colour
lumen	1980 lm	
watt	18W	
beam angle	120°	
	Ø 205 mm	





INC-SLIM-24CCT
8031414892303

	colour temp.	colour
lumen	2700 lm	
watt	24W	
beam angle	120°	
	Ø 220 mm	



Fotometria del prodotto / Photometric curve



INC-SLIM-8CCT | INC-SLIM-12CCT | INC-SLIM-18CCT | INC-SLIM-24CCT

FLAP CCT

Faretto da incasso con struttura quadrata in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.
Recessed spotlight with square structure in ultra-thin die-cast aluminum with switch for color temperature regulation.

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K


Driver
incluso

Material
die cast aluminum

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included



INC-FLAP-8CCT
8031414892273


	colour temp.	colour
lumen	780 lm	
watt	8W	
beam angle	120°	
	110 × 110 mm	





INC-FLAP-12CCT
8031414892242


	colour temp.	colour
lumen	1260 lm	
watt	12W	
beam angle	120°	
	160 × 160 mm	





INC-FLAP-18CCT
8031414892259

	colour temp.	colour
lumen	1980 lm	
watt	18W	
beam angle	120°	
	205 × 205 mm	





INC-FLAP-24CCT
8031414892266

	colour temp.	colour
lumen	2700 lm	
watt	24W	
beam angle	120°	
	220 × 220 mm	



Fotometria del prodotto / Photometric curve



INC-FLAP-8CCT | INC-FLAP-12CCT | INC-FLAP-18CCT | INC-FLAP-24CCT

FLAP

Faretto da incasso con struttura quadrata in alluminio pressofuso ultrasottile.
Recessed spotlight with square structure in ultra-thin die-cast aluminum.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bianco opaco

Temperatura colore
3000K / 4000K / 6500K

Driver
integrato

Material
die cast aluminum

Colour
satin white


Colour temperature
3000K / 4000K / 6500K

Driver
included





	colour temp.	colour
INC-FLAP/8WC 8031440363419 lumen	780 lm	
INC-FLAP/8WM 8031440363402 lumen	780 lm	
INC-FLAP/8WF 8031440363389 lumen	780 lm	
watt	8W	
beam angle	120°	
	105 × 105 mm	






	colour temp.	colour
INC-FLAP/12WC 8031440354615 lumen	1260 lm	
INC-FLAP/12W 8031431441188 lumen	1260 lm	
INC-FLAP/12WF 8031440357265 lumen	1260 lm	
watt	12W	
beam angle	120°	
	155 × 155 mm	







	colour temp.	colour
INC-FLAP/18WC 8031440357272 lumen	1980 lm	
INC-FLAP/18W 8031431451187 lumen	1980 lm	
INC-FLAP/18WF 8031440357241 lumen	1980 lm	
watt	18W	
beam angle	120°	
	205 × 205 mm	




Fotometria del prodotto / Photometric curve



INC-FLAP 8W



INC-FLAP 12W



INC-FLAP 18W

TOTAL

Incasso in alluminio con diffusore in policarbonato effetto plafoniera con bordi illumunati.
Built-in aluminum with polycarbonate diffuser with illuminated edges.

Materiale
alluminio + PC

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included



INC-TOTAL-R15
8031414893744


	colour temp.	colour
lumen	1600 lm	
watt	15W	
beam angle	120°	
	Ø 70 - 115 mm	





INC-TOTAL-R24
8031414893751


	colour temp.	colour
lumen	2680 lm	
watt	24W	
beam angle	120°	
	Ø 110 - 160 mm	







INC-TOTAL-R30
8031414893768


	colour temp.	colour
lumen	3280 lm	
watt	30W	
beam angle	120°	
	Ø 130 - 200 mm	



Fotometria del prodotto / Photometric curve


INC-TOTAL-R15


INC-TOTAL-R24


INC-TOTAL-R30

PLUS

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco.
Recessed spotlight with aluminum frame and matt white acrylic diffuser.

Materiale
struttura in alluminio diffusore in acrilico

Colore
bianco opaco

Temperatura colore
4000K

Driver
incluso

Material
aluminum structure, acrylic diffuser

Colour
satin white

Colour temperature
4000K

Driver
included



indoor use | accommodation areas use | office use | commercial areas use

IP40 | CRI >85 | LED SMD



INC-PLUS-R8M
8031414876105

	colour temp.	colour
lumen	780 lm	
watt	8W	
beam angle	120°	
pf	-	
	Ø 75 mm	





INC-PLUS-R20M
8031414876136

	colour temp.	colour
lumen	2220 lm	
watt	20W	
beam angle	120°	
pf	-	
	Ø 155 mm	






INC-PLUS-R30M
8031414876167


	colour temp.	colour
lumen	3420 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	Ø 205 mm	




Fotometria del prodotto / Photometric curve



INC-PLUS-R8M



INC-PLUS-R20M



INC-PLUS-R30M

SNIPER

Faretto da incasso con struttura in fibre di plastica e punto luce orientabile.
Recessed spotlight with plastic fibre structure and adjustable light point.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PC

Colour
white

Selectable color temperature
3000K / 4000K / 6500K


Driver
built-in

CRI >80 · LED SMD



INC-SNIPER-QR90
8031414888719

	colour temp.	colour
lumen	660 lm	
watt	7W	
beam angle	38°	
	Ø 70 mm	



Accessori inclusi / Included accessories




due ghiere intercambiabili
1 rotonda 1 quadrata /
interchangeable ring



INC-SNIPER-QR120
8031414888726

	colour temp.	colour
lumen	1165 lm	
watt	12W	
beam angle	38°	
	Ø 90 mm	




Accessori inclusi / Included accessories



due ghiere intercambiabili
1 rotonda 1 quadrata /
interchangeable ring

Fotometria del prodotto / Photometric curve

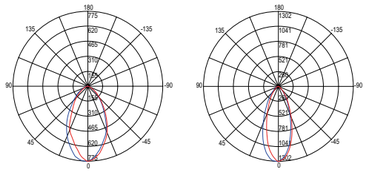

INC-SNIPER-QR90

INC-SNIPER-QR120

POLARIS

Faretto da incasso con struttura in alluminio e punto luce orientabile.
Recessed spotlight with aluminum structure and adjustable light point.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco goffrato
silver goffrato

Temperatura colore
4000K

Driver
incluso

Durata e on/off
25.000 h
>10.000 on/off

Material
aluminum

Colour
embossed white
embossed silver

Colour temperature
4000K

Driver
included

Life time and on/off
25.000 h
>10.000 on/off



CRI 90 · LED COB · 25°




INC-POLARIS-R3 BCO
8031429681169
lumen 300 lm

INC-POLARIS-R3
8031432041196
lumen 300 lm

colour temp. · colour





INC-POLARIS R3

watt 3W
beam angle 24°
Ø 55 mm




INC-POLARIS-Q3 BCO
8031429761168
lumen 300 lm

INC-POLARIS-Q3
8031432051195
lumen 300 lm

colour temp. · colour





INC-POLARIS Q3

watt 3W
beam angle 24°
Ø 55 mm

ORIONE

Faretto da incasso in alluminio nei colori bianco o silver goffrato.
Recessed aluminum spotlight in white or embossed silver.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco goffrato
silver goffrato

Temperatura colore
4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver

Colour temperature
4000K

Driver
included




CRI >80 · LED COB · 25°




INC-ORIONE-R6 BCO
8031429771167
lumen 650 lm

INC-ORIONE-R6
8031432021198
lumen 650 lm

colour temp. · colour





INC-ORIONE R6


watt 7W
beam angle 87°
Ø 75 mm




INC-ORIONE-Q6 BCO
8031434361216
lumen 650 lm

INC-ORIONE-Q6
8031432031197
lumen 650 lm

colour temp. · colour






INC-ORIONE Q6

watt 7W
beam angle 87°
Ø 75 mm

FUSION

Faretto da incasso in alluminio con finitura in nikel, bianco satinato o oro.
Recessed aluminum spotlight with nikel, satin white or gold finish.



Materiale
alluminio

Colore
bianco satinato
nikel
oro

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
white
nikel
gold

Colour temperature
4000K

Driver
built-in




1 pz / 1 pcs



	colour temp.	colour
INC-FUSION-5W BCO		
8031440361736		
lumen	400 lm	
INC-FUSION-5W NIK		
8031440361705		
lumen	400 lm	
INC-FUSION-5W ORO		
8031440361712		
lumen	400 lm	

watt	5W
beam angle	120°
	Ø 60 mm




Kit 3 pz / Kit 3 pcs




	colour temp.	colour
INC-FUSION-3X5W BCO		
8031440353335		
lumen	3 × 400 lm	
INC-FUSION-3X5W NIK		
8031440353342		
lumen	3 × 400 lm	
INC-FUSION-3X5W ORO		
8031440353359		
lumen	3 × 400 lm	

watt	3 × 5W
beam angle	120°
	Ø 60 mm



Fotometria del prodotto / Photometric curve



INC-FUSION 5W

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

BLITZ

Lampada sottopensile kit 3pz con struttura in alluminio in policarbonato bianco opaco.
Cabinet ceiling lamp kit 3pz with aluminum structure in opal white polycarbonate.

indoor use · accommodation areas use

Materiale
struttura in alluminio diffusore in pc

Colore
bianco opaco

Temperatura colore
4000K

Driver
incluso

Material
aluminum structure with PC diffuser


Colour
satin white and silver reflector

Colour temperature
4000K

Driver
included



CE · EMC · CRI >80 · LED SMD



LED-BLITZ-R3*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento /
Above photometric curve represent the single module of each element

Accessori inclusi / Included accessories



x3
Driver + morsettiera con cavo 1,5m /
Driver + connector with 1,5m cable included

Kit 3 pz / Kit 3 pcs



	colour temp.	colour
LED-BLITZ-R3		
8031440353274		
lumen	350 lm	
watt	3 × 5W	
beam angle	105°	



NEMO

Lampada sottopensile da incasso con struttura in termoplastica con finitura in bianco o silver.
Recessed cabinet lamp with thermoplastic structure with white or silver finish.

indoor use · outdoor use · accommodation areas use · bathroom use

Materiale
struttura in termoplastica

Colore
bianco
silver

Temperatura colore
4000K


Driver
integrato

Material
thermoplastic structure

Colour
white
silver

Colour temperature
4000K

Driver
built-in




INC-NEMO 3,5W



CE · EMC · IP44 · CRI >80 · LED SMD

	colour temp.	colour
INC-NEMO-65 BCO		
8031414877065		
lumen	300 lm	
INC-NEMO-65 SIL		
8031414877072		
lumen	300 lm	
watt	3,5W	
beam angle	120°	
	Ø 55 mm	





RAINBOW

Faretto da incasso in alluminio in bianco o cromato.
Recessed aluminum spotlight in white or chromed.

indoor use · outdoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
alluminio

Colore
bianco
cromo

Temperatura colore
RGB + 4000K

Driver
DC 12V
tensione costante
non incluso

Material
aluminum

Colour
white
chrome

Colour temperature
RGB + 4000K

Driver
DC 12V
tensione costante
non incluso




IP65 · RGB · CRI >80 · LED SMD

EASY DOMOTICA





	colour temp.	colour
INC-RAINBOW-M BCO		
8031414862627		
lumen	110 lm	
INC-RAINBOW-M		
8031414862603		
lumen	110 lm	






INC-RAINBOW 4000K

watt	5W
beam angle	120°
	Ø 90 mm

Sistema di connessione / Connection system

Driver pag. 837-846
Controller pag. 848-851



ZENIT

Faretto da incasso orientabile con struttura in policarbonato e finitura in nikel, bianco satinato, cromo o oro.
Adjustable recessed spotlight with polycarbonate structure and nikel, satin white, chrome or gold finish.

indoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
policarbonato

Colore
bianco satinato
nikel
cromo
oro

Temperatura colore
3000K

Driver
integrato

Material
polycarbonate

Colour
satin white
nikel
chrome
gold finish

Colour temperature
3000K

Driver
built-in



IP44 · CRI >80 · LED COB · 25°











	colour temp.	colour
INC-ZENIT-5W BCO		
8031439881276		
lumen	390 lm	
INC-ZENIT-5W NIK		
8031439901271		
lumen	390 lm	
INC-ZENIT-5W CR		
8031439891275		
lumen	390 lm	
INC-ZENIT-5W ORO		
8031439911270		
lumen	390 lm	





INC-ZENIT 5W

watt	5W
beam angle	120°
	Ø 65 mm

QUANTUM

Faretto da incasso con struttura in alluminio nelle versioni bianco e nero satinato.
Recessed spotlight with aluminum structure in white and satin black versions.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in



IP44 · CRI >80 · LED COB




	colour temp.	colour
INC-QUANTUM-R18-BCO 8031414893683		
lumen	2000 lm	
INC-QUANTUM-R18-NER 8031414893713		
lumen	2000 lm	
watt	18W	
beam angle	60°	
pf	-	
	Ø 120 mm	






	colour temp.	colour
INC-QUANTUM-R30-BCO 8031414893690		
lumen	3300 lm	
INC-QUANTUM-R30-NER 8031414893720		
lumen	3300 lm	
watt	30W	
beam angle	60°	
pf	0.90	
	Ø 140 mm	








	colour temp.	colour
INC-QUANTUM-R40-BCO 8031414893706		
lumen	4300 lm	
INC-QUANTUM-R40-NER 8031414893737		
lumen	4300 lm	
watt	40W	
beam angle	60°	
pf	0.90	
	Ø 165 mm	



Fotometria del prodotto / Photometric curve


INC-QUANTUM-R18


INC-QUANTUM-R30


INC-QUANTUM-R40

HORUS

Faretto da incasso dimmerabile con struttura in policarbonato bianco opaco.
Dimmable recessed spotlight with matt white polycarbonate structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco opaco

Temperatura colore
4000K

Dimmer
dimmer 1-10

Driver
integrato

Material
polycarbonate

Colour
matt white

Colour temperature
4000K

Dimmer
dimmable 1-10

Driver
built-in




+ 10-100% − · IP40 · CRI >80 · LED SMD · CE · EMC



INC-HORUS-10W
8031440363501


	colour temp.	colour
lumen	1050 lm	
watt	10W	
beam angle	100°	
pf	-	
	Ø 90 mm	





INC-HORUS-15W
8031440363518


	colour temp.	colour
lumen	1900 lm	
watt	15W	
beam angle	100°	
pf	-	
	Ø 120 mm	





INC-HORUS-20W
8031440363464


	colour temp.	colour
lumen	2600 lm	
watt	20W	
beam angle	100°	
pf	-	
	Ø 170 mm	







INC-HORUS-25W
8031440363495


	colour temp.	colour
lumen	3250 lm	
watt	25W	
beam angle	100°	
pf	0.90	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve


INC-HORUS-10W


INC-HORUS-15W


INC-HORUS-20W


INC-HORUS-25W

MATRIX

Faretto da incasso in metallo con lampadina GU10 inclusa disponibile nei colori bianco, nikel, oro e cromo.
Recessed metal spotlight with GU10 bulb included available in white, nikel, gold and chrome.

indoor use

accommodation areas use

office use

commercial areas use



Materiale
metallo

Colore
bianco
nikel
cromo
oro

Temperatura colore
3000K

Material
metal

Colour
white
nikel
chrome
gold


Colour temperature
3000K



Kit 3 pz / Kit 3 pcs

Ø 80 mm





	colour
INC-MATRIX-LEDF3 BCO 8031440359320	
INC-MATRIX-LEDF3 NIK 8031440359337	

3 x GU10 — 5W LED — Ø 60 mm

Accessori inclusi / Included accessories

3 lampadine LED SMD / 3 LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included


GU10 230V~50Hz Portalampada / Lampholder

3 pz inclusi / 3 pcs included

Kit 3 pz / Kit 3 pcs

Ø 100 mm
orientabile / adjustable





15°

	colour
INC-MATRIX-LEDM3 BCO 8031429651162	
INC-MATRIX-LEDM3 NIK 8031431571182	
INC-MATRIX-LEDM3 CR 8031440313032	
INC-MATRIX-LEDM3 ORO 8031440313025	

3 x GU10 — 5W LED — Ø 80 mm

Accessori inclusi / Included accessories

3 lampadine LED SMD / 3 LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included


Portalampada / Lampholder GU10 230V~50Hz

3 pz inclusi / 3 pcs included

1 pz / 1 pcs

Ø 100 mm
orientabile / adjustable





15°

	colour
INC-MATRIX-LEDM1 BCO 8031440313063	
INC-MATRIX-LEDM1 NIK 8031440313049	
INC-MATRIX-LEDM1 CR 8031440313056	
INC-MATRIX-LEDM1 ORO 8031440313070	

1 x GU10 — 5W LED — Ø 80 mm

Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included

Portalampada / Lampholder GU10 230V~50Hz

3 pz inclusi / 3 pcs included

TUBEX

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante. Punto luce regolabile e orientabile con finitura in bianco o nero goffrato.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body. Adjustable light point with embossed black or white finish.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
gesso e alluminio

Colore
bianco goffrato
nero goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
gypsum and aluminum

Colour
embossed white
embossed black

Colour temperature
3000K / 4000K

Driver
included





CRI >80 · LED COB


technical information **TUBEX**

CE · EMC


	colour temp.	colour
 **INC-TUBEX-2C-BCO** 8031414883752 lumen 190 lm	●	○
INC-TUBEX-2M-BCO 8031414883769 lumen 190 lm	●	○
 **INC-TUBEX-2C-NER** 8031414883776 lumen 190 lm	●	●
INC-TUBEX-2M-NER 8031414883783 lumen 190 lm	●	●
 **INC-TUBEX-BASE** 8031414883745 watt 2,5W · beam angle 30° · 165 × 165 mm		







Modular system:
INC-TUBEX-BASE
+ INC-TUBEX-2





Staffa regolabile /
Adjustable bracket

STARRY

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
gesso
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
gypsun
aluminum

Colour
white

Colour temperature
3000K / 4000K

Driver
included



CRI >80 · LED COB




LED-STARRY-C
8031414884476
lumen 160 lm
LED-STARRY-M
8031414884483
lumen 160 lm

colour temp.


watt 2,5W
beam angle 45°




Modular system:
LED-STARRY +
INC-STARRY-R1





Modular system:
LED-STARRY +
INC-STARRY-Q1






INC-STARRY-R1
8031414884452
Ø 75 mm






INC-STARRY-Q1
8031414884469
75 × 75 mm



GHOST

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante con emissione di luce asimmetrica.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.


indoor use · accommodation areas use · office use · commercial areas use

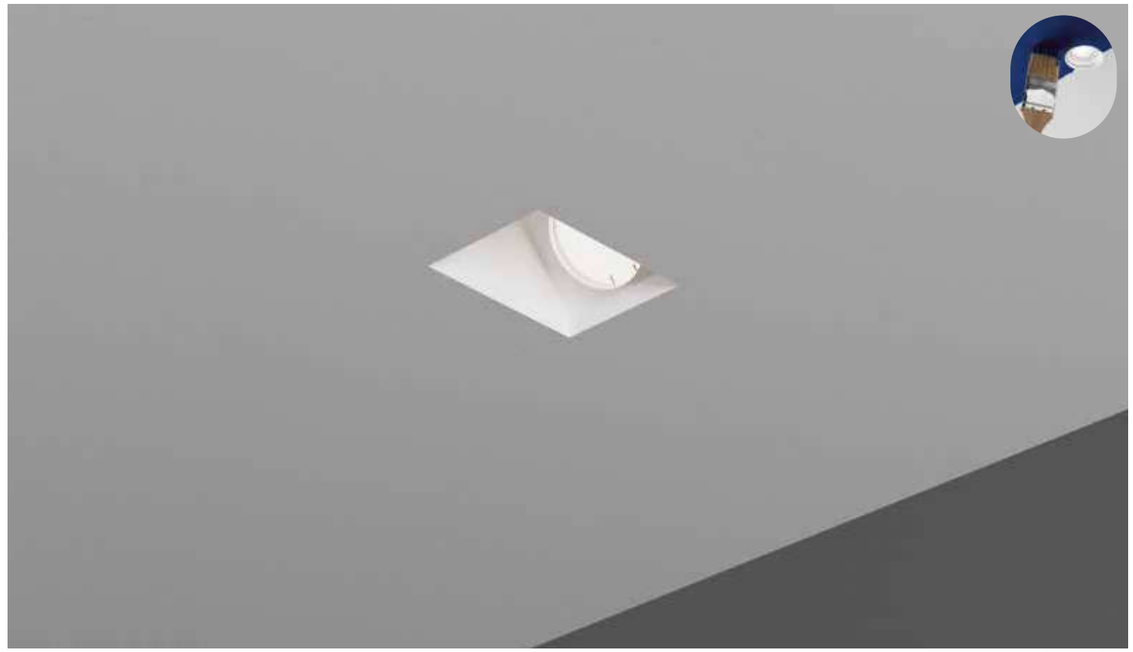

GU10




INC-GHOST-Q1D
8031434241211
1 x GU10 MAX 35W
125 × 125 mm






INC-GHOST-Q1
8031434261219
1 x GU10 MAX 35W
125 × 125 mm





INC-GHOST-Q2
8031434301212
2 x GU10 MAX 35W
219 × 123 × 8-15 mm







Staffa regolabile /
Adjustable bracket



Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

VULKAN

Incasso in gesso verniciabili con cilindri intercambiabili e finiture bianco, nero e oro satinato.
Gypsum down light paintable with interchangeable cylinders and in white, black and satin gold finishes.

indoor use · accommodation areas use · office use · commercial areas use



CE

GU10







Modular system:
INC-VULKAN-BASE
+ INC-VULKAN





	colour
INC-VULKAN-BASE 8031414883707	
1 x GU10 MAX 35W	
170 × 170 mm	
INC-VULKAN-BCO 8031414883714	
INC-VULKAN-NER 8031414883721	
INC-VULKAN-ORO 8031414883738	
1 x GU10 MAX 35W	





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

ENTITY

Incasso in gesso verniciabile con ghiere intercambiabili in finiture bianco, oro e cromo.
Gypsum down light paintable with interchangeable cylinders white, black and satin gold finishes.

indoor use · accommodation areas use · office use · commercial areas use



CE

GU10






Modular system:
INC-ENTITY-Q
+ ENTITY-RING





	colour
INC-ENTITY-Q 8031414883790	
1 x GU10 MAX 35W	
125 × 125 mm	
ENTITY-RING-CR 8031414883813	
ENTITY-RING-NER 8031414883820	
ENTITY-RING-ORO 8031414883806	
1 x GU10 MAX 35W	



8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

GOBLET

Incasso con struttura sporgente in gesso verniciabile e portalampade incluso.
Gypsum prominent down light paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-GOBLET-R
8031414882960


1 x GU10 MAX 35W
Ø 75 mm



INC-GOBLET-Q
8031414882977

1 x GU10 MAX 35W
Ø 75 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SHADOW

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-SHADOW-R
8031414882984


1 x GU10 MAX 35W
Ø 90 mm



INC-SHADOW-Q
8031414882991

1 x GU10 MAX 35W
Ø 100 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

PHANTOM

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-PHANTOM-R1
8031431551184


1 x GU10 MAX 35W
Ø 83 mm



INC-PHANTOM-Q1
8031431561183

1 x GU10 MAX 35W
82 × 82 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SPETTRO

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-SPETTRO-R1
8031431531186


1 x GU10 MAX 35W
Ø 85 mm



INC-SPETTRO-Q1
8031431541185

1 x GU10 MAX 35W
Ø 95 × 95 mm






Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

MINI

Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Recessed gypsum downlight to be integrated into te plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

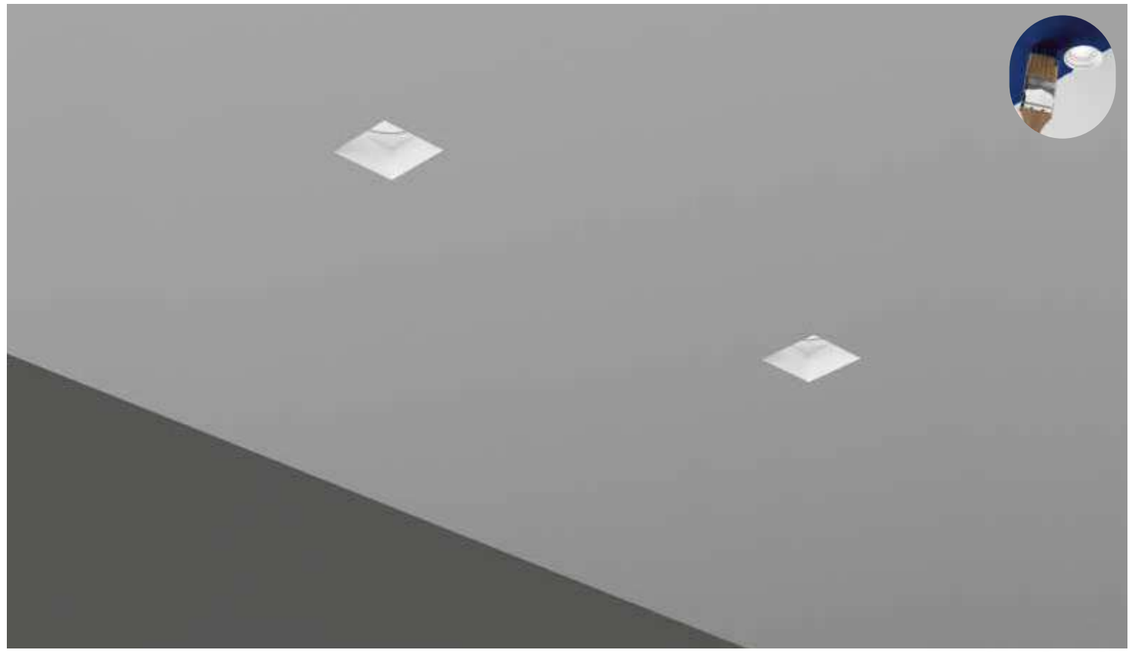



GU10 · Ø34 · H49



INC-MINI-R1
8031414873623


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
Ø 73 mm





INC-MINI-Q1
8031414873616

1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
73 × 73 mm






Portalampada incluso /
Lampholder included

Lampadina non inclusa /
Light bulb not included

HIVE

Incasso in gesso verniciabile con 4 punti luce da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed gypsum paintable downlight with 4 light to be integrated into the plasterboard to give homogeneity between ceiling and lighting body.

indoor use · accommodation areas use · office use · commercial areas use

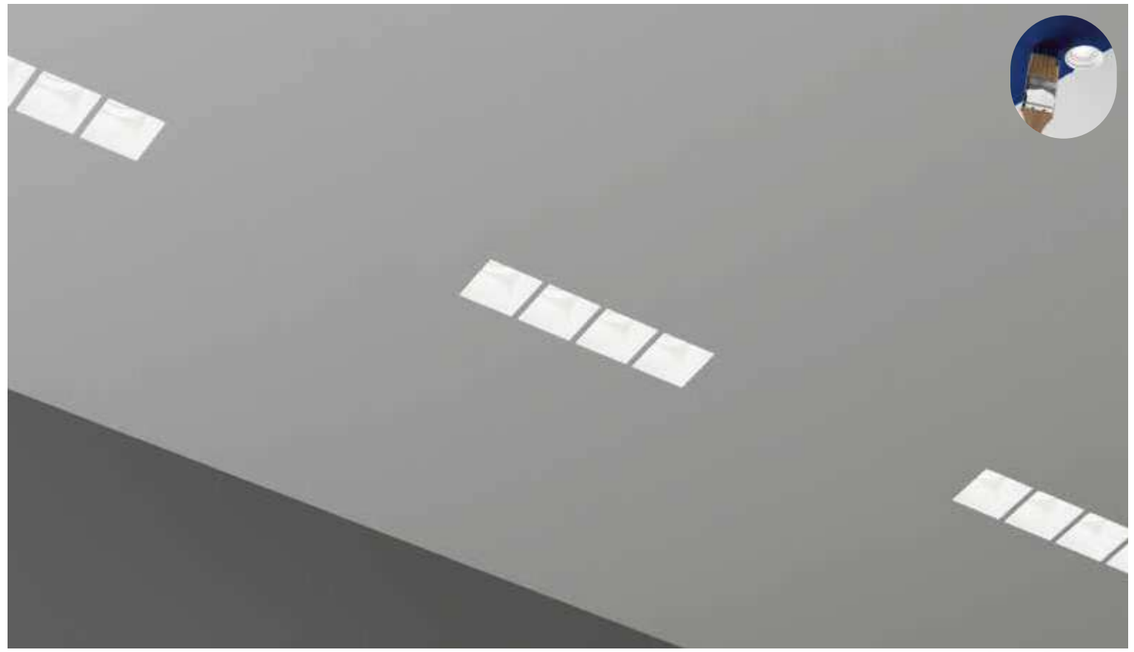



GU10 · Ø34 · H49



INC-HIVE-RT4
8031414884278

4 x MINI GU10 MAX 35W
bulb size Ø 34 mm
275 × 125 mm





8/15mm
Staffa regolabile /
Adjustable bracket

Portalampada incluso /
Lampholder included

Lampadina non inclusa /
Light bulb not included

SPIRIT

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Recessed gypsum downlight to be integrated into te plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use




GU10




INC-SPIRIT-R1
8031440362177


1 x GU10 MAX 35W
Ø 103 mm



INC-SPIRIT-Q1
8031440362160

1 x GU10 MAX 35W
103 × 103 mm








Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SNOW

Incasso in gesso verniciabile con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminato.
Recessed paintable gypsum downlight with satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

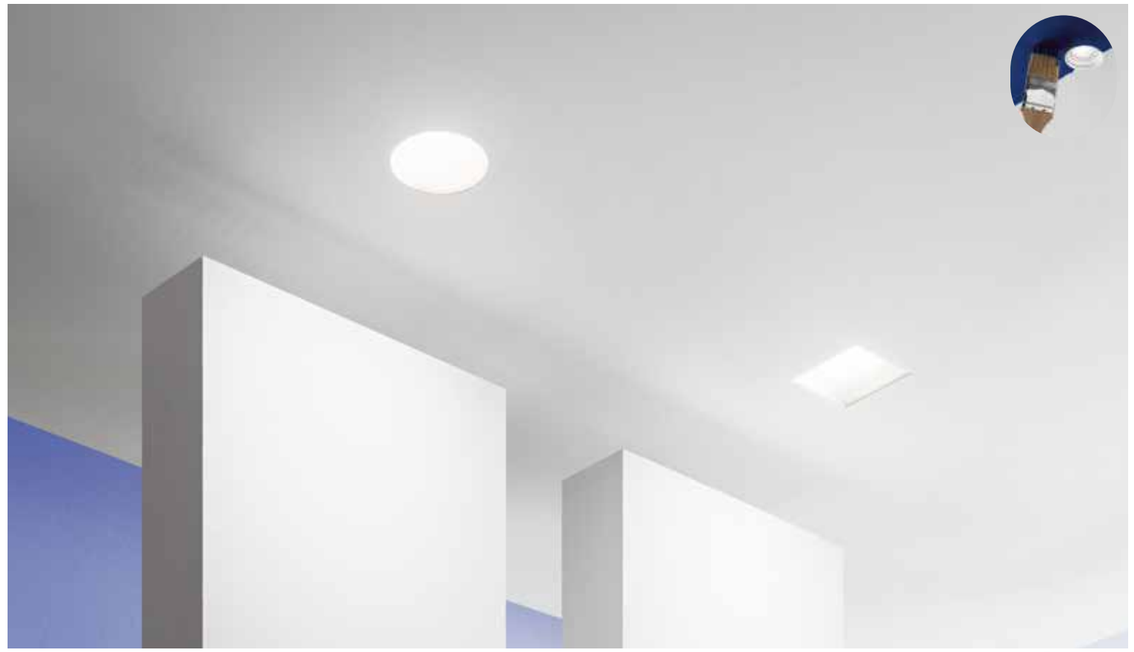

GU10




INC-SNOW-R
8031440351607


1 x GU10 MAX 10W
Ø 125 mm



INC-SNOW-Q
8031440351577

1 x GU10 MAX 10W
125 × 125 mm









Staffa regolabile / Adjustable bracket


Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

MORGANA

Incasso orientabile in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Adjustable and paintable recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

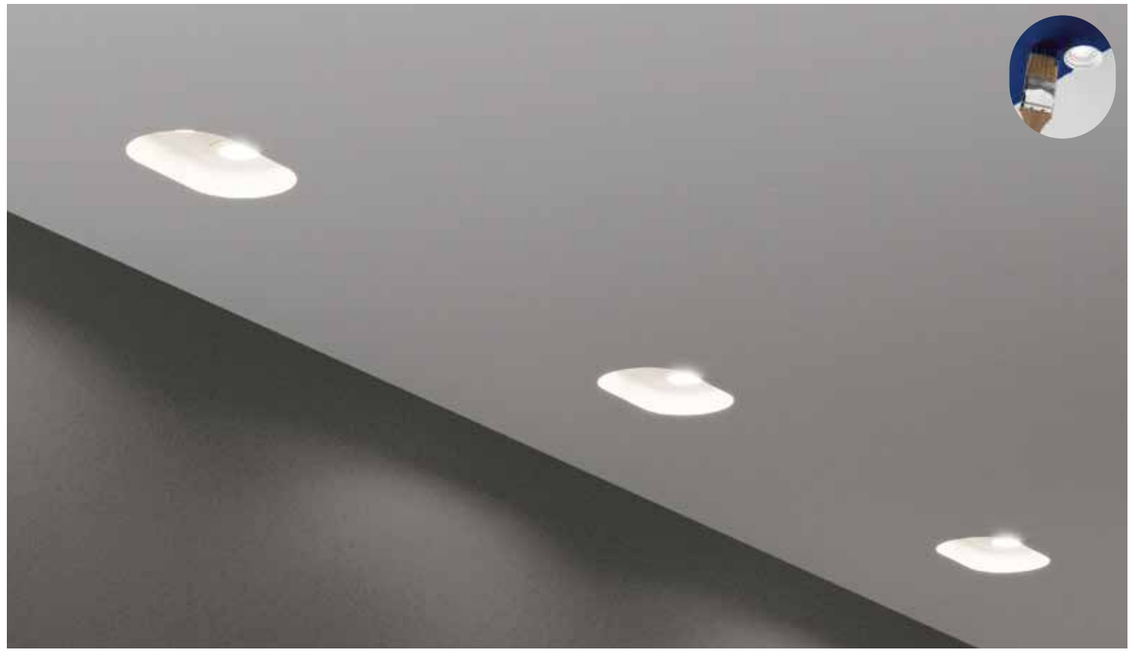


GU10 · 15°



INC-MORGANA-R1
8031434211214


1 x GU10 MAX 35W
Ø 155 mm





INC-MORGANA-Q1
8031434231212


1 x GU10 MAX 35W
160 × 160 mm






INC-MORGANA-Q2
8031434201215

2 x GU10 MAX 35W
260 × 160 mm







Staffa regolabile / Adjustable bracket



Portalampada incluso / Lampholder included




Lampadina non inclusa / Light bulb not included

SENSO

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

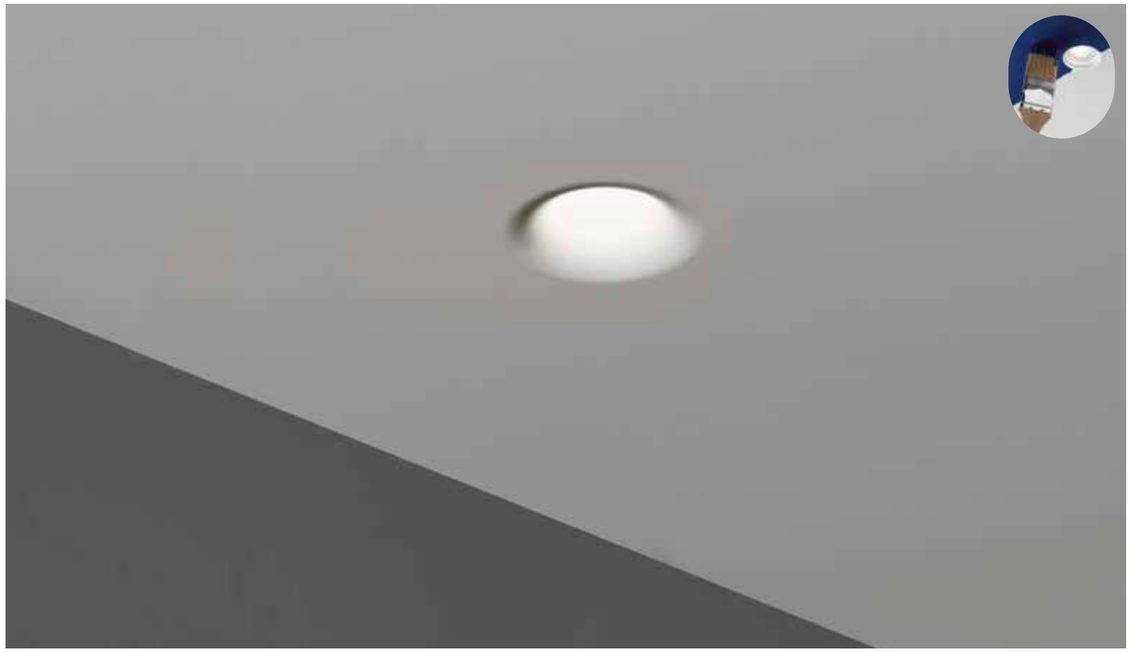


GU10



INC-SENSO-MINI
8031414892723


1 x MINI GU10 MAX 10W
80 × 80 mm





INC-SENSO-1
8031434221213


1 x GU10 MAX 35W
125 × 125 mm






INC-SENSO-2
8031414873593

2 x GU10 MAX 35W
243 × 123 mm







Staffa regolabile / Adjustable bracket



Portalampada incluso / Lampholder included



Lampadina non inclusa / Light bulb not included

BRICK

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante con steli dalle forme modulari che sporgono dalla parete.
Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body with modular stems protruding from the wall.

indoor use · accommodation areas use · office use · commercial areas use




GU10



INC-BRICK-Q1
8031414873586

1 x GU10 MAX 35W
123 × 123 mm





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

EVA

Struttura ad incasso a scomparsa in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed structure in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and lighting body.

indoor use · accommodation areas use · office use · commercial areas use




E27



INC-EVA-R1
8031414873609

1 x E27 MAX 35W
Ø 185 mm



Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SKILIFT

Sistema componibile da incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Modular recessed system in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.


indoor use | accommodation areas use | office use | commercial areas use









INC-SKILIFT-40CM
8031414884346
405 × 115 mm







INC-SKILIFT-20CM
8031414884322
205 × 115 mm







INC-SKILIFT-L16CM
8031414884360
165 × 165 mm






NC-SKILIFT-CAP
8031414886869
55 × 115 mm





INC-SKILIFT-6
8031414884339


6 x MINI GU10 MAX 35W
bulb size Ø 34 mm
405 × 115 mm






INC-SKILIFT-3
8031414884315


3 x MINI GU10 MAX 35W
bulb size Ø 34 mm
205 × 115 mm





INC-SKILIFT-L3
8031414884353

3 x MINI GU10 MAX 35W
bulb size Ø 34 mm
165 × 165 mm





Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

ARIEL

Segnapasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Paintable gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and lighting body.

indoor use | accommodation areas use | office use | commercial areas use





MAX 1 | GU10 | MAX 35W Ø34 H49


technical information **ARIEL**

CE



I-ARIEL-QL1
8031434151213


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
115 × 250 × 12 mm





I-ARIEL-RM1
8031434121216


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
125 × 185 × 12 mm





I-ARIEL-RS1
8031434131215

1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
105 × 105 × 12 mm





8/15mm — Staffa regolabile / Adjustable bracket


Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included



I-ARIEL-QL1-BOX
8031414868360


Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation





I-ARIEL-RM1-BOX
8031414868384


Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation






I-ARIEL-RS1-BOX
8031414868377

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation




ANIMA

Applique in gesso verniciabile con leggera sporgenza da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.
Wall lamp in paintable gypsum with slight protrusion to be integrated into the plasterboard to give homogenity between the part and the illuminating body.










I-ANIMA-AP2
8031414861323

2 x E14 MAX 14W
320 × 260 × 90 mm








I-ANIMA-AP2-BOX
8031414868391

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation





Staffa regolabile / Adjustable bracket




Portalampada incluso / Lampholder included



Lampadina non inclusa / Light bulb not included

STENOS

Faretto da incasso con struttura in termoplastica orientabile ed antiriflesso.
Recessed spotlight with adjustable and anti-reflective thermoplastic structure.







INC-STENOS-R-OV
8031414875818





INC-STENOS-Q-OV
8031414875856

INC-STENOS-R-QU
8031414875832





INC-STENOS-Q-QU
8031414875870

INC-STENOS-R-RO
8031414875801





INC-STENOS-Q-RO
8031414875849

INC-STENOS-R-ML
8031414875825






INC-STENOS-Q-ML
8031414875863

Ø 75 mm



Ø 75 mm





Lampadina
non inclusa /
Light bulb
not included



Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included



Lampadina
non inclusa /
Light bulb
not included



Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included

VIPER



IP65

indoor use · outdoor use · accommodation areas use · office use · commercial areas use · bathroom use

Faretto con struttura in metallo e diffusore in vetro satinato.
Spotlight with metal structure and satin glass diffuser.

Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included

Lampadina non inclusa / Light bulb not included






colour

INC-VIPER-R-BCO
8031414861590

INC-VIPER-R-NIK
8031414861576

Ø 74 mm



Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included

Lampadina non inclusa / Light bulb not included





colour

INC-VIPER-Q-BCO
8031414861866

INC-VIPER-Q-NIK
8031414861873

Ø 74 mm



AYRIS



GU10

CE

Faretto ad incasso antiriflesso in alluminio nero o bianco goffrato.
Recessed spotlight with anti-reflective in black or white embossed aluminum.

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included






colour

INC-AYRIS-R BCO
8031414868216

INC-AYRIS-R NER
8031414868193

1 x GU10 MAX 35W

Ø 75 mm



Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included






colour


INC-AYRIS-Q BCO
8031414868223

INC-AYRIS-Q NER
8031414868186

1 x GU10 MAX 35W

72 × 72 mm




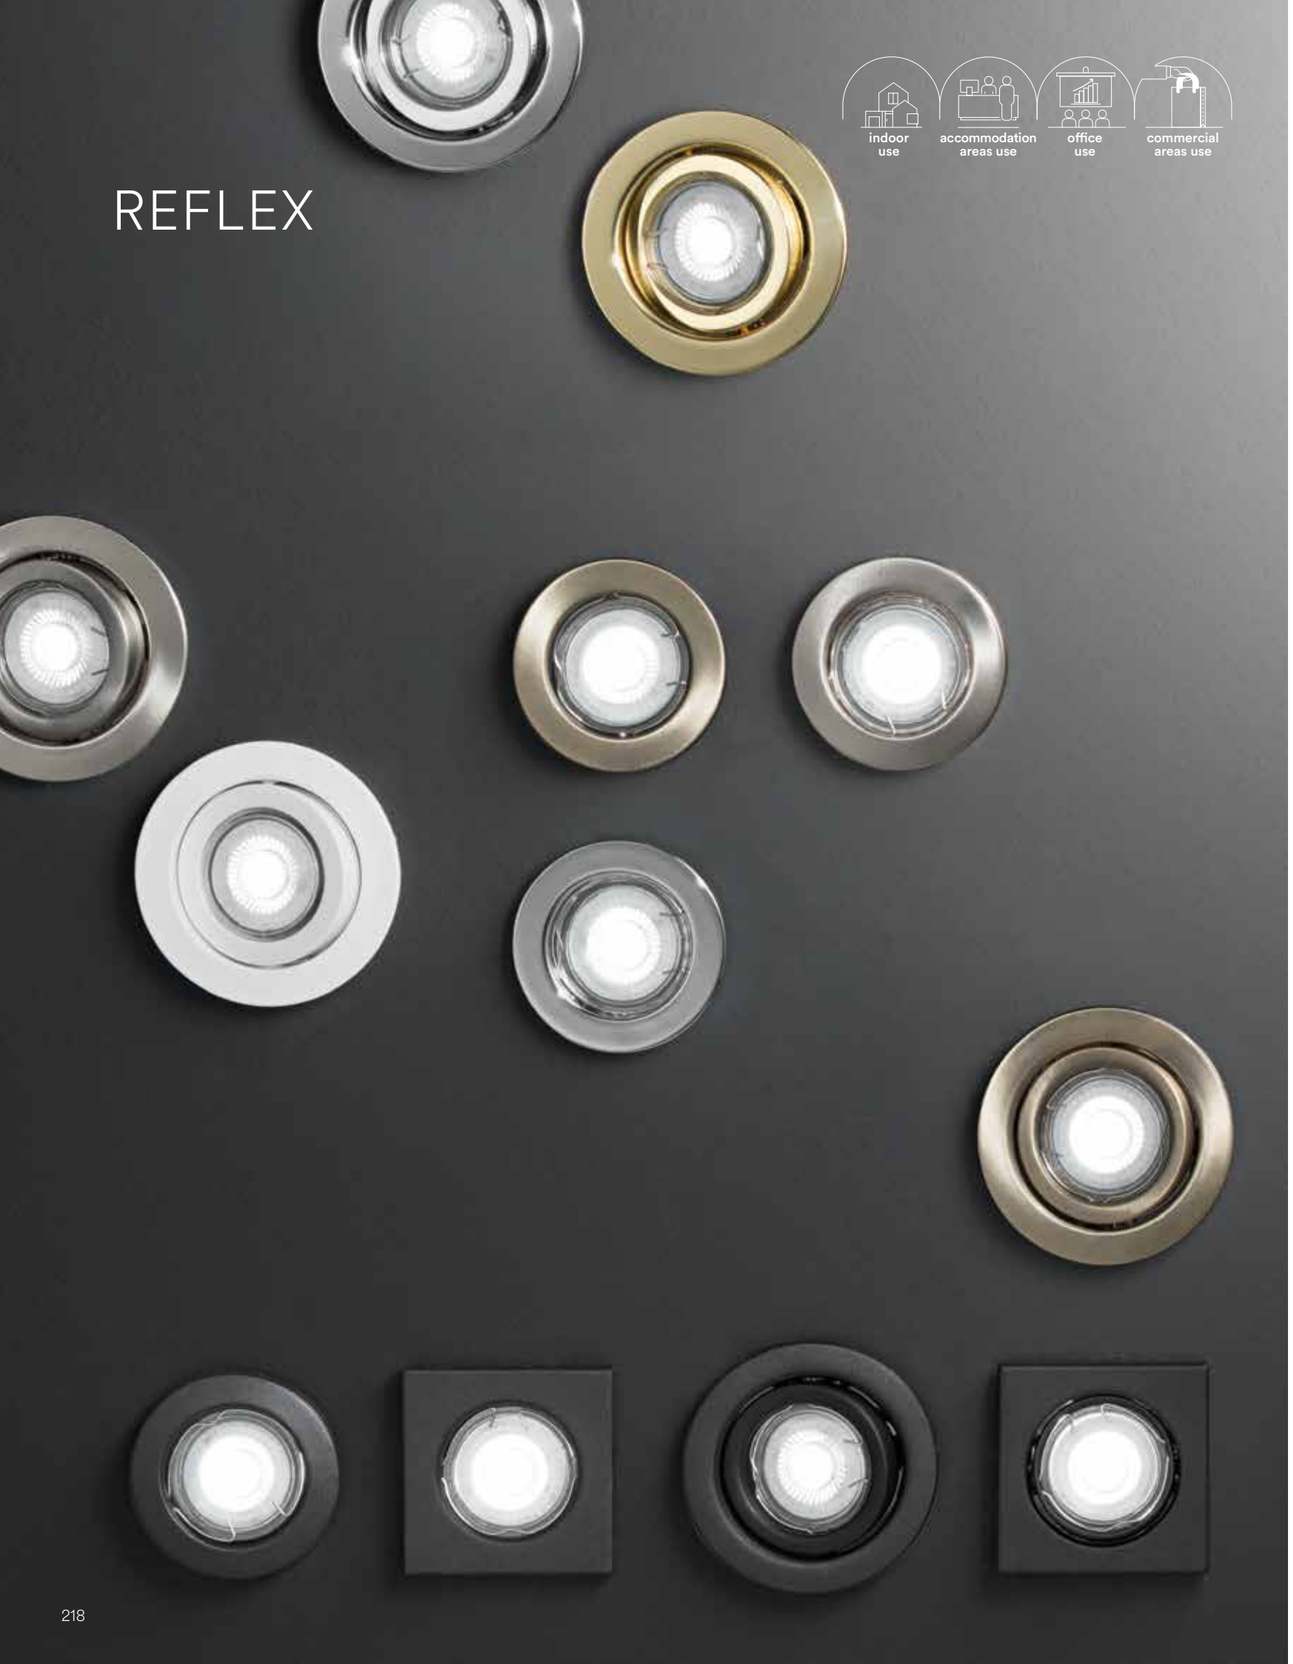

REFLEX

Incasso in metallo
Metal down light

INC-REFLEX-SF1 BCO
8031439321260

INC-REFLEX-SF1 NER
8031414861552



INC-REFLEX-SF1 CR
8031439301262



INC-REFLEX-SF1 ORO
8031439341268



INC-REFLEX-SF1 NIK
8031439311261




INC-REFLEX-SF1 BR
8031439331269



Incasso in metallo orientabile
Metal down light adjustable



INC-REFLEX-SM1 BCO
8031439251260

INC-REFLEX-SM1 NER
8031414861569



INC-REFLEX-SM1 CR
8031439281267



INC-REFLEX-SM1 ORO
8031439271268



INC-REFLEX-SM1 NIK
8031439261269



INC-REFLEX-SM1 BR
8031439291266



INC-REFLEX-Q-SF1 BCO
8031414861538




INC-REFLEX-Q-SF1 NER
8031414885053



INC-REFLEX-Q-SF1 NIK
8031414861545



INC-REFLEX-Q-SM1 BCO
8031440363310





INC-REFLEX-Q-SM1 NER
8031414885060



INC-REFLEX-Q-SM1 NIK
8031440363280





Lampadina non inclusa / Light bulb not included


Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included


Lampadina non inclusa / Light bulb not included


Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included

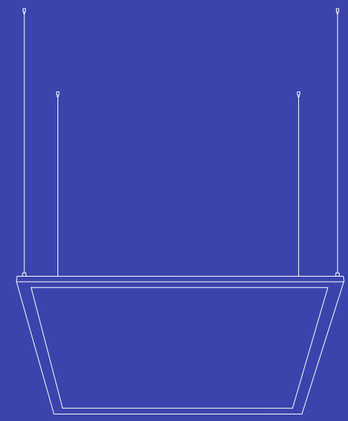

SISTEMI D’ILLUMINAZIONE MULTIFUNZIONE
MULTI-FUNCTION LIGHTING SYSTEM

SEGMENTO

Supporto lineare modulabile in acciaio rivestito in silicone nero.
Modular linear support in steel and coated in black silicone.

indoor use
accommodation areas use
office use
commercial areas use






Supporto lineare modulabile in acciaio rivestito in silicone nero.
Modular linear support in steel and coated in black silicone.


Strip LED non inclusa / Strip LED not included

Kit completo / Complete kit



I-SEGMENTO-6M
8031414882458

Kit base 6 m con nastro tagliabile /
6 m basic kit with cuttable ribbon



Accessori inclusi / Included accessories



Set di 2 basette ed accessori / Set of 2 bases and accessories



Kit di arnesi / Tool kit


Elementi singoli per comporre il kit / Single elements to compose the kit

Servizio customizzato taglio su misura / Customized cut service



I-SEGMENTO-1M
8031414882441


TAGLIO 1 M NASTRO Indicare la misura desiderata nelle note del B2B (multipli di 1 metro) / 1 M TAPE CUT Indicate the desired size in the B2B notes (multiples of 1 meter)





I-SEGMENTO-BASE
8031414894307


Base per piantana SEGMENTO / Base for SEGMENTO floor lamp





I-SEGMENTO-FIX
8031414882465

Set di 2 basette ed accessori / Set of 2 bases and accessories





I-SEGMENTO-TOOL
8031414882472

Kit di arnesi / Tool kit

METRO

Sistema cavi tesi con finitura cromo.
Wire system chrome system.

indoor use · accommodation areas use · office use · commercial areas use



CE


MR16



LED-METRO-5
8031414862139

5 x MR16 MAX 9W
Driver 50W included

5 m cable included

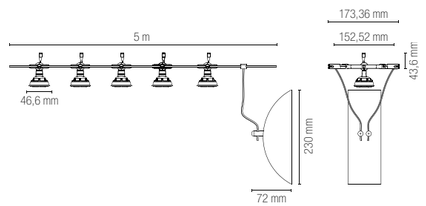

Accessorio non incluso / Accessory not included



I-WIRE-10M
8031414870387

Cavo 10 m / 10 m cable

Lampadina non inclusa / Light bulb not included

EUCLID

Sistema cavi tesi con finitura nikel.
Wire system nikel system.

indoor use · accommodation areas use · office use · commercial areas use



CE


MR16



LED-EUCLID-5
8031414862146

5 x MR16 MAX 9W
Driver 50W included

5 m cable included

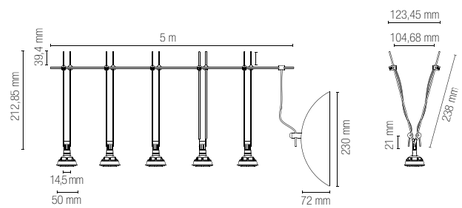

Accessorio non incluso / Accessory not included



I-WIRE-10M
8031414870387

Cavo 10 m / 10 m cable

Lampadina non inclusa / Light bulb not included

BUILD

Barra a LED in alluminio bianco o nero goffrato.
LED bar in aluminum finish embossed white or black.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio

Colore
bianco goffrato
nero goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black


Colour temperature
3000K / 4000K

Driver
included








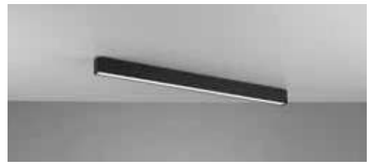

	colour temp.	colour
LED-BUILD-W-1C 8031414897445		
lumen	3650 lm	
LED-BUILD-W-1M 8031414867912		
lumen	3650 lm	
LED-BUILD-B-1C 8031414896585		
lumen	2030 lm	
LED-BUILD-B-1M 8031414867899		
lumen	2030 lm	

watt	26W
beam angle	87°
pf	0.90









	colour temp.	colour
LED-BUILD-W-2C 8031414896578		
lumen	7300 lm	
LED-BUILD-W-2M 8031414867950		
lumen	7300 lm	
LED-BUILD-B-2C 8031414897452		
lumen	4060 lm	
LED-BUILD-B-2M 8031414867936		
lumen	4060 lm	

watt	26W
beam angle	87°
pf	0.90



Fotometria del prodotto / Photometric curve


Le curve fotometriche sopra indicate rappresentano il singolo metro / Above photometric curve represent the single meter



LED-BUILD 1M*

Accessorio incluso / Included accessory

Kit cavi e fissaggio a plafoniera / Metal bracket and steel hanging wire



PANEL

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure and white acrylic diffuser.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
3000K / 4000K / 6000K

Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
3000K / 4000K / 6000K


Driver
included



CRI >80 | LED SMD




	colour temp.	colour
LED-PANEL-C-60X60BK		
8031414885046		
lumen	4260 lm	
LED-PANEL-60X60BK		
8031414874323		
lumen	4939 lm	
LED-PANEL-F-60X60BK		
8031414874347		
lumen	4806 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	






	colour temp.	colour
LED-PANEL-30X120BK		
8031414874316		
lumen	4510 lm	
LED-PANEL-F-30X120BK		
8031414874330		
lumen	4426 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	



IP40 | UGR <19 | CRI >80 | LED SMD



	colour temp.	colour
LED-PANEL-60X60-SCH		
8031414897612		
lumen	4300 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	








	colour temp.	colour
LED-PANEL-30X120-SCH		
8031414897629		
lumen	4300 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	




Fotometria del prodotto / Photometric curve


LED-PANEL-60X60 BK



LED-PANEL-30X120 BK


LED-PANEL-60X60-SCH


LED-PANEL-30X120-SCH

PANEL

indoor use · accommodation areas use · office use · commercial areas use

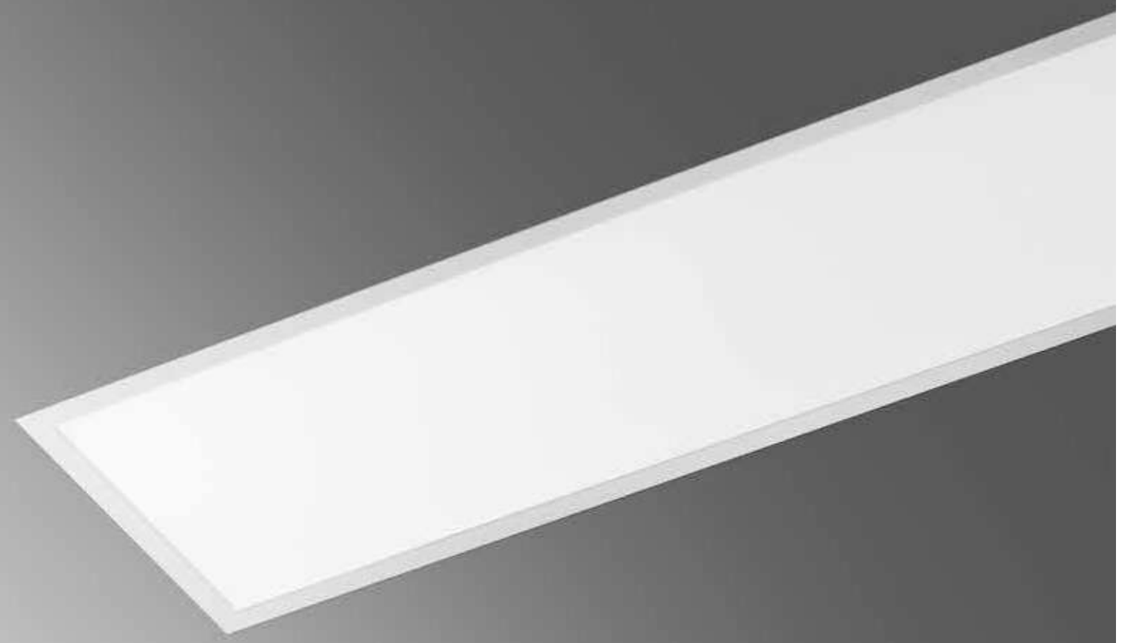

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
4000K / 6500K

Driver
incluso

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
4000K / 6500K

Driver
included

Lifetime and on/off
50.000h
>25.000 on/off


Pannello a LED con struttura in alluminio, diffusore in PMMA.
LED panel with aluminum structure, PMMA diffuser.





	colour temp.	colour
LED-PANEL-60X60-5Y		
8031414875344		
lumen	4669 lm	
LED-PANEL-F-60X60-5Y		
8031414875368		
lumen	4610 lm	


watt	40W
beam angle	110°
pf	0.90
	590 × 590 mm






	colour temp.	colour
LED-PANEL-30X120-5Y		
8031414871773		
lumen	4669 lm	
LED-PANEL-F-30X120-5Y		
8031414874354		
lumen	4743 lm	


watt	40W
beam angle	110°
pf	0.90
	290 × 1190 mm



Fotometria del prodotto / Photometric curve




LED-PANEL-60X60 5Y



LED-PANEL-30X120 5Y

PANEL

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure and white acrylic diffuser.



Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
4000K / 5000K

Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
4000K / 5000K

Driver
included




CRI >80 LED SMD




	colour temp.	colour
LED-PANEL-60X120 8031440361897 lumen	9298 lm	
LED-PANEL-F-60X120 8031440361873 lumen	9298 lm	

watt	60W
beam angle	120°
pf	0.90
	590 × 1190 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X120

PANEL UGR

Pannello LED UGR<19.
LED panel UGR<19.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
4000K


Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
4000K

Driver
included

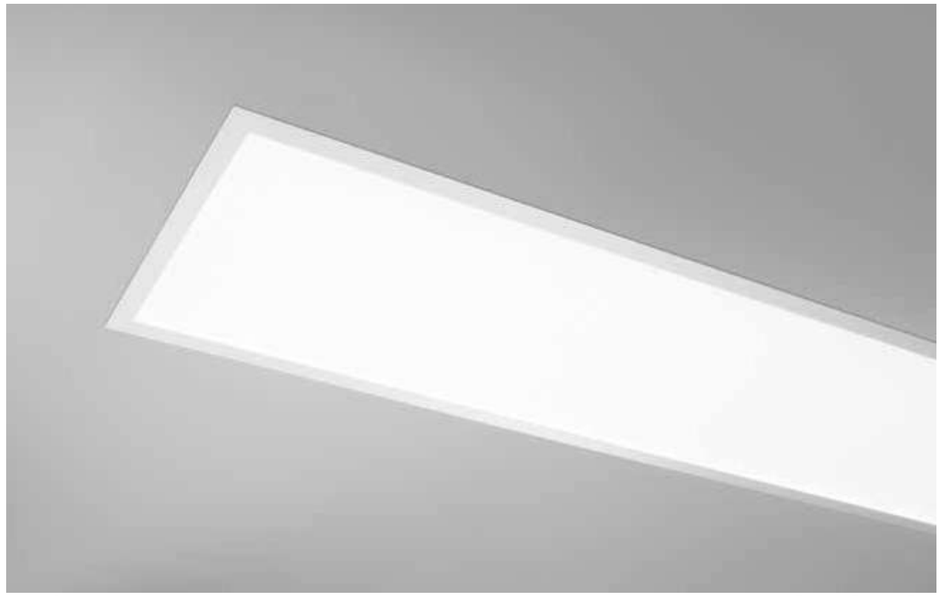


UGR <19 · CRI >80 · LED SMD



colour temp. | colour

LED-PANEL-60X60-UGR
8031440357524
lumen 4650 lm

watt	40W
beam angle	120°
pf	0.90
	590 × 590 mm







colour temp. | colour

LED-PANEL-30X120-UGR
8031414878444
lumen 3200 lm


watt	40W
beam angle	120°
pf	0.90
	290 × 1190 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60 UGR



LED-PANEL-30X120 UGR

PANEL IP65

Pannello LED UGR<19 e IP65.
LED panel UGR<19 and IP65.

indoor use · outdoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
4000K


Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
4000K

Driver
included

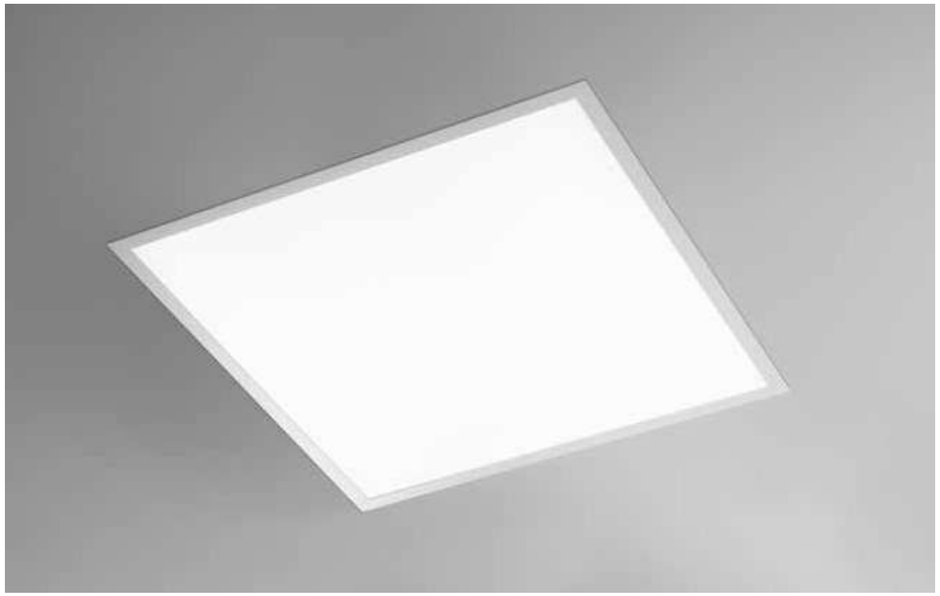


UGR <19 · CRI >80 · LED SMD




colour temp. | colour

LED-PANEL-60X60-IP65
8031414876303
lumen 3240 Lm

watt	36W
beam angle	120°
pf	0.90
	590 × 590 mm




Fotometria del prodotto / Photometric curve



LED-PANEL-60X60 IP65 UGR

PANEL



Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
acrylic diffuser


Colour
white

Colour temperature
4000K

Driver
included

CRI >80 · LED SMD

Sensore crepuscolare /
Adjustable light intensity through Harvest lux sensor

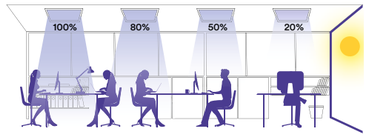

Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione di intensità luminosa intelligente tramite sensore LUX integrato.
LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable light intensity through built-in harvest LUX sensor.





colour temp. | colour

LED-PANEL-60X60-SENS
8031414861897

lumen	4000 Lm
watt	40W
beam angle	120°
pf	0.90

590 × 590 mm



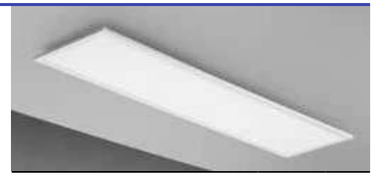


colour temp. | colour


LED-PANEL-30X120-SENS
8031414861880

lumen	4000 Lm
watt	40W
beam angle	120°
pf	0.90


290 × 1190 mm



**Fotometria del prodotto /
Photometric curve**




LED-PANEL-60X60-SENS




LED-PANEL-30X120-SENS

3 step dimmer x1 100% x2 50% x3 10%
3 step dimming function x1 100% x2 50% x3 10%



Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione intensità di luce in 3 step tramite interruttore.
LED panel with aluminum structure, acrylic diffuser and white finish. Light intensity variation system in 3 steps via switch.

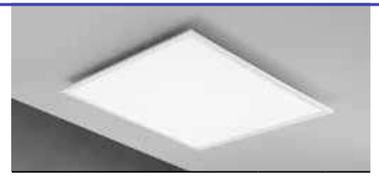



colour temp. | colour

LED-PANEL-60×60-DIM
8031414861026

lumen	3600 Lm
watt	40W
beam angle	120°
pf	0.90

590 × 590 mm



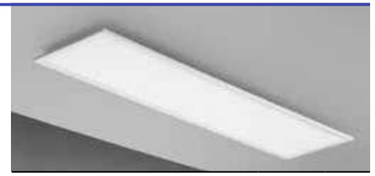


colour temp. | colour


LED-PANEL-30×120-DIM
8031414861033

lumen	3600 Lm
watt	40W
beam angle	120°
pf	0.90


290 × 1190 mm



**Fotometria del prodotto /
Photometric curve**



LED-PANEL-60X60-DIM



LED-PANEL-30X120-DIM

PANEL

indoor use

accommodation areas use

office use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Driver
incluso

Dimmer
dimmerabile
con radiocomando
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Driver
included

Dimmer
dimmable with radio
frequency remote control
included


CCT



Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione gradi Kelvin e intensità di luce, con radiocomando incluso.
LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable kelvin and luminous flux with radio frequency remote control included.

LED-PANEL-60×60-CCT
8031414861040


	colour temp.	colour
	CCT	
lumen	4650 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	





LED-PANEL-30×120-CCT
8031414861057


	colour temp.	colour
	CCT	
lumen	3600 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	




Accessorio incluso / Included accessory

Telecomando incluso /
Remote control included

Fotometria del prodotto / Photometric curve




LED-PANEL-60×60-CCT



LED-PANEL-30×120-CCT


RGB

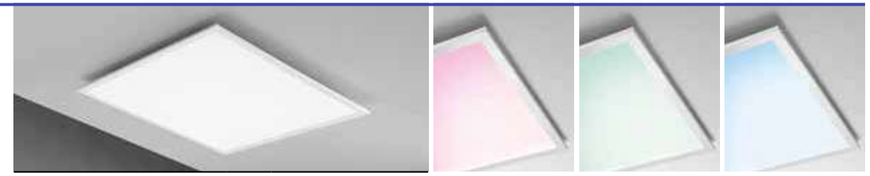

Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione colorazione luce RGB e luce bianca, con radiocomando incluso.
LED panel with aluminum structure, acrylic diffuser and white finish. RGB and natural white light adjustable with radio frequency remote control included.

LED-PANEL-60×60-RGBW
8031414861064


	colour temp.	colour
	RGB + 4000K	
lumen	4150 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



Accessorio incluso / Included accessory

Telecomando incluso /
Remote control included

Fotometria del prodotto / Photometric curve



LED-PANEL-60×60-RGBW

PANEL

Pannello LED a cornice luminosa.
LED panel with light frame.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
CCT

Driver
incluso

Material
aluminum,
PMMA diffuser


Colour
white

Colour temperature
CCT

Driver
included





CRI >80 · LED SMD · CCT

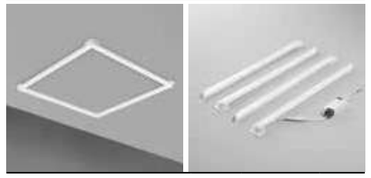

LED-PANEL-60X60-FR
8031414897643


	colour temp.	colour
	CCT	
lumen	5000 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



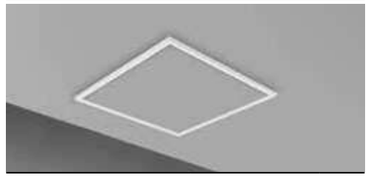


LED-PANEL-60X60-EDG
8031414897650


	colour temp.	colour
	CCT	
lumen	4200 lm	
watt	42W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-FR



LED-PANEL-60X60-EDG

PANEL

Pannello a LED, fissaggio easy a soffitto.
LED panel, easy ceiling fixing.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
4000K

Driver
included




CRI >80 · LED SMD



LED-PANEL-60X60-SM
8031414897599


	colour temp.	colour
lumen	4000 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	






LED-PANEL-30X120-SM
8031414897605


	colour temp.	colour
lumen	4000 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-SM



LED-PANEL-30X120-SM

PANEL

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure, acrylic diffuser and white finish.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
acrylic diffuser


Colour
white

Colour temperature
4000K

Driver
included




CRI >80 · LED SMD

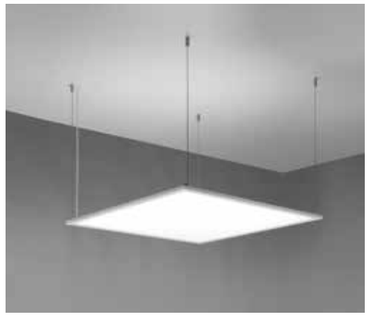

LED-PANEL-60X60-BIS
8031414865383

	colour temp.	colour
lumen	4000 lm (↓ 2000 lm+2000 lm ↑)	
watt	40W	
beam angle	↓ 110° + 110° ↑	
pf	0.90	







LED-PANEL-30X120-BIS
8031414865376

	colour temp.	colour
lumen	4000 lm (↓ 2000 lm+2000 lm ↑)	
watt	40W	
beam angle	↓ 110° + 110° ↑	
pf	0.90	

Fotometria del prodotto / Photometric curve




LED-PANEL-60X60-BIS



LED-PANEL-30X120-BIS

Accessorio incluso / Included accessory

Kit cavi acciaio ed elettrico 1,5 m /
steel hanging cable and electric cable 1,5 m




Accessori
Accessories



LED-PANEL-KIT
8031440352451

Kit 6 cavi 150 cm in acciaio per sospensione.

Steel cable kit 150 cm for sospension.






LED-PANEL-GANCI
8031440361903

Kit molle 4pz.

Metal spring kit 4pcs.





LED-PANEL-STAFFE
8031414866175

Kit 6 staffe in acciaio per pannello LED.

Steel fixing bars for LED panel.






LED-PANEL-BASE
8031414866236

Base a soffitto per driver pannello LED misura: 160 × 110 × 35 mm

Metal canopy base for LED panel size: 160 × 110 × 35 mm





LED-PANEL-SOSP
8031440361781

Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto misura: 120 × 120 × 60 mm

Kit for sospension with 1,5 m cable + metal canopy with electric connection size: 120 × 120 × 60 mm



LED-PANEL-DR
8031414889082

PANEL-DR
Output 45W
1000mA 45VDC
Input 230VAC
misura: 141 × 38 × 28 mm

PANEL-DR
Output 45W
1000mA 45VDC
Input 230VAC
size: 141 × 38 × 28 mm



LED-PANEL-DR-SLIM
8031414888412

PANEL-DR-SLIM
Output 45W
1050mA 27-42V
Input 220~240VAC
misura: 265 × 23 × 20,5 mm

PANEL-DR-SLIM
Output 45W
1050mA 27-42V
Input 220~240VAC
size: 265 × 23 × 20,5 mm



LED-PANEL-DR-SLIM-DIM
8031414888429

PANEL-DR-SLIM-DIM
Output 45W
1050mA 27-42V
Input 220~240VAC
0-10V DIMM
misura: 265 × 23 × 22,3 mm

PANEL-DR-SLIM-DIM
Output 45W
1050mA 27-42V
Input 220~240VAC
0-10V DIMM
size: 265 × 23 × 22,3 mm

Strutture in alluminio per montaggio a plafoniera per pannello LED.
Aluminum structures for panel light surface mount.


LED-PANEL-60X60-MT
8031414866212

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour

Misure dimensioni mm / Size mm





LED-PANEL-60X60-MT GR
8031414871452

Struttura per pannello LED, finitura grigio goffrato

Aluminum frame for LED panel, embossed grey

colour



LED-PANEL-60X60-MT NER
8031414871469

Struttura per pannello LED, finitura nero goffrato

Aluminum frame for LED panel, embossed black

colour


LED-PANEL-60X120-MT
8031414869176

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour

Misure dimensioni mm / Size mm






LED-PANEL-30X120-MT
8031414866199

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour

Misure dimensioni mm / Size mm





LED-PANEL-30X120-MT GR
8031414871506

Struttura per pannello LED, finitura grigio goffrato

Aluminum frame for LED panel, embossed grey

colour



LED-PANEL-30X120-MT NER
8031414871476

Struttura per pannello LED, finitura nero goffrato

Aluminum frame for LED panel, embossed black

colour

PANEL-DJ

Pannello a LED con struttura in alluminio e diffusore in acrilico. Sistema di variazione gradi Kelvin e di intensità regolabili con radiocomando incluso e speaker bluetooth.
LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable Kelvin and luminous flux with radio frequency remote control included abd speaker bluetooth.



Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
CCT

Driver
incluso

Dimmer
dimmerabile
con radiocomando
incluso


Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
CCT


Driver
included

Dimmer
dimmable with radio
frequency remote control
included

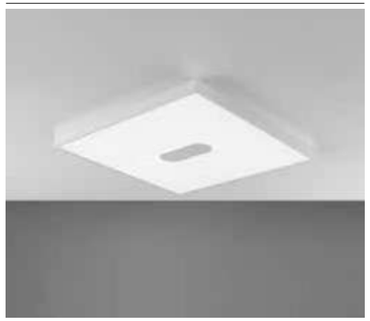

LED-PANEL-60X60-DJ
8031414876242
lumen

	colour temp.	colour
	CCT	
	1840 lm	
watt	42W	
beam angle	120°	




SPEAKER
2×5W connessione bluetooth 4.2 max 10 m / 2×5W bluetooth 4.2 connection max 10 m




LED-PANEL-30X60-DJ
8031414876259
lumen

	colour temp.	colour
	CCT	
	3360 lm	
watt	23W	
beam angle	120°	



SPEAKER
2×5W connessione bluetooth 4.2 max 10 m / 2×5W bluetooth 4.2 connection max 10 m

Fotometria del prodotto / Photometric curve

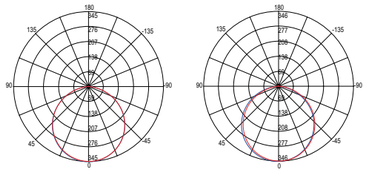


LED-PANEL-60X60-DJ LED-PANEL-30X60-DJ

Accessorio incluso / Included accessory



Radiocomando / Remote control
Dimmerabile con radiocomando / Dimmable with radio frequency remote control



APPLIQUE E PLAFONIERE

WALL LAMPS AND CEILING LAMPS

KLIO

Plafoniera a LED con struttura in alluminio pressofuso e diffusore in acrilico.
LED ceiling lamp with die-cast aluminum structure and acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio,
diffusore in acrilico

Colore
bianco goffrato
nero goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum,
acrilic diffuser

Colour
embossed white
embossed black

Colour temperature
3000K / 4000K


Driver
included




KLIO

indoor use · accommodation areas use · office use · commercial areas use

CRI >80 · LED SMD

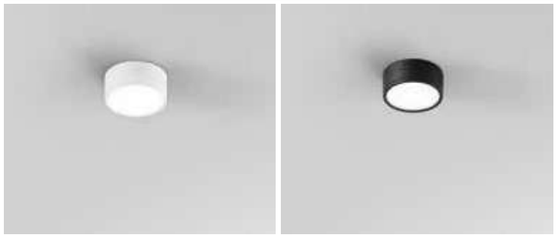


	colour temp.	colour
LED-KLIO-R11C 8031414875719		
lumen	2000 lm	
LED-KLIO-R11 8031440358675		
lumen	2000 lm	
LED-KLIO-R11 NER 8031414868032		
lumen	2000 lm	
watt	16W	
beam angle	120°	
pf	-	

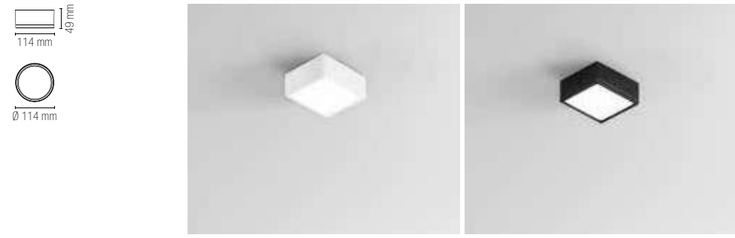

	colour temp.	colour
LED-KLIO-Q11C 8031414875672		
lumen	2000 lm	
LED-KLIO-Q11 8031440363563		
lumen	2000 lm	
LED-KLIO-Q11 NER 8031414868001		
lumen	2000 lm	
watt	16W	
beam angle	120°	
pf	-	




	colour temp.	colour
LED-KLIO-R17C 8031414875726		
lumen	3000 lm	
LED-KLIO-R17 8031440363587		
lumen	3000 lm	
LED-KLIO-R17 NER 8031414868049		
lumen	3000 lm	
watt	22W	
beam angle	120°	
pf	-	

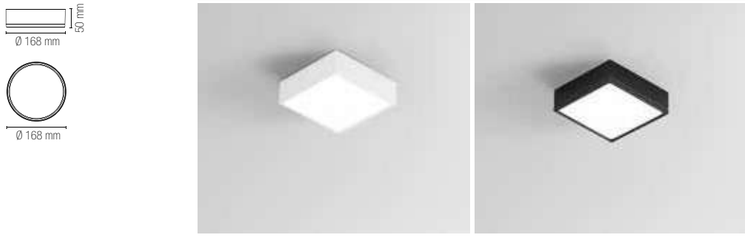

	colour temp.	colour
LED-KLIO-Q17C 8031414875689		
lumen	3000 lm	
LED-KLIO-Q17 8031440363570		
lumen	3000 lm	
LED-KLIO-Q17 NER 8031414868018		
lumen	3000 lm	
watt	22W	
beam angle	120°	
pf	-	




	colour temp.	colour
LED-KLIO-R21C 8031414875733		
lumen	4600 lm	
LED-KLIO-R21 8031440363594		
lumen	4600 lm	
LED-KLIO-R21 NER 8031414868056		
lumen	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	

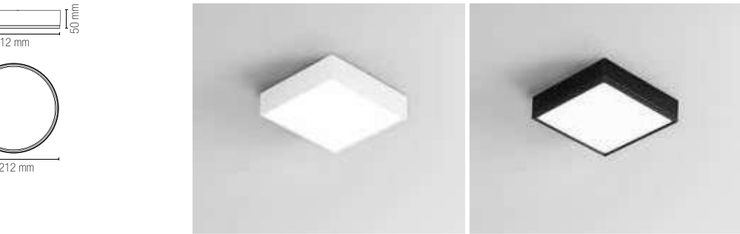

	colour temp.	colour
LED-KLIO-Q21C 8031414875696		
lumen	4600 lm	
LED-KLIO-Q21 8031440363549		
lumen	4600 lm	
LED-KLIO-Q21 NER 8031414868025		
lumen	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	




	colour temp.	colour
LED-KLIO-R40C 8031414875740		
lumen	7800 lm	
LED-KLIO-R40 8031414868087		
lumen	7800 lm	
LED-KLIO-R40 NER 8031414868094		
lumen	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	

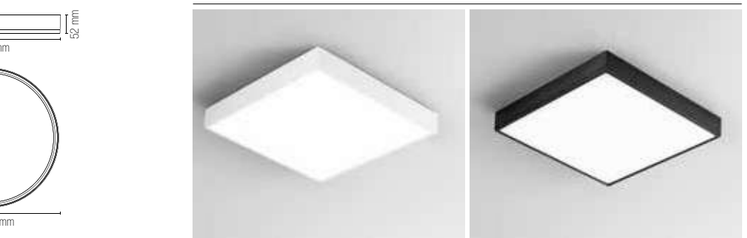


	colour temp.	colour
LED-KLIO-Q40C 8031414875702		
lumen	7800 lm	
LED-KLIO-Q40 8031414868070		
lumen	7800 lm	
LED-KLIO-Q40 NER 8031414868063		
lumen	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	


Fotometria del prodotto / Photometric curve




LED-KLIO-R11



LED-KLIO-R17




LED-KLIO-R21




LED-KLIO-R40


Fotometria del prodotto / Photometric curve




LED-KLIO-Q11



LED-KLIO-Q17



LED-KLIO-Q21



LED-KLIO-Q40

MIG

Plafoniera a LED anti-abbagliamento con struttura in alluminio.
Anti-glare LED ceiling lamp with aluminum structure.

Materiale
struttura in alluminio
riflettore in acrilico

Colore
bianco goffrato con riflettore cromato,
nero goffrato con riflettore nero lucido

Temperatura colore
3000K / 4000K

Driver
incluso

Durata e on/off
50.000 h >25.000 on/off

Material
aluminum structure with acrylic reflector

Colour
embossed white with chrome reflector, embossed black with glossy black reflector

Colour temperature
3000K / 4000K

Driver
included

Durata e on/off
50.000 h >25.000 on/off



indoor use · accommodation areas use · office use · commercial areas use

CRI 90 · UGR <19 · LED COB

CE · EMC



	colour temp.	colour
LED-MIG-R20C BCO		
8031414874064		
lumen	2000 lm	
LED-MIG-R20 BCO		
8031414866823		
lumen	2000 lm	
LED-MIG-R20C NER		
8031414874057		
lumen	2000 lm	
LED-MIG-R20 NER		
8031414866717		
lumen	2000 lm	

watt	20W
beam angle	45°
pf	0.90






	colour temp.	colour
LED-MIG-Q20C BCO		
8031414874118		
lumen	2000 lm	
LED-MIG-Q20 BCO		
8031414870981		
lumen	2000 lm	
LED-MIG-Q20C NER		
8031414874101		
lumen	2000 lm	
LED-MIG-Q20 NER		
8031414866731		
lumen	2000 lm	


watt	20W
beam angle	45°
pf	0.90



Fotometria del prodotto / Photometric curve



LED-MIG R 20W



LED-MIG Q 20W

GENESIS

Plafoniera orientabile con struttura in alluminio bianco o nero opaco.
Adjustable ceiling lamp with aluminum structure in matt white and black.

indoor use | accommodation areas use | office use | commercial areas use



GU10





colour

I-GENESIS-R6-BCO
8031414883202


1 x GU10 MAX 35W




colour

I-GENESIS-R6-NER
8031414883219

1 x GU10 MAX 35W







Lampadina non inclusa /
Light bulb not included

TOWN

Plafoniera con struttura in alluminio bianco o nero opaco.
Ceiling lamp with aluminum structure in matt white and black.

indoor use | accommodation areas use | office use | commercial areas use



GU10

CE




colour

I-TOWN-R BCO
8031414868179
I-TOWN-R NER
8031414868162

1 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

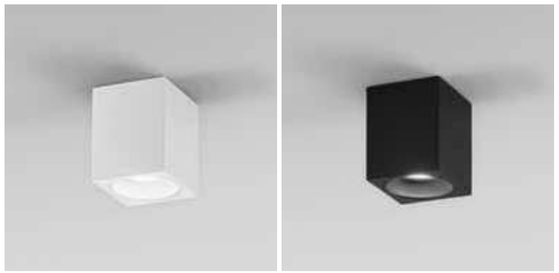

colour

I-TOWN-Q BCO
8031414868155
I-TOWN-Q NER
8031414868148

1 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



colour

I-TOWN-R2 BCO
8031414883189
I-TOWN-R2 NER
8031414883196

2 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



colour

I-TOWN-Q2 BCO
8031414883165
I-TOWN-Q2 NER
8031414883172

2 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

XICO

Plafoniera a LED in gesso verniciabile con interruttore per regolazione colore temperatura Kelvin.
LED ceiling lamp in paintable gypsum and switch for temperature adjustment Kelvin.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
gesso verniciabile con ghiere nere lucide

Temperatura colore selezionabile
2700K / 4000K / 6500K

Driver
incluso

Material
paintable plaster with glossy black metal decorative rings

Selectable color temperature
2700K / 4000K / 6500K

Driver
included






CRI >80 · LED SMD

technical information **XICO**


CE · EMC

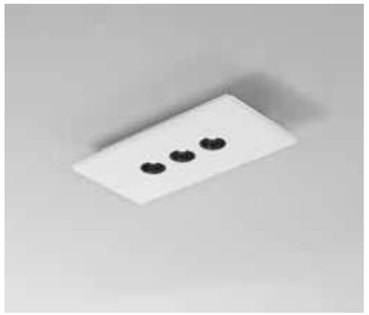


colour temp. | colour

LED-XICO-40X20
8031414883677
lumen 840 lm

watt LED 3 × 4W
beam angle 36°




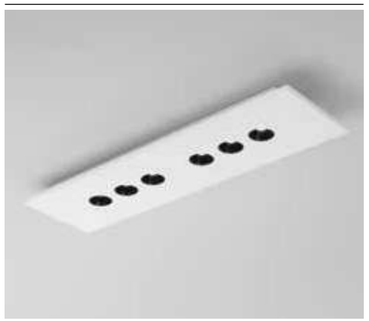


colour temp. | colour

LED-XICO-70X20
8031414883660
lumen 1260 lm

watt LED 6 × 3W
beam angle 36°




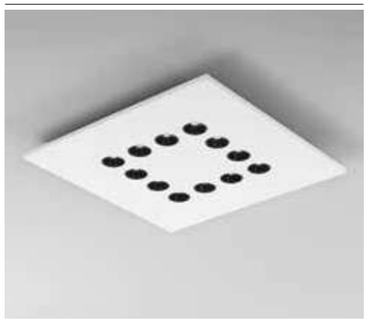

colour temp. | colour

LED-XICO-50X50
8031414883653
lumen 2520 lm

watt LED 12 × 3W
beam angle 36°



VORTEX

Plafoniera a LED in gesso verniciabile con interruttore per regolazione colore temperatura Kelvin.
LED ceiling lamp in paintable gypsum with switch for temperature adjustment Kelvin.

Materiale
gesso verniciabile


Temperatura colore selezionabile
2700K / 4000K / 6500K

Driver
incluso

Material
paintable plaster

Selectable color temperature
2700K / 4000K / 6500K

Driver
included

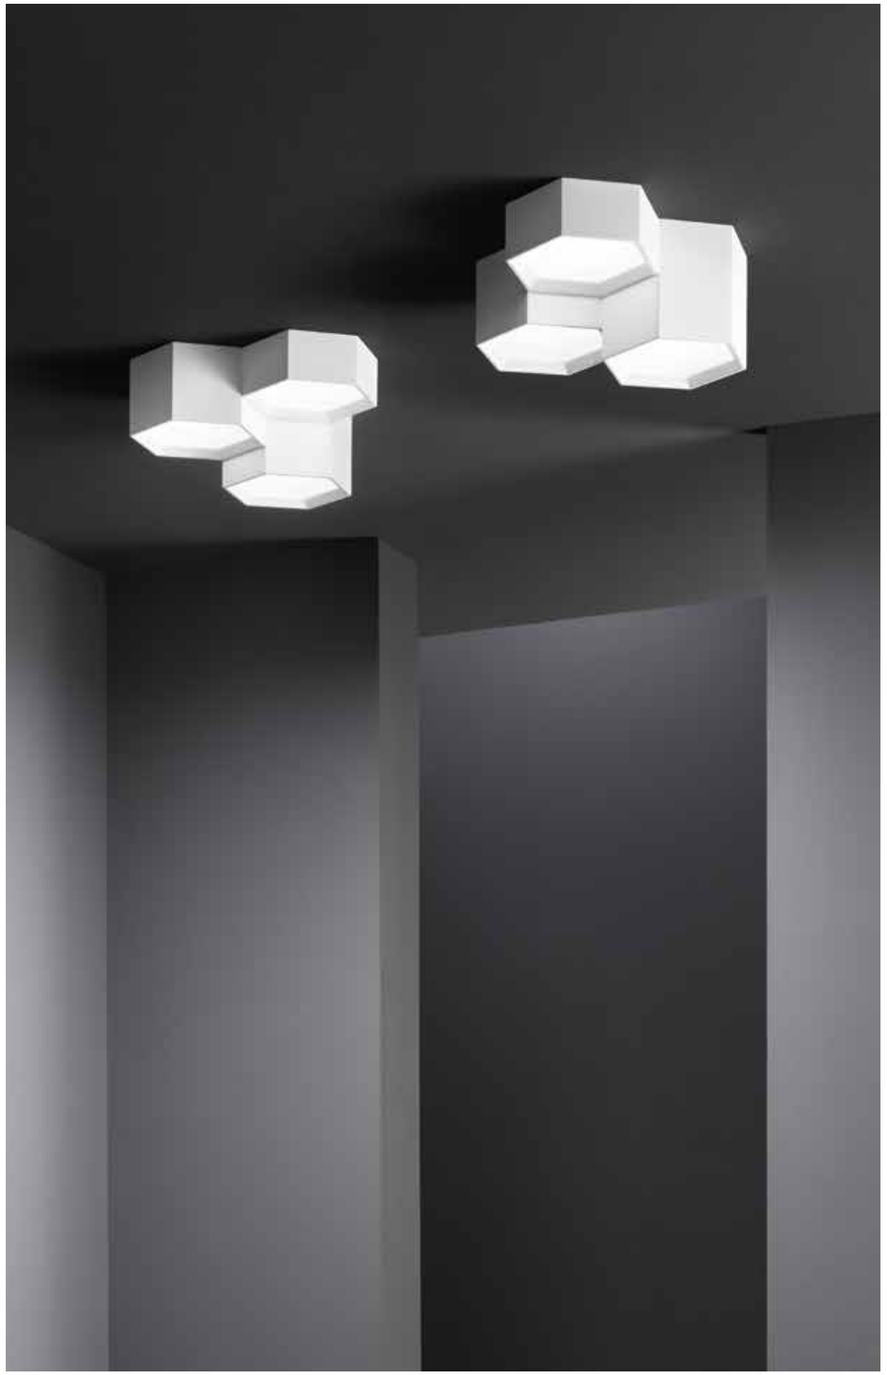

indoor use · accommodation areas use · office use · commercial areas use



CRI >80 · LED SMD

technical information **VORTEX**


CE · EMC



colour temp.

LED-VORTEX-PL1
8031414883691

lumen	1310 lm
watt	LED 12W
beam angle	120°
pf	-






colour temp.

LED-VORTEX-PL3
8031414883684

lumen	3930 lm
watt	LED 36W
beam angle	120°
pf	0.90




ATHEN

Plafoniera in gesso verniciabile con portalampade GX53.
Ceiling lamp in paintable gypsum with GX53 lamp holder.

indoor use | accommodation areas use | office use | commercial areas use



I-ATHEN-R1
8031414892945
1 x GX53 MAX 9W






I-ATHEN-R2
8031414892679
2 x GX53 MAX 9W





I-ATHEN-R3
8031414892686
3 x GX53 MAX 9W







Lampadina non inclusa /
Light bulb not included




I-ATHEN-Q1
8031414892693
1 x GX53 MAX 9W






I-ATHEN-Q2
8031414892709
2 x GX53 MAX 9W





I-ATHEN-Q3
8031414892716
3 x GX53 MAX 9W





Lampadina non inclusa /
Light bulb not included





CE



SPACE


Plafoniera in gesso verniciabile con ghiera orientabile.
LED ceiling lamp in paintable gypsum with adjustable ring.





I-SPACE-R1
8031434141214

1 x GU10 MAX 35W





I-SPACE-Q1
8031434171211

1 x GU10 MAX 35W





Lampadina non inclusa /
Light bulb not included

Plafoniera struttura in gesso verniciabile.
Gypsum ceiling lamp paintable.



indoor use
accommodation areas use
office use
commercial areas use



I-SPACE-S-R1
8031439531263

1 x GU10 MAX 9W





I-SPACE-S-Q1
8031439521264

1 x GU10 MAX 9W






Lampadina non inclusa /
Light bulb not included

BANJIE

Applique a parete o plafoniera con struttura in gesso verniciabile.
Gypsum ceiling and wall lamps paintable.







BANJIE





technical information **BANJIE**



I-BANJIE-S-AP
8031440365475

2 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-BANJIE-L-AP
8031440365499

2 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-BANJIE-AP4
8031414866533

4 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-BANJIE-PL1
8031414867479

1 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included



I-BANJIE-PL3
8031414867486

3 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-BANJIE-PL5
8031414867493


5 x GU10 MAX 9W

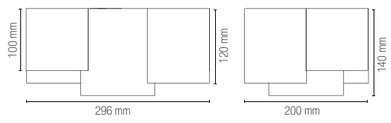


Lampadina non inclusa /
Light bulb not included

FOSTER


Applique a parete o plafoniera con struttura in gesso verniciabile.
Gypsum ceiling and wall lamps paintable.



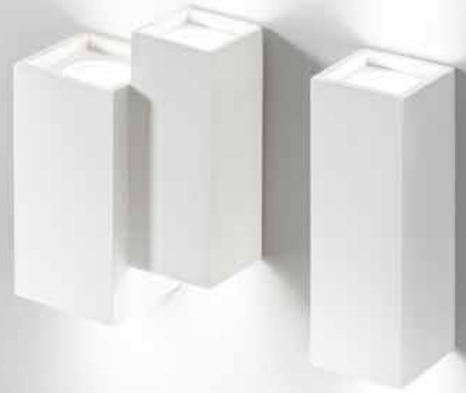



collection **FOSTER**

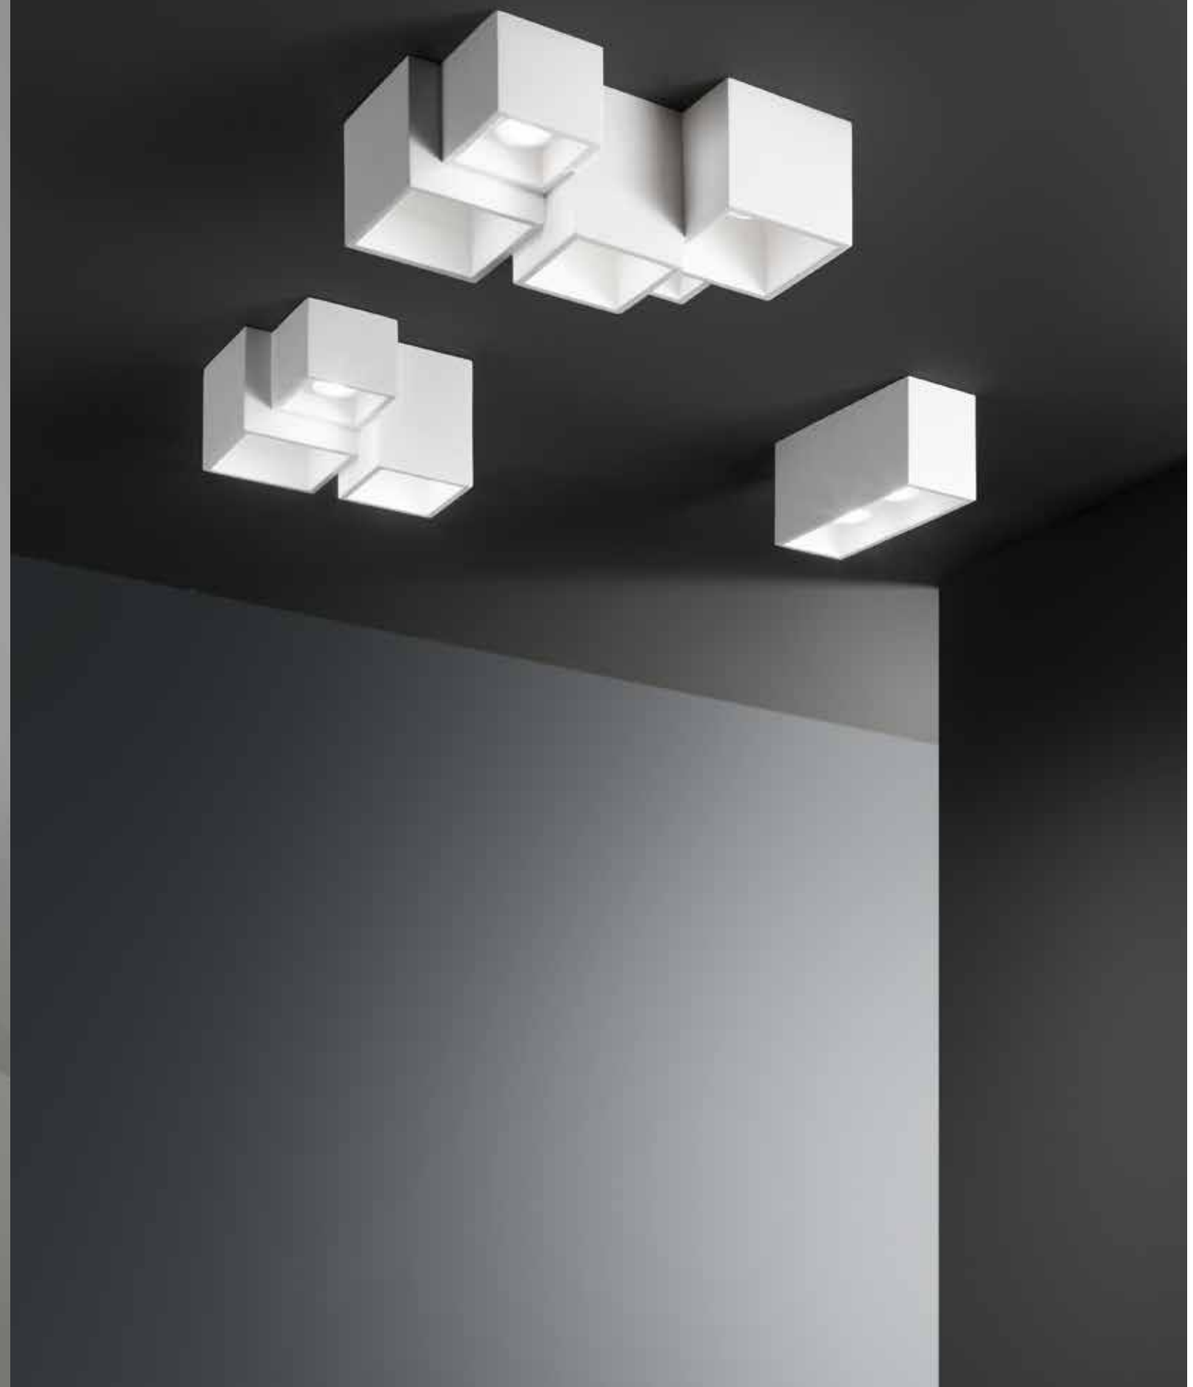

FOSTER






technical information **FOSTER**



I-FOSTER-AP
8031414861385

2 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-FOSTER-PL25
8031414876013

2 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included



I-FOSTER-AP4
8031414867509

4 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-FOSTER-PL3
8031414867523

3 x GU10 MAX 9W




Lampadina non inclusa /
Light bulb not included



I-FOSTER-PL1
8031414867516

1 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included



I-FOSTER-PL5
8031414867530

5 x GU10 MAX 9W



Lampadina non inclusa /
Light bulb not included

HAPIS

Plafoniere con struttura in gesso verniciabile.
Paintable gypsum ceiling lamps.

indoor use | accommodation areas use | office use | commercial areas use






GU10 | Ø34 | H49


technical information **HAPIS**

CE

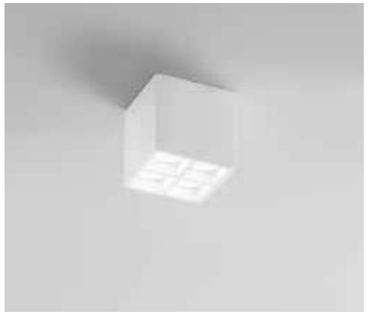

I-HAPIS-Q4
8031414884308

4 x GU10 MINI MAX 35W




Lampadina non inclusa /
Light bulb not included



I-HAPIS-RT4
8031414884285

4 x GU10 MINI MAX 35W




Lampadina non inclusa /
Light bulb not included



I-HAPIS-RT8
8031414884292

8 x GU10 MINI MAX 35W



Lampadina non inclusa /
Light bulb not included

LIVING

Plafoniere in gesso verniciabile con diffusore in acrilico.
Paintable gypsum ceiling lamps with acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use





E14 E27

technical information **LIVING**

CE



I-LIVING-PL14
8031414876020

1 x E27 MAX 15W




Lampadina non inclusa /
Light bulb not included



I-LIVING-PL11
8031414876037

1 x E14 MAX 13W




Lampadina non inclusa /
Light bulb not included



I-LIVING-PL23
8031414876044

2 x E14 MAX 13W




Lampadina non inclusa /
Light bulb not included



I-LIVING-PL36
8031414876051

4 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

GABRIEL

Plafoniere in gesso verniciabile con diffusore in vetro.
Ceiling lamps in paintable gypsum with glass diffuser.






I-GABRIEL/PL30R
8031434111217

2 x E27 MAX 25W

Lampadina non inclusa /
Light bulb not included






I-GABRIEL/PL25Q
8031434101218


2 x E27 MAX 25W

Lampadina non inclusa /
Light bulb not included



indoor use | accommodation areas use | office use | commercial areas use

E27

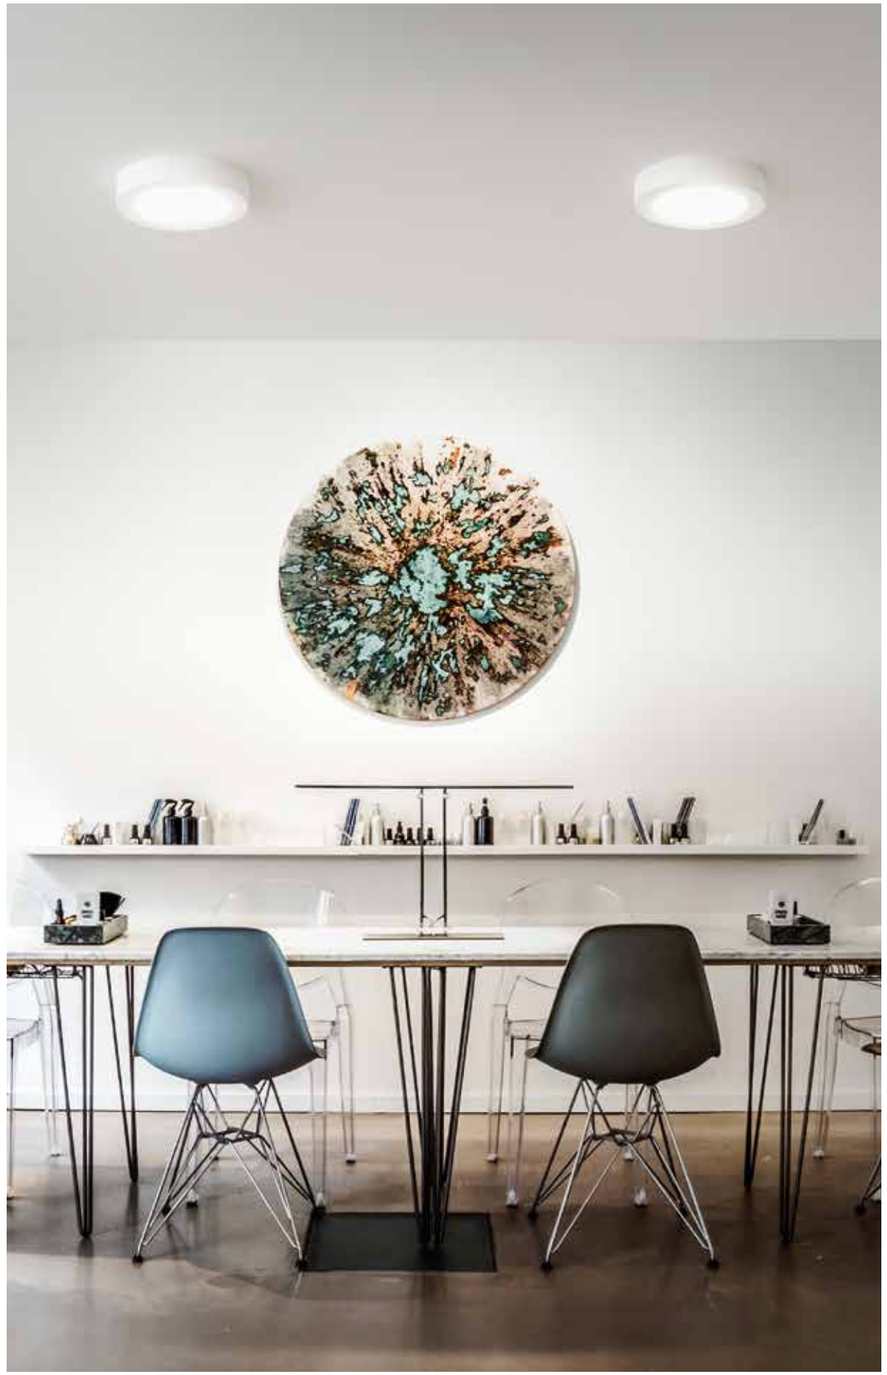

ROCK

Plafoniera in gesso verniciabile o cemento naturale con LED integrato.
Gypsum paintable or natural concrete ceiling lamp with built-in LED.



Materiale
gesso verniciabile
cemento naturale

Temperatura colore
4000K


Driver
incluso

Material
paintable plaster
natural concrete


Colour temperature
4000K

Driver
included

CRI >80 LED SMD

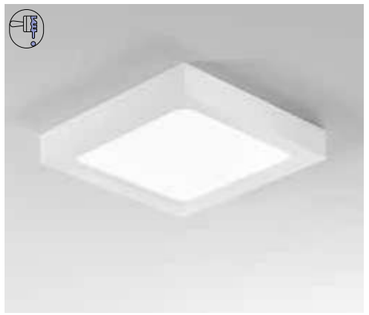

	colour temp.	colour
LED-ROCK-Q		
8031414867660		
lumen	2000 lm	
watt	25W	
beam angle	120°	





	colour temp.	colour
LED-ROCK-CM-Q		
8031414867646		
lumen	2000 lm	
watt	25W	
beam angle	120°	



ALOHA

Applique a parete in gesso verniciabile.
Gypsum wall lamp paintable.



indoor use · accommodation areas use · office use · commercial areas use

Materiale
gesso verniciabile

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
paintable plaster

Selectable color temperature
3000K / 4000K

Driver
included



CRI >80 · LED SMD

technical information **ALOHA**


CE · EMC



colour temp.

LED-ALOHA-AP35
8031414892594

lumen	740 lm
watt	7W
beam angle	120°






colour temp.

LED-ALOHA-AP55
8031414892600

lumen	1400 lm
watt	12W
beam angle	120°






colour temp.

LED-ALOHA-AP80
8031414892617

lumen	2300 lm
watt	20W
beam angle	120°



ORTISEI

Applique a parete in gesso verniciabile e doppia biemissione.
Gypsum wall lamp paintable and double light emission.



Materiale
gesso verniciabile

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
paintable plaster

Colour temperature
4000K


Selectable color temperature
3000K / 4000K

Driver
included



CRI >80 · LED SMD


technical information **ORTISEI**

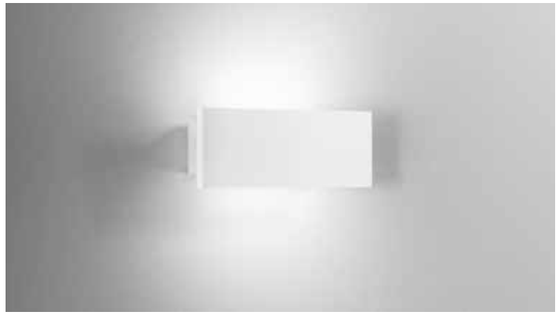


colour temp.

LED-ORTISEI-AP22
8031414866571
lumen 1080 lm

watt 8W
beam angle ↓120° + 120°↑



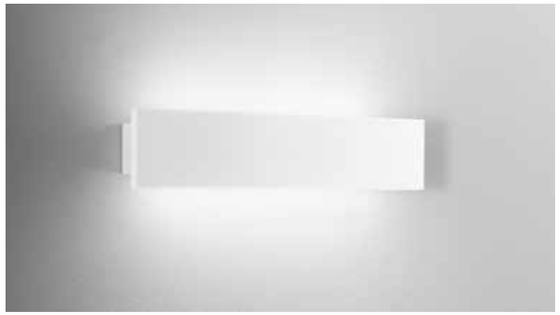


colour temp.

LED-ORTISEI-AP40
8031414866588
lumen 1400 lm

watt 11,8W
beam angle ↓120° + 120°↑




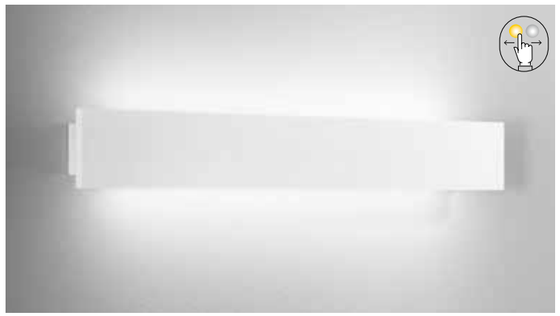

colour temp.

LED-ORTISEI-AP60
8031414866557
lumen 2200 lm

watt 18W
beam angle ↓120° + 120°↑



ROLLER

Applique a parete in gesso verniciabile con LED integrato.
Wall lamp in paintable gypsum with integrated LED.



indoor use · accommodation areas use · office use · commercial areas use

Materiale
gesso verniciabile


Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
paintable plaster

Selectable color temperature
3000K / 4000K

Driver
included

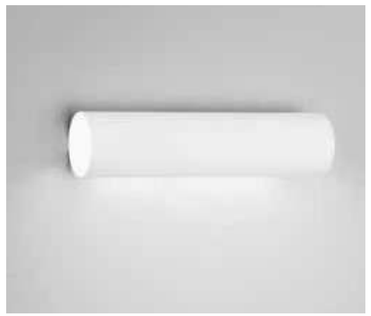

	colour temp.
LED-ROLLER-AP	
8031414892624	
lumen	700 lm
watt	7W
beam angle	120°



CRI >80 · LED SMD





MOOD

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use | accommodation areas use | office use | commercial areas use



G9

I-MOOD-AP
8031414882946

2 x G9 MAX 25W

Lampadina non inclusa /
Light bulb not included

SOUL

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use | accommodation areas use | office use | commercial areas use



E14

I-SOUL-AP
8031414882953

1 x E14 MAX 20W






Lampadina non inclusa /
Light bulb not included

SPIRAL


Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use · accommodation areas use · office use · commercial areas use

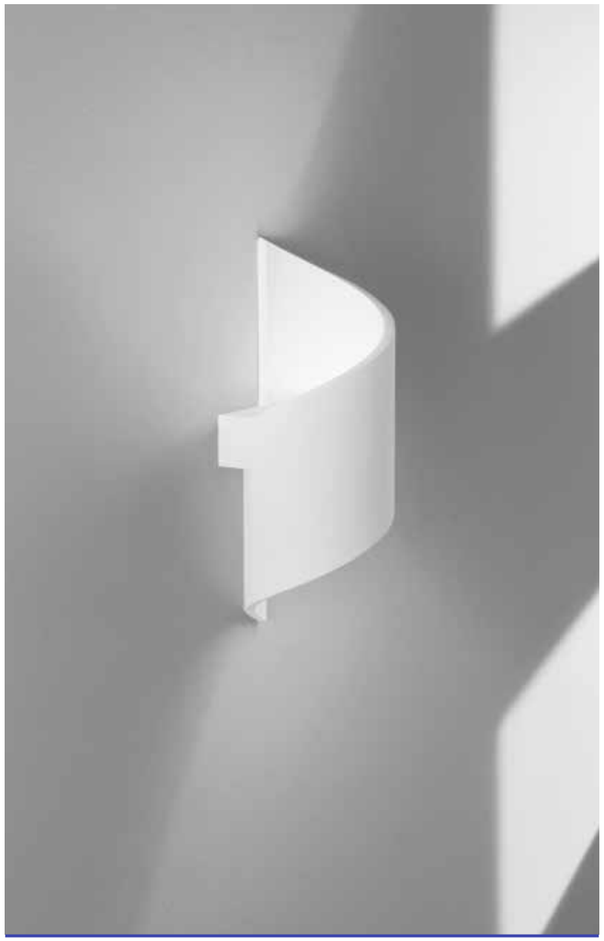


CE

G9



I-SPIRAL-AP
8031414892662

1 x G9 MAX 25W





Lampadina non inclusa /
Light bulb not included

ORIGAMI

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use · accommodation areas use · office use · commercial areas use

CE

E27

I-ORIGAMI-AP
8031414892938

1 x E27 MAX 20W





Lampadina non inclusa /
Light bulb not included

LEIRON

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use · accommodation areas use · office use · commercial areas use



G9

I-LEIRON-AP
8031436741238

1 x G9 MAX 25W

Lampadina non inclusa /
Light bulb not included

MONTBLANC

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use · accommodation areas use · office use · commercial areas use



G9

I-MONTBLANC-AP
8031414861354

1 x G9 MAX 25W





Lampadina non inclusa /
Light bulb not included

CLEPSYDRA

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.




indoor use · accommodation areas use · office use · commercial areas use



I-CLEPSYDRA-M-AP
8031414892822

2 x E14 MAX 20W

Lampadina non inclusa /
Light bulb not included






I-CLEPSYDRA-L-AP
8031414892839

2 x E14 MAX 20W

Lampadina non inclusa /
Light bulb not included



technical information **CLEPSYDRA**

E14



SHINE

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use | accommodation areas use | office use | commercial areas use






CE

G9

I-SHINE-AP
8031434191219

1 x G9 MAX 25W





Lampadina non inclusa /
Light bulb not included

ASTRON

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use | accommodation areas use | office use | commercial areas use

CE

G9

I-ASTRON-AP
8031414862412

1 x G9 MAX 25W





Lampadina non inclusa /
Light bulb not included

CERVINIA

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use · accommodation areas use · office use · commercial areas use



I-CERVINIA-AP
8031414873555

1 x E27 MAX 12W

E27

Lampadina non inclusa /
Light bulb not included

SCOTT

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use · accommodation areas use · office use · commercial areas use





I-SCOTT-AP
8031414876082

2 x E14 MAX 20W



E14



Lampadina non inclusa /
Light bulb not included

RUBIK

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use | accommodation areas use | office use | commercial areas use



G9

technical information **RUBIK**


CE

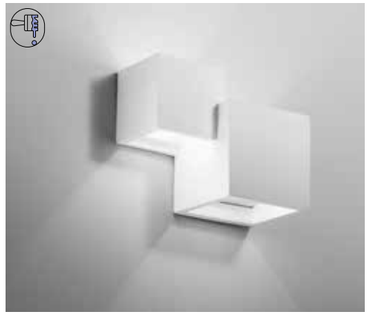

colour

I-RUBIK-AP2
8031414876075

2 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included



colour

I-RUBIK-AP
8031440362146

1 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included



colour

I-RUBIK-CM-AP
8031414867608


1 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included

MOSES

Applique a parete in gesso verniciabile o cemento naturale.
Wall lamp in paintable gypsum or natural cement.



G9


CE

colour




I-MOSES-AP
8031434181210

1 x G9 MAX 25W




Lampadina non inclusa /
Light bulb not included

colour

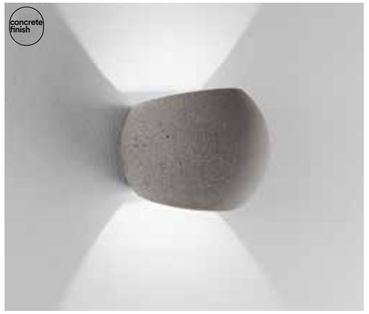

I-MOSES-CM-AP
8031414867615

1 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included

PIROETTE

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use · accommodation areas use · office use · commercial areas use






technical information **PIROETTE**

R7s

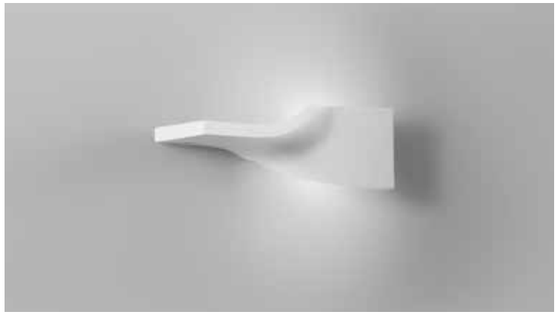


I-PIROETTE-AP36
8031414873562

1 x R7S MAX 7W




78mm
Lampadina non inclusa / Light bulb not included

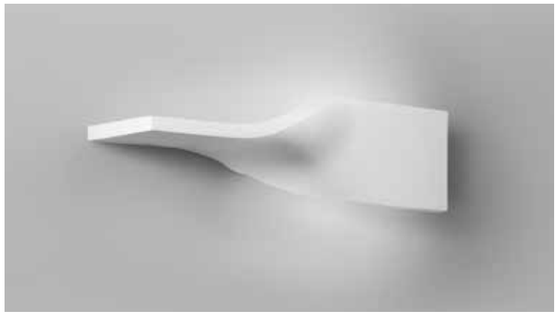


I-PIROETTE-AP56
8031414873579

1 x R7S MAX 20W



118mm
Lampadina non inclusa / Light bulb not included

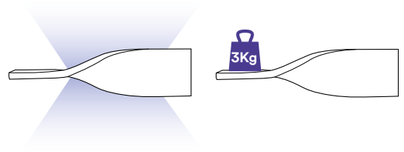

CORTINA

Applique a parete in gesso verniciabile, diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco.
Gypsum wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

indoor use | accommodation areas use | office use | commercial areas use



technical information **CORTINA**

E14



I-CORTINA-S-AP
8031414866472

1 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included



I-CORTINA-AP
8031414861347

2 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

CANDIDA

Applique a parete in gesso verniciabile o cemento, diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco.
Gypsum wall lamp paintable or concrete, lower diffuser in satin glass and upper diffuser white acrylic.

indoor use | accommodation areas use | office use | commercial areas use



technical information **CANDIDA**

E14

colour



I-CANDIDA-S-AP
8031414866502

1 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

colour



I-CANDIDA-AP
8031436751237

2 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

colour



I-CANDIDA-L-AP
8031414865567

2 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

colour



I-CANDIDA-CM-AP
8031414867592

2 x E14 MAX 25W



Lampadina non inclusa /
Light bulb not included

FLOW





technical information **FLOW**


Applique a parete in gesso verniciabile, diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco.
Wall lamp in paintable gypsum, lower diffuser in satin glass and upper diffuser white acrylic.



I-FLOW-AP29
8031414892655

1 x E27 MAX 20W

Lampadina non inclusa /
Light bulb not included






I-FLOW-AP37
8031414892648

2 x E14 MAX 20W

Lampadina non inclusa /
Light bulb not included



GATSBY

Applique a parete in gesso verniciabile, diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco.
Gypsum wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

indoor use | accommodation areas use | office use | commercial areas use



E14

I-GATSBY-AP
8031414876068

2 x E14 MAX 20W

Lampadina non inclusa /
Light bulb not included

STONE

Applique a parete in gesso effetto sassi.
Wall lamp in stone effect gypsum.


indoor use | accommodation areas use | office use | commercial areas use



E14

I-STONE-AP
8031414865291

1 x E14 MAX 13W



Lampadina non inclusa /
Light bulb not included

SANTORINI

Applique a parete angolare in gesso verniciabile.
Angular paintable gypsum.

indoor use · accommodation areas use · office use · commercial areas use




CE

E14



I-SANTORINI-AP
8031440351553

1 x E14 MAX 13W





Lampadina non inclusa /
Light bulb not included

MYKONOS

Applique a parete angolare in gesso verniciabile con diffusore in vetro satinato.
Wall lamp in angular paintable gypsum with satin glass diffuser.

indoor use · accommodation areas use · office use · commercial areas use




CE

E14



I-MYKONOS-AP
8031440351584

1 x E14 MAX 13W





Lampadina non inclusa /
Light bulb not included

SOLEIL


Applique in gesso verniciabile con diffusore in vetro satinato.
Paintable gypsum wall lamp with satin glass diffuser.





I-SOLEIL-AP
8031414892815

1 x E14 MAX 20W





Lampadina non inclusa /
Light bulb not included

OLYMPIA

Applique a parete in gesso verniciabile con diffusione luminosa verso l'alto.
Wall lamp in gypsum paintable with light diffusion upwards.

I-OLYMPIA-AP
8031414892631

1 x GU10 MAX 10W





Lampadina non inclusa /
Light bulb not included

ABEL

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.

indoor use · accommodation areas use · office use · commercial areas use



E14

I-ABEL-AP
8031440362153

2 x E14 MAX 25W

Lampadina non inclusa /
Light bulb not included

SESTRIERE

Applique a parete in gesso verniciabile.
Wall lamp in paintable gypsum.


indoor use · accommodation areas use · office use · commercial areas use



E27

I-SESTRIERE-AP
8031414861330

1 x E27 MAX 40W





Lampadina non inclusa /
Light bulb not included

MORITZ

Applique a parete in gesso verniciabile in foglia oro, foglia argento, effetto legno noce o rovere sbiancato.
Wall lamp in paintable gypsum in gold leaf, silver leaf, walnut or oak effect.



E27


Lampadina non inclusa / Light bulb not included

colour



I-MORITZ-L-AP
8031414861361

1 x E27 MAX 40W




colour



I-MORITZ-S-AP
8031414861378

1 x E27 MAX 40W




colour



I-MORITZ-S-SIL-AP
8031414866489

1 x E27 MAX 40W




colour



I-MORITZ-S-ORO-AP
8031414866458

1 x E27 MAX 40W




colour



I-MORITZ-S-BG-AP
8031414865338

1 x E27 MAX 40W




colour



I-MORITZ-S-NOC-AP
8031414865352


1 x E27 MAX 40W



LIVIGNO

Applique a parete in gesso verniciabile, in foglia oro o foglia argento.
Wall lamp in paintable gypsum also in gold leaf or silver leaf versions.






technical information **LIVIGNO**



colour

I-LIVIGNO-AP
8031414867561

2 x G9 MAX 25W




Lampadina non inclusa /
Light bulb not included



colour

I-LIVIGNO-AP SIL
8031414867585

2 x G9 MAX 25W




Lampadina non inclusa /
Light bulb not included



colour

I-LIVIGNO-AP ORO
8031414867578

2 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included

ALMA

Applique a parete in gesso bianco verniciabile, in foglia oro o foglia argento.
Wall lamp in white paintable gypsum, in gold or silver leaf.

indoor use
accommodation areas use
office use
commercial areas use



technical information **ALMA**


G9

colour



I-ALMA-AP
8031414866496

2 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included

colour



I-ALMA-AP SIL
8031414867554

2 x G9 MAX 25W




Lampadina non inclusa /
Light bulb not included

colour



I-ALMA-AP ORO
8031414867547

2 x G9 MAX 25W



Lampadina non inclusa /
Light bulb not included

AILERON

Applique a LED orientabile in alluminio bianco sabbiato o bronzo sabbiato.
Adjustable LED wall light in aluminum in sandblasted white or sandblasted bronze version.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco sabbiato
bronzo sabbiato

Temperatura colore
4000K

Driver
incluso

Material
aluminum

Colour
sandblasted white
sandblasted bronze

Colour temperature
4000K

Driver
included






CRI >80 · LED SMD


technical information **AILERON**

CE · EMC

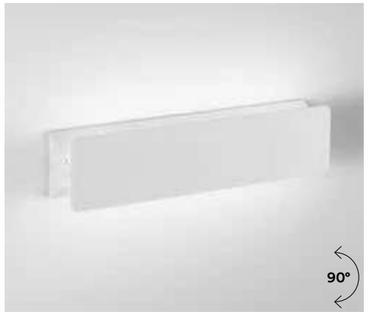

LED-W-AILERON BCO
8031414876938


	colour temp.	colour
lumen	1300 lm	
watt	10W	
beam angle	↓120° + 120°↑	





LED-W-AILERON BRO
8031414876945

	colour temp.	colour
lumen	1300 lm	
watt	10W	
beam angle	↓120° + 120°↑	



SIGMA

Applique a LED orientabile in metallo cromato con diffusore in acrilico.
Adjustable LED wall light in chromed metal with acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use

Temperatura colore
3500K

Driver
incluso


Colour temperature
3500K

Driver
included



LED-W-SIGMA/4W
8031432971202

	colour temp.	colour
lumen	550 lm	
watt	4W	
beam angle	120°	



CRI >80 · LED SMD

ATLAS

Applique a LED in alluminio bianco goffrato.
White embossed aluminum LED wall light.

indoor use · accommodation areas use · office use · commercial areas use

Temperatura colore
3500K

Driver
incluso


Colour temperature
3500K

Driver
included



LED-W-ATLAS/6W
8031433071208

	colour temp.	colour
lumen	380 lm	
watt	6W	
beam angle	↓ 90° + 90° ↑	



CRI >80 · LED SMD

ANDROMEDA

Applique a LED orientabile in metallo cromato dalla linea sottile.
Adjustable LED wall light in chromed metal with a thin line.

Temperatura colore
3500K

Driver
incluso


Colour temperature
3500K

Driver
included



LED-W-ANDROMEDA/4W
8031432941205

	colour temp.	colour
lumen	470 lm	
watt	4W	
beam angle	120°	



CRI >80 · LED SMD

OMEGA

Applique a LED in alluminio bianco goffrato.
White embossed aluminum LED wall light.

Temperatura colore
4000K

Driver
incluso


Colour temperature
4000K

Driver
included



LED-W-OMEGA BCO
8031414875467

	colour temp.	colour
lumen	800 lm	
watt	6W	
beam angle	↓ 90° + 90° ↑	



CRI >80 · LED SMD

LAMBDA

Applique a LED in alluminio bianco goffrato.
Aluminum LED wall lamp embossed white.

indoor use | accommodation areas use | office use | commercial areas use



Materiale
alluminio

Temperatura colore
3500K

Driver
incluso


Material
aluminum

Colour temperature
3500K

Driver
included

CE | EMC | CRI >80 | LED SMD

	colour temp.	colour
LED-W-LAMBDA/4W		
8031433001205		
lumen	800 lm	
watt	6W	
beam angle	↓ 90° + 90° ↑	



ALCOR

Applique a LED in alluminio dalla forma sottile in bianco goffrato o silver goffrato.
LED wall lamp in aluminum with a thin shape in embossed white or embossed silver.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio

Temperatura colore
3000K

Driver
incluso


Material
aluminum

Colour temperature
3000K

Driver
included

CE | EMC | CRI >80 | LED SMD

	colour temp.	colour
LED-W-ALCOR/5W BCO		
8031440355186		
lumen	550 lm	
LED-W-ALCOR/5W SIL		
8031440355148		
lumen	550 lm	
watt	5W	
beam angle	120°	



GRADO

Applique a LED in alluminio bianco goffrato.
Aluminum LED wall lamp embossed white.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Temperatura colore
4000K

Driver
incluso


Material
aluminum

Colour temperature
4000K

Driver
included

CRI >80 · LED SMD

	colour temp.	colour
LED-W-GRADO		
8031440361194		
lumen	800 lm	
watt	10W	
beam angle	120°	



KITE

Applique a LED in alluminio bianco o nero laccato lucido.
LED wall lamp in white or glossy lacquered black aluminum.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Temperatura colore
4000K

Driver
incluso


Material
aluminum

Colour temperature
4000K

Driver
included

CRI >80 · LED SMD

	colour temp.	colour
LED-W-KITE BCO		
8031440361170		
lumen	540 lm	
LED-W-KITE NERO		
8031440361187		
lumen	540 lm	
watt	2 × 3W	
beam angle	← 120° + 120° →	



MUSTANG

Applique a LED in alluminio bianco goffrato.
Aluminum LED wall lamp embossed white.



indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio

Temperatura colore
4000K

Driver
incluso

Material
aluminum


Colour temperature
4000K

Driver
included

CRI >80 | LED SMD




	colour temp.	colour
LED-W-MUSTANG-200		
8031440361156		
lumen	780 lm	
watt	8W	
beam angle	120°	





	colour temp.	colour
LED-W-MUSTANG-600		
8031440361149		
lumen	1860 lm	
watt	15W	
beam angle	120°	



TWILIGHT

Applique a LED In alluminio con diffusore orientabile in bianco goffrato.
Embossed white aluminum LED wall lamp with adjustable diffuser.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Temperatura colore
4000K

Driver
incluso


Material
aluminum

Colour temperature
4000K

Driver
included

CRI >80 · LED SMD

	colour temp.	colour
LED-W-TWILIGHT 8031440361088		
lumen	288 lm	
watt	4W	
beam angle	107°	



OMNIA

Applique orientabile con LED dimmerabile in alluminio bianco goffrato.
Adjustable wall lamp with dimmable LED in embossed white aluminum.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Temperatura colore
3000K

Driver
incluso

Material
aluminum

Colour temperature
3000K

Driver
included

+ 10-100% − · CRI >80 · LED SMD

	colour temp.	colour
LED-W-OMNIA/15W 8031440351423		
lumen	1300 lm	
watt	15W	
beam angle	107°	



Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
acrilico PMMA
bianco effetto cielo stellato

Temperatura colore
CCT

Materiale ventilatore
7 lame bianche
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione unilaterale.
Ghiera esterna roteante per
una maggiore diffusione dell'aria.

Driver
incluso

Material
PMMA acrylic white colour
with starry sky effect

Colour temperature
CCT

Fan material
7 white
thermoplastic blades

Fan characteristics
7 ultra-silent blades
unidirectional rotation
rotating outer ring for
greater air diffusion

Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

technical information


WI-FI SMART INTEC

BOREA



LED-BOREA-INT
8031414873692

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	




SKYRON



LED-SKYRON-INT
8031414873678

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Control system easy installation

- On-off ghiera esterna / On-off outer ring
- Regolazione velocità ventole / Fan speed adjustment
- Regolazione gradi kelvin / Adjustable white
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

Smart Intec WIFI · **RF 2.4G control system** · **ALEXA e GOOGLE HOME voice control**

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Plafoniere con ventilatore in acrilico PMMA.
Ceiling fan lamps with PMMA acrylic fan.



indoor use · accommodation areas use · office use · commercial areas use

Materiale
acrilico PMMA

Temperatura colore
CCT

Materiale ventilatore
7 lame trasparenti
in termoplastica

Caratteristiche ventilatore
7 lame ultra
silenziose con
rotazione unilaterale

Driver
incluso

Material
PMMA acrylic

Colour temperature
CCT

Fan material
7 trasparent
thermoplastic blades

Fan characteristics
7 ultra-silent
blades unidirectional
rotation

Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

technical information

WI-FI SMART INTEC


CE EMC

ALISEO



LED-ALISEO-INT
8031414873661

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	




FOEHN



LED-FOEHN-INT
8031414873685

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Control system easy installation

On-off ghiera esterna /
On-off outer ring

Regolazione velocità ventole /
Fan speed adjustment

Regolazione gradi kelvin /
Adjustable white

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

GRECALE

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
7 lame
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT


Fan material
7 thermoplastic blades

Fan characteristics
7 ultra-silent blades

Driver
included





WI-FI SMART INTEC

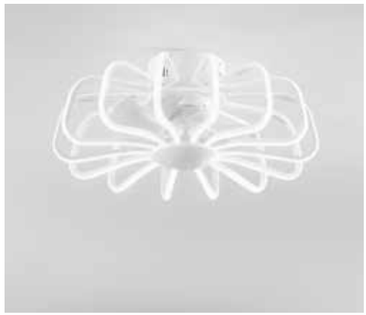

LED-GRECALE-W-INT
8031414885947


	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



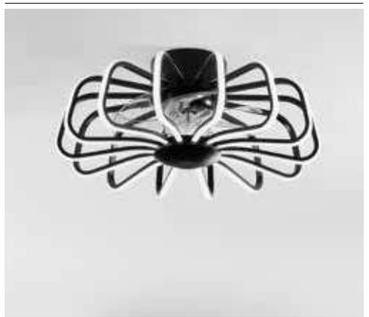

LED-GRECALE-B-INT
8031414885954

	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Regolazione gradi kelvin /
Adjustable white

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.



Materiale
acrilico PMMA
bianco effetto cielo stellato

Temperatura colore
CCT

Materiale ventilatore
7 lame bianche
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale,
ghiera esterna roteante per
una maggiore diffusione dell'aria

Driver
incluso

Material
PMMA acrylic white colour
with starry sky effect

Colour temperature
CCT

Fan material
7 white
thermoplastic blades

Fan characteristics
7 ultra-silent blades
bidirectional rotation
rotating outer ring for
greater air diffusion

Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

technical information

WI-FI SMART INTEC


CE EMC

LEVANTE



LED-LEVANTE-INT
8031414885930

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	




SCIROCCO




LED-SCIROCCO-INT
8031414885923

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

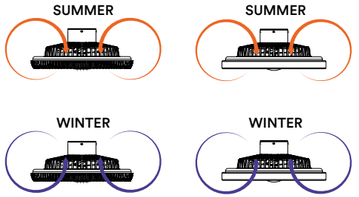

Control system easy installation

- On-off ghiera esterna / On-off outer ring
- Regolazione velocità ventole / Fan speed adjustment
- Regolazione gradi kelvin / Adjustable white
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

ETESIA

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
7 lame
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT

Fan material
7 thermoplastic
blades


Fan characteristics
7 ultra-silent
blades

Driver
included

IR · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT


Plafoniera con ventilatore.
Ceiling lamp with fan.








Reverse system - DC motor





	colour temp.	colour
LED-ETESIA-W-FAN 8031414899005		
LED-ETESIA-B-FAN 8031414899012		
	CCT	
lumen	3300 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	

Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Regolazione gradi kelvin /
Adjustable white

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

PONENTE

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Temperatura colore
CCT

Materiale ventilatore
7 lame trasparenti
in termoplastica

Caratteristiche ventilatore
7 lame ultra
silenziose
rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour temperature
3000K / 4000K / 6500K

Fan material
7 trasparent
thermoplastic blades


Fan characteristics
7 ultra-silent
blades
bidirectional rotation

Driver
included

IR · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

Plafoniera con ventilatore.
Ceiling lamp with fan.








Reverse system - DC motor





	colour temp.	colour
LED-PONENTE-FAN 8031414886586		
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC 22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	

Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Regolazione gradi kelvin /
Adjustable white

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Plafoniera con ventilatore.
Ceiling lamp with fan.



indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Temperatura colore
CCT

Materiale ventilatore
3 lame trasparenti
in termoplastica

Caratteristiche ventilatore
3 lame ultra
silenziose
rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour temperature
3000K / 4000K / 6500K

Fan material
7 trasparent
thermoplastic blades

Fan characteristics
3 ultra-silent
blades
bidirectional rotation

Driver
included


IR · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

CE EMC

ESPERO




	colour temp.	colour
LED-ESPERO-FAN 8031414898992	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	




NASHI



	colour temp.	colour
LED-NASHI-FAN 8031414899029	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

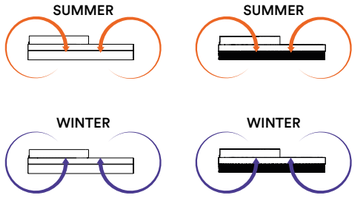

Control system easy installation

- Regolazione velocità ventole / Fan speed adjustment
- Regolazione gradi kelvin / Adjustable white
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

MOON

Plafoniera a LED in acrilico PMMA effetto cielo stellato.
Ceiling LED acrylic PMMA starry sky effect.

indoor use · accommodation areas use · office use · commercial areas use · bathroom use

RF 2.4G CONTROL SYSTEM included · IP44 · CRI >80 · LED SMD

Materiale
acrilico PMMA


Colore
bianco
effetto cielo stellato

Driver
integrato

Material
PMMA acrylic

Colour
white
with starry sky effect

Driver
built-in driver

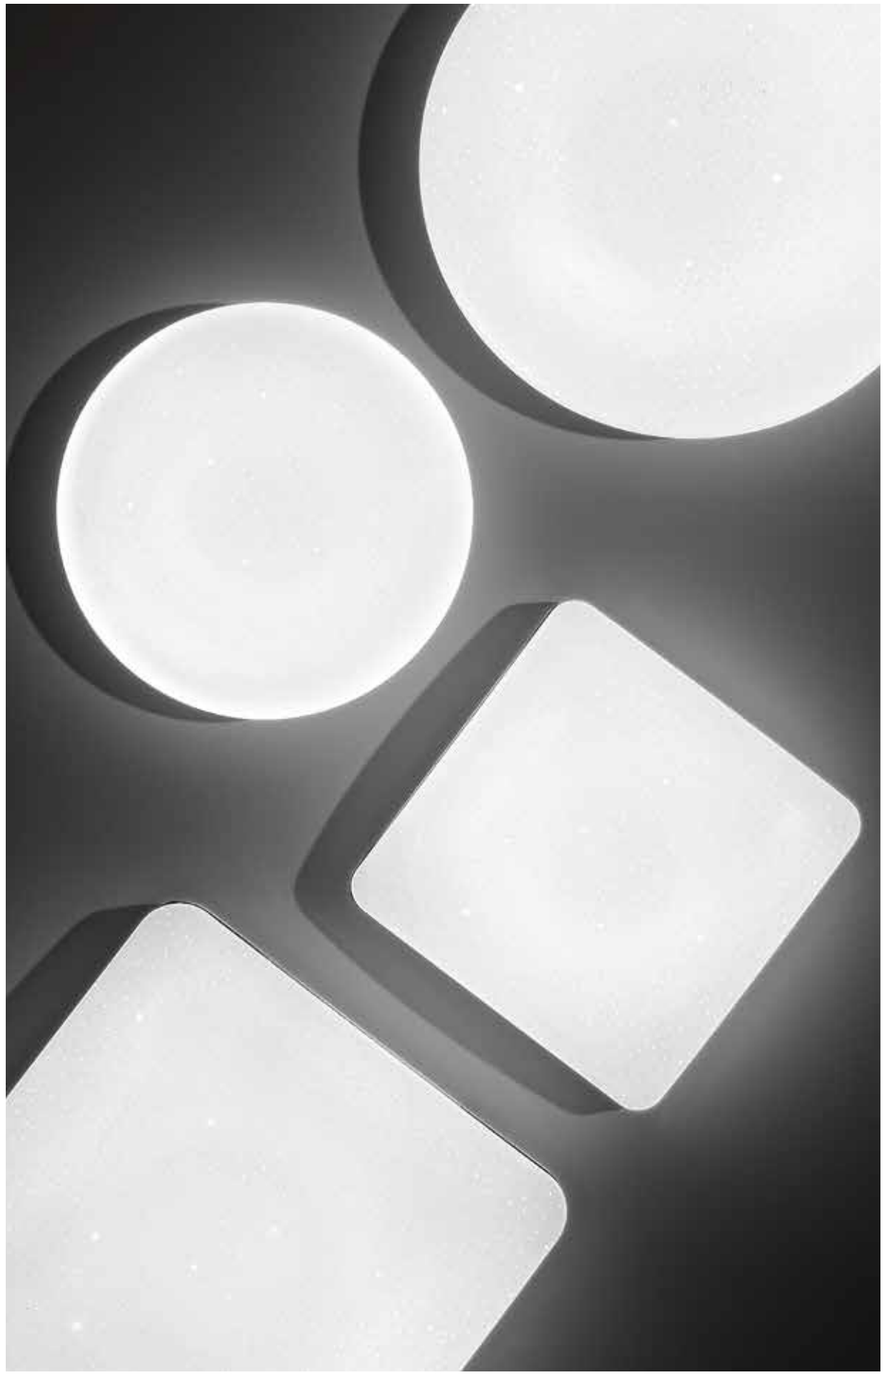


CCT · 3STEP MEMORY FUNCTION



I-MOON-R40-CCT
8031414879823


	colour temp.
	CCT
lumen	2460 lm
watt	24W
beam angle	120°





I-MOON-R30-CCT
8031414879847


	colour temp.
	CCT
lumen	1815 lm
watt	18W
beam angle	120°





I-MOON-Q38-CCT
8031414879830


	colour temp.
	CCT
lumen	2460 lm
watt	24W
beam angle	120°





I-MOON-Q28-CCT
8031414879854

	colour temp.
	CCT
lumen	1815 lm
watt	18W
beam angle	120°




RGB

WI-FI SMART INTEC



I-MOON-R40-INT
8031414863488

	colour temp.
	RGB + 4000K
lumen	2460 lm
watt	24W
beam angle	120°



Control system easy installation

Smart Intec WIFI · RF 2.4G control system · ALEXA e GOOGLE HOME voice control

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

STREAM

Plafoniera a LED in acrilico con decorazioni a rilievo.
Acrylic LED ceiling light with relief decorations.



Materiale
acrilico PMMA

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
PMMA acrylic

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included



I-STREAM-PL30
8031414894987


	colour temp.	colour
lumen	2640 lm	
watt	18W	
beam angle	120°	





I-STREAM-PL40
8031414894994


	colour temp.	colour
lumen	3520 lm	
watt	24W	
beam angle	120°	





I-STREAM-PL50
8031414895007


	colour temp.	colour
lumen	6000 lm	
watt	40W	
beam angle	120°	





I-STREAM-PL60
8031414895014

	colour temp.	colour
	CCT	
lumen	7120 lm	
watt	48W	
beam angle	120°	



DOMO

Plafoniera in alluminio con diffusore in acrilico.
Aluminum ceiling lamp with acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco
nero
cromo

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
acrilic diffuser

Colour
white
black
chrome


Colour temperature
4000K

Driver
included






	colour temp.	colour
LED-DOMO-R24-BCO		
8031414882779		
lumen	2700 lm	
LED-DOMO-R24-NER		
8031414893836		
lumen	2700 lm	
LED-DOMO-R24		
8031414876228		
lumen	2700 lm	
watt	24W	
beam angle	120°	





	colour temp.	colour
LED-DOMO-Q24-BCO		
8031414882762		
lumen	2700 lm	
LED-DOMO-Q24		
8031414876235		
lumen	2700 lm	
LED-DOMO-Q24 NER		
8031414893843		
lumen	2700 lm	
watt	24W	
beam angle	120°	



BLASTER

Applique a LED con struttura cromata e diffusore in policarbonato.
LED wall lamp with chromed structure and polycarbonate diffuser.

indoor use · accommodation areas use · bathroom use



Materiale
alluminio, diffusore in PC

Material
aluminum, PC diffuser

Colore
struttura cromata diffusore bianco

Colour
chrome structure white diffuser

Temperatura colore
4000K

Colour temperature
4000K

Driver
integrato

Driver
built-in driver



IP44 · UGR <19 · CRI >80 · LED SMD

	colour temp.		colour temp.
LED-BLASTER-60		**LED-BLASTER-PLUG**	
8031414866526		8031414866519	
lumen 1720 lm		lumen 1000 lm	
watt 15W		watt 8W	
beam angle 133°		beam angle 133°	
		plug max 2000W	



CRUISE

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use



Temperatura colore
4000K


Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-CRUISE-BCO		
8031414897636		
lumen 440 lm		
SPOT-B-CRUISE-NER		
8031414897674		
lumen 440 lm		
SPOT-B-CRUISE		
8031440363426		
lumen 440 lm		
watt 5,2W		
beam angle 120°		




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

LANCER

Applique a LED in alluminio bianco, nero, cromato ed oro spazzolato.
LED wall light in white, black, chrome and brushed gold aluminum.





Materiale
alluminio,
diffusore in PC

Colore
bianco goffrato
nero goffrato
cromo
oro spazzolato

Temperatura colore
3000K / 4000K

Driver
integrato


Material
aluminum,
PC diffuser

Colour
embossed white
embossed black
chrome
brushed gold


Colour temperature
3000K / 4000K

Driver
built-in driver

IP54 · CRI >80 · LED SMD

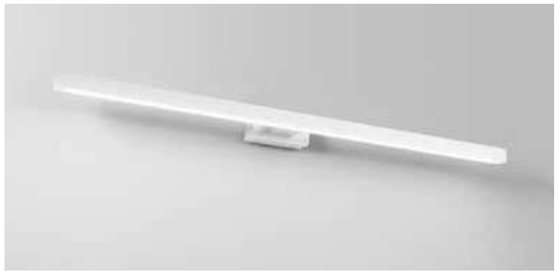


	colour temp.	colour
LED-W-LANCER-C BCO		
8031414876679		
lumen	1000 lm	
LED-W-LANCER BCO		
8031440361200		
lumen	1000 lm	
watt	13W	
beam angle	120°	






	colour temp.	colour
LED-W-LANCER NERO		
8031440361217		
lumen	1000 lm	
watt	13W	
beam angle	120°	






	colour temp.	colour
LED-W-LANCER CR		
8031414882564		
lumen	1000 lm	
watt	13W	
beam angle	120°	





	colour temp.	colour
LED-W-LANCER ORO		
8031414882571		
lumen	1000 lm	
watt	13W	
beam angle	120°	



SACS

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use | accommodation areas use | bathroom use



Temperatura colore
4000K


Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 | CRI >80 | LED SMD

	colour temp.	colour
SPOT-B-SACS-XL		
8031414877010		
lumen	819 lm	
watt	7W	
beam angle	120°	



	colour temp.	colour
SPOT-B-SACS		
8031414870776		
lumen	438 lm	
watt	5W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing


Fissaggio su cornice / Frame fixing

RIVA

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use | accommodation areas use | bathroom use



Temperatura colore
4000K

Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 | CRI >80 | LED SMD

	colour temp.	colour
SPOT-B-RIVA		
8031440363457		
lumen	575 lm	
watt	8W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

AQA

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use



Materiale
alluminio, diffusore in PC

Material
aluminum, PC diffuser

Colore
struttura cromata diffusore bianco

Colour
chrome structure white diffuser

Temperatura colore
4000K


Colour temperature
4000K

Driver
integrato

Driver
built-in driver

UGR <19 · IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-AQA		
8031414877027		
lumen	819 lm	
watt	8W	
beam angle	120°	





Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing

SCARAB

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use

Temperatura colore
4000K

Driver
integrato

Colour temperature
4000K

Driver
built-in driver



	colour temp.	colour
SPOT-B-SCARAB		
8031440363440		
lumen	280 lm	
watt	3W	
beam angle	120°	



IP44 · CRI >80 · LED SMD

Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing

WALLY

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

Temperatura colore
4000K


Driver
integrato

Colour temperature
4000K

Driver
built-in driver



	colour temp.	colour
SPOT-B-WALLY		
8031440363471		
lumen	910 lm	
watt	8W	
beam angle	120°	



IP44 · CRI >80 · LED SMD

Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing

F1

Applique metallo flessibile cromo con diffusore in vetro bianco satinato.
Flexible chrome metal wall lamp with satin white glass diffuser.

indoor use · accommodation areas use · office use · commercial areas use



colour

SPOT-F1
8031414076956

1 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included

ROBY


Applique da specchio in metallo cromato con diffusore in vetro bianco cromato.
Mirror wall lamp in chromed metal with white chromed glass diffuser.



colour

SPOT-B-ROBY-CP
8031440312349

2 x G9 MAX 28W




Fissaggio su cornice /
Frame fixing

Lampadina non inclusa /
Light bulb not included

colour

SPOT-B-ROBY
8031440312356

2 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included

Q1

Applique metallo cromo con diffusore in vetro satinato.
Chrome metal wall lamp with satin glass diffuser.


indoor use · accommodation areas use · office use · commercial areas use




colour

SPOT-Q1
8031414076932

2 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included



SPOT E FARETTI
SPOT LIGHTS

ZERO

Spot in metallo con punti luce orientabili, disponibili nelle versioni nero o bianco opaco.
Metal spot with adjustable light points, available in black or white matt.

indoor use · accommodation areas use · office use · commercial areas use

GU10






colour

SPOT-ZERO-1 BCO
8031414866878

SPOT-ZERO-1 NER
8031414866915

1 x GU10 MAX 35W







colour

SPOT-ZERO-2 BCO
8031414866885

SPOT-ZERO-2 NER
8031414866922

2 x GU10 MAX 35W








colour

SPOT-ZERO-PL3 BCO
8031414866861

SPOT-ZERO-PL3 NER
8031414866908

3 x GU10 MAX 35W



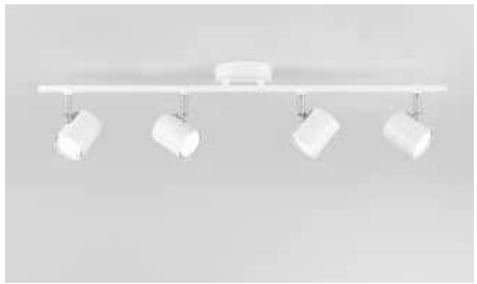



colour

SPOT-ZERO-4 BCO
8031414866854

SPOT-ZERO-4 NER
8031414866892

4 x GU10 MAX 35W





Lampadina non inclusa /
Light bulb not included


PUNTO

Spot in metallo con punti luce orientabili disponibili nelle versioni nero o bianco opaco.
Metal spot with adjustable light points available in black or matt white versions.

indoor use | accommodation areas use | office use | commercial areas use

E27







colour

SPOT-PUNTO-1 BCO
8031414866830

SPOT-PUNTO-1 NER
8031414867011

1 x E27 MAX 40W



Lampadina non inclusa /
Light bulb not included






colour

SPOT-PUNTO-2 BCO
8031414866847

SPOT-PUNTO-2 NER
8031414867028

2 x E27 MAX 40W









colour

SPOT-PUNTO-PL3 BCO
8031414867042

SPOT-PUNTO-PL3 NER
8031414867004

3 x E27 MAX 40W



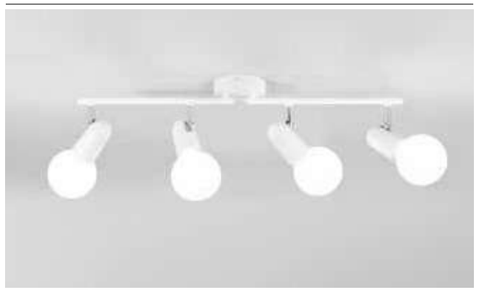




colour

SPOT-PUNTO-4 BCO
8031414867035

SPOT-PUNTO-4 NER
8031414866991

4 x E27 MAX 40W



TECHNO

Spot in metallo con punti luce orientabili in bianco o nero opaco e nikel spazzolato.
Metal spot with adjustable light points in white or matt black and brushed nikel.

indoor use | accommodation areas use | office use | commercial areas use



indoor use · accommodation areas use · office use · commercial areas use

GU10

Accessori inclusi /
Included accessories

**Lampadine LED SMD /
LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
4000K	
lumen	400 lm
dimmer	

Accessori inclusi /
Included accessories


**Lampadine LED SMD /
LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
4000K	
lumen	400 lm
dimmer	

Accessori inclusi /
Included accessories

**Lampadine LED SMD /
LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
2700K	
lumen	400 lm
dimmer	























	colour	colour	colour	colour
SPOT-TECHNO-1 BCO		**SPOT-TECHNO-2 BCO**	**SPOT-TECHNO-3 BCO**	**SPOT-TECHNO-PL4 BCO**
8031414864638		8031414864645	8031414864515	8031414864522
SPOT-TECHNO-1 NER		**SPOT-TECHNO-2 NER**	**SPOT-TECHNO-3 NER**	**SPOT-TECHNO-PL4 NER**
8031414864652		8031414864669	8031414864539	8031414864546
SPOT-TECHNO-1		**SPOT-TECHNO-2**	**SPOT-TECHNO-3**	**SPOT-TECHNO-PL4**
8031422881108		8031422891107	8031423041105	8031423051104
1 x GU10	5W LED	2 x GU10	3 x GU10	4 x GU10	5W LED









SUNNY

Spot in metallo con punti luce orientabili, base cromo e finitura in nikel spazzolato.
Metal spot with adjustable light, cromed base and brushed nikel finish.

indoor use · accommodation areas use · office use · commercial areas use

GU10

CE






colour

SPOT-SUNNY-1
8031431831187

1 x GU10 — 5W LED






colour

SPOT-SUNNY-2
8031431841186

2 x GU10 — 5W LED






colour

SPOT-SUNNY-S3
8031431861184

3 x GU10 — 5W LED






colour

SPOT-SUNNY-4
8031431851185

4 x GU10 — 5W LED



Accessori inclusi / Included accessories

Lampadine LED SMD / LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
2700K	
lumen	400 lm
dimmer	

MIAMI

Spot in metallo con punti luce orientabili con finitura in nikel spazzolato e base con cornice in vetro trasparente.
Metal spot with adjustable light points with brushed nikel finish and base with transparent glass frame.

indoor use | accommodation areas use | office use | commercial areas use

GU10

CE






colour

SPOT-MIAMI 01
8031414076772

1 x GU10 — 5W LED






colour

SPOT-MIAMI 02
8031414076796

2 x GU10 — 5W LED






colour

SPOT-MIAMI 03
8031414076802

3 x GU10 — 5W LED






colour

SPOT-MIAMI PL4
8031414076819

4 x GU10 — 5W LED



Accessori inclusi / Included accessories

Lampadine LED SMD /
LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
2700K	
lumen	400 lm
dimmer	

COOPER

Spot in metallo con punti luce orientabili con finitura silver.
Metal spot with adjustable light points with silver finish.

indoor use · accommodation areas use · office use · commercial areas use

GU10






colour

SPOT-COOPER-1
8031440360913

1 x GU10 — 5W LED






colour

SPOT-COOPER-2
8031440360920

2 x GU10 — 5W LED






colour

SPOT-COOPER-3
8031440360937

3 x GU10 — 5W LED






colour

SPOT-COOPER-4
8031440360944

4 x GU10 — 5W LED



Accessori inclusi / Included accessories

Lampadine LED SMD /
LED SMD light bulbs


watt	5W
beam angle	100°
cri	80
on/off	>10.000
2700K	
lumen	400 lm
dimmer	

indoor use · accommodation areas use · office use · commercial areas use

E14

CADILLAC

Spot in metallo con punti luce orientabili e finitura cromo.
Metal spot with adjustable light points and chrome finish.




Lampadina consigliata
Lampadina non inclusa /
Suggested light bulb
Light bulb not included



colour

SPOT-CADILLAC-1
8031438541256

1 x E14 MAX 40W






colour

SPOT-CADILLAC-2
8031438551255

2 x E14 MAX 40W







colour

SPOT-CADILLAC-3
8031414076918

3 x E14 MAX 40W




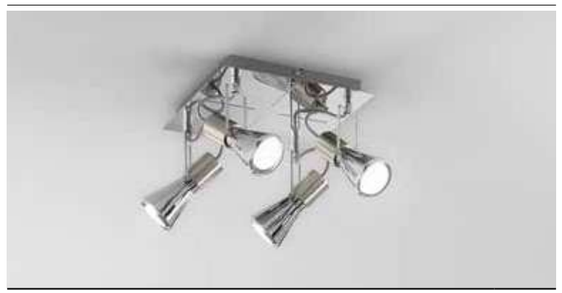

colour


SPOT-CADILLAC-PL4
8031438521258

4 x E14 MAX 40W



MITO

Spot in metallo con punti luce orientabili, finitura in nikel spazzolato e diffusori in vetro bianco.
Metal spot with adjustable light points, brushed nikel finish and white glass diffusers.




Lampadina non inclusa /
Light bulb not included



colour

SPOT-MITO-1
8031431791184

1 x E14 MAX 40W






colour

SPOT-MITO-PL3
8031431801180

3 x E14 MAX 40W






colour

SPOT-MITO-S3
8031431811189

3 x E14 MAX 40W






colour

SPOT-MITO-S4
8031431821188

4 x E14 MAX 40W




indoor use · accommodation areas use · office use · commercial areas use

E27

CARRERA

Spot in metallo con punti luce orientabili con finitura in bianco.
Metal spot with adjustable light points with white finish.




Lampadina non inclusa / Light bulb not included



colour

SPOT-CARRERA-1
8031431701183

1 x E27 MAX 40W






colour

SPOT-CARRERA-C
8031431731180

1 x E27 MAX 40W

Cavo / Cable 150 cm






colour

SPOT-CARRERA-2
8031431711182

2 x E27 MAX 40W






colour

SPOT-CARRERA-3
8031431721181

3 x E27 MAX 40W






colour

SPOT-CARRERA-PL3
8031431741189


3 x E27 MAX 40W



DOUBLEU

Base lampada in termoplastica bianca lucida.
Lamp base in glossy white thermoplastic.

Lampadina non inclusa / Light bulb not included

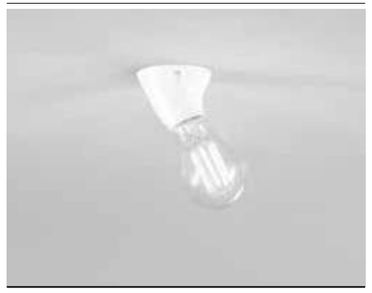

colour

I-PORTALAMPADE-E27-WO
8031440364874

1 x E27 MAX 42W





colour

I-PORTALAMPADE-E27-WS
8031440364867

1 x E27 MAX 42W







UNIX

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC riflettente

Colore
nikel

Temperatura colore
4000K

Driver
incluso


Material
nikel

Colour
aluminum body with PC reflective diffuser

Colour temperature
4000K

Driver
included



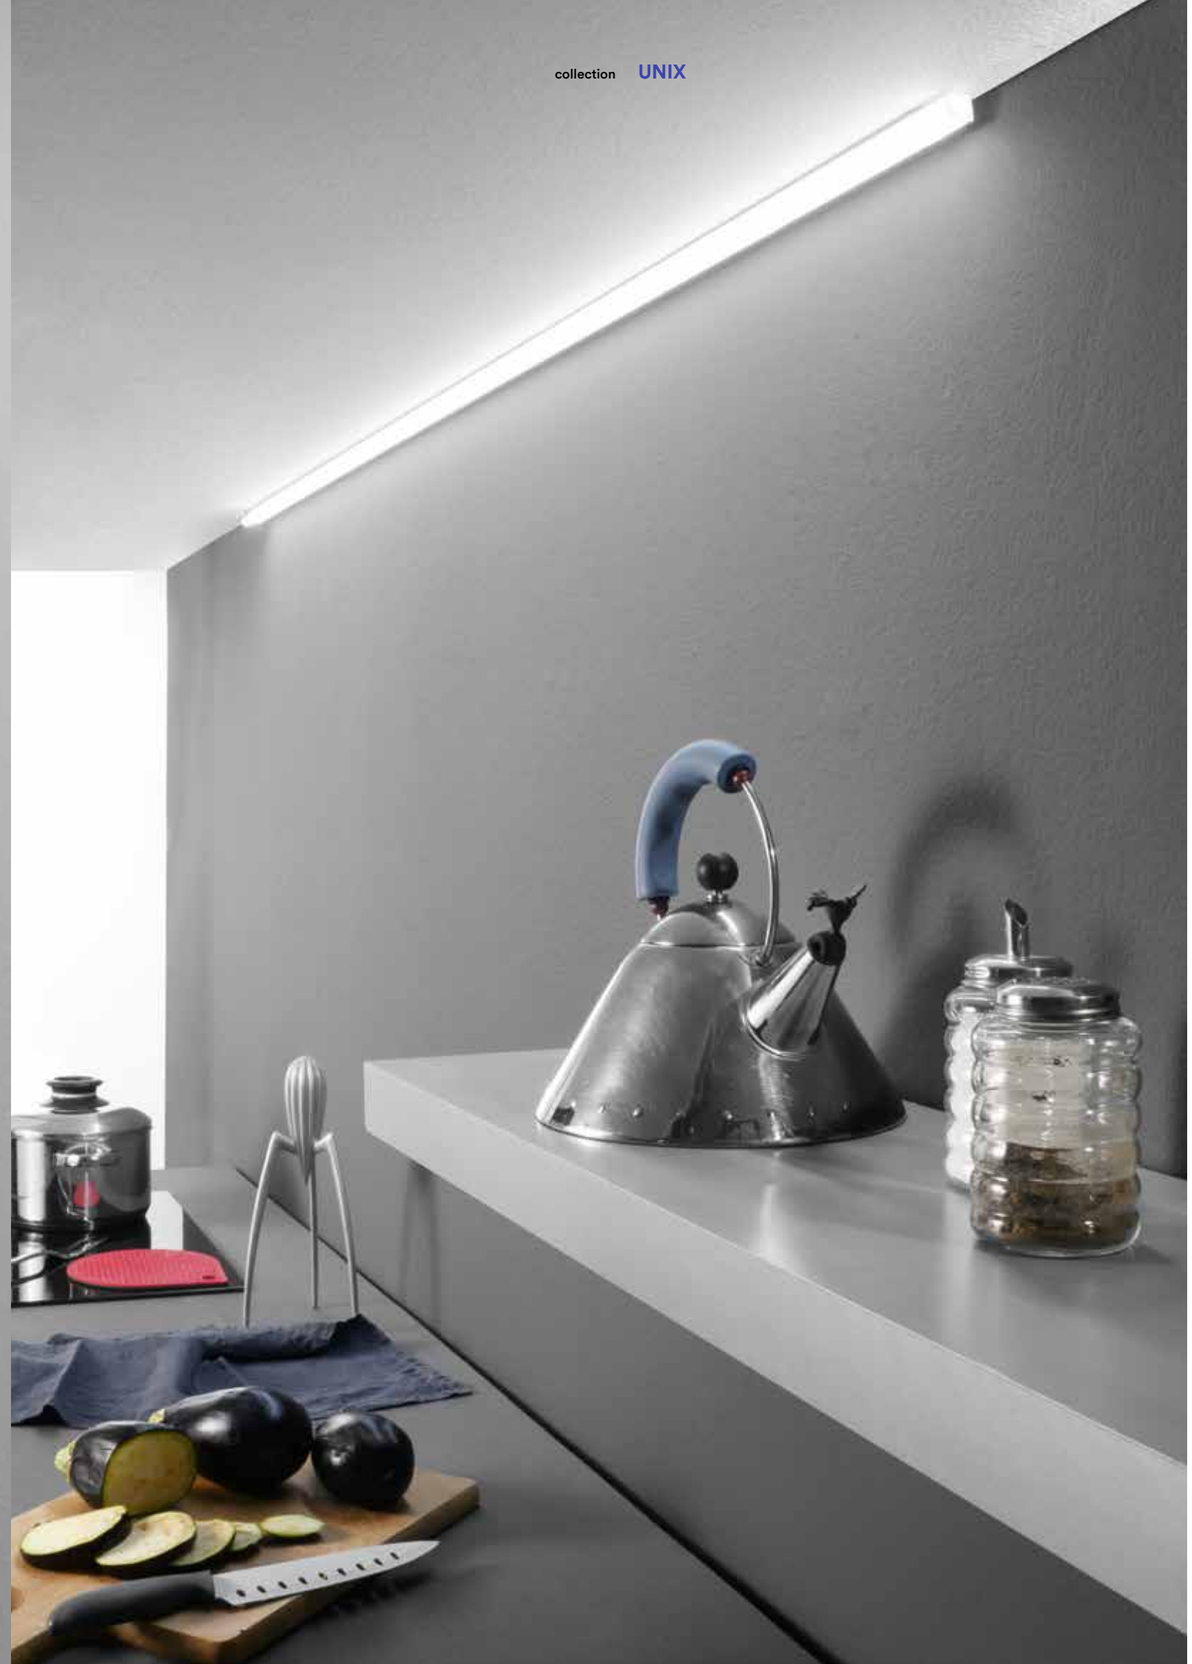

SWICTH TOUCH · CRI >80 · LED SMD

Barra sottopensile in alluminio con diffusore in PC riflettente.
Cabinet bar with aluminum structure under wall unit with reflective PC diffuser.



Accessori inclusi / Included accessories



staffe / brackets

	colour temp.	colour	Accessori inclusi / Included accessories
LEDBAR-UNIX-30 8031414866403 lumen 400 lm watt 5,76W beam angle 120°			12W · 1500 mm · 100x42x25mm · 1000 mm
LEDBAR-UNIX-45 8031414864614 lumen 600 lm watt 8,64W beam angle 120°			12W · 1500 mm · 100x42x25mm · 1000 mm
LEDBAR-UNIX-60 8031414864621 lumen 800 lm watt 11,52W beam angle 120°			12W · 1500 mm · 100x42x25mm · 1000 mm
LEDBAR-UNIX-90 8031414864492 lumen 1180 lm watt 17,28W beam angle 120°			20W · 1500 mm · 115x45x28mm · 1000 mm
LEDBAR-UNIX-120 8031414864508 lumen 1560 lm watt 23,04W beam angle 120°			30W · 1500 mm · 140x45x28mm · 1000 mm
LEDBAR-UNIX-150 8031414865185 lumen 1950 lm watt 28,8W beam angle 120°			30W · 1500 mm · 140x45x28mm · 1000 mm
LEDBAR-UNIX-180 8031414865154 lumen 2350 lm watt 34,56W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-210 8031414865161 lumen 2730 lm watt 40,32W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-270 8031414865178 lumen 3510 lm watt 51,84W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-300 8031414870738 lumen 3900 lm watt 57,6W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm

Barra sottopensile angolare in alluminio con diffusore in PC riflettente.
Angular cabinet bar with aluminum structure under wall unit with reflective PC diffuser.



Accessori inclusi / Included accessories



staffe / brackets

	colour temp.	colour	Accessori inclusi / Included accessories
LEDBAR-UNIX-45 ANG 8031414864607 lumen 600 lm watt 8,64W beam angle 120°			12W · 1500 mm · 100x42x25mm · 1000 mm
LEDBAR-UNIX-60 ANG 8031414864478 lumen 800 lm watt 11,52W beam angle 120°			12W · 1500 mm · 100x42x25mm · 1000 mm
LEDBAR-UNIX-90 ANG 8031414864485 lumen 1180 lm watt 17,28W beam angle 120°			20W · 1500 mm · 115x45x28mm · 1000 mm
LEDBAR-UNIX-120 ANG 8031414864577 lumen 1560 lm watt 23,04W beam angle 120°			30W · 1500 mm · 140x45x28mm · 1000 mm
LEDBAR-UNIX-150 ANG 8031414866373 lumen 1950 lm watt 28,8W beam angle 120°			30W · 1500 mm · 140x45x28mm · 1000 mm
LEDBAR-UNIX-180 ANG 8031414866380 lumen 2350 lm watt 34,56W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-210 ANG 8031414866359 lumen 2730 lm watt 40,32W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-240 ANG 8031414866366 lumen 3120 lm watt 46,08W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm
LEDBAR-UNIX-300 ANG 8031414866342 lumen 3900 lm watt 57,6W beam angle 120°			40W · 1500 mm · 142x45x30mm · 1000 mm

T8

Barra sottopensile con struttura in alluminio a LED integrato con diffusore in PC.
Cabinet bar with integrated LED aluminum structure for under cabinet with PC diffuser.

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC

Colore
bianco

Temperatura colore
4000K


Driver
integrato

Material
aluminum body with PC diffuser

Colour
white

Colour temperature
4000K

Driver
built-in

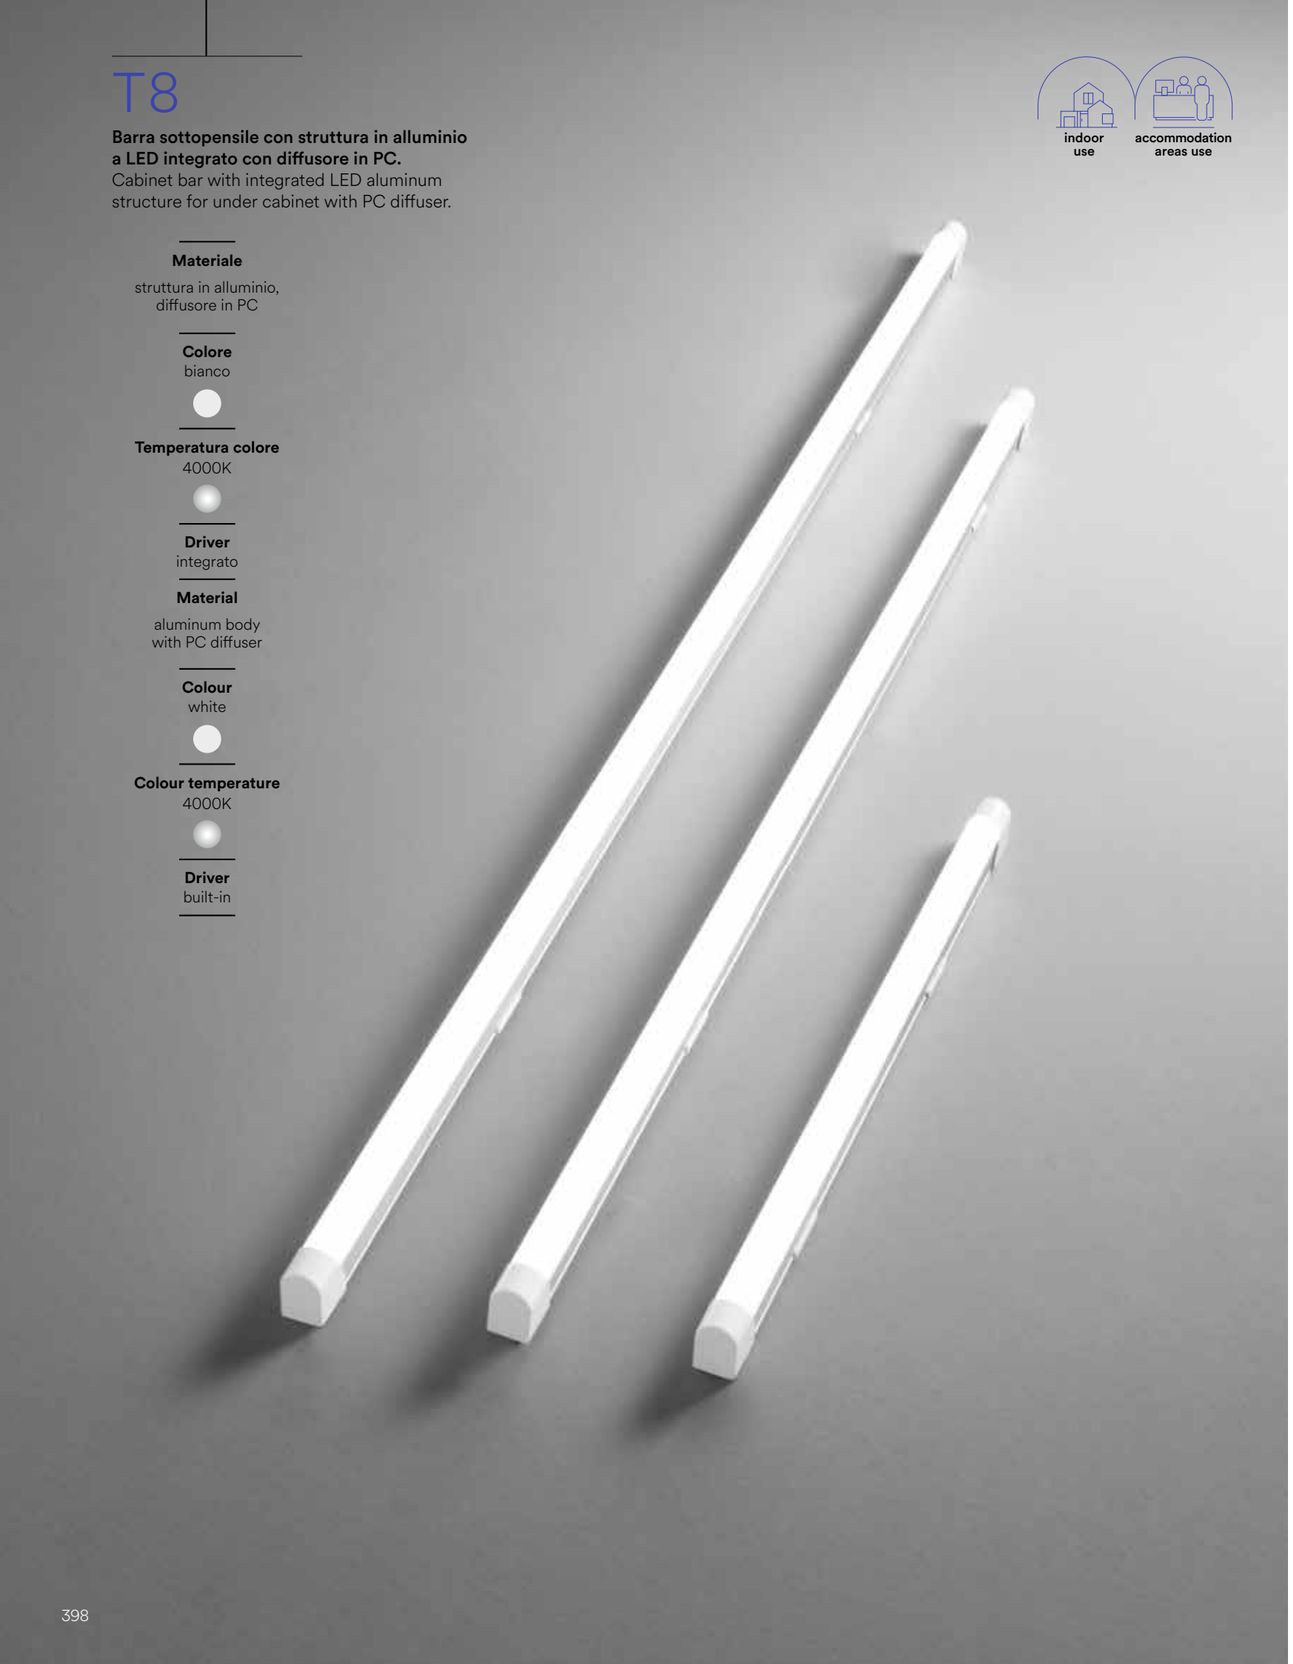




colour temp. | colour


LEDBAR-T8-60
8031414875382

lumen	850 lm
watt	9W
beam angle	120°




LEDBAR-T8-120
8031414875399

lumen	1700 lm
watt	18W
beam angle	120°



LEDBAR-T8-150
8031414875405

lumen	2300 lm
watt	24W
beam angle	120°



BATTEN

Barra ultra sottile a LED integrato.
Ultra slim cabinet built-in LED bar.

indoor use

accommodation areas use

Materiale
struttura in PC bianco, diffusore in PC bianco

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
PC white body with PC white diffuser

Colour
white

Colour temperature
4000K

Driver
built-in




CRI >80

LED SMD




	colour temp.	colour
LED-BATTEN-30		
8031440357722		
lumen	1077 lm	
watt	9W	
beam angle	120°	




LED-BATTEN-60		
8031440357739		
lumen	2166 lm	
watt	18W	
beam angle	120°	



LED-BATTEN-120		
8031440357746		
lumen	4252 lm	
watt	36W	
beam angle	120°	



LED-BATTEN-150		
8031440357753		
lumen	5677 lm	
watt	48W	
beam angle	120°	



Accessori inclusi / Included accessories



staffe / brackets

HABILIS

Barra sottopensile angolare in alluminio a LED integrato con diffusore in PC.
Angular cabinet bar with integrated LED aluminum structure with PC diffuser.





Materiale
struttura in alluminio diffusore in PC

Colore
bianco

Temperatura colore
4000K

Interruttore
incluso

Driver
integrato

Materiale
aluminum body with PC diffuser

Colore
white


Colour temperature
4000K

Interruttore
included

Driver
built-in



	colour temp.	colour
LED-HABILIS-AP 8031414881604		
lumen	1750 lm	
watt	15W	
beam angle	105°	
2 plug max 16A		
2 USB 2.4A		



T5

Barra sottopensile con struttura e diffusore in PC.
Cabinet bar with PC structure and diffuser.

Materiale
struttura in PC
diffusore in PC

Colore
bianco

Temperatura colore
4000K

Interruttore
incluso

Driver
integrato

Material
PC white body with PC white diffuser

Colour
white


Colour temperature
4000K

Swicth
included

Driver
built-in

indoor use

accommodation areas use

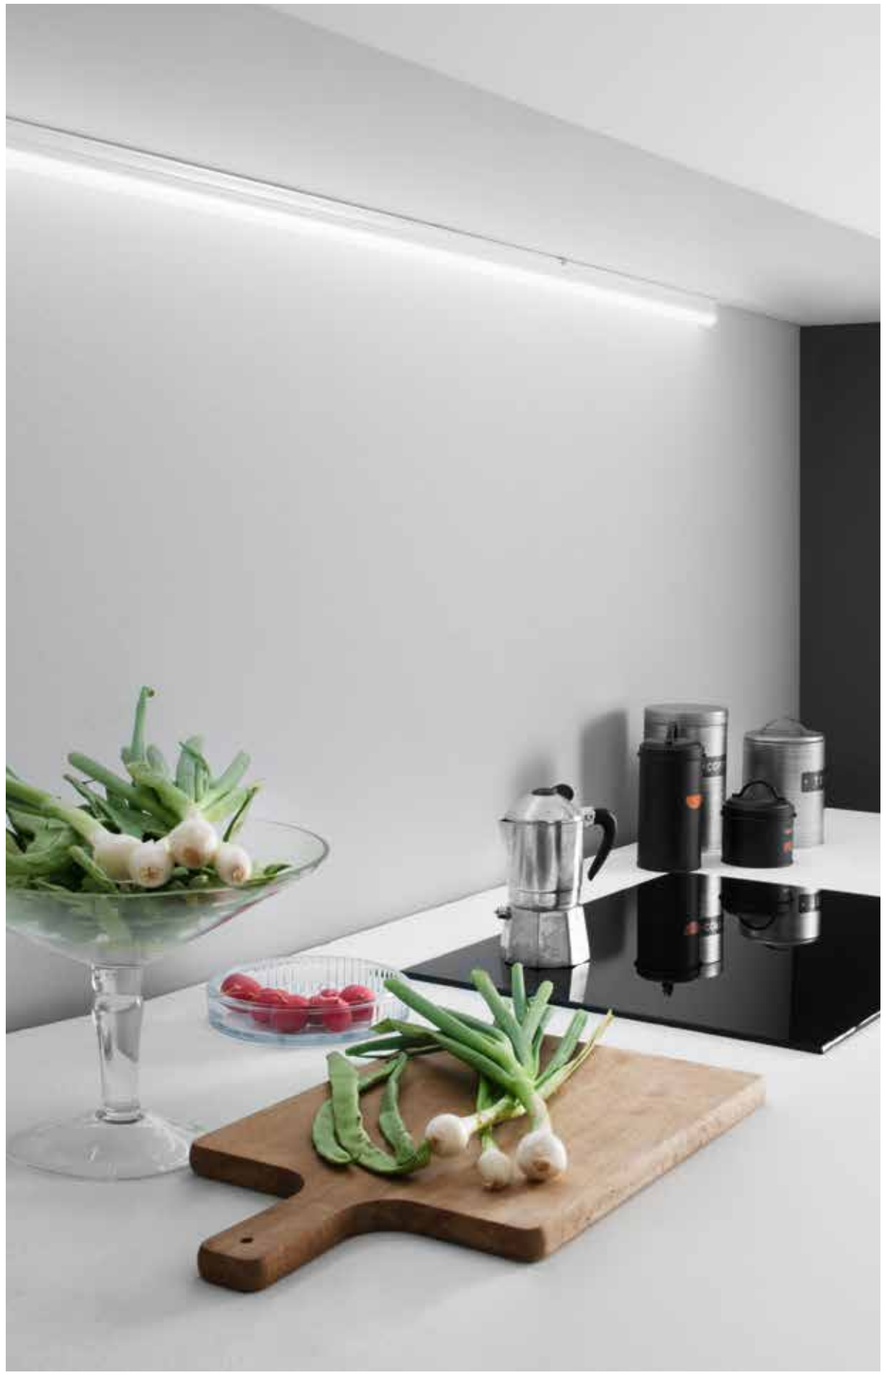

CRI >80

LED SMD



Optional installation: multiconnect
AC 100 – 240 V

Max lenght multiconnect
MAX 15 m

	colour temp.	colour
LEDBAR-T5-30		
8031440354691		
lumen	436 lm	
watt		5W
beam angle		135°
LEDBAR-T5-60		
8031440354707		
lumen	784 lm	
watt		8W
beam angle		135°
LEDBAR-T5-90		
8031440354677		
lumen	1249 lm	
watt		12W
beam angle		135°
LEDBAR-T5-120		
8031440354684		
lumen	1565 lm	
watt		15W
beam angle		135°
LEDBAR-T5-150		
8031414871742		
lumen	1926 lm	
watt		18W
beam angle		135°

Accessori inclusi / Included accessories

staffe / brackets

MOVIE

Barra sottopensile orientabile con struttura e diffusore in PC.
Adjustable cabinet bar with PC structure and diffuser.



indoor use

accommodation areas use

Materiale
struttura in PC
diffusore in PC

Colore
bianco

Temperatura colore
4000K

Temperatura colore selezionabile
2700K / 4000K / 6500K

Interruttore
incluso

Driver
integrato

Materiale
PC body with PC diffuser

Colore
white

Temperatura colore
4000K

Temperatura colore selezionabile
2700K / 4000K / 6500K

Interruttore
included

Driver
built-in

CRI >80

LED SMD





AC220V- 240V 50Hz
MULTI-CONNECT

colour temp. | colour


Accessori inclusi / Included accessories


LEDBAR-MOVIE-S
8031414866427
lumen 425 lm
watt 5W
beam angle 120°






LEDBAR-MOVIE
8031440355100
lumen 800 lm
watt 8W
beam angle 120°








LEDBAR-MOVIE-L
8031414866441
lumen 1275 lm
watt 15W
beam angle 120°





LINE

Barra incasso sottopensile con struttura in alluminio e sensore di movimento.
Built-in bar under wall unit with aluminum structure and motion sensor

indoor use

accommodation areas use

CRI >80

LED SMD

Materiale
struttura in alluminio, diffusore in PC riflettente

Colore
bianco

Temperatura colore
4000K

Interruttore
sensore di movimento

Driver
non incluso DC12V

Material
aluminum body with PC reflective diffuser

Colour
white

Colour temperature
4000K


Swicth
motion sensor


Driver
not included DC12V





	colour temp.	colour
LEDBAR-LINE-91 8031414874286		
lumen	500 lm	
watt	9,5W	
beam angle	120°	
	905 × 16 x pr. 11 mm	
LEDBAR-LINE-127 8031414874279		
lumen	710 lm	
watt	13,5W	
beam angle	120°	
	1265 × 16 x pr. 11 mm	
LEDBAR-LINE-199 8031414874309		
lumen	1030 lm	
watt	19,5W	
beam angle	120°	
	1985 × 16 x pr. 11 mm	
LEDBAR-LINE-223 8031414874293		
lumen	1120 lm	
watt	21W	
beam angle	120°	
	2225 × 16 x pr. 11 mm	









Accessori inclusi / Included accessories



Sensore di movimento regolabile / Adjustable motion sensor



staffe / brackets



LED-DRIVER-LINE-33
8031414874262

Driver 33W 200-240V Dc12v 2.75A
Cavo 1m 2×0.75 mm con spina /
Driver 33W 200-240V Dc12v 2.75A
Cable 1m 2×0.75 mm with plug

140 × 47 × 25 mm

Driver con connettore multientrata max 3 barre MAX 33W /
Driver with multi connector max 3 bar MAX 33W




LED-DRIVER-LINE-54
8031414874255

Driver 54W 200-240V Dc12v 4.5A
Cavo 1m 2×0.75mm con spina /
Driver 54W 200-240V Dc12v 4.5A
Cable 1m 2×0.75mm with plug

152 × 59 × 32 mm

Driver con connettore multientrata max 3 barre MAX 54W /
Driver with multi connector max 3 bar MAX 54W

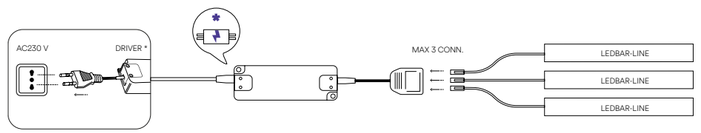

ZAK

Lampada LED con sensore IR.
IR sensor LED lamp.

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC riflettente

Colore
silver

Temperatura colore
3000K

Driver
non incluso DC12V

Material
aluminum body with PC reflective diffuser

Colour
silver


Colour temperature
3000K

Driver
not included DC12V




CRI >80


LED SMD

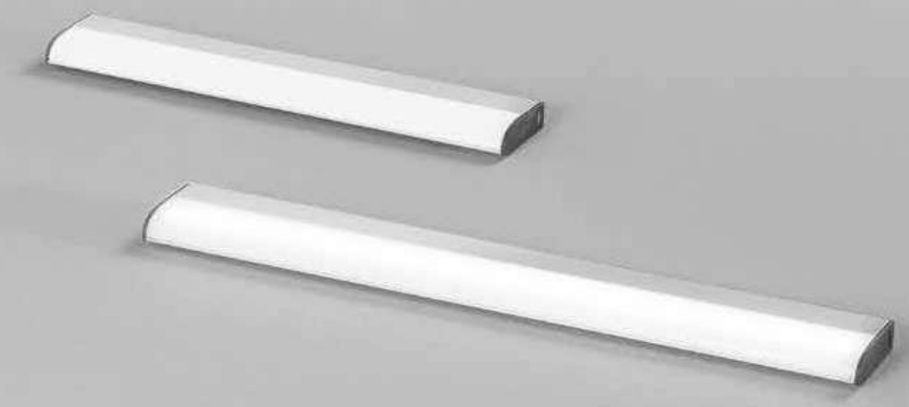

	colour temp.	colour
LEDBAT-ZAK-IR26 8031414882281		
lumen	100 lm	
watt	1,20W	
beam angle	110°	



LEDBAT-ZAK-IR35 8031414882298		
lumen	150 lm	
watt	1,70W	
beam angle	110°	



Accessori inclusi / Included accessories

IR
sensore 2 funzioni /
2 function sensor





3.7V 1600mAh
Batteria ricaricabile inclusa /
Included rechargeable battery



DC5V 0,4A Micro USB
Cavo / Cable

GTO

Materiale
policarbonato

Colore
bianco

Temperatura colore
3000K

Material
polycarbonate

Colour
white


Colour temperature
3000K

LED SMD

indoor use


accommodation areas use

Lampada con sensore di movimento ricaricabile.
Rechargeable lamp with motion sensor.

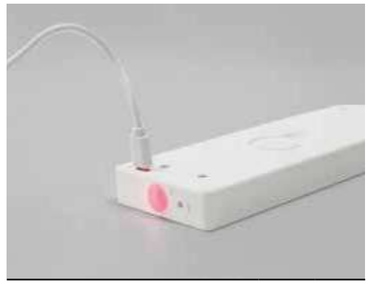



	colour temp.	colour
LEDBAT-GTO 8031414882274		
lumen	105 lm	
watt	1W	



Accessori inclusi / Included accessories

Sensore di movimento / motion sensor
2m in side
4m in front
120°
25"

DC 3.7V 1A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable

BLAM

Materiale
alluminio

Colore
struttura silver
diffusore bianco

Temperatura colore
3000K

Material
aluminum

Colour
silver structure
white diffuser

Colour temperature
3000K

LED SMD


indoor use

accommodation areas use

Lampada LED con sensore IR.
IR sensor LED lamp.



	colour temp.	colour
LEDBAT-BLAM-IR38 8031414882267		
lumen	150 lm	
watt	1,7W	



Accessori inclusi / Included accessories

IR
sensore / sensor
ON/OFF

DC 3.7V 2.2A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable

AURIKA

Materiale
policarbonato

Colore
bianco

Temperatura colore
3000K

Material
polycarbonate

Colour
white

Colour temperature
3000K


LED SMD

Lampada LED con sensore IR.
IR sensor LED lamp.





	colour temp.	colour
LEDBAT-AURIKA 8031414882250		
lumen	100 lm	
watt	1,25W	



Accessori inclusi / Included accessories

IR
sensore / sensor
ON/OFF

DC 3.7V 2.2A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable



CLOSET

Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Material
polycarbonate

Colour
silver

Colour temperature
4000K

LED SMD

indoor use


accommodation areas use

Lampada con sensore di movimento.
Lamp with motion sensor.





	colour temp.	colour
LED-CLOSET-10 8031414873012		
lumen	105 lm	
watt	1W	



Accessori inclusi / Included accessories

Sensore di movimento / motion sensor

3m 110° 15"

DC 5V 1A
Batteria ricaricabile / Rechargeable battery

2 hours

Micro USB charging wires DC 5V
Cavo non incluso / Not included cable

TRIGGER

Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Material
polycarbonate

Colour
silver

Colour temperature
4000K

LED SMD

Kit 2pz. copri cerniera.
Kit 2pz. hinge cover.





	colour temp.	colour
LED-TRIGGER 8031414873005		
watt	0,2W DC12V	



Accessorio non incluso / Not included accessory

2×23A
Batteria / Battery



Compatibile per cerniera a scatto collo “0” / Compatibe with “0” neck snap hinge

SHELF

Materiale
policarbonato

Colore

struttura silver
diffusore bianco

Temperatura colore
4000K

Material
polycarbonate

Colour

silver structure
white diffuser

Colour temperature
4000K

LED SMD


indoor use

accommodation areas use

Lampada con sensore di movimento.
Lamp with motion sensor.



	colour temp.	colour
LED-SHELF-R7 8031414873029		
lumen	110 lm	
watt	1W	



Accessori inclusi / Included accessories

Sensore di movimento / motion sensor

3m 110° 15"

DC 5V 1A
Batteria ricaricabile / Rechargeable battery

2 hours

Micro USB charging wires DC 5V
Cavo non incluso / Not included cable



SONAR

Materiale
policarbonato

Colore
silver

Temperatura colore
4500K

Material
polycarbonate

Colour
silver

Colour temperature
4500K

CRI >80 · LED SMD

indoor use · accommodation areas use

Barra sottopensile con sensore di movimento.
Cabinet bar with motion sensor.



	colour temp.	colour
LED-SONAR-AP 8031440021272		
lumen	35 lm	
watt	6 × 0,45W	
beam angle	45°	



Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor

ON 10lux 3m 90° 15-45"

3×1,5V AAA
batteria non inclusa / not included battery

VISTA

Materiale
policarbonato

Colore
bianco
silver

Temperatura colore
4500K / 6000K

Material
polycarbonate

Colour
white
silver

Colour temperature
4500K / 6000K


LED SMD

indoor use · accommodation areas use

Lampada LED con sensore di movimento in bianco.
LED lamp with motion sensor in white.



	colour temp.	colour
LED-VISTA-M-AP 8031440031271		
lumen	18 lm	
watt	3 × 0,075W	
beam angle	68° ↑	
beam angle	88° ↓	



Accessori inclusi / Included accessories

Sensore di movimento / motion sensor

ON 10lux 3m 90° 15-45"

3×1,5V AAA
batteria ricaricabile / rechargeable battery

YOUNG

Materiale
alluminio
silver

Temperatura colore
4000K

Driver
incluso

Material
aluminum
silver

Colour temperature
4000K


Driver
included

CRI >80 · LED SMD

Barra sottile sottopensile con interruttore ottico.
Thin bar under cabinet with optical switch.



	colour temp.	colour
LED-YOUNG-5W 8031440071277		
lumen	320 lm	
watt	4,9W	
beam angle	120°	



Accessori inclusi / Included accessories

x1 alimentatore con cavo 2 m / **x1** power supply with 2 m cable included

Lampada LED con sensore di movimento in silver.
LED lamp with motion sensor in silver.



	colour temp.	colour
LED-VISTA-AP 8031439991272		
lumen	20 lm	
watt	3 × 0,075W	




Accessori inclusi / Included accessories

Sensore di movimento / motion sensor

ON 10lux 3m 90° 15-45"

3×1,5V AAA
batteria ricaricabile / rechargeable battery

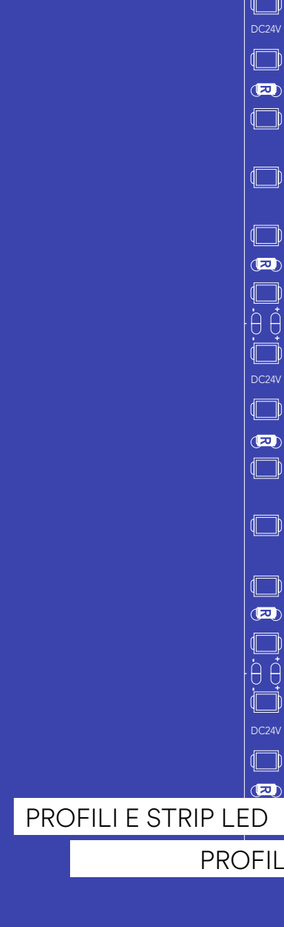

PROFILI E STRIP LED

PROFILES AND STRIP LED

Profili in alluminio per fissaggio nel cartongesso.
Aluminum fixing profile in plasteboard.




I-PROFILO-GORIZIA-XL
8031414871094

Profilo 2 m a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi.

2 m quick fixing profile in plasteboard with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-GORIZIA-XL-CAP
8031414890514

Kit 2 pz tappi di chiusura per profilo GORIZIA-XL.

2 pcs kit caps for GORIZIA-XL profile.




I-PROFILO-GORIZIA
8031414871124

Profilo 2 m a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi.

2 m quick fixing profile in plasteboard with opal diffuser and caps included.


colour



Accessori / Accessories
I-PROFILO-GORIZIA-CAP
8031414890484

Kit 2 pz tappi di chiusura per profilo GORIZIA.

2 pcs kit caps for GORIZIA profile.




I-PROFILO-GORIZIA-S
8031414876587

Profilo 2 m a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi.

2 m quick fixing profile in plasteboard with opal diffuser and caps included.


colour



Accessori / Accessories
I-PROFILO-GORIZIA-S-CAP
8031414890491

Kit 2 pz tappi di chiusura per profilo GORIZIA-S.

2 pcs kit caps for GORIZIA-S profile.



I-PROFILO-GORIZIA-S NER
8031414876624

Profilo 2 m di colore nero opaco a rapido fissaggio nel cartongesso, diffusore nero traslucido e tappi inclusi.


2 m quick fixing profile in plasteboard matt black with translucent black diffuser and caps included.

colour

Accessori / Accessories
I-PROFILO-GORIZIA-S-NER-CAP
8031414890507

Kit 2 pz tappi di chiusura per profilo GORIZIA-S nero.

2 pcs kit caps for GORIZIA-S black profile.




I-PROFILO-EDGE
8031414897575

Profilo 2 m a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi.

2 m quick fixing profile in plasteboard with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-EDGE-CAP
8031414897582

Kit 2 pz tappi di chiusura per profilo EDGE.

2 pcs kit caps for EDGE profile.



Profili in alluminio per fissaggio nel cartongesso.
Aluminum fixing profile in plasteboard.




I-PROFILO-RIDGE-2
8031414876570

Profilo 2 m angolare a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi.

2 m quick fixing angular profile in plasteboard with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-RIDGE-CAP
8031414890552

Kit 2 pz tappi di chiusura per profilo RIDGE.

2 pcs kit caps for RIDGE profile.




I-PROFILO-TRIM-2
8031414876563

Profilo 2 m a veletta bianco diffusore opale incluso.

2 m profile in white colour plasterboard veil with opal diffuser included.

colour



Accessori / Accessories
I-PROFILO-TRIM-CAP
8031414890583

Kit 2 pz tappi di chiusura per profilo TRIM.

2 pcs kit caps for TRIM profile.



I-PROFILO-MOP
8031414890019

Profilo 2 m a veletta bianco diffusore opale e 2 tappi inclusi.

2 m white veil profile, opal diffuser and 2 caps included.

colour



Accessori / Accessories
I-PROFILO-MOP
8031414888733

Kit 2 pz tappi di chiusura per profilo MOP.

2 pcs kit caps for MOP profile.




I-PROFILO-GASH
8031414890262

Profilo 2 m a veletta bianco diffusore opale e 2 tappi inclusi.

2 m white veil profile, opal diffuser and 2 caps included.

colour



Accessori / Accessories
I-PROFILO-GASH-STL
8031414889990

Kit 2 pz staffe per profilo GASH incluso viti.

2 pcs kit brackets for GASH profile with included screws.

I-PROFILO-GASH-STZ
8031414890286

Kit 2 pz staffe per profilo GASH incluso viti.

2 pcs kit brackets for GASH profile with included screws.



Profili in alluminio.
Aluminum profile.




I-PROFILO-STEPWAY
8031414876594

Profilo 2 m per gradini, diffusore opale, tappi inclusi.

2 m profile for step with opal diffuser included.

colour



Accessori / Accessories
I-PROFILO-STEPWAY-CAP
8031414877782

Kit 2 pz tappi di chiusura per profilo STEPWAY.

2 pcs kit caps for STEPWAY profile.




I-PROFILO-DRIVEWAY-2
8031414881949

Profilo in alluminio silver carrabile DRIVEWAY 2 m incluso tappi e staffe. (max 2000Kg)

Walkable 2 m profile with opal diffuser included. (max 2000Kg)

colour




Accessori / Accessories
I-PROFILO-DRIVEWAY-CAP
8031414881956

Tappi per profilo in alluminio silver carrabile DRIVEWAY silver.

2 pcs kit caps for DRIVEWAY profile.

Profili in alluminio.
Aluminum profile.





I-PROFILO-BERLINO
8031434611212

Profilo 1 m a rapido fissaggio nel cartongesso, diffusore opale, tappi e staffe inclusi.

1 m quick fixing profile in plasteboard with opal diffuser caps and bracket included.

colour






I-PROFILO-BERLINO-2
8031440359405

Profilo 2 m a rapido fissaggio nel cartongesso, diffusore opale, tappi e staffe inclusi.

2 m quick fixing profile in plasteboard with opal diffuser caps and bracket included.

colour




Accessori / Accessories

I-PROFILO-BERLINO-CAP
8031414890446

Kit 2 pz tappi di chiusura per profilo BERLINO.

2 pcs kit caps for BERLINO profile.



I-PROFILO-BERLINO-2 BCO
8031414871070

Profilo bianco 2 m a rapido fissaggio nel cartongesso, diffusore opale, tappi e staffe inclusi.

2 m quick fixing profile in plasteboard white colour with opal diffuser caps and bracket included.


colour

Accessori / Accessories

I-PROFILO-BERLINO-BCO-CAP
8031414890453

Kit 2 pz tappi di chiusura per profilo BERLINO bianco.

2 pcs kit caps for BERLINO white profile.



I-PROFILO-BERLINO-2 NER
8031414876617

Profilo 2 m nero opaco a rapido fissaggio nel cartongesso, diffusore nero traslucido, tappi e staffe incluse.

2 m quick fixing profile in plasterboard matt, translucent black diffuser, caps and brackets included.

colour

Accessori / Accessories

I-PROFILO-BERLINO-NER-CAP
8031414890460

Kit 2 pz tappi di chiusura per profilo BERLINO nero.

2 pcs kit caps for BERLINO black profile.

Accessori / Accessories

I-PROF-BERLINO2-DIFF
8031440357647

Diffusore 2 m trasparente per profili BERLINO.

2 m PC trasparent diffuser for BERLINO.





I-PROFILO-ROMA
8031434601213

Profilo 1 m a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi.

1 m quick fixing profile in plasteboard or surface mount with opal diffuser caps and bracket included.

colour






I-PROFILO-ROMA-2
8031440359399

Profilo 2 m a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi.

2 m quick fixing profile in plasteboard or surface mount with opal diffuser caps and bracket included.

colour




Accessori / Accessories

I-PROFILO-ROMA-CAP
8031414890569

Kit 2 pz tappi di chiusura per profilo ROMA.

2 pcs kit caps for ROMA profile.



I-PROFILO-ROMA-2 NER
8031414876600

Profilo 2 m nero opaco a rapido fissaggio nel cartongesso o superfici esterne, diffusore nero traslucido, tappi e staffe incluse.

2 m quick fixing profile in plasterboard or surface mount matt, translucent black diffuser, caps and brackets included.

colour

Accessori / Accessories

I-PROFILO-ROMA-NER-CAP
8031414890576

Kit 2 pz tappi di chiusura per profilo ROMA nero.

2 pcs kit caps for ROMA black profile.

I-PROF-ROMA2-DIFF
8031440357630

Diffusore 2 m trasparente per profili ROMA.

2 m PC trasparent diffuser for ROME.



Profili in alluminio.
Aluminum profile.



I-PROFILO-MICRO
8031414888740

Profilo 2 m a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi.

2 m quick fixing profile in plasteboard or surface mount with opal diffuser caps and bracket included.

colour



Accessori / Accessories
I-PROFILO-MICRO-CAP
8031414888757

Kit 2 pz tappi di chiusura per profilo MICRO.

2 pcs kit caps for MICRO profile.



I-PROFILO-INCRO
8031414888764

Profilo 2 m a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi.

2 m quick fixing profile in plasteboard or surface mount with opal diffuser caps an bracket included.

colour



Accessori / Accessories
I-PROFILO-INCRO-CAP
8031414888771

Kit 2 pz tappi di chiusura per profilo INCRO.

2 pcs kit caps for INCRO profile.



Profili in alluminio per installazione a muro/soffitto o sospensione.
Aluminum profile for wall/celing or sospension installation.




I-PROFILO-LOOP-2
8031414881840

Profilo 2 m per gradini, diffusore opale, tappi inclusi.

2 m profile for step with opal diffuser included.

colour



Accessori / Accessories
I-PROFILO-LOOP-CAP
8031414881857

Tappi per profilo in alluminio LOOP.

2 pcs kit caps for LOOP profile.




I-PROFILO-TUBE-2
8031414881925

Profilo in alluminio silver carrabile DRIVEWAY 2 m incluso tappi e staffe. (max 2000Kg)

Walkable 2 m profile with opal diffuser included. (max 2000Kg)

colour



Accessori / Accessories
I-PROFILO-TUBE-CAP
8031414881932

Tappi per profilo tubolare ø 60 mm base in alluminio TUBE.

2 pcs kit caps for TUBE profile.

Accessori / Accessories
I-PROFILO-TUBE-SOSP
8031414882243

Kit cavi acciaio sospensione 2,5 m profilo tubolare TUBE.

Kit suspension mountig system.

Profili angolari in alluminio per installazione a muro/soffitto o sospensione.
Angular Aluminum profiles for wall/ceiling or suspension installation.




I-PROFILO-DORIK-2
8031414876556

Profilo 2 m con fissaggio a parete diffusore angolare opale tappi e staffe inclusi.

2 m profile surface mount with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-DORIK-CAP
8031414877768

Kit 2 pz tappi di chiusura per profilo DORIK.

2 pcs kit caps for DORIK profile.




I-PROFILO-DORIK-16-2
8031414882205

Profilo in alluminio silver angolare DORIK 2 m incluso tappi e staffe.

2 m profile surface mount with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-DORIK-16-CAP
8031414882212

Tappi per profilo in alluminio angolare DORIK 16×16 mm silver.

2 pcs kit caps for DORIK profile.




I-PROFILO-IONIK-2
8031414876549

Profilo 2 m con fissaggio a parete diffusore angolare opale, tappi e staffe inclusi.

2 m profile surface mount with opal diffuser and caps included.

colour



Accessori / Accessories
I-PROFILO-IONIK-CAP
8031414877775

Kit 2 pz tappi di chiusura per profilo IONIK.

2 pcs kit caps for IONIK profile.




I-PROFILO-IONIK-16-2
8031414882229

Profilo in alluminio silver angolare IONIK 2 m incluso tappi e staffe.

2 m profile surface mount with opal diffuser and caps included.


colour



Accessori / Accessories
I-PROFILO-IONIK-16-CAP
8031414882236

Tappi per profilo in alluminio angolare IONIK 16×16 mm silver.

2 pcs kit caps for IONIK profile.




I-PROFILO-NEWYORK
8031434581218

Profilo angolare 1 m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi.

1m quick fixing angular profile in plasteboard with opal diffuser caps and bracket included.

colour






I-PROFILO-NEWYORK-2
8031440359382

Profilo angolare 2 m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi.

2 m quick fixing angular profile in plasteboard with opal diffuser caps and bracket included.

colour



Accessori / Accessories
I-PROFILO-NEWYORK-CAP
8031414890545

Kit 2 pz tappi di chiusura per profilo NEWYORK.

2 pcs kit caps for NEWYORK profile.

Accessori / Accessories
I-PROF-NEWYORK2-DIFF
8031440357623

Diffusore 2 m trasparente profilo NEW YORK angolare alluminio.

2 m PC trasparent diffuser for NEW YORK.






I-PROFILO-CAMELOT
8031414871087

Profilo flessibile 2 m diffusore opale, tappi e staffette inclusi.

Flexible profile 2 m with opal diffuser caps and bracket included.

colour



Accessori / Accessories
I-PROFILO-CAMELOT-CAP
8031414890477

Kit 2 pz tappi di chiusura per profilo CAMELOT.

2 pcs kit caps for CAMELOT profile.



I-PROFILO-ULTRA
8031414888788

Profilo 2 m con diffusore opale, tappi e staffe inclusi.

2 m profile with opal diffuser, caps and brackets included.

colour



Accessori / Accessories
I-PROFILO-ULTRA-CAP
8031414890255

Kit 2 pz tappi di chiusura per profilo ULTRA.

2 pcs kit caps for ULTRA profile.




I-PROFILO-LINEA-2-BCO
8031414881963

Profilo in alluminio bianco LINEA 2 m incluso tappi e staffe.

2 m black profile with opal diffuser, bracket and caps included.

colour



I-PROFILO-LINEA-BCO-CAP
8031414881970

Tappi per profilo in alluminio LINEA bianco.

2 pcs kit caps for LINEA profile.



I-PROFILO-LINEA-2-NER
8031414881987

Profilo in alluminio nero LINEA 2 m incluso tappi e staffe.

2 m black profile with black diffuser, bracket and caps included.

colour

Accessori / Accessories
I-PROFILO-LINEA-NER-CAP
8031414882199

Tappi per profilo in alluminio LINEA nero.

2 black pcs kit caps for LINEA profile.




I-PROFILO-MILANO
8031434611854

Profilo 1 m diffusore opale, tappi e staffette inclusi.

Profile 1 m with opal diffuser, caps and bracket included.

colour





I-PROFILO-MILANO-2
8031440359412

Profilo 2 m diffusore opale, tappi e staffette inclusi.

Profile 2m with opal diffuser, caps and bracket included.

Accessori / Accessories
I-PROFILO-MILANO-CAP
8031414890538

Kit 2 pz tappi di chiusura per profilo MILANO.

2 pcs kit caps for MILANO profile.



I-PROFILO-MILANO-2 BCO
8031414871100

Profilo bianco 2 m diffusore opale, tappi e staffette inclusi.

White profile 2 m with opal diffuser, caps and bracket included.

colour

Accessori / Accessories
I-PROFILO-MILANO-BCO-CAP
8031414890521

Kit 2 pz tappi di chiusura per profilo MILANO bianco.

2 pcs kit caps for MILANO white profile.

Accessori / Accessories
I-PROF-MILANO2-DIFF
8031440357654

Diffusore 2 m trasparente profilo MILANO alluminio.

2 m PC trasparent diffuser for MILANO.

Profili in alluminio.
Aluminum profile.




I-PROFILO-DUAL-2-BCO
8031414881864

Profilo in alluminio bianco doppia emissione 2 m incluso tappi e staffe.

2 m biemission profile.

colour



Accessori / Accessories

I-PROFILO-DUAL-BCO-CAP
8031414881871

Tappi per profilo in alluminio DUAL doppia emissione bianco.

2 pcs kit caps for DUAL profile.



I-PROFILO-DUAL-2-NER
8031414881888

Profilo in alluminio nero doppia emissione 2 m incluso tappi e staffe.

2 m black biemission profile.

colour

Accessori / Accessories

I-PROFILO-DUAL-NER-CAP
8031414881895

Tappi per profilo in alluminio DUAL doppia emissione nero.

2 black pcs kit caps for DUAL profile.




I-PROFILO-VEIL-2
8031414881901

Profilo in alluminio bianco a veletta singola emissione 2 m incluso tappi e staffe.

2 m single emission white aluminum profile caps and brackets included.

colour



Accessori / Accessories

I-PROFILO-VEIL-CAP
8031414881918

Tappi per profilo in alluminio VEIL a veletta singola emissione bianco.

2 pcs kit caps for VEIL profile.




I-PROFILO-PIANO-2
8031414878802


Profilo base per dissipazione strip colore silver 2 m.

2 m profile dissipation base silver colour.

colour




Accessori per barre LED.
LED bar accessories.



STRIP-HANDSENSOR-W
8031414879335


Scheda rilevatore movimento mano per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max

Hand motion card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore interruttore
Raggio di rilevamento 5-15 cm

Motion sensor switch
Detection range 5-15 cm






STRIP-PIRSENSOR
8031414879373


Scheda sensore movimento pir per strip Input DC12V-24V output DC12V-24V 60/120W 5A max

Pir motion sensor card for strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore movimento

Motion sensor function






STRIP-TOUCH-W
8031414879359

Scheda pulsante touch per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max

Touch botton card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore touch
Passando sul sensore entro i 0,5 secondi si attiva la funzione ON/OFF

Restando sul sensore oltre i 0,5 secondi si attiva la funzione di regolazione di intensità luminosa (massima - minima - massima)

Touch sensor function
When touching the sensor within 0,5 second the switch status changes ON/OFF

When touching the sensor for over 0,5 second the switch turn to adjustment status (high - low - high)



I-PROFILO-INC-STAFFE
8031414890002

Molla per incasso adatto per profili MILANO/ROMA/BERLINO, kit 2 pz

Metal spring for profile MILANO/ROMA/BERLINO, 2pcs kit



Profili in gesso verniciabile per dare omogeneità tra parete e corpo illuminante.
Paintable gypsum profile to give homogeneity between the wall and the lighting body.






I-PROFY-BIS
8031414882359

Profilo in gesso per led biemissione, incluso anima alluminio e diffusori in PC / Gypsum profile for led double emission including PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-BIS-L
8031414882380

Angolo L per profilo in gesso per led biemissione incluso anima in alluminio e diffusori in PC / Gypsum corner profile including PC cover and aluminum






I-PROFY-GIMEL
8031414882410

Profilo in gesso per led singola emissione, anima allumimio e diffusore in PC / Gypsum profile for led single emission including PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-GIMEL-L
8031414882427

Angolo L per profilo in gesso per led, singola emissione, anima alluminio e diffusore in PC / Gypsum corner profile including PC cover and aluminum






I-PROFY-MONO
8031414882366

Profilo in gesso per led singola emissione, angolo 90° anima alluminio e diffusore in PC / Gypsum profile for LED single emission including PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-MONO-L
8031414882397

Angolo L per profilo in gesso per led singola emissione, angolo 90°, anima alluminio e diffusore in PC / Gypsum corner profile including PC cover and aluminum







I-PROFY-VELA
8031414882373

Angolo l per profilo in gesso per led singola emissione, anima alluminio e diffusore in PC / Gypsum corner for led single including PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-VELA-L
8031414882403

Angolo L per profilo in gesso per led, singola emissione, anima alluminio e diffusore in PC / Gypsum corner profile including PC cover and aluminum



STRIP

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

CE

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED COB

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-COB-480C	
8031414881697	
lumen/m	1538 lm
total lumen	7690 lm
STRIP24V-COB-480M	
8031414883516	
lumen/m	1700 lm
total lumen	8500 lm
STRIP24V-COB-480F	
8031414881703	
lumen/m	1698 lm
total lumen	8490 lm
light source	LED COB 480
watt/m	15W

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

CE

Driver p. 837-846
Controller p. 848-851

IP67 · CRI >85 · LED COB

Materiale
kapton
con silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

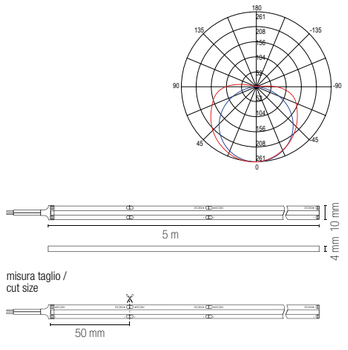

	colour temp.
STRIP24V-COB-IP67-480C	
8031414881710	
lumen/m	1538 lm
total lumen	7690 lm
STRIP24V-COB-IP67-480M	
8031414881727	
lumen/m	1700 lm
total lumen	8500 lm
STRIP24V-COB-IP67-480F	
8031414881734	
lumen/m	1698 lm
total lumen	8490 lm
light source	LED COB 480
watt/m	15W

STRIP

Rotolo 30 metri strip led.
Roll 30 meters strip-led.



CE

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 5000K

Driver
DC36V
tensione costante
non incluso


Durata e on/off
25.000h
>15.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 5000K

Driver
DC36V
costant voltage
not included

Life time and on/off
25.000h
>15.000 on/off



	colour temp.
STRIPLED-CC30-C	
8031414864409	
lumen	720 lm/m
STRIPLED-CC30-M	
8031414864379	
lumen	720 lm/m
STRIPLED-CC30-F	
8031414864386	
lumen	720 lm/m
light source	SMD 2835
watt/m	7,2W
led/m	90

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

CE

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

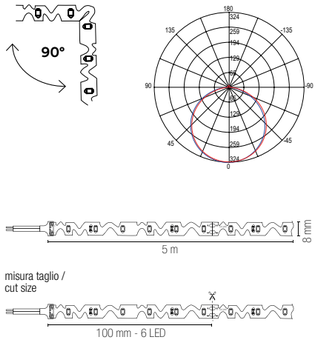

	colour temp.
STRIP24V-2835-3D-60C	
8031414878765	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835-3D-60M	
8031414878727	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835-3D-60F	
8031414878628	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	12W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >85 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835-60C	
8031414871278	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835-60M	
8031414871285	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835-60F	
8031414871292	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	12W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP67 | CRI >85 | LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone
cover

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835IP67-60C	
8031414871308	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835IP67-60M	
8031414871315	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835IP67-60F	
8031414871322	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	12W
led/m	60

Rotolo 5 metri strip led ultrasottile.
Roll 5 meters ultra-thin strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >80 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
25.000h
>15.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
25.000h
>15.000 on/off



	colour temp.
STRIP24V-SLIM-120C	
8031414881741	
lumen/m	1896 lm
total lumen	9480 lm
STRIP24V-SLIM-120M	
8031414881758	
lumen/m	1838 lm
total lumen	9190 lm
STRIP24V-SLIM-120F	
8031414881765	
lumen/m	1766 lm
total lumen	8830 lm
light source	SMD 2835
watt/m	18W
led/m	120

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >85 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K/4000K/6000K/BLU

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K/4000K/6000K/BLU

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835-120C	
8031414871056	
lumen/m	2342 lm
total lumen	11710 lm
STRIP24V-2835-120M	
8031414871063	
lumen/m	2280 lm
total lumen	11400 lm
STRIP24V-2835-120F	
8031414871032	
lumen/m	2258 lm
total lumen	11290 lm
STRIP24V-2835-120BLU	
8031414871049	
lumen	BLU
light source	SMD 2835
watt/m	18W
led/m	120

STRIP

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP68 · CRI >80 · LED COB

Materiale
kapton
con silicone

Temperatura colore
6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone

Temperatura colore
6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835IP68-120F	
8031414881772	
lumen/m	2258 lm
total lumen	11290 lm
light source	LED COB 120
watt/m	18W
led/m	120

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED SMD · CCT

Materiale
kapton
senza silicone

Temperatura colore
CCT

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
CCT

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835-CCT	
8031414875795	
lumen/m	2652 lm
total lumen	13260 lm
light source	SMD 2835
watt/m	24W
led/m	120

STRIP

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-2835-240C	
8031414871018	
lumen/m	2706 lm
total lumen	13530 lm
STRIP24V-2835-240M	
8031414871025	
lumen/m	2640 lm
total lumen	13200 lm
STRIP24V-2835-240F	
8031414871001	
lumen/m	2526 lm
total lumen	12630 lm
light source	SMD 2835
watt/m	24W
led/m	240

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050-60C	
8031414878420	
lumen/m	1390 lm
total lumen	6950 lm
STRIP24V-5050-60M	
8031414878741	
lumen/m	1430 lm
total lumen	7150 lm
STRIP24V-5050-60F	
8031414876129	
lumen/m	1314 lm
total lumen	6570 lm
light source	SMD 5050
watt/m	14,4W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP67 · CRI >85 · LED SMD

Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton with silicone cover

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050IP67-60C	
8031414876143	
lumen/m	1390 lm
total lumen	6950 lm
STRIP24V-5050IP67-60M	
8031414876150	
lumen/m	1430 lm
total lumen	7150 lm
STRIP24V-5050IP67-60F	
8031414876174	
lumen/m	1314 lm
total lumen	6570 lm
light source	SMD 5050
watt/m	14,4W
led/m	60

Rotolo 15 metri strip led.
Roll 15 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · LED SMD

Materiale
kapton senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso


Durata e on/off
25.000h
>15.000 on/off

Materiale
kapton without silicone

Temperatura colore
RGB

Driver
DC24V
costant voltage
not included

Life time and on/off
25.000h
>15.000 on/off



	colour temp.
STRIPLED-CC15-RGB	
8031414864560	
	RGB
light source	SMD 5050
watt/m	10W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · LED SMD

Materiale
kapton senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton without silicone

Temperatura colore
RGB

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050-RGB	
8031414871360	
	RGB
light source	SMD 5050
watt/m	14,4W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP67 · LED SMD

Materiale
kapton con rivestimento in silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton with silicone cover

Temperatura colore
RGB

Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050RGB-IP67	
8031414871377	
	RGB
light source	SMD 5050
watt/m	14,4W
led/m	60

STRIP

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

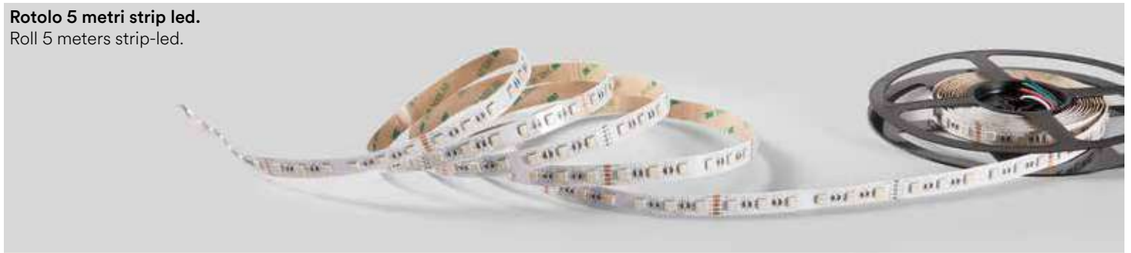

EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >85 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050-RGBW	
8031414871384	
lumen/m	RGB + 1080 lm
total lumen	5400 lm
light source	SMD 5050
watt/m	19,2W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP68 | CRI >85 | LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone
cover

Temperatura colore
RGB + 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050RGBW-IP68	
8031414871407	
lumen/m	RGB + 1080 lm
total lumen	5400 lm
light source	SMD 5050
watt/m	19,2W
led/m	60

STRIP

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >80 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone


Temperatura colore
RGB

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050-3D-RGBW	
8031414878819	
lumen/m	RGB + 264 lm
light source	SMD 5050
watt/m	10W
led/m	48

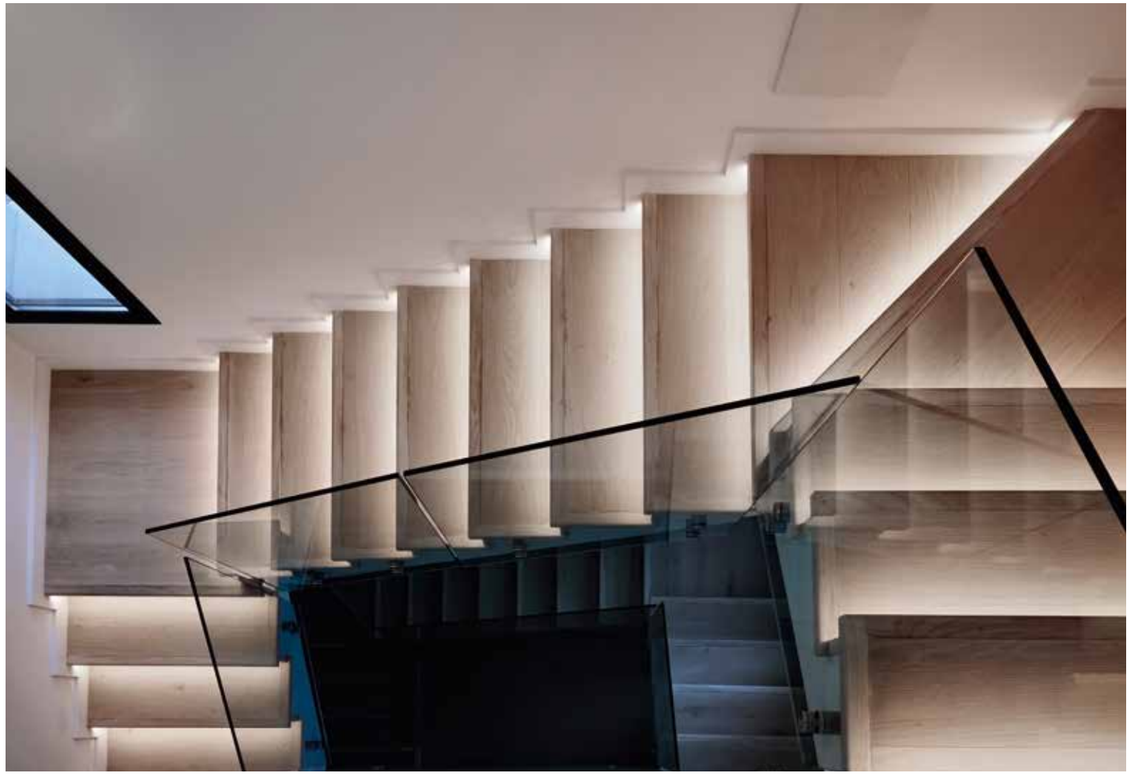

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >85 | LED SMD

Materiale
kapton
con silicone

Temperatura colore
RGB + CCT

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone

Temperatura colore
RGB + CCT

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-5050-RGBCCT	
8031414871391	
lumen/m	712 lm
total lumen	3560 lm
light source	SMD 5050
watt/m	19,2W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >85 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone

Temperatura colore
RGB

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



	colour temp.
STRIP24V-3838-168RGB	
8031414877898	
	RGB
light source	SMD 3838
watt/m	24W
led/m	168

STRIP

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.




WI-FI SMART INTEC

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >80 | LED SMD

Materiale	Materiale		colour temp.
kapton senza silicone	kapton without silicone	**STRIP24V-5050RGBW-INT**	
		8031414881796	
Temperatura colore	**Temperatura colore**	lumen/m	280 lm
RGB + 4000K	RGB + 4000K	total lumen	540 lm
Driver	**Driver**	light source	SMD 5050
12V DC incluso	12V DC incluso	watt/m	6,5W
Durata e on/off	**Life time and on/off**	led/m	60
25.000h >12.500 on/off	25.000h >12.500 on/off		



Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Diver + Remote control + Wi-Fi accesories

Control system easy installation

SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside

Smart Intec WIFI

ALEXA e GOOGLE HOME voice control

STRIP

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.




WI-FI SMART INTEC

Driver p. 837-846
Controller p. 848-851

IP20 | CRI >80 | LED SMD

Materiale	Materiale		colour temp.
kapton senza silicone	kapton without silicone	**STRIP24V-2835C-INT**	
		8031414882182	
Temperatura colore	**Temperatura colore**	lumen/m	380 lm
3000K / 4000K	3000K / 4000K	total lumen	760 lm
Driver	**Driver**	**STRIP24V-2835M-INT**	
12V DC incluso	12V DC incluso	8031414881789	
Durata e on/off	**Life time and on/off**	lumen/m	380 lm
25.000h >12.500 on/off	25.000h >12.500 on/off	total lumen	760 lm
		light source	SMD 2835
		watt/m	6,5W
		led/m	60



Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Diver + Remote control + Wi-Fi accesories

Control system easy installation

SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside

Smart Intec WIFI

ALEXA e GOOGLE HOME voice control



STRIP

Rotolo strip led 3 metri incluso di alimentatore.
Kit 3 meters roll strip led with driver included.



Driver p. 837-846
Controller p. 848-851

IP20 · CRI >85 · LED SMD

Materiale
kapton
senza silicone

Materiale
kapton
without silicone

Temperatura colore
3000K / 4000K / 6000K


Temperatura colore
3000K / 4000K / 6000K

Driver
36W - 24V DC
incluso

Driver
36W - 24V DC
included

Durata e on/off
25.000h
>12.500 on/off

Life time and on/off
25.000h
>12.500 on/off



	colour temp.
STRIP24V-2835C-KIT	
8031414871414	
lumen	820 lm/m
STRIP24V-2835M-KIT	
8031414871421	
lumen	820 lm/m
STRIP24V-2835F-KIT	
8031414871438	
lumen	820 lm/m
light source	SMD 2835
watt/m	10W
led/m	48

Accessori inclusi / Included accessories

36W - 24V DC

Rotolo strip led 3 metri incluso di alimentatore.
Kit 3 meters roll strip led with driver included.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP20 · LED SMD

Materiale
kapton
senza silicone

Materiale
kapton
without silicone

Temperatura colore
RGB


Temperatura colore
RGB

Driver
24W - 24V DC
incluso

Driver
24W - 24V DC
included

Durata e on/off
25.000h
>12.500 on/off

Life time and on/off
25.000h
>12.500 on/off



	colour temp.
STRIP24V-5050RGB-KIT	
8031414871445	
	RGB
light source	SMD 5050
total power 3m	21,6W
total led 3m	90

Accessori inclusi / Included accessories

24W - 24V DC + Telecomando + Controller RGB /
24W - 24V DC + Remote control + Controller RGB

NEON FLEX





Rotolo 20 metri striscia led ultraflessibile in silicone.
20 meters roll extra flexible led line in silicone.



EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP65 · CRI >80 · LED SMD

Materiale
silicone

Temperatura colore
5000K
GIALLO/ROSSO/VERDE

Driver
DC24V (8,3A)
tensione costante
non incluso


Durata e on/off
25.000h
>15.000 on/off

Materiale
silicone

Temperatura colore
5000K
YELLOW/RED/GREEN

Driver
DC24V (8,3A)
costant voltage
not included

Durata e on/off
25.000h
>15.000 on/off





misura taglio /
cut size



	colour temp.
NEON-FLEX-BIANCO	
8031440361842	
lumen	344 lm/m
NEON-FLEX-GIALLO	
8031440364515	
lumen	yellow
NEON-FLEX-ROSSO	
8031440364560	
lumen	red
NEON-FLEX-VERDE	
8031440364546	
lumen	green
light source	SMD 2835
watt/m	8W
led/m	140

Accessori non inclusi /
Not included accessories

NEON-FLEX-CAP
8031440364522

Kit 4 tappi in silicone	Kit 4 pcs silicon caps



NEON-FLEX-NEX
8031440364478

Connettore di giunzione entrata e uscita 15 cm	Linkable connector input and output 15 cm



NEON-FLEX-NEX-T
8031440364485

Connettore T a 3 entrate 30 × 15 cm	T connector with 3 input 30 × 15 cm



NEON-FLEX-POWER
8031440364508

Innesto elettrico 15 cm	Electrical connector 15 cm



NEON-FLEX-STAFFE
8031440364492

Kit 2 pz staffe in metallo 10 × 1,3 × 1 cm	Kit 2 pcs metal 10 × 1,3 × 1 cm

INSIGN

Kit 20 pz moduli LED.
Kit 20 pcs LED module.



kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP66 | CRI >85 | LED SMD

Materiale
PC

Temperatura colore
6000K

Driver
DC12V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Materiale
PC

Temperatura colore
6000K


Driver
DC12V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


LED-INSIGN-F-LENS
8031414871155

	colour temp.
lumen	120 lm/m

sorgente luminosa / light source	LED SMD 5050
watt/m	20 × 1,2W
beam angle	160°



Kit 20 pz moduli LED.
Kit 20 pcs LED module.

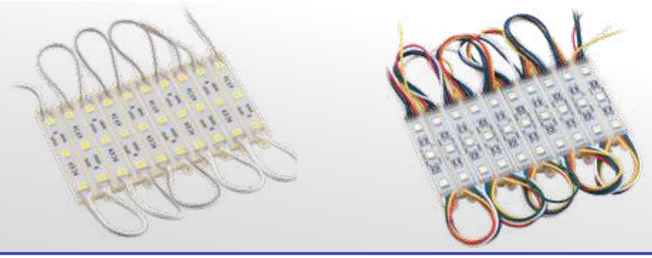

kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA

Driver p. 837-846
Controller p. 848-851

IP65 | CRI >80 | LED SMD

Materiale
PC

Temperatura colore
RGB + 6000K

Driver
DC12V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Materiale
PC

Temperatura colore
RGB + 6000K


Driver
DC12V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

LED-INSIGN-F
8031414862979

	colour temp.
lumen	72 lm/m


light source	SMD 5050
watt/m	20 × 0,72W
beam angle	120°



LED-INSIGN-RGBW
8031414862955

	colour temp.
lumen	RGB + 72 lm/m

light source	SMD 5050
watt/m	20 × 0,96W
beam angle	120°



STRIP

Strip LED comando touch con attacco USB.
LED strip light with switch touch control and USB connection.




TOUCH CONTROL | IP20 | DC 5V Ah USB | IP65 | LED SMD

Materiale
kapton con
rivestimento in silicone

Temperatura colore
RGB

Materiale
kapton with
silicone cover

Temperatura colore
RGB



STRIP-SURROUND
8031440354202

	colour temp.
	RGB

light source	SMD 5050
watt/m	1,5W
led/m	15

Kit strip con telecomando e funzione RGB music color con attacco USB.
Kit strip with remote control and RGB music function with USB connection.




TOUCH CONTROL | IP20 | DC 5V Ah USB | IP65 | LED SMD

Materiale
kapton con
rivestimento in silicone

Temperatura colore
RGB

Materiale
kapton with
silicone cover


Temperatura colore
RGB



STRIP-SURROUND-2M
8031414881802

	colour temp.
	RGB

light source	SMD 5050
watt/m	3W
led/m	60

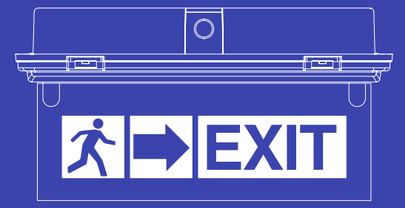

LAMPADE D’EMERGENZA

EMERGENCY LAMPS

ETERNA

Plafoniera LED in policarbonato bianca con batteria Ni-Cd con durata fino a 12H e funzione d'emergenza combinata e permanente.
White polycarbonate LED ceiling light with Ni-Cd battery with 12H dino duration and emergency function mantain or non-mantain.

Materiale
PC

Colore
bianco

Temperatura colore
4000K

Material
PC

Colour
white


Colour temperature
4000K



IP65 · CRI >80 · LED SMD



	colour temp.	colour
LED-ETERNA-54		
8031440358521		
lumen	900 lm	
emergency light	3 h - 120 lm	
watt	16W	
beam angle	120°	




Ni-Cd 6V 1800 mAh
Batteria per emergenza inclusa /
Included emergency battery

12 hours




	colour temp.	colour
LED-ETERNA-120		
8031440358538		
lumen	1160 lm	
emergency light	3 h - 120 lm	
watt	20W	
beam angle	120°	



LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery

12 hours

Fotometria del prodotto / Photometric curve

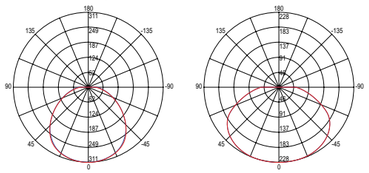

LED-ETERNA-54 LED-ETERNA-120

Funzione MAINTAIN sempre accesa / MAINTAIN function always on



Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency



HELP INC

Incasso a LED emergenza in policarbonato bianco.
Emergency LED installation in white polycarbonate.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
polycarbonate

Colour
white

Colour temperature
4000K

Driver
included



CE EMC

CRI >80 · LED SMD

Angolo di luce per open space / Open space beam angle

	colour temp.	colour
INC-HELP-R37		
8031414882786		
lumen	130 lm	
watt	1,2W	
beam angle	140°	
	Ø 32 mm	



Angolo di luce direzionale asimmetrico / Asymmetric directional beam angle

	colour temp.	colour
INC-HELP-R37-NR		
8031414883097		
lumen	130 lm	
watt	1,2W	
beam angle	120° x 60°	
	Ø 32 mm	




LiFePO4 3.2V 1000mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours


LiFePO4 3.2V 1000mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

Fotometria del prodotto / Photometric curve



INC-HELP-R37



INC-HELP-R37-NR

HELP TRACK

Lampade di emergenza LED per sistema binario trifase nei colori bianco o nero.
LED emergency lamps for three-phase rail system in white or black.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K


Driver
incluso

Material
polycarbonate

Colour
white
black

Colour temperature
4000K

Driver
included

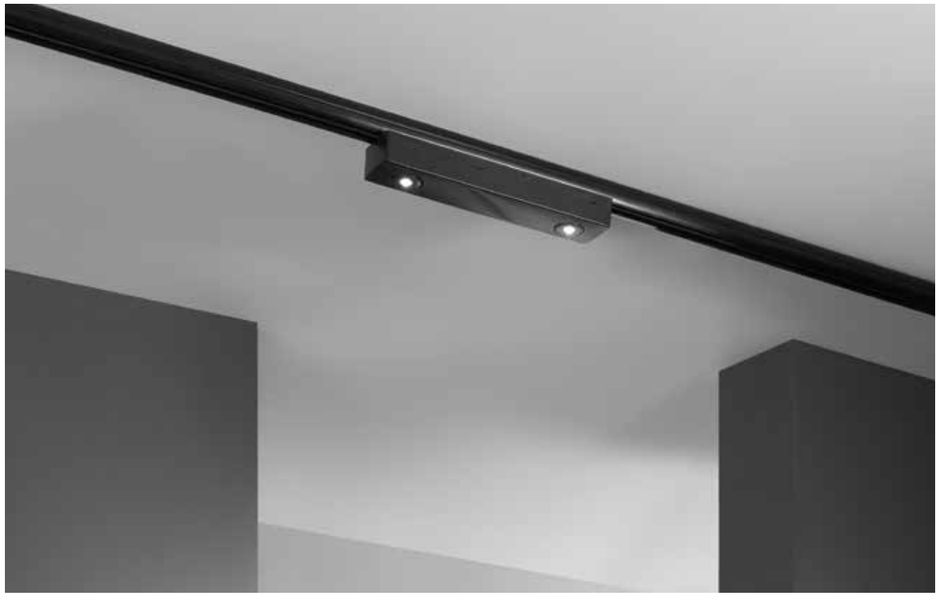


CE EMC

CRI >80 · LED SMD





	colour temp.	colour
LED-HELP-W-TRACK		
8031414884179		
lumen	250 lm	
LED-HELP-B-TRACK		
8031414884162		
lumen	250 lm	
watt	2W	
beam angle	140°	





LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

HELP EXIT

Lampada a LED di emergenza multiuso: plafoniera, incasso ed incasso più bandiera.
Multipurpose emergency LED lamp:
ceiling lamps, recessed light and recessed with flag.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
PC

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
PC

Colour
white

Colour temperature
4000K

Driver
built-in

CE EMC

IP65 · LED SMD




	colour temp.	colour
LED-HELP-EXIT 8031414876310		
lumen	400 lm	
emergency light	3 h - 400 lm	
watt	4W	

2 x 7.4V 1.8Ah Li-ion
Batteria per emergenza inclusa /
Included emergency battery

3 hours

Incluso adesivi /
With stickers kit


EXIT



Accessori / Accessories



HELP-EXIT-KIT
8031414876327
Kit incasso cornice e molle /
Kit recessed with frame and spring



HELP-EXIT-FLAG
8031414877331
Kit bandiera incluso adesivi /
Emergency flag with stickers kit

EXIT

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT

Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT · EMERGENCY LIGHT

BOLT HELP

indoor use · outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato
+ acciaio

Colore
bianco
nikel

Temperatura colore
4000K

Driver
integrato

Material
polycarbonate
+ stainless steel

Colour
white
nikel

Colour temperature
4000K

Driver
built-in

Incasso segnapassi in policarbonato con alloggio in cassetta di derivazione 503 con placchetta intercambiabile bianco o nikel in alluminio per funzione di emergenza combinata e permanente.
Downlight in polycarbonate for recessed box 503 built-in-LED with replaceable in aluminum buckle white or nikel finish and double emergency function mantain or non-mantain.



CE EMC


IP65 · CRI >80 · LED SMD

	colour temp.	colour
INC-BOLT-503HP 8031414866243		
lumen	200 lm	
emergency light	3 h - 150 lm	
watt	3W	
	Ø 32 mm	


Accessori inclusi / Included accessories

2x placchette / frames

2x staffette / brackets



scatola derivazione 503
503 junction box
non inclusa / not included



Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery

36 hours

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT

Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT · EMERGENCY LIGHT

HELP 503

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
polycarbonate

Colour
white

Colour temperature
4000K


Driver
built-in

Lampada di emergenza LED in policarbonato con batteria Li-on incasso con cassetta di derivazione 503.
Emergency LED lamp in PC with
Li-on battery; fit with recess box 503.



CE EMC · CRI >80 · LED SMD

	colour temp.	colour
LED-HELP-503		
8031414862573		
lumen	80 lm	
emergency light	3 h - 80 lm	
watt	1W	
beam angle	120°	
	90 × 55 × 31 mm	



scatola derivazione 503
503 junction box
non inclusa / not included



Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery

36 hours

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT

Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT · EMERGENGY LIGHT

HELP 511

Lampada di emergenza LED in policarbonato con batteria Li-on incasso con cassetta di derivazione 511.
Emergency LED lamp in PC with
Li-on battery; fit with recess box 511.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
polycarbonate

Colour
white


Colour temperature
4000K

Driver
built-in



CE EMC · IP40 · CRI >80 · LED SMD

	colour temp.	colour
LED-HELP-511		
8031414862566		
lumen	80 lm	
emergency light	3 h - 180 lm	
watt	4W	
beam angle	100°	
	275 × 95 × 35 mm	



Accessori inclusi / Included accessories

Scatola derivazione /
Recess box hole



Adesivo /
stickers



Li-ion 7.4V 1200mA
Batteria per emergenza inclusa /
Included emergency battery


18 hours

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT

Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT · EMERGENGY LIGHT



APPLIQUE

WALL LAMPS

COMPASS

Applique a LED in alluminio orientabile colore antracite.
Adjustable LED wall lamp in aluminum anthracite colour.

outdoor use | accommodation areas use | urban areas use

IN&OUT | + 10-100% − | IP54 | degree IK08 | CRI >80 | LED SMD | CCT

technical information COMPASS WI-FI SMART INTEC

Materiale
alluminio

Colore
antracite

Temperatura colore
CCT


Driver
incluso

Material
aluminum


Colour
anthracite

Colour temperature
CCT

Driver
included

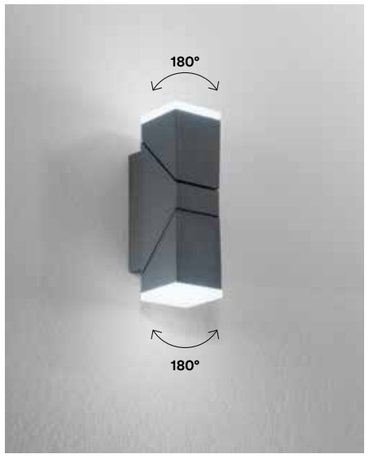

	colour temp.	colour
LED-W-COMPASS-INT		
8031414870158		
lumen	470 lm	
watt	10W	
beam angle	↓110° + 110°↑	



Control system easy installation

SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside


Smart Intec WIFI | RF 2.4G control system | ALEXA e GOOGLE HOME voice control



COMPACT

Applique a LED in alluminio colore antracite con diffusore in policarbonato.
Anthracite aluminum LED wall lamp and PC diffuser.

outdoor use · accommodation areas use · urban areas use

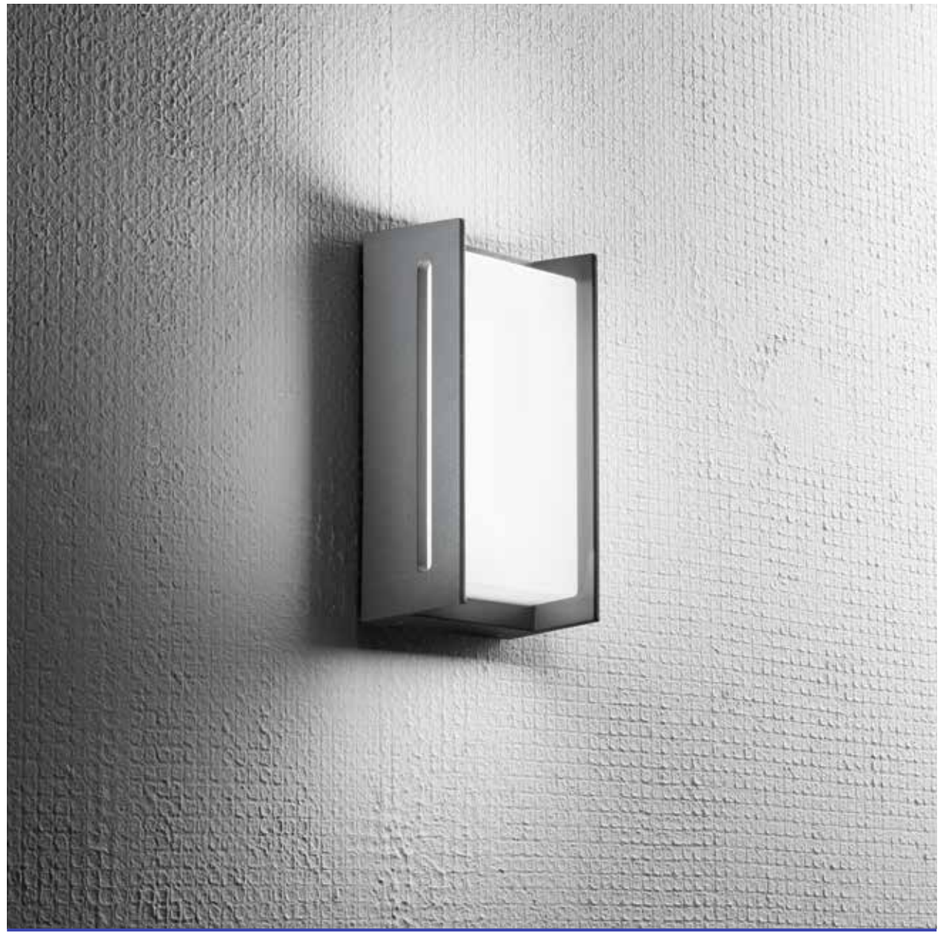

Materiale
alluminio + policarbonato

Colore
antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum + polycarbonate


Colour
anthracite

Selectable color temperature
3000K / 4000K

Driver
included

CE · EMC · IN&OUT · IP54 · degree IK08 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-COMPACT		
8031414867110		
lumen	2260 lm	
watt	18W	
beam angle	120°	



DETROIT

Applique a LED in alluminio nero diffusore in policarbonato.
Aluminum LED wall lamp black finish with PC shade.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio + policarbonato

Colore
nero

Temperatura colore
4000K

Driver
incluso

Material
aluminum + polycarbonate


Colour
black

Colour temperature
4000K

Driver
included

CE · EMC · IN&OUT · IP54 · degree IK08 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-DETROIT-AP		
8031414862290		
lumen	700 lm	
watt	10W	
beam angle	120°	



AMON

Applique a LED in alluminio goffrato bianco o nero.
Aluminum LED wall lamp embossed white or black finish.



Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum


Colour
embossed white
embossed black


Colour temperature
3000K / 4000K

Driver
included

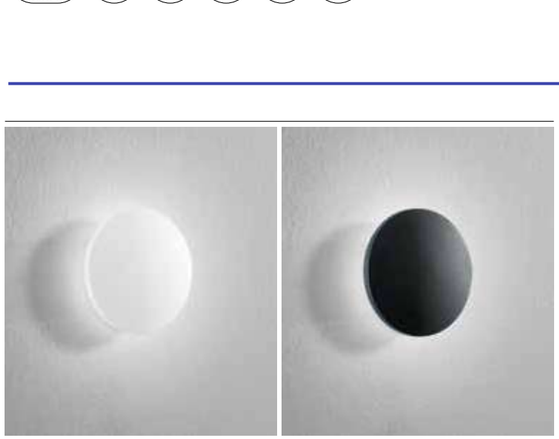

	colour temp.	colour
LED-W-AMON-SC BCO		
8031414876723		
lumen	620 lm	
LED-W-AMON-S BCO		
8031414866946		
lumen	620 lm	
LED-W-AMON-S NERO		
8031414866939		
lumen	620 lm	
watt	6W	
beam angle	360°	



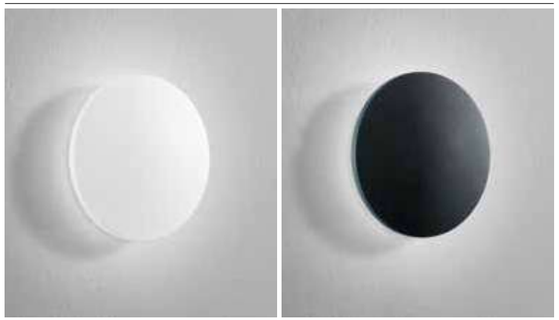

	colour temp.	colour
LED-W-AMON-MC BCO		
8031414876709		
lumen	660 lm	
LED-W-AMON-M BCO		
8031414867165		
lumen	660 lm	
LED-W-AMON-M NERO		
8031414867158		
lumen	660 lm	
watt	9W	
beam angle	360°	



ZODIAC

Applique a LED in policarbonato nei colori bianco e nero.
LED polycarbonate wall lamp in black and white.

outdoor use · accommodation areas use · urban areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
PC

Colour
white
black


Selectable color temperature
3000K / 4000K

Driver
built-in





technical information **ZODIAC**

IP65 · 360° · CRI >80 · LED SMD

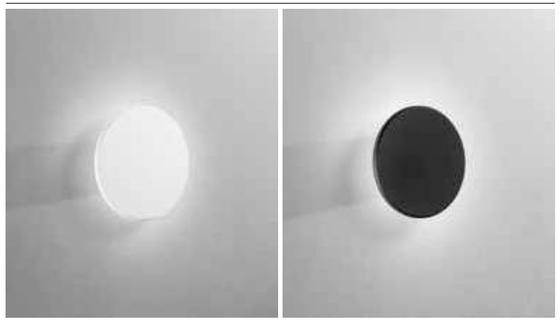


	colour temp.	colour
LED-W-ZODIAC-M-BCO		
8031414889846		
lumen	1200 lm	
LED-W-ZODIAC-M-NER		
8031414889853		
lumen	1200 lm	
watt	12W	
beam angle	360°	



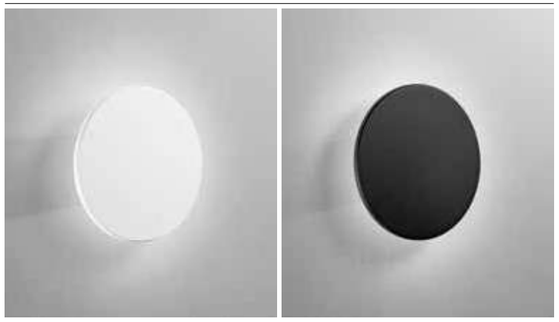

	colour temp.	colour
LED-W-ZODIAC-L-BCO		
8031414889860		
lumen	1800 lm	
LED-W-ZODIAC-L-NER		
8031414889877		
lumen	1800 lm	
watt	18W	
beam angle	360°	



STEALTH

Applique a LED in alluminio goffrato bianco o nero.
Aluminum LED wall lamp embossed white or black.



Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum


Colour
embossed white
embossed black

Colour temperature
4000K

Selectable color temperature
3000K / 4000K


Driver
included


IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD

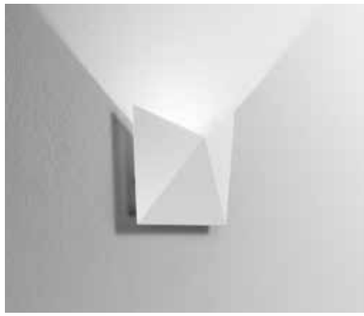

LED-W-STEALTH BCO
8031414866960


	colour temp.	colour
lumen	470 lm	
watt	7W	
beam angle	120°	



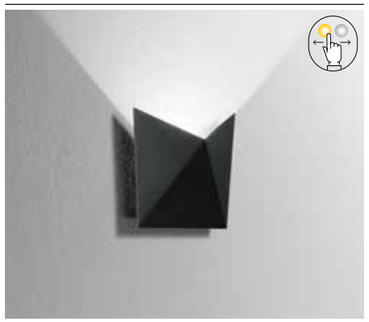

LED-W-STEALTH NER
8031414866953

	colour temp.	colour
lumen	470 lm	
watt	7W	
beam angle	120°	



MERCURY

Applique a LED in alluminio goffrato bianco.
Aluminum LED wall lamp embossed white finish.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
goffrato bianco

Temperatura colore
3000K

Driver
incluso

Material
aluminum


Colour
embossed white

Colour temperature
3000K

Driver
included

IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-MERCURY/5W		
8031434091212		
lumen	630 lm	
watt	6W	
beam angle	↓120° + 120°↑	



GAMMA

Applique a LED in alluminio goffrato bianco.
Aluminum LED wall lamp embossed white finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum


Colour
embossed white

Selectable color temperature
3000K / 4000K

Driver
included

IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-GAMMA/10W		
8031434041217		
lumen	1100 lm	
watt	2 × 5W	
beam angle	↓120° + 120°↑	



MIURA

Applique a LED in alluminio bianco goffrato ultrasottile.
Ultra-thin embossed white aluminum LED wall light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminium

Colour
embossed white

Selectable color temperature
3000K / 4000K

Driver
included

IP54 · degree IK07 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-MIURA/6W		
8031440351447		
lumen	520 lm	
watt	2 × 3W	
beam angle	↓ 110° + 110° ↑	



TUNNEL

Applique a LED in alluminio colore antracite diffusore in policarbonato.
Aluminum LED wall lamp anthracite colour, shade in PC.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio + policarbonato

Colore
antracite e bianco latte

Temperatura colore
4000K

Driver
incluso

Material
aluminum + polycarbonate


Colour
anthracite and milky white

Colour temperature
4000K

Driver
included

IP54 · degree IK07 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-TUNNEL		
8031414863556		
lumen	800 lm	
watt	12W	
beam angle	120°	



VEYRON

Applique a LED in alluminio con doppia emissione bianco o nero goffrato.
LED aluminum wall light with double emission in white or black.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K


Driver
included





LED-W-VEYRON BCO
8031440361163


	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	





LED-W-VEYRON NERO
8031440361095

	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	



BIOME

Applique a LED in alluminio bianco o nero goffrato.
LED aluminum wall lamps in embossed white or black.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · degree IK07 · CRI >85 · LED COB

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
4000K

Driver
incluso

Material
aluminum


Colour
embossed white
embossed black

Colour temperature
4000K

Driver
included




CE · EMC

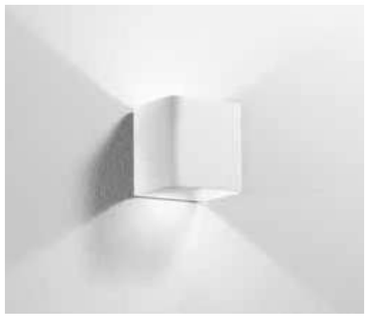

LED-W-BIOME BCO
8031440361125


	colour temp.	colour
lumen	900 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	





LED-W-BIOME NERO
8031440361132

	colour temp.	colour
lumen	900 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	



GOLF

Applique a LED in alluminio goffrato bianco o nero.
Aluminum LED wall lamp embossed white or black finish.



outdoor use
accommodation areas use
urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K

Driver
included

IN&OUT · IP54 · degree IK07 · CRI >85 · LED COB

technical information


GOLF



colour temp. | colour

LED-W-GOLF BCO
8031440361101

lumen	840 lm
watt	2 × 3,5W
beam angle	↓ 120° + 120° ↑






colour temp. | colour

LED-W-GOLF NERO
8031440361118

lumen	840 lm
watt	2 × 3,5W
beam angle	↓ 120° + 120° ↑



POLO

Applique a LED in policarbonato con singola o doppia emissione bianco o nero opaco.
Polycarbonate LED wall light with single or double emission in matt white or black.

outdoor use · accommodation areas use · urban areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
PC


Colour
white
black

Selectable color temperature
3000K / 4000K


Driver
included




IP65 · CRI >80 · LED SMD

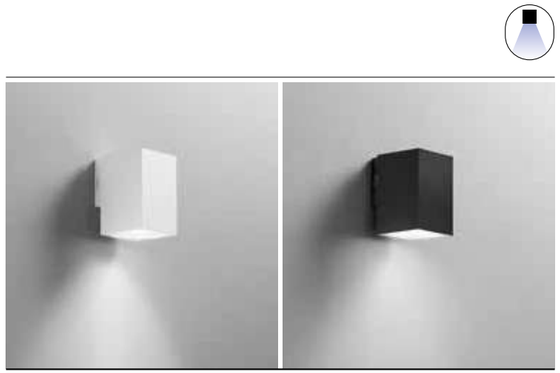



	colour temp.	colour
LED-W-POLO-Q1-BCO 8031414889655		
lumen	800 lm	
LED-W-POLO-Q1-NER 8031414889662		
lumen	800 lm	
watt	8W	
beam angle	60°	



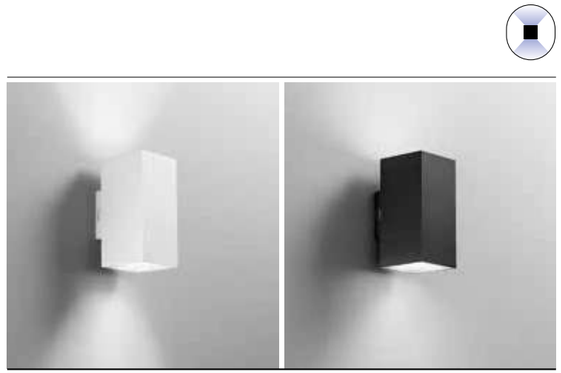



	colour temp.	colour
LED-W-POLO-Q2-BCO 8031414889679		
lumen	1600 lm	
LED-W-POLO-Q2-NER 8031414889686		
lumen	1600 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



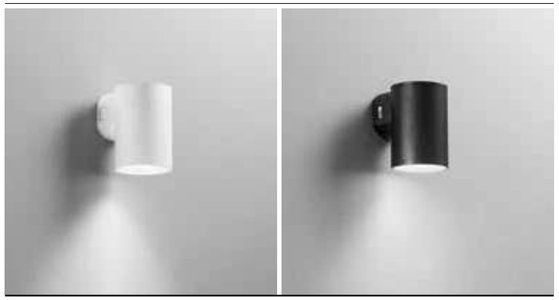


	colour temp.	colour
LED-W-POLO-R1-BCO 8031414889617		
lumen	800 lm	
LED-W-POLO-R1-NER 8031414889624		
lumen	800 lm	
watt	8W	
beam angle	60°	



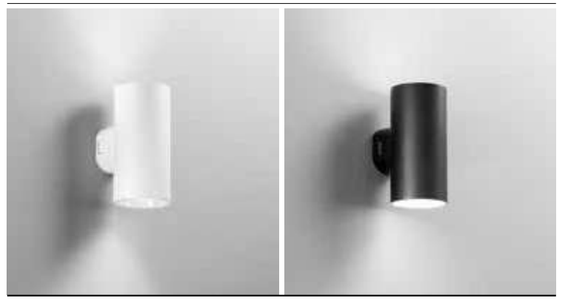

	colour temp.	colour
LED-W-POLO-R2-BCO 8031414889631		
lumen	1600 lm	
LED-W-POLO-R2-NER 8031414889648		
lumen	1600 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



RAY

Applique a LED in alluminio biemissione più emissione frontale in antracite o corten goffrato.
Aluminum LED wall lamp double emission light and front light stream embossed anthracite or corten finish.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed anthracite
embossed corten

Selectable color temperature
3000K / 4000K


Driver
included

IN&OUT · 50° 120° 50° · IP54 · degree IK10 · UGR <16 · CRI >80 · LED SMD · LED COB



LED-W-RAY ANT
8031414867127


	colour temp.	colour
lumen	1100+390 lm	
watt	14W	
beam angle	↓ 50° + 50° ↑ + 120° →	





LED-W-RAY BRO
8031414870998


	colour temp.	colour
lumen	1100+390 lm	
watt	14W	
beam angle	↓ 50° + 50° ↑ + 120° →	



TWIN

Applique a LED in alluminio finitura bianco, antracite o nikel spazzolato.
Aluminum LED wall lamp in white, anthracite finish or brush nikel.



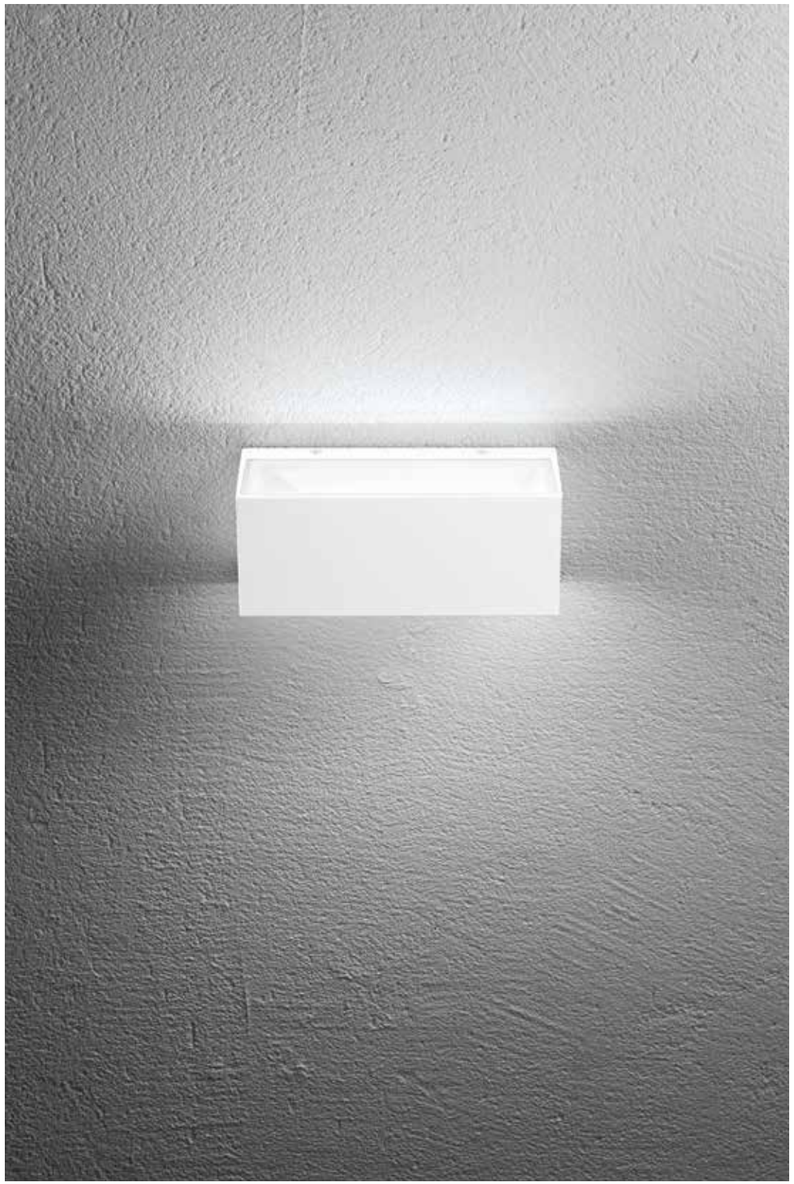

TWIN

IN&OUT · IP54 · degree IK06 · UGR <16 · CRI >80 · LED SMD

Materiale
alluminio

Colore
bianco
antracite
nikel spazzolato

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
white
anthracite
brush nikel

Colour temperature
4000K


Selectable color temperature
3000K / 4000K

Driver
included

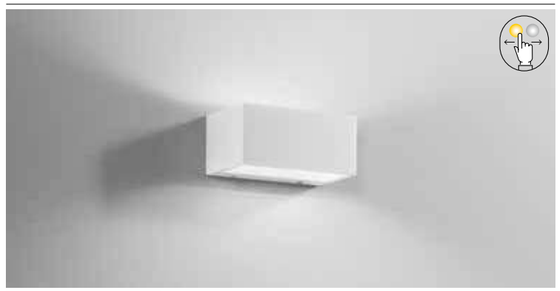



	colour temp.	colour
LED-W-TWIN-S BCO		
8031414863976		
lumen	1500 lm	
LED-W-TWIN-S ANT		
8031414863709		
lumen	1500 lm	
LED-W-TWIN-S NIK		
8031414863983		
lumen	1560 lm	
watt	12W	
beam angle	↓ 90° + 90° ↑	

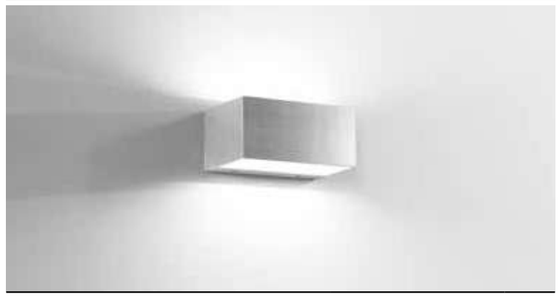










	colour temp.	colour
LED-W-TWIN-M BCO		
8031414863969		
lumen	2150 lm	
LED-W-TWIN-M ANT		
8031414863693		
lumen	2150 lm	
LED-W-TWIN-M NIK		
8031414863990		
lumen	2150 lm	
watt	20W	
beam angle	↓ 90° + 90° ↑	

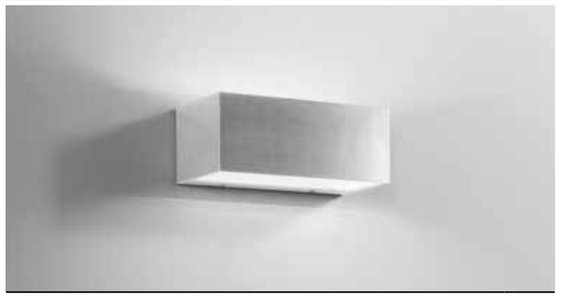




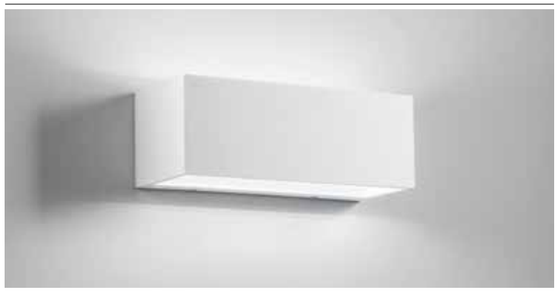




	colour temp.	colour
LED-W-TWIN-XL BCO		
8031414863716		
lumen	4440 lm	
LED-W-TWIN-XL ANT		
8031414863686		
lumen	4440 lm	
LED-W-TWIN-XL NIK		
8031414864362		
lumen	4440 lm	
watt	40W	
beam angle	↓ 90° + 90° ↑	

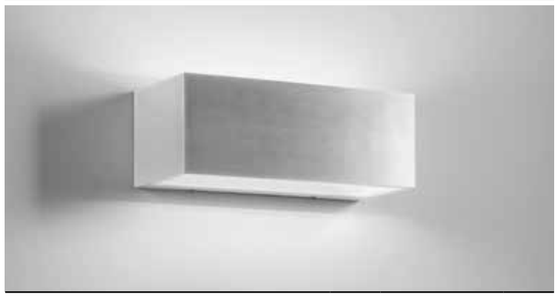



DUBAI

Applique a LED in alluminio con biemissione, emissione frontale con finitura bianco, antracite e bronzo.
LED aluminum wall lamp with double emission, frontal emission with white, anthracite and bronze finish.

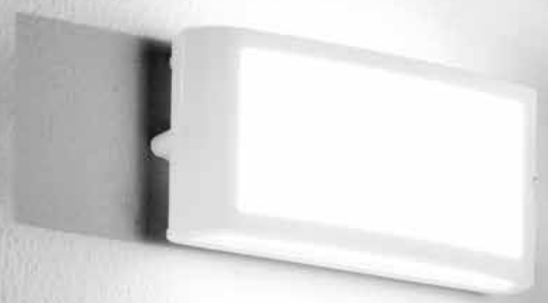

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco opaco
antracite
bronzo

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
matt white
anthracite
bronze

Temperatura colore selezionabile
3000K / 4000K


Driver
built-in

IN&OUT · IP54 · degree IK08 · CRI >80 · LED SMD



LED-W-DUBAI-BCO
8031414888115


	colour temp.	colour
lumen	1280 lm	
watt	10W	
beam angle	↓120° + 120° ↑ + 180° →	





LED-W-DUBAI-ANT
8031414888108


	colour temp.	colour
lumen	1280 lm	
watt	10W	
beam angle	↓120° + 120° ↑ + 180° →	





LED-W-DUBAI-BRO
8031414888122

	colour temp.	colour
lumen	1280 lm	
watt	10W	
beam angle	↓120° + 120° ↑ + 180° →	



WEISS

Applique a LED in alluminio con finitura bianco, nero o corten.
Aluminum LED wall light in white, black and corten finish.



outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco
nero
corten

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
white
black
corten

Selectable color temperature
3000K / 4000K


Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD



LED-W-WEISS-BCO
8031414897193


	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	





LED-W-WEISS-NER
8031414897216


	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	





LED-W-WEISS-BRO
8031414897209

	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	



BORDER

Applique angolare a LED con struttura e diffusore in policarbonato e finitura bianco o nero opaco.
Angular LED wall lamp with structure and diffuser in PC and matt white and black finish.

Materiale
PC

Colore
bianco opaco
nero opaco

Temperatura colore
4000K

Driver
incluso

Material
PC

Colour
matt white
matt black

Colour temperature
4000K

Driver
included



outdoor use · accommodation areas use · urban areas use


IP65 · degree IK10 · UGR <16 · CRI >80 · LED SMD

CE · EMC



LED-BORDER-30M-BCO
8031414883578


	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	





LED-BORDER-30M-ANT
8031414883561

	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	



LUXON

Applique angolare a LED con struttura e diffusore in alluminio e finitura bianco o nero goffrato.
Angular LED wall lamp with structure and diffuser in aluminum and embossed white and black finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K

Driver
included




IP54 · degree IK10 · UGR <16 · CRI >80 · LED SMD



LED-W-LUXON BCO
8031414870677


	colour temp.	colour
lumen	1550 lm	
watt	12W	
beam angle	120°	





LED-W-LUXON ANT
8031414867097

	colour temp.	colour
lumen	1550 lm	
watt	12W	
beam angle	120°	



GRIS

Applique a LED in alluminio con finitura bianco o nera.
LED wall light in aluminum with white or black finish.

outdoor use · accommodation areas use · urban areas use



IN&OUT · IP54 · degree IK07 · UGR <19 · CRI >80 · LED COB

Materiale
alluminio

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
white
black


Selectable color temperature
3000K / 4000K

Driver
built-in



colour temp. | colour


LED-W-GRIS-BCO
8031414897223
lumen 1390 lm
watt 12W
beam angle 180°





colour temp. | colour

LED-W-GRIS-NER
8031414897230
lumen 1390 lm
watt 12W
beam angle 180°



AGERA

Applique a LED in alluminio goffrato nero.
Aluminum LED wall lamp embossed black finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato nero

Temperatura colore
4000K

Driver
incluso

Material
aluminum

Colour
embossed black


Colour temperature
4000K

Driver
included



technical information **AGERA**


IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

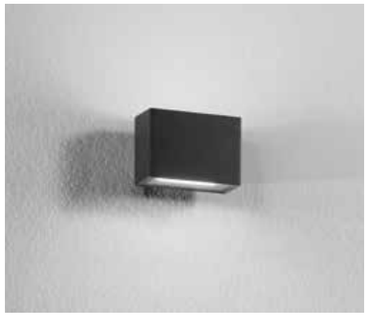

LED-W-AGERA-90
8031440360951


	colour temp.	colour
lumen	700 lm	
watt	2 × 3W	
beam angle	↓ 120° + 120° ↑	



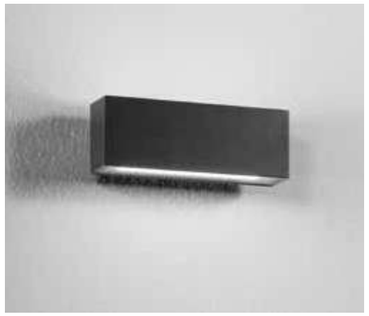

LED-W-AGERA-180
8031440360975

	colour temp.	colour
lumen	1440 lm	
watt	2 × 8W	
beam angle	↓ 120° + 120° ↑	



BOXTER

Applique a LED in alluminio goffrato bianco, silver, nero o corten.
Aluminum LED wall lamp embossed white, silver, black or corten finish.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP44 · degree IK07 · CRI >80 · LED COB

Materiale
alluminio

Colore
bianco
silver
nero
corten

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
white
silver
black
corten

Colour temperature
4000K

Selectable color temperature
3000K / 4000K

Driver
included

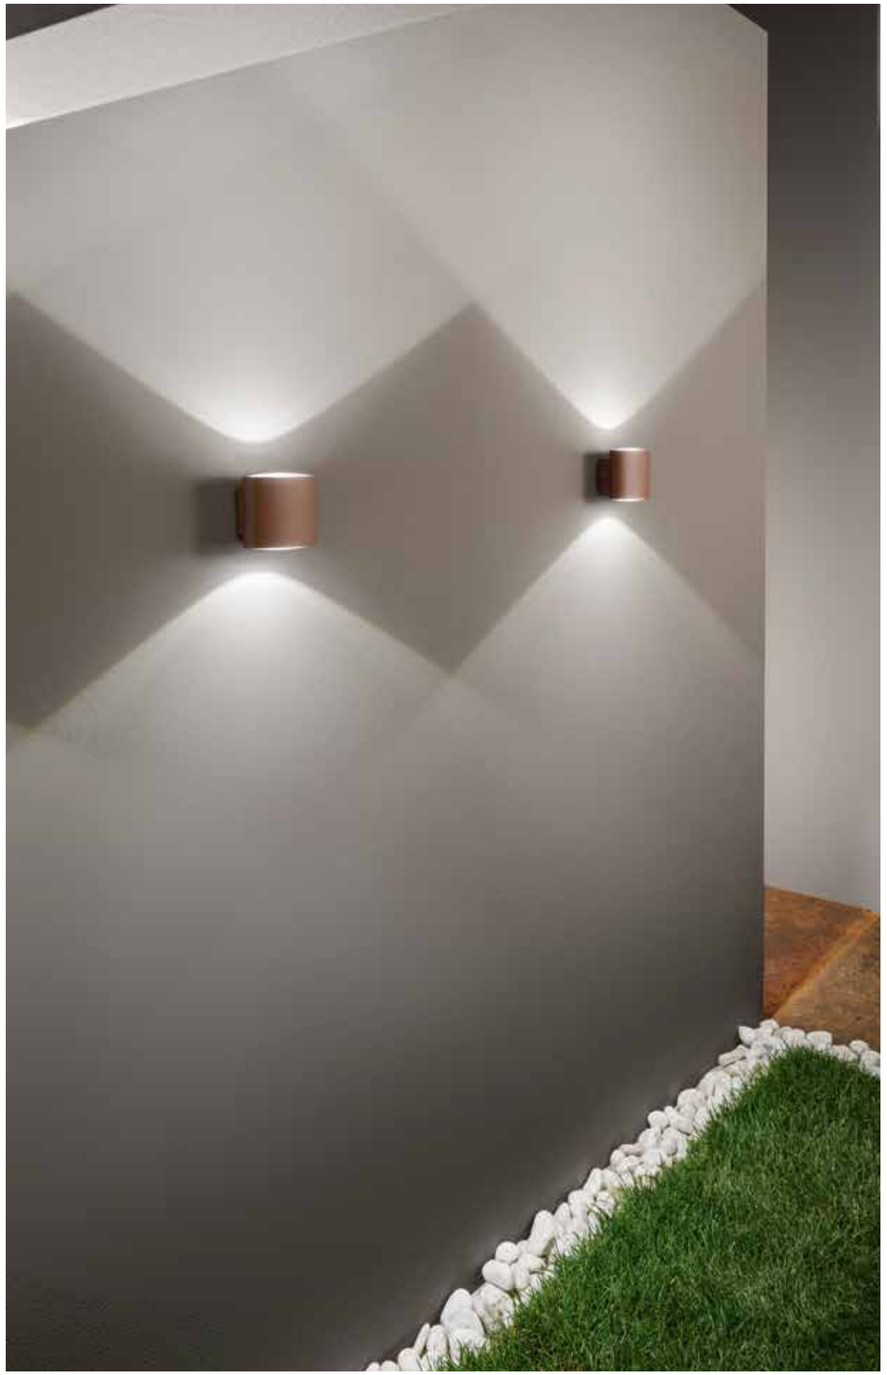



LED-W-BOXTER BCO
8031414873043
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓120° + 120°↑






LED-W-BOXTER SIL
8031414862399
lumen 800 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓120° + 120°↑





LED-W-BOXTER NER
8031414862382
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓120° + 120°↑





LED-W-BOXTER BRO
8031414862405
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓120° + 120°↑



BEETLE

Applique a LED in alluminio bianco o antracite goffrato.
Aluminum LED wall lamp embossed white or anthracite finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum


Colour
embossed white
embossed anthracite

Selectable color temperature
3000K / 4000K


Driver
included



IP54 · degree IK10 · CRI >80 · LED SMD · CE · EMC

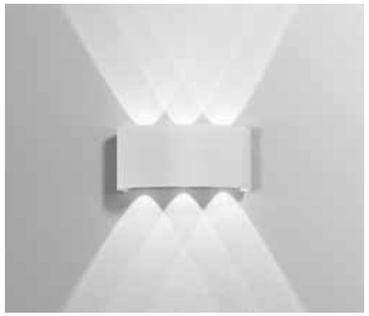

	colour temp.	colour
LED-W-BEETLE BCO		
8031414876952		
lumen	600 lm	
watt	6W	
beam angle	100°	





	colour temp.	colour
LED-W-BEETLE GR		
8031414876969		
lumen	600 lm	
watt	6W	
beam angle	100°	



RIBBON

Fascia a LED in alluminio in antracite goffrato.
Aluminum LED applique in embossed anthracite finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
incluso

Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K

Driver
included




IP65 · degree IK08 · CRI >80 · LED SMD



LED-RIBBON-42
8031414882335


	colour temp.	colour
lumen	1600 lm	
watt	2 × 6W	
beam angle	120°	





LED-RIBBON-72
8031414882342

	colour temp.	colour
lumen	2600 lm	
watt	2 × 10W	
beam angle	120°	



LASER



IP65 · degree IK08 · CRI >80 · LED SMD

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
incluso

Material
thermoplastic

Colour
anthracite

Colour temperature
4000K

Driver
included

Applique a LED in termoplastica antracite.
LED wall lamp in thermoplastic anthracite.



LED-LASER
8031414882328

	colour temp.	colour
lumen	170 lm	
watt	3W	
beam angle	5°	







LED-LASER-BIS
8031414882311

	colour temp.	colour
lumen	40 lm	
watt	5W	
beam angle	2 × 4°	





ALFA

Applique a LED in alluminio con paratie regolabili indipendenti.
Aluminum LED wall lamp with independent adjustable wings.

outdoor use
accommodation areas use
urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato silver
goffrato antracite
goffrato corten

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver
embossed anthracite
embossed corten

Colour temperature
3000K / 4000K

Driver
included



Materiale
alluminio

Colore
goffrato bianco
goffrato silver

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum


Colour
embossed white
embossed silver

Colour temperature
3000K / 4000K

Driver
included

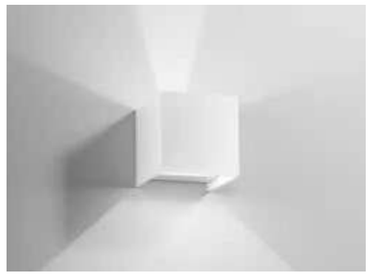


	colour temp.	colour
LED-W-ALFA-10C BCO		
8031414870851		
lumen	700 lm	
LED-W-ALFA-10M BCO		
8031414876686		
lumen	740 lm	
watt	2 × 5W	
beam angle	↓ 10°/120° + 10°/120° ↑	






	colour temp.	colour
LED-W-ALFA-10C GR		
8031414871346		
lumen	700 lm	
LED-W-ALFA-10M GR		
8031414876693		
lumen	740 lm	
watt	2 × 5W	
beam angle	↓ 10°/120° + 10°/120° ↑	



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

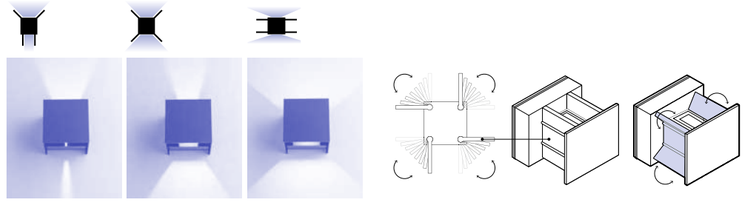

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite
goffrato corten

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum


Colour
embossed white
embossed anthracite
embossed corten

Colour temperature
3000K / 4000K

Driver
included

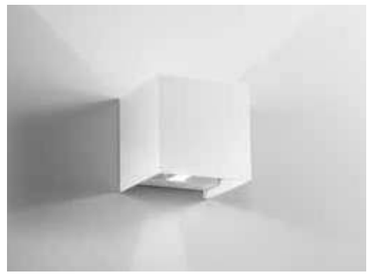


	colour temp.	colour
LED-W-ALFA-20C BCO		
8031414883479		
lumen	1360 lm	
LED-W-ALFA-20M BCO		
8031414883486		
lumen	1500 lm	
watt	20W	
beam angle	↓ 10°/120° + 10°/120° ↑	






	colour temp.	colour
LED-W-ALFA-20C ANT		
8031414883455		
lumen	1360 lm	
LED-W-ALFA-20M ANT		
8031414883462		
lumen	1500 lm	
watt	20W	
beam angle	↓ 10°/120° + 10°/120° ↑	






	colour temp.	colour
LED-W-ALFA-20C BRO		
8031414883493		
lumen	1360 lm	
LED-W-ALFA-20M BRO		
8031414883509		
lumen	1500 lm	
watt	20W	
beam angle	↓ 10°/120° + 10°/120° ↑	



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

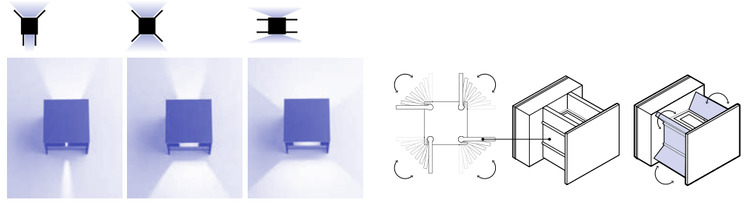

DELTA

Applique a LED in alluminio bianco o silver goffrato con paratie regolabili indipendenti.
Aluminum LED wall lamp in embossed white or silver finish with independent adjustable wings.

Materiale
alluminio

Colore
goffrato bianco
goffrato silver

Temperatura colore
3000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver

Colour temperature
3000K

Driver
included



outdoor use · accommodation areas use · urban areas use


IN&OUT · IP54 · degree IK04 · CRI >80 · LED SMD




colour temp. | colour

LED-W-DELTA-10C BCO
8031414868537
lumen 700 lm

watt 2 × 5W
beam angle ↓ 10°/120° + 10°/120° ↑




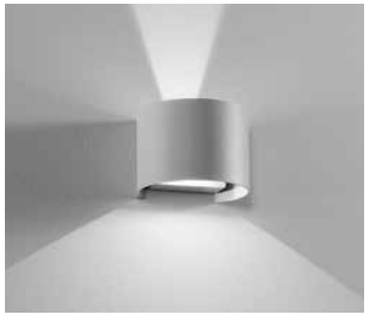


colour temp. | colour


LED-W-DELTA-10C GR
8031414874125
lumen 700 lm

watt 2 × 5W
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

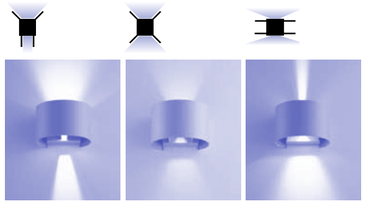


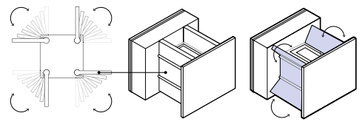

GHIBLI

Applique a LED in alluminio.
Aluminum LED wall lamp.

outdoor use | accommodation areas use | urban areas use

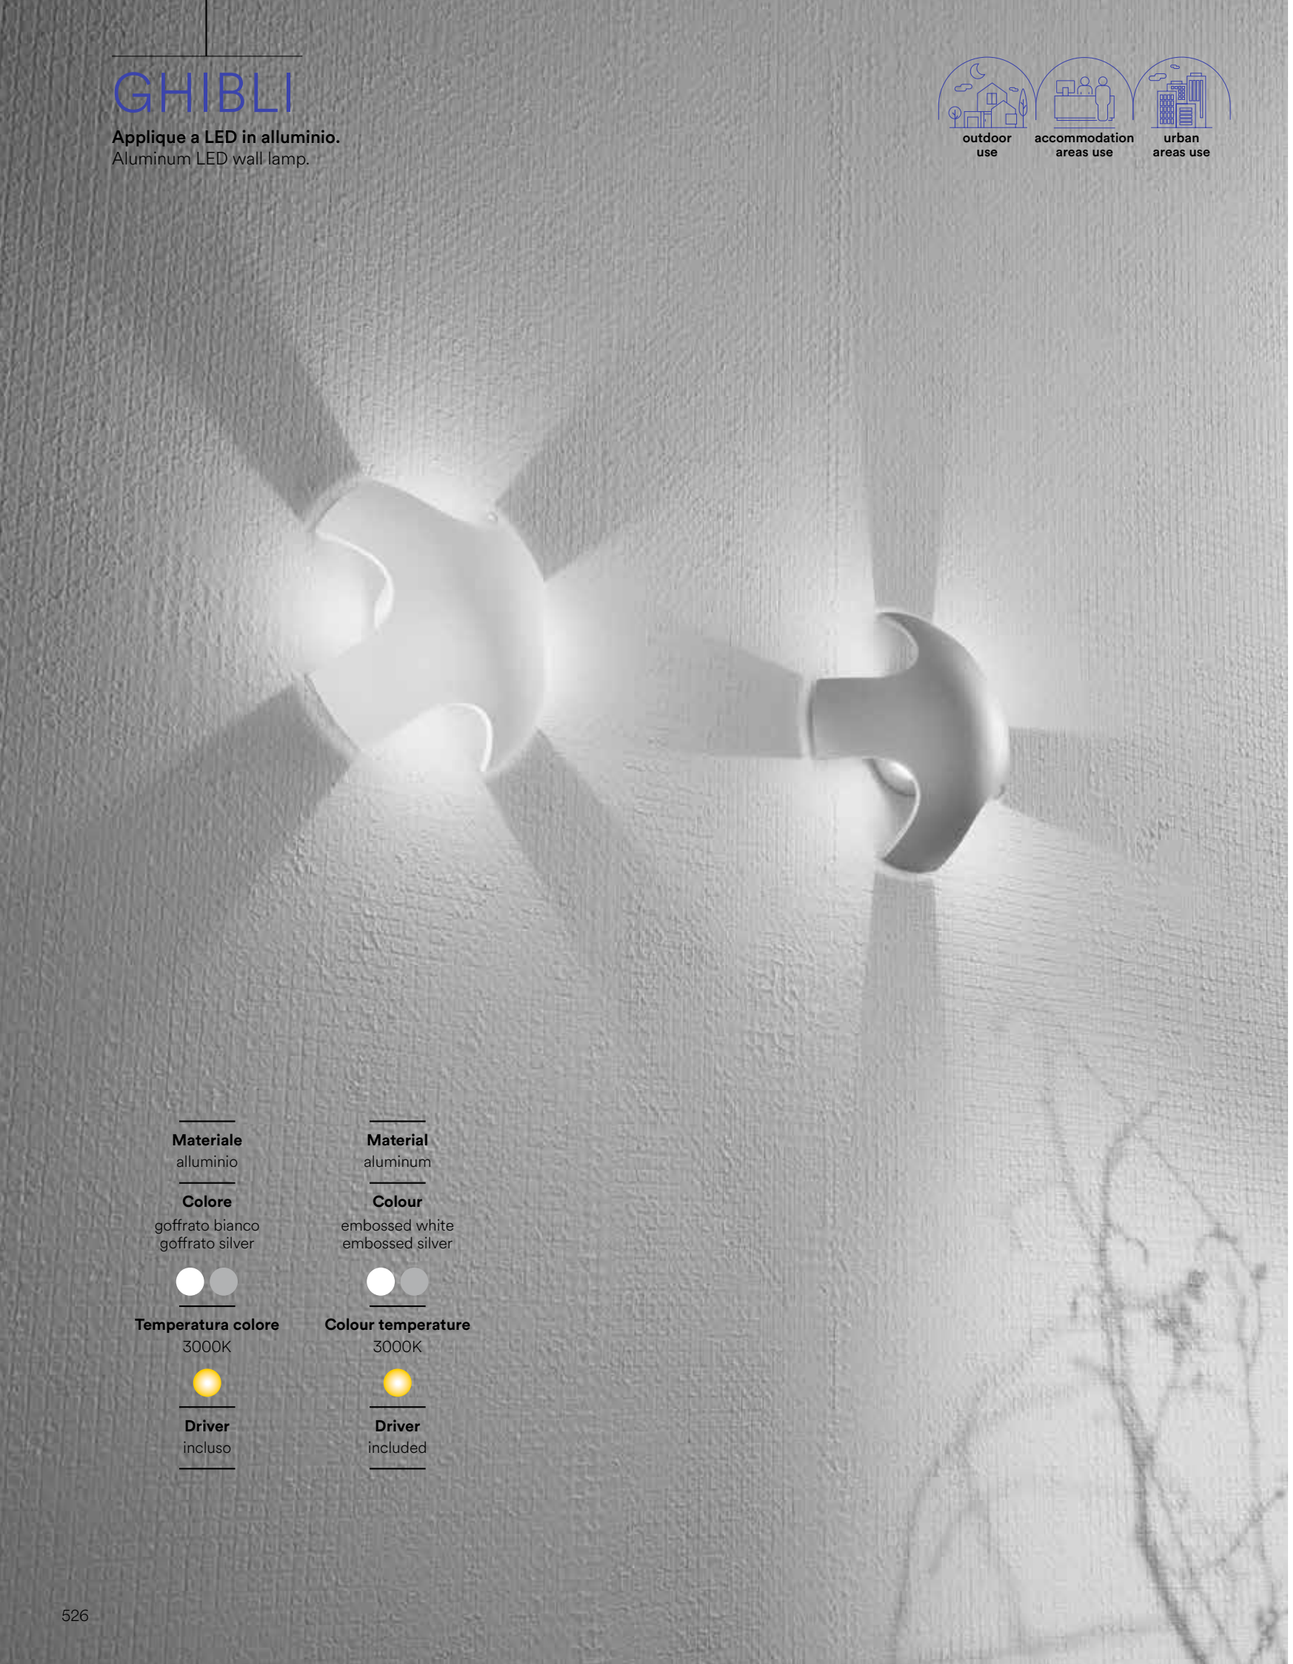

Materiale
alluminio

Colore
goffrato bianco
goffrato silver

Temperatura colore
3000K


Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver

Colour temperature
3000K


Driver
included

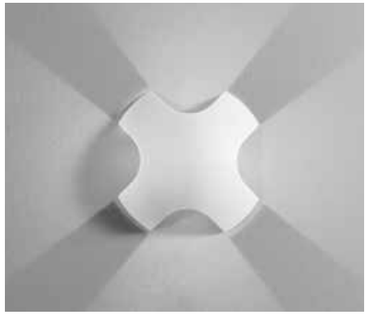

LED-W-GHIBLI/8W BCO
8031440360593

	colour temp.	colour
lumen	520 lm	
watt	4 × 2W	
beam angle	4 × 120°	



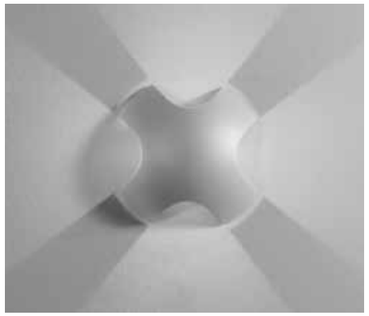

LED-W-GHIBLI/8W
8031440351430

	colour temp.	colour
lumen	520 lm	
watt	4 × 2W	
beam angle	4 × 120°	



PARKER

Applique a LED in cemento bianco o grigio naturale.
LED wall lamp in natural white or grey concrete.

outdoor use · accommodation areas use · urban areas use

Materiale
cemento

Colore
bianco
grigio

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
concrete

Colour
white
grey

Colour temperature
4000K

Selectable color temperature
3000K / 4000K

Driver
included








LED-PARKER-AP30
8031414864195

	colour temp.	colour
lumen	1080 lm	
watt	8W	
beam angle	↓120° + 120°↑	




Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



LED-PARKER-AP40
8031414864201

	colour temp.	colour
lumen	1400 lm	
watt	12W	
beam angle	↓120° + 120°↑	




Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



LED-PARKER-AP60
8031414862504

	colour temp.	colour
lumen	2400 lm	
watt	20W	
beam angle	↓120° + 120°↑	




Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



LED-PARKER-AP120
8031414862511

	colour temp.	colour
lumen	1500 lm	
watt	30W	
beam angle	↓120° + 120°↑	




Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



LED-PARKER-AP30 GR
8031414866977

	colour temp.	colour
lumen	1080 lm	
watt	8,6W	
beam angle	↓120° + 120°↑	




Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



LED-PARKER-AP50 GR
8031414866984

	colour temp.	colour
lumen	2000 lm	
watt	16,9W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included

PORTLAND

Applique cilindrico in cemento bianco.
Cylindrical wall lamp in white concrete.

outdoor use · accommodation areas use · urban areas use




CE · IP65 · concrete finish · degree IK04 · GU10

colour

I-PORTLAND-AP2 BCO
8031414863563

2 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included

OAKLAND

Applique in cemento bianco.
Wall lamp in white concrete.

outdoor use · accommodation areas use · urban areas use




CE · IP65 · concrete finish · degree IK04 · GU10

colour

I-OAKLAND-AP2 BCO
8031414864218

2 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included

JUMP

Applique in alluminio bianco, silver o in acciaio inox.
Wall lamp aluminum white, silver finish or stainless steel.



outdoor use · accommodation areas use · urban areas use

IP44


CE

GU10



	colour
I-JUMP-AP2 BCO 8031414862351	
I-JUMP-AP2 SIL 8031414862344	
I-JUMP-AP2 INOX 8031414862368	

2 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included

E27



	colour
I-JUMP-AP2-E27 SIL 8031414865390	

2XE27 MAX 60W



Lampadina non inclusa / Light bulb not included

ONE

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.
Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.




outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · GU10 · CE



	colour
I-ONE-AP1 BCO 8031414878857	
I-ONE-AP1 ANT 8031414073009	
I-ONE-AP1 BRO 8031414048861	

1 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



	colour
I-ONE-AP2 BCO 8031414878864	
I-ONE-AP2 ANT 8031414082100	
I-ONE-AP2 BRO 8031414079995	

2 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

QUBO

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.
Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.



IN&OUT IP54 GU10

CE






colour

I-QUBO-AP1 BCO
8031414878833

I-QUBO-AP1 ANT
8031414084203

I-QUBO-AP1 BRO
8031414082117

1 x GU10 MAX 35W





Lampadina non inclusa / Light bulb not included




colour

I-QUBO-AP2 BCO
8031414878840

I-QUBO-AP2 ANT
8031414084289

I-QUBO-AP2 BRO
8031414083336

2 x GU10 MAX 35W





Lampadina non inclusa / Light bulb not included

TUCSON

Applique in alluminio bianco, silver o bronzo goffrato con diffusore in policarbonato.
Aluminum wall lamp in embossed white, silver or bronze PC diffuser.

outdoor use | accommodation areas use | urban areas use




technical information **TUCSON**

IN&OUT | IP44 | E14

CE

colour

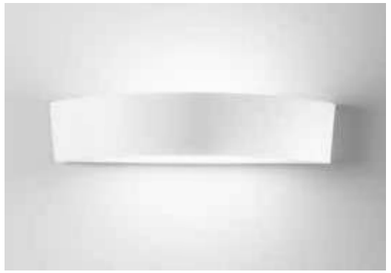

I-TUCSON-AP BCO
8031414862160

2 x E14 MAX 40W

360 mm | 75 mm | 96 mm

H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

colour



I-TUCSON-AP SIL
8031414862184

2 x E14 MAX 40W

360 mm | 75 mm | 96 mm

H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

colour



I-TUCSON-AP BRO
8031414862191

2 x E14 MAX 40W

360 mm | 75 mm | 96 mm

H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included


HURACAN

Applique in alluminio pressofuso antracite goffrato.
Aluminum die-cast wall lamp embossed anthracite finish.

outdoor use | accommodation areas use | urban areas use







IP54 GU10

colour

I-HURACAN-AP
8031440361026

1 x GU10 MAX 35W

Lampadina non inclusa /
Light bulb not included


SEATTLE

Applique in alluminio, finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp with anthracite finish and PC opal diffuser.

outdoor use | accommodation areas use | urban areas use







IP54 E27

colour

I-SEATTLE-AP
8031440312233

1 x E27 MAX 42W

Lampadina non inclusa /
Light bulb not included

AUSTIN

Applique in alluminio bianco, silver, nero o bronzo con diffusore in policarbonato.
Aluminum wall lamp white, silver, black or bronze PC diffuser.



outdoor use · accommodation areas use · urban areas use

IP54 · E27 · 120° · 120° · 120°

CE




colour

I-AUSTIN-AP BCO
8031440362122

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included






colour

I-AUSTIN-AP SIL
8031414862429

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included






colour

I-AUSTIN-AP NER
8031440362139

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included






colour

I-AUSTIN-AP BRO
8031440362108

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included



BOSTON

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.


outdoor use · accommodation areas use · urban areas use

IP54 · E27 · CE

colour

I-BOSTON-AP
8031440312240

1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

ATLANTA

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.

outdoor use · accommodation areas use · urban areas use




IP54 · E27 · CE

colour

I-ATLANTA-AP
8031440312257


1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

DENVER

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.

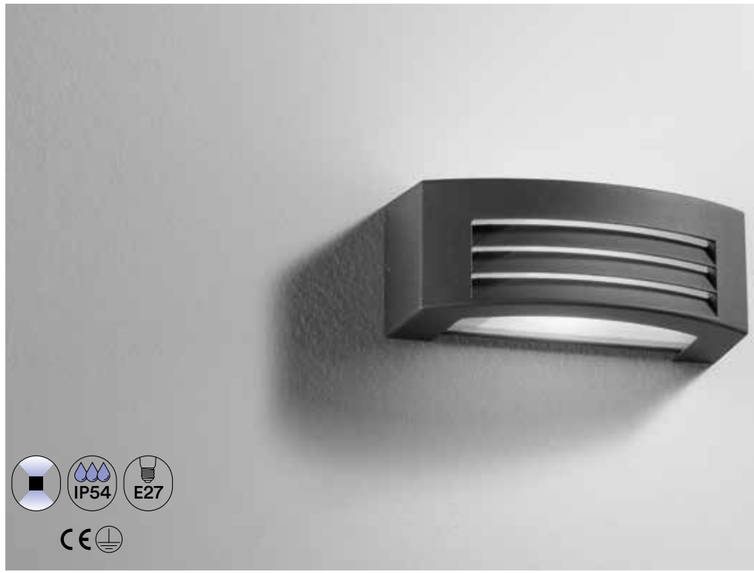


IP54 · E27 · CE

colour

I-DENVER-AP
8031440312264

1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

MONDRIAN

Applique in metallo bianco, nero, silver o bronzo con diffusore in vetro.
Metal wall lamp white, black, silver or bronze glass diffuser.


outdoor use | accommodation areas use | urban areas use



IP44 E27

	colour
I-MONDRIAN-AP BCO 8031414896134	
I-MONDRIAN-AP SIL 8031414862306	
I-MONDRIAN-AP NER 8031414896127	
I-MONDRIAN-AP BRO 8031414862313	

2 x E27 MAX 25W



Lampadina non inclusa / Light bulb not included

GAETA

Lanterna in alluminio pressofuso finitura nero-oro con diffusore in vetro.
Diecast aluminum black-gold finish lantern with glass diffuser.

outdoor use | accommodation areas use | urban areas use

IP44 E27

	colour
LANT-GAETA-AP1 8031440313278	

1 x E27 MAX 60W



Lampadina non inclusa / Light bulb not included

GRUBB

Proiettore in termoplastica picchetto incluso.
Termoplastic flood light with spike included.

outdoor use · accommodation areas use · urban areas use




IP44 · GU10

colour

LED-GRUBB-7M
8031414883554

1 x E27



Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb


watt	7W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	510 lm
dimmer	



colour

LED-GRUBB-15M
8031414883547

1 x E27



Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb

watt	15W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	1100 lm
dimmer	

AKRON

Proiettore in alluminio con picchetto incluso.
Aluminum flood light with spike included.

outdoor use · accommodation areas use · urban areas use



IP54 · GU10



colour

I-AKRON-BCO
8031414882649

I-AKRON-NER
8031414882663

I-AKRON-BRO
8031414882656

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included

PEG

outdoor use · accommodation areas use · urban areas use



IP65 · CRI >80 · LED SMD

Materiale
PC

Colore
nero

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC

Colour
black

Colour temperature
3000K / 4000K

Driver
built-in


Proiettore in termoplastica con picchetto incluso.
Termoplastic flood ligh with spike included.





	colour temp.	colour
LED-PEG-9C-NER 8031414889600		
lumen	800 lm	
LED-PEG-9M-NER 8031414895403		
lumen	800 lm	

watt	9W
beam angle	60°



TOGO

Plafoniera a LED in acrilico.
LED acrylic ceiling lamp with diffuser.





Materiale
Acrilico PMMA

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PMMA acrylic

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in driver







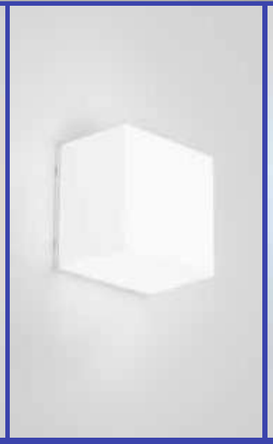






LED-TOGO-Q10
8031414883615


	colour temp.	colour
lumen	600 lm	
watt	5W	
beam angle	120°	





LED-TOGO-Q25
8031414883646


	colour temp.	colour
lumen	2400 lm	
watt	20W	
beam angle	120°	





LED-TOGO-RT20
8031414883622


	colour temp.	colour
lumen	1000 lm	
watt	8W	
beam angle	120°	






LED-TOGO-RT30
8031414883639

	colour temp.	colour
lumen	1500 lm	
watt	12W	
beam angle	120°	



OUTDOOR

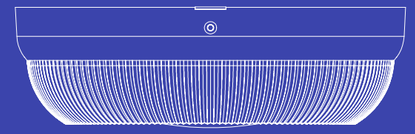

PLAFONIERE

CEILING LAMPS

ZOOM

Plafoniera a LED wifi con videocamera di sicurezza integrata.
LED wifi ceiling lamp with built-in security camera.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio + PC

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium + PC

Colour
Embossed anthracite

Colour temperature
4000K

Driver
built-in





IN&OUT · SECURITY CAMERA · IP54 · degree IK08 · CRI >85 · LED SMD


WI-FI SMART INTEC · CE · EMC




	colour temp.	colour
LED-ZOOM-INT		
8031414877874		
lumen	3600 lm	
watt	30W	
beam angle	110°	
pf	0.95	










Tipo di sensore video Video sensor type	**1/2,9" CMOS**
Pixel	**2.0 Mega**
Illuminazione minima Min illuminance	**Color 0.10lux @F2.0, black and white 0.01lux @F2.0**
Angolo vista camera Camera view angle	**135°**
Otturatore Shutter	**1/25-1/100,000 per second**
Infrarossi IR	**High power LED with ICR**
WDR	**Digital WDR**
Video compression standard	**H.264 32Kbps - 2Mbps**
Risoluzione video Max picture size	**1920×1080**
Frequenza fotogrammi Frame rate	**1-20 per second**
Audio	**Full duplex audio (doppio sistema di comunicazione)**
Memoria	**Support SD card (MAX 128Gb) Cloud storage NVR**
Impostazione immagine Image setting	**Support HD/SD; support mirror**
Reset	**Support**
Controllo della luce Lighting control	**Support manual, sensor, plan switch light (gestione accensioni)**
Interfaccia di protocollo Interface protocol	**Private**
Comunicazione di protocollo Communication protocol	**TCP/IP, HTTP, DHCP, DNS, RTSP**
Funzioni generali General function	**Dual stream, password protection**
Wi-Fi	**IEEE802.11b/g/n**
PIR	**Support PIR and motion detection**

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI · **RF 2.4G control system** · **ALEXA e GOOGLE HOME voice control** · **compatible with AMAZON ECHO SHOW GOOGLE CHROME CAST**

Full duplex audio



TUTOR

Plafoniera a LED wifi.
LED wifi ceiling lamp.

outdoor use | accommodation areas use | urban areas use

IN&OUT | 10-100% | IP54 | degree IK08 | CRI >80 | LED SMD | CCT

technical information **TUTOR**

WI-FI SMART INTEC

Materiale
alluminio + PMMA

Colore
antracite

Temperatura colore
CCT

Driver
incluso

Material
aluminium + PMMA


Colour
anthracite

Colour temperature
CCT

Driver
included



	colour temp.	colour
LED-TUTOR-INT		
8031414870165		
lumen	600 lm	
watt	10W	
beam angle	120°	



SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI | RF 2.4G control system | ALEXA e GOOGLE HOME voice control



VERTIGO

Plafoniera in cemento bianco o grigio.
Concrete ceiling lamp white or gray.



Materiale
cemento

Colore
bianco
grigio

Temperatura colore
4000K

Driver
incluso

Material
concrete

Colour
white
grey

Colour temperature
4000K

Driver
included

IP44 · concrete finish · CRI >80 · LED SMD



LED-VERTIGO-R23
8031414867141

	colour temp.	colour
lumen	500 lm	
watt	10W	
beam angle	120°	









Connettore IP65 incluso /
IP65 connector included



LED-VERTIGO-Q23
8031414867134

	colour temp.	colour
lumen	500 lm	
watt	10W	
beam angle	120°	







Connettore IP65 incluso /
IP65 connector included

CITIZEN

Plafoniera in alluminio nelle versioni bianco, nero o corten.
Ceiling wall lamp white, black or corten finish.

outdoor use · accommodation areas use · urban areas use



IN&OUT · IP54 · E27



	colour
I-CITIZEN-Q1-BCO 8031414882922	
I-CITIZEN-Q1-NER 8031414882939	
I-CITIZEN-Q1-BRO 8031414882915	

1 x E27



Lampadina non inclusa / Light bulb not included



	colour
I-CITIZEN-R1-BCO 8031414882892	
I-CITIZEN-R1-NER 8031414882908	
I-CITIZEN-R1-BRO 8031414882885	

1 x E27



Lampadina non inclusa / Light bulb not included

ISCHIA

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.
Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

outdoor use · accommodation areas use · urban areas use



Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic


Colour temperature
4000K

Driver
built-in



IP65 · IK06 · CRI >80 · LED SMD

	colour temp.	colour
LED-ISCHIA-L-BCO		
8031414883608		
lumen	2300 lm	
watt	20W	
beam angle	100°	



CAPRI

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.
Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

outdoor use · accommodation areas use · urban areas use



Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato


Material
thermoplastic

Colour temperature
4000K


Driver
built-in

IP65 · IK06 · CRI >80 · LED SMD

	colour temp.	colour
LED-CAPRI-S-BCO		
8031414883585		
lumen	2350 lm	
watt	20W	
beam angle	100°	



	colour temp.	colour
LED-CAPRI-L-BCO		
8031414883592		
lumen	3200 lm	
watt	30W	
beam angle	100°	



SENSITIVE

outdoor use · accommodation areas use · urban areas use



IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

Materiale
PP + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K


Driver
integrato

Material
PP + PC

Colour
white
anthracite

Colour temperature
3000K / 4000K

Driver
built-in



Doppio sistema
di installazione /
Double installation system


Plafoniera LED integrato con sensore di movimento; materiale base in PP bianco o antracite con diffusore bianco PC.
LED ceiling lamp with motion sensor; PP white base or anthracite colour with white PC diffuser.



Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor





	colour temp.	colour
LED-SENSITIVE-C BCO 8031414876815		
lumen	1000 lm	
LED-SENSITIVE-BCO 8031440361750		
lumen	1600 lm	
LED-SENSITIVE-ANT 8031440361743		
lumen	1600	

watt	14W
beam angle	120°

EXTRA



IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

Materiale
PP + PC

Colore
bianco
antracite

Temperatura colore
4000K

Driver
integrato


Material
PP + PC


Colour
white
anthracite

Colour temperature
4000K

Driver
built-in


Plafoniera LED integrato materiale base PP bianco con diffusore bianco PC adatte ad installazione con impianto canaline esterne.
Ceiling LED integrated white PP base material with white PC diffuser fit for surface mount cable ducts connections.

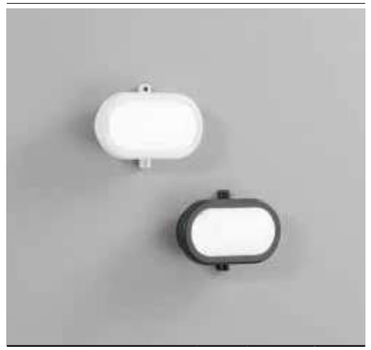




	colour temp.	colour
LED-EXTRA-BCO 8031440361071		
lumen	1100 lm	
LED-EXTRA-ANT 8031440361064		
lumen	1100 lm	


watt	10W
beam angle	120°



Doppio sistema di installazione / Double installation system



Adatte ad installazione con impianto canaline esterne / Surface mount cable ducts connections

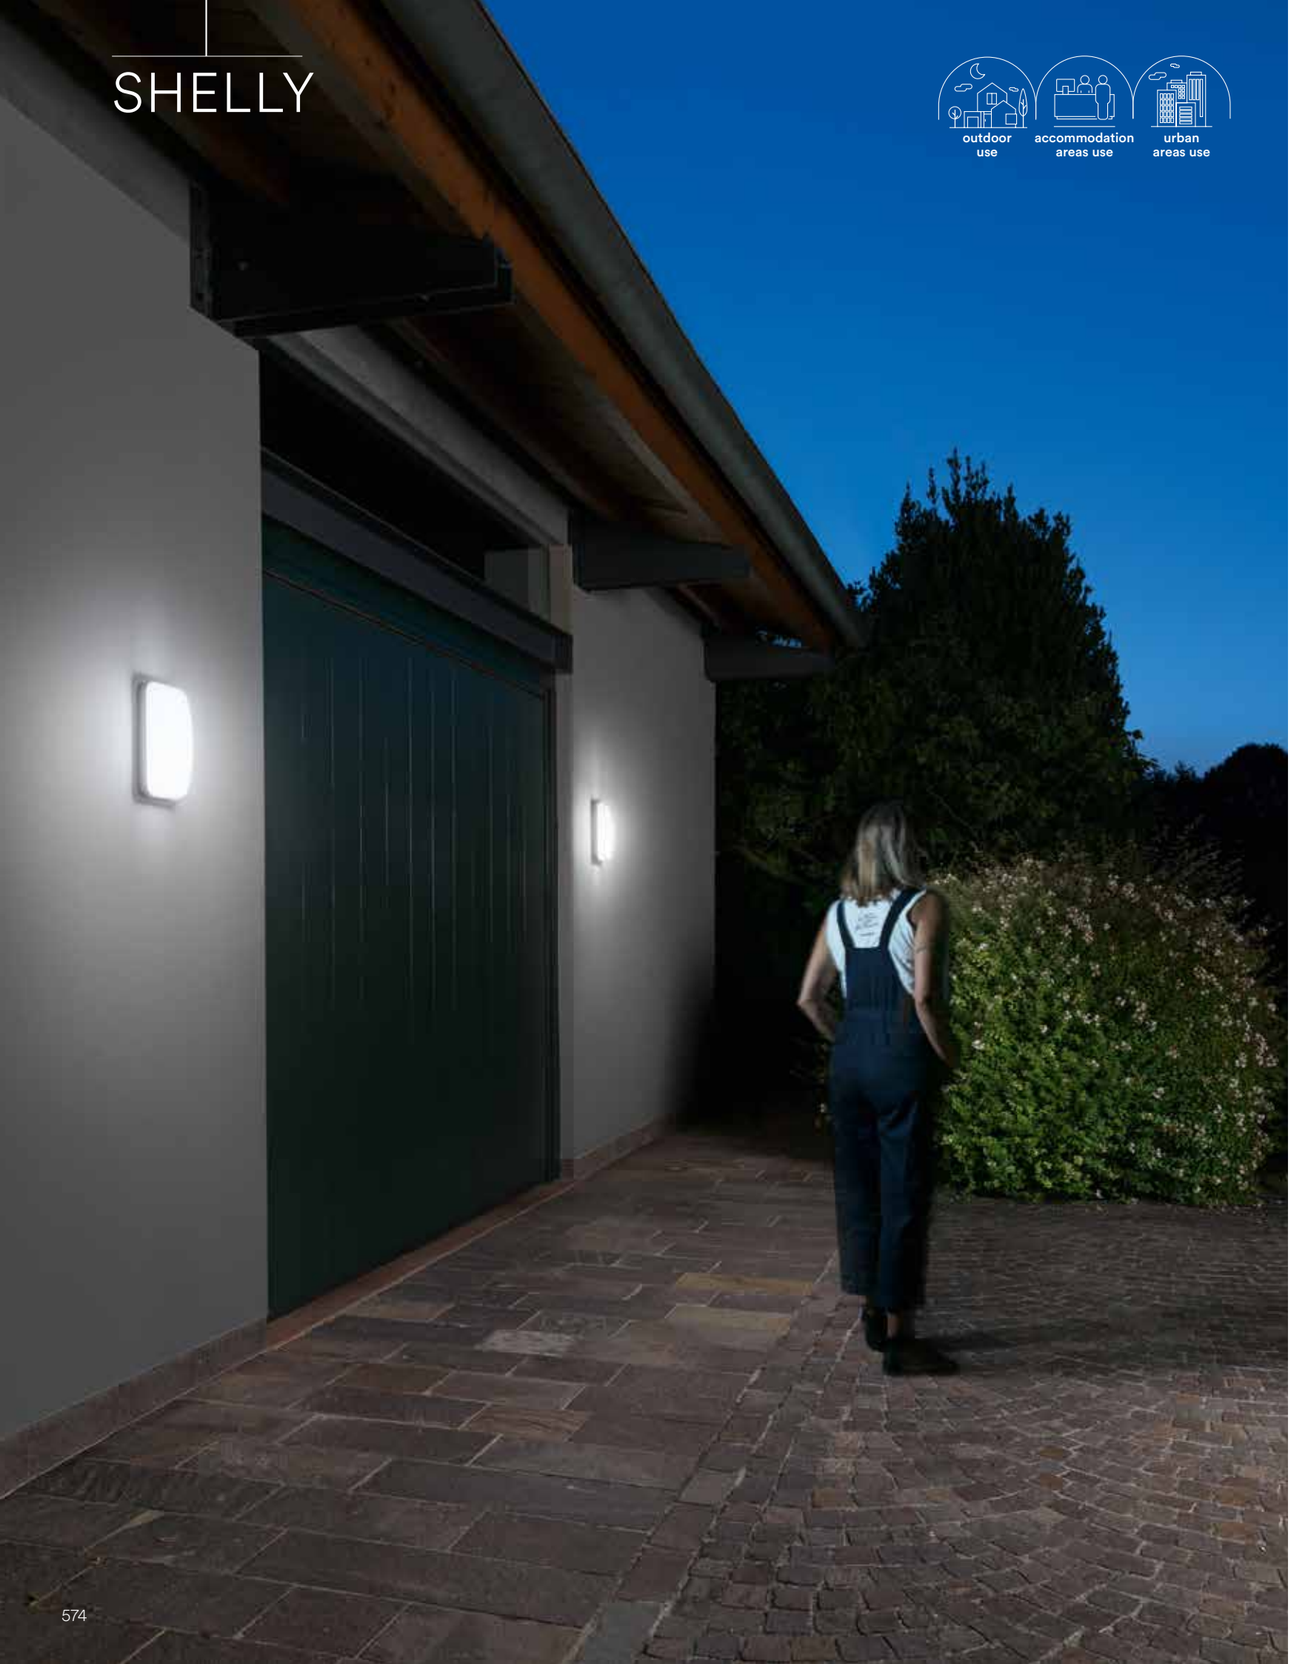

IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
4000K


Driver
integrato

Material
PC + PC

Colour
white
anthracite

Colour temperature
4000K

Driver
built-in




Doppio sistema
di installazione /
Double installation system

Plafoniera LED integrato con sensore, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser.



Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor





	colour temp.	colour
LED-SHELLY-Q-MW BCO		
8031414862153		
lumen	2500 lm	
LED-SHELLY-Q-MW ANT		
8031414862177		
lumen	2500 lm	

watt	20W
beam angle	120°

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite

Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.




	colour temp.	colour
LED-SHELLY-Q-SC BCO		
8031414876730		
lumen	1200 lm	
LED-SHELLY-Q-S BCO		
8031414085507		
lumen	1900 lm	
LED-SHELLY-Q-S ANT		
8031414862009		
lumen	1900 lm	
watt	15W	
beam angle	120°	





	colour temp.	colour
LED-SHELLY-Q-LC BCO		
8031414876747		
lumen	1600 lm	
LED-SHELLY-Q-L BCO		
8031414862016		
lumen	2500 lm	
LED-SHELLY-Q-L ANT		
8031414862023		
lumen	2500 lm	
watt	20W	
beam angle	120°	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.

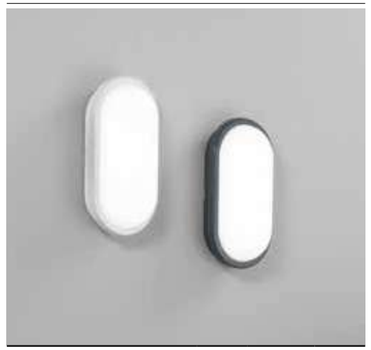



	colour temp.	colour
LED-SHELLY-SC BCO		
8031414876761		
lumen	1900 lm	
LED-SHELLY-S BCO		
8031440351720		
lumen	1900 lm	
LED-SHELLY-S ANT		
8031440351706		
lumen	1900 lm	
watt	15W	
beam angle	120°	





	colour temp.	colour
LED-SHELLY-LC BCO		
8031414876716		
lumen	2500 lm	
LED-SHELLY-L BCO		
8031440351713		
lumen	2500 lm	
LED-SHELLY-L ANT		
8031440351690		
lumen	2500 lm	
watt	20W	
beam angle	120°	





Doppio sistema
di installazione /
Double installation system

EVER



IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.





	colour temp.	colour
LED-EVER-Q-SC BCO		
8031414876778		
lumen	1900 lm	
LED-EVER-Q-S BCO		
8031414862238		
lumen	1900 lm	
LED-EVER-Q-S ANT		
8031414862269		
lumen	1900 lm	
watt	15W	
beam angle	120°	
pf	-	





	colour temp.	colour
LED-EVER-Q-LC BCO		
8031414876785		
lumen	3420	
LED-EVER-Q-L BCO		
8031414862276		
lumen	3420	
LED-EVER-Q-L ANT		
8031414862283		
lumen	3420	
watt	30W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite


Colour temperature
4000K

Driver
built-in

Plafoniera LED integrato materiale base in policarbonato bianco o antracite con diffusore in policarbonato bianco
Polycarbonate built-in LED ceiling lamp PC
base white or anthracite with white PC diffuser.





	colour temp.	colour
LED-EVER-LP BCO 8031440355650		
lumen	2500 lm	
LED-EVER-LP ANT 8031440355643		
lumen	2500 lm	
watt	20W	
beam angle	120°	
pf	-	





	colour temp.	colour
LED-EVER-XLP BCO 8031440355636		
lumen	3750 lm	
LED-EVER-XLP ANT 8031440355629		
lumen	3750 lm	
watt	30W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K


Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white
or anthracite colour with white PC diffuser.

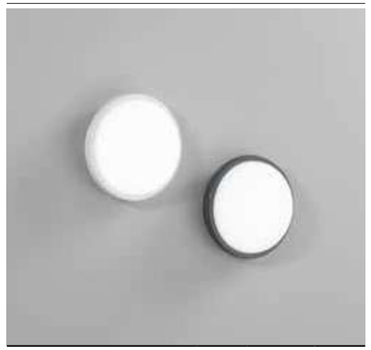



	colour temp.	colour
LED-EVER-SC BCO 8031414876808		
lumen	1900 lm	
LED-EVER-S BCO 8031440351683		
lumen	1900 lm	
LED-EVER-S ANT 8031440351638		
lumen	1900 lm	
watt	15W	
beam angle	120°	
pf	-	



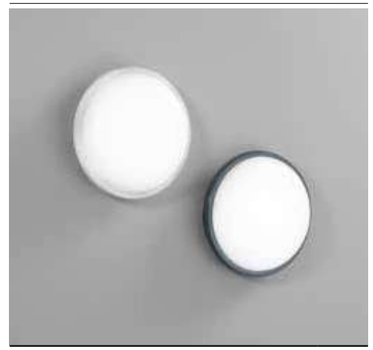

	colour temp.	colour
LED-EVER-LC BCO 8031414876754		
lumen	2500 lm	
LED-EVER-L BCO 8031440351676		
lumen	2500 lm	
LED-EVER-L ANT 8031440351645		
lumen	2500 lm	
watt	20W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

EVER



outdoor use
accommodation areas use
urban areas use

IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD

Materiale
PC + PC

Colore
bianco
silver

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
silver

Colour temperature
3000K / 4000K


Driver
built-in


Plafoniera LED integrato, base policarbonato bianco o silver con diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser.

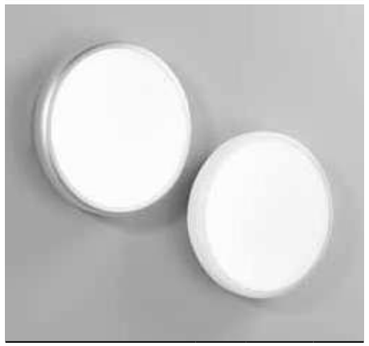

	colour temp.	colour
LED-EVER-XLC BCO 8031414876792		
lumen	3750 lm	
LED-EVER-XL BCO 8031440355612		
lumen	3750 lm	
LED-EVER-XL SIL 8031440355605		
lumen	3750 lm	

watt	30W
beam angle	120°
pf	0.90





Doppio sistema di installazione / Double installation system

Materiale
PC + PC

Colore
bianco
silver

Temperatura colore
4000K

Driver
integrato

Material
PC + PC

Colour
white
silver

Colour temperature
4000K


Driver
built-in


Plafoniera con sensore di movimento microwave, base in policarbonato, diffusore in policarbonato bianco.
Ceiling lamp with microwave sensor in polycarbonate ceiling with white PC diffuser.



	colour temp.	colour
LED-EVER-XL-MW BCO 8031414862375		
lumen	3750 lm	
LED-EVER-XL-MW SIL 8031414862610		
lumen	3750 lm	

watt	30W
beam angle	120°
pf	0.90






Doppio sistema di installazione / Double installation system

Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor



outdoor use | accommodation areas use

IN&OUT | 10-100% | IP65 | CRI >80 | CCT | RGB

WI-FI SMART INTEC | CE | EMC



Materiale
PC + PVC

Colore
nero

Temperatura colore
RGB + CCT

Driver
integrato

Material
PC + PVC

Colour
black

Colour temperature
RGB + CCT


Driver
built-in

Stringa elettrificata a LED per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
LED light string with PVC cable inclusive of schuko plug and modular connector.




	colour temp.	colour
I-PICNIC-INT 8031414884391		
lumen	400 lm	

watt	0,5 × 10W
beam angle	110°



END-TO-END
easy connection / max 1000W




Control system easy installation

SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside

Smart Intec WIFI | **RF 2.4G control system** | **ALEXA e GOOGLE HOME voice control**

Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
Light string E12 PVC cable inclusive of schuko plug and modular connector.

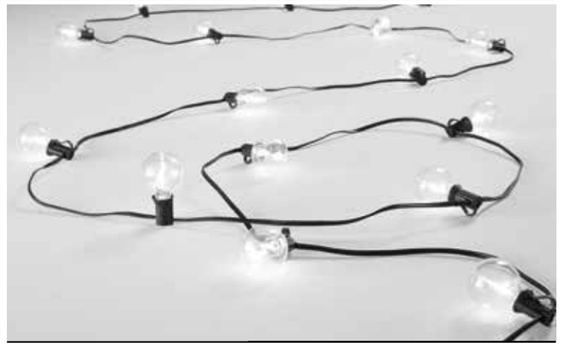

colour


Accessori inclusi / Included accessories

Lampadina E12
E12 light bulb

I-PICNIC-LED
8031414884407

watt	0,3W
volt	230V
3000K	

25 x E12 MAX 20W



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di pannello solare.
Light string E12 PVC cable inclusive solar panel.



colour

Accessori inclusi / Included accessories

Lampadina E12
E12 light bulb

I-PICNIC-SOLAR
8031414884414


watt	0,3W
volt	3V
3000K	

25 x E12 MAX 20W


3 hours

6V 1.5W

3.7V 2200mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable



END-TO-END
easy connection / max 1000W

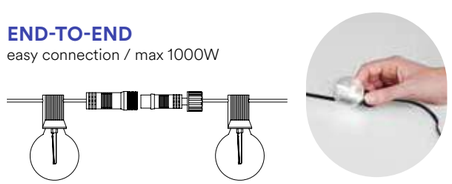

Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile.
Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector.




colour

I-PICNIC-E27-BCO
8031414043064

I-PICNIC-E27
8031414862719


10 x E27 MAX 25W


Lampadina non inclusa / Light bulb not included





END-TO-END
easy connection / max 1000W



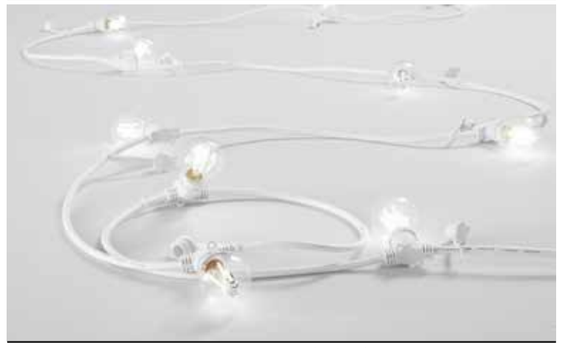


colour

I-PICNIC-E14-BCO
8031414023745

I-PICNIC-E14
8031414862726


10 x E14 MAX 25W

Lampadina non inclusa / Light bulb not included





END-TO-END
easy connection / max 1000W



PICNIC COLOR

outdoor use

accomodation areas use




IN&OUT


IP44

Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
Light string E12 PVC cable inclusive of schuko plug and modular connector.

E12

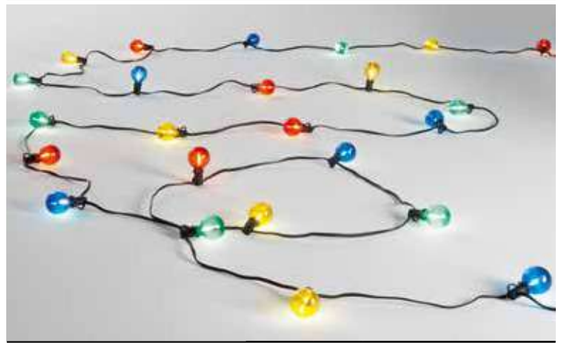


colour	Accessori inclusi / Included accessories
I-PICNIC-COLOR 8031414891863	**Lampadina E12 E12 light bulb**
25 x E12 MAX 20W	7 rosse/red 6 gialle/yellow 6 verdi/green 6 blu/blue
	watt 0,3W
	volt 230V



END-TO-END
easy connection / max 1000W



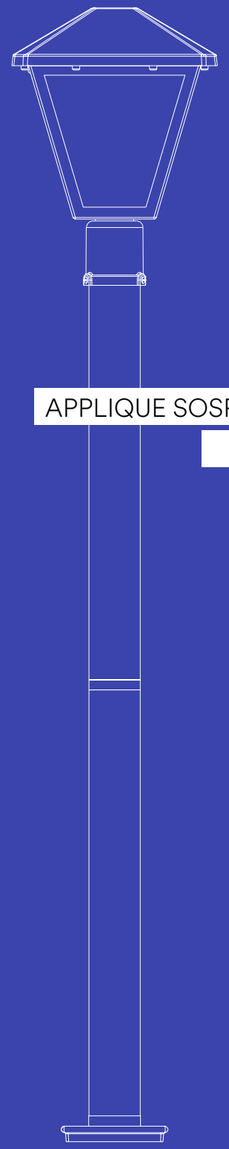

APPLIQUE SOSPENSIONI E PALETTI CORRELATI

WALL SUSPENSION AND FLOOR LAMPS COMBINED

POLLY




POLLY

Collezione con base in fibre di plastica e sfere in PMMA nei colori trasparente, bianco o fumè.
Collection with base in plastic fibers and spheres in PMMA in transparent, white or smoked colors.

Lampadina non inclusa / Light bulb not included

IP44 E27


CE

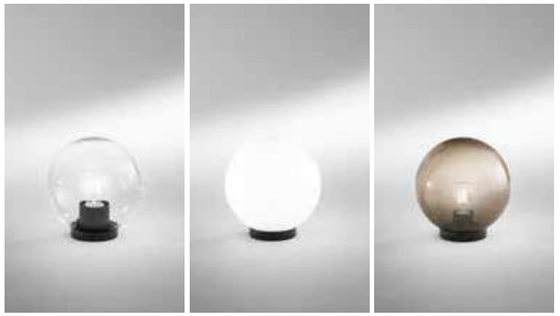

colour

I-POLLY-G20-TR
8031414889136
I-POLLY-G20-BCO
8031414889112
I-POLLY-G20-GR
8031414889129

1 x E27 MAX 20W







colour

I-POLLY-S-TR
8031414889228
I-POLLY-S-BCO
8031414889204
I-POLLY-S-GR
8031414889211

1 x E27 MAX 20W




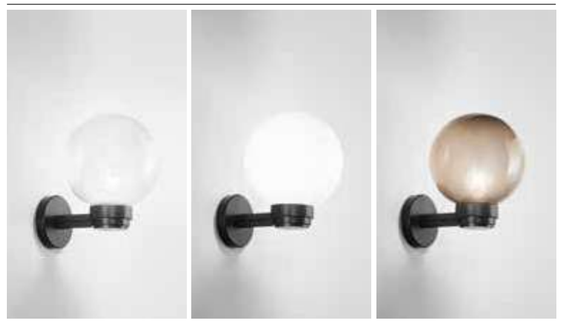


colour

I-POLLY-AP-TR
8031414889105
I-POLLY-AP-BCO
8031414889389
I-POLLY-AP-GR
8031414889099

1 x E27 MAX 20W




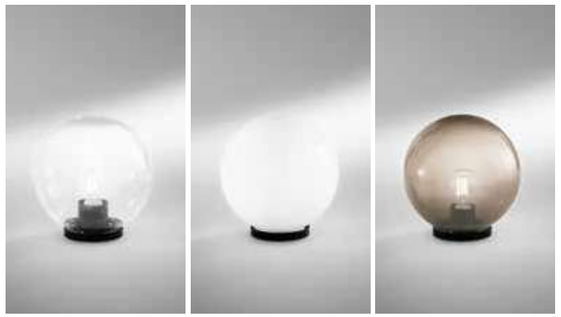


colour

I-POLLY-G25-TR
8031414889167
I-POLLY-G25-BCO
8031414889143
I-POLLY-G25-GR
8031414889150

1 x E27 MAX 20W




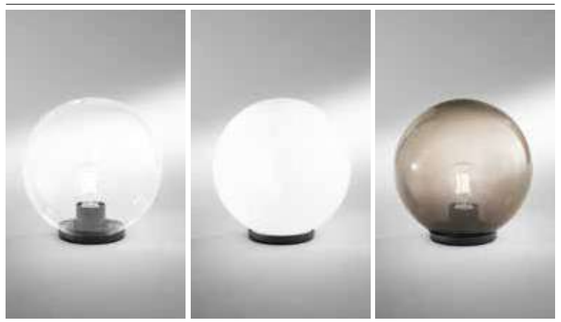

colour

I-POLLY-G30-TR
8031414889198
I-POLLY-G30-BCO
8031414889174
I-POLLY-G30-GR
8031414889181

1 x E27 MAX 20W








colour

I-POLLY-TUBE100
8031414890149

I-POLLY-TUBE150
8031414890156

I-POLLY-TUBE200
8031414890163

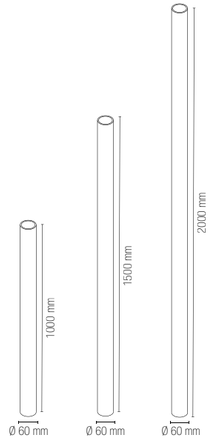



colour

I-POLLY-BASE
8031414889235





colour

I-POLLY-JOINT
8031414890170



WIZARD

Collezione in alluminio antracite, LED integrato RGB+CCT con funzione smart Wi-Fi, compatibili con dispositivi VOICE CONTROL.
Aluminum collection anthracite colour built-in LED RGB+CCT with smart Wi-Fi function, compatible with VOICE CONTROL devices.

Materiale
alluminio + PC

Colore
antracite

Temperatura colore
RGB + CCT


Driver
integrato

Material
aluminum + PC

Colour
anthracite

Colour temperature
RGB + CCT

Driver
built-in

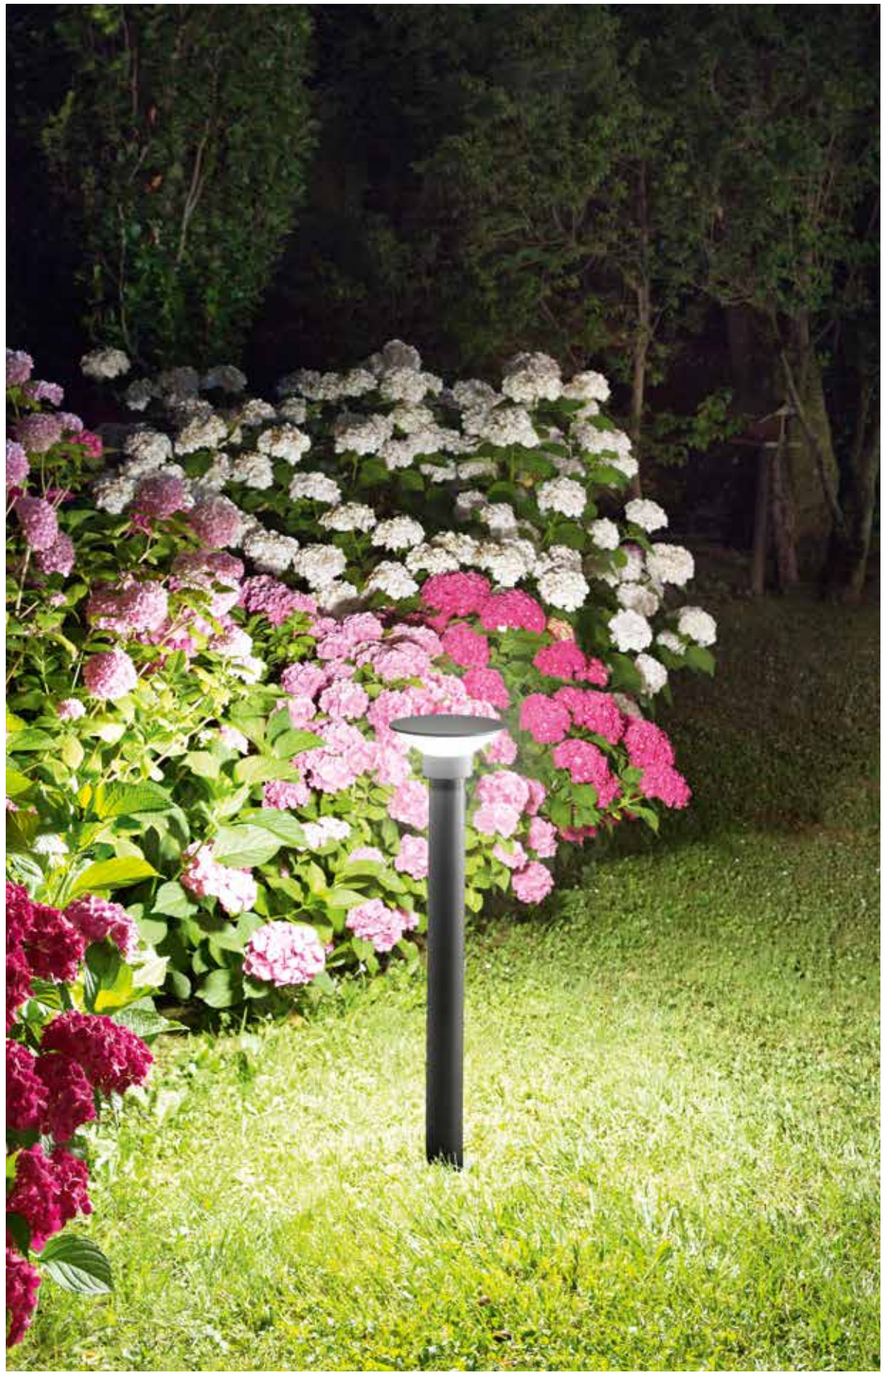


outdoor use · accommodation areas use · urban areas use

10-100% · IP54 · degree IK08 · UGR <16 · CRI >80 · LED SMD · CCT · RGB

technical information **WIZARD** WI-FI SMART INTEC




LED-WIZARD-AP
8031414870172
lumen — colour temp. RGB + CCT — colour — 400 lm
watt 10W
beam angle 110°





LED-WIZARD-P80
8031414870189
lumen — colour temp. RGB + CCT — colour — 400 lm
watt 10W
beam angle 110°



Control system easy installation

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Smart Intec WIFI · RF 2.4G control system · ALEXA e GOOGLE HOME voice control

WAMI

Collezione a LED integrato in alluminio pressofuso nei colori antracite o corten goffrato con temperatura colore selezionabile.
Integrated LED collection in die-cast aluminum in anthracite or corten embossed colors with selectable color temperature.

Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite
embossed corten

Selectable color temperature
3000K / 4000K


Driver
built-in




outdoor use · accommodation areas use · urban areas use

IP65 · degree IK08 · CRI >80 · LED SMD

technical information **WAMI**

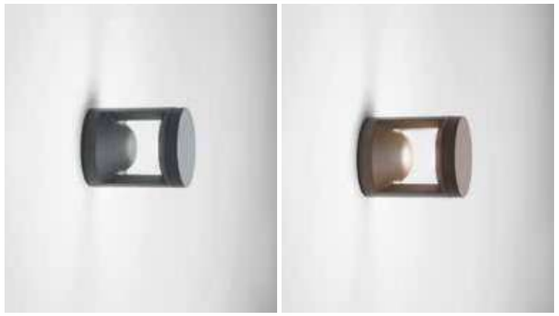


	colour temp.	colour
LED-WAMI-AP-ANT		
8031414890026		
lumen	1530 lm	
LED-WAMI-AP-BRO		
8031414890057		
lumen	1530 lm	
watt	10W	
beam angle	120°	






	colour temp.	colour
LED-WAMI-P25-ANT		
8031414890033		
lumen	1530 lm	
LED-WAMI-P25-BRO		
8031414890064		
lumen	1530 lm	
watt	12W	
beam angle	120°	






	colour temp.	colour
LED-WAMI-P80-ANT		
8031414890040		
lumen	1530 lm	
LED-WAMI-P80-BRO		
8031414890071		
lumen	1530 lm	
watt	12W	
beam angle	120°	




DISCOVERY

Collezione a LED integrato in alluminio con finitura antracite goffrato.
Aluminum collection LED lamp anthracite embossed finish.

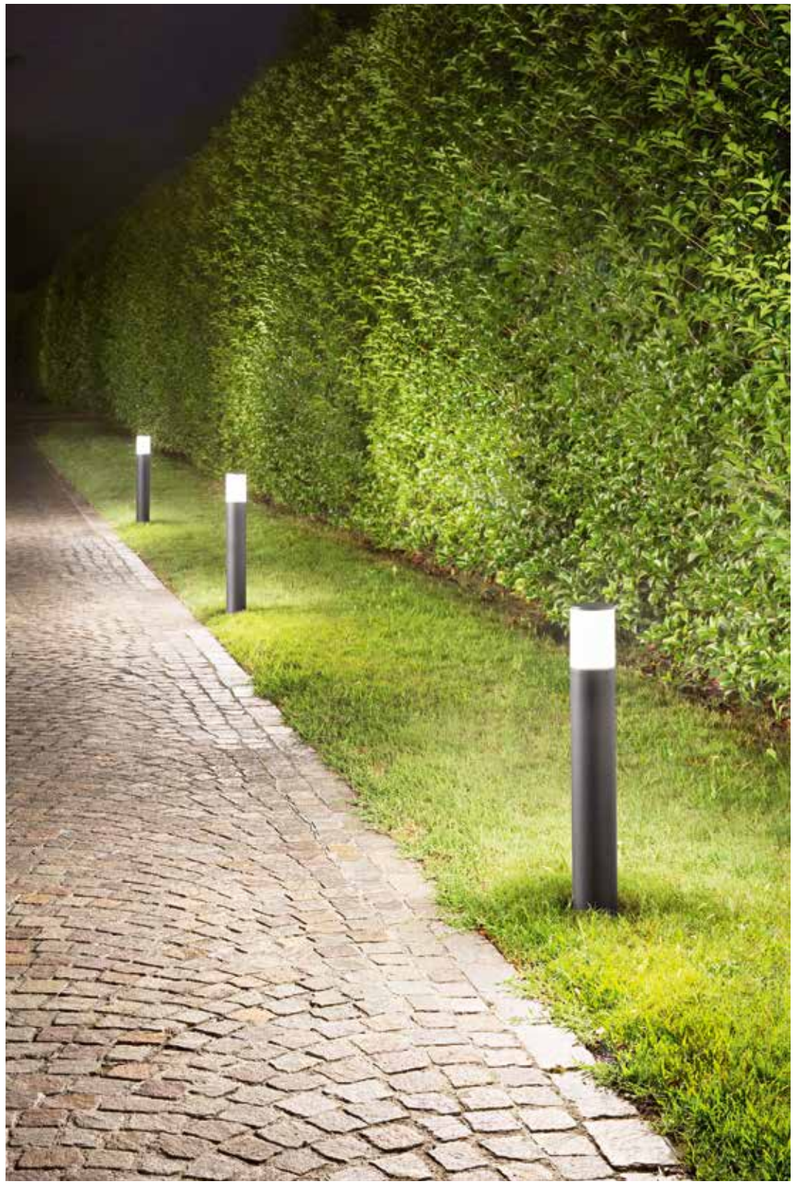

DISCOVERY

outdoor use · accommodation areas use · urban areas use

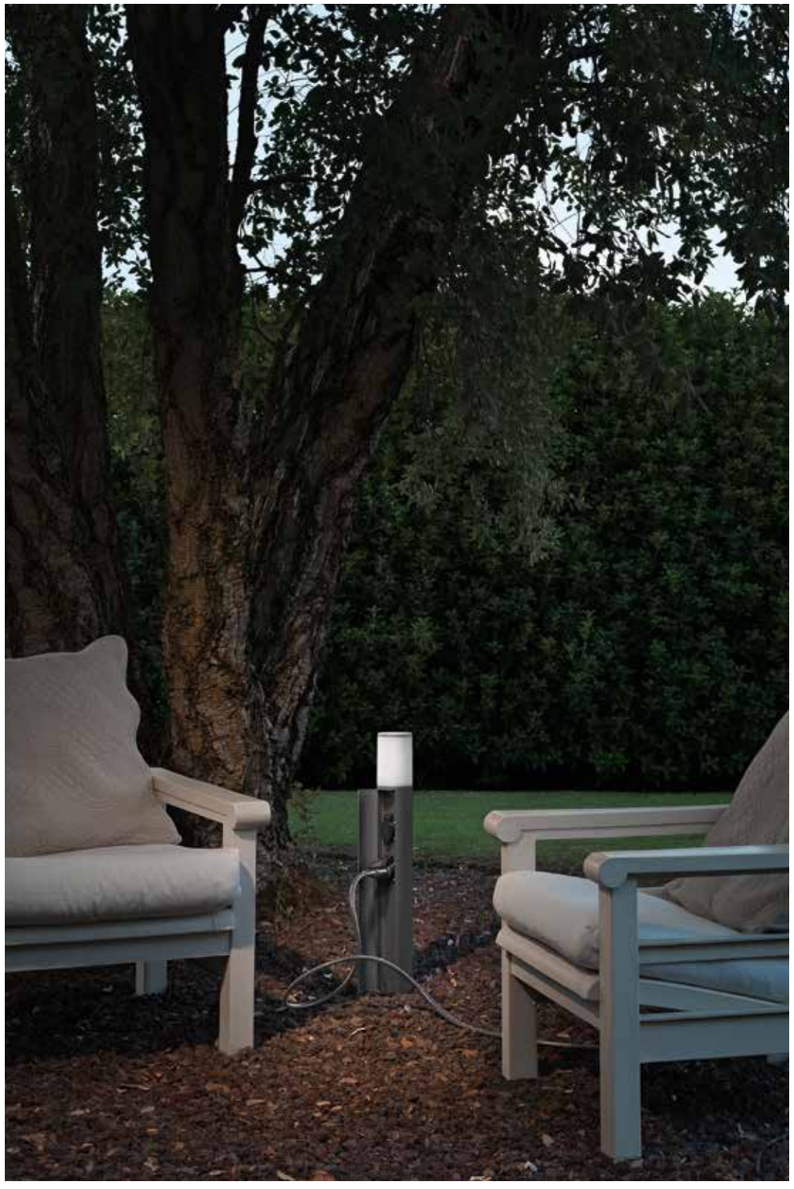

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in

IP54 · degree IK08 · CRI >85 · LED SMD



LED-DISCOVERY-AP
8031414877836

	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	





LED-DISCOVERY-P65
8031414877850


	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	





LED-DISCOVERY-HUB
8031414877867

	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	
	Plug 2X max 15A 250V 2500W	



IDEM

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite


Colour temperature
4000K

Driver
built-in




IP44 | degree IK07 | CRI >80 | LED SMD

technical information **IDEM**

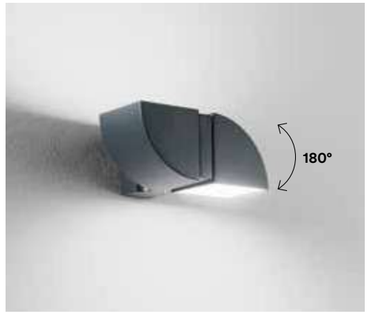

LED-IDEM-AP
8031414883103


	colour temp.	colour
lumen	840 lm	
watt	8W	
beam angle	120°	





LED-IDEM-P1
8031414883110

	colour temp.	colour
lumen	840 lm	
watt	8W	
beam angle	120°	



REVERSE

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K


Driver
integrato

Material
aluminum


Colour
embossed anthracite

Colour temperature
4000K

Driver
built-in

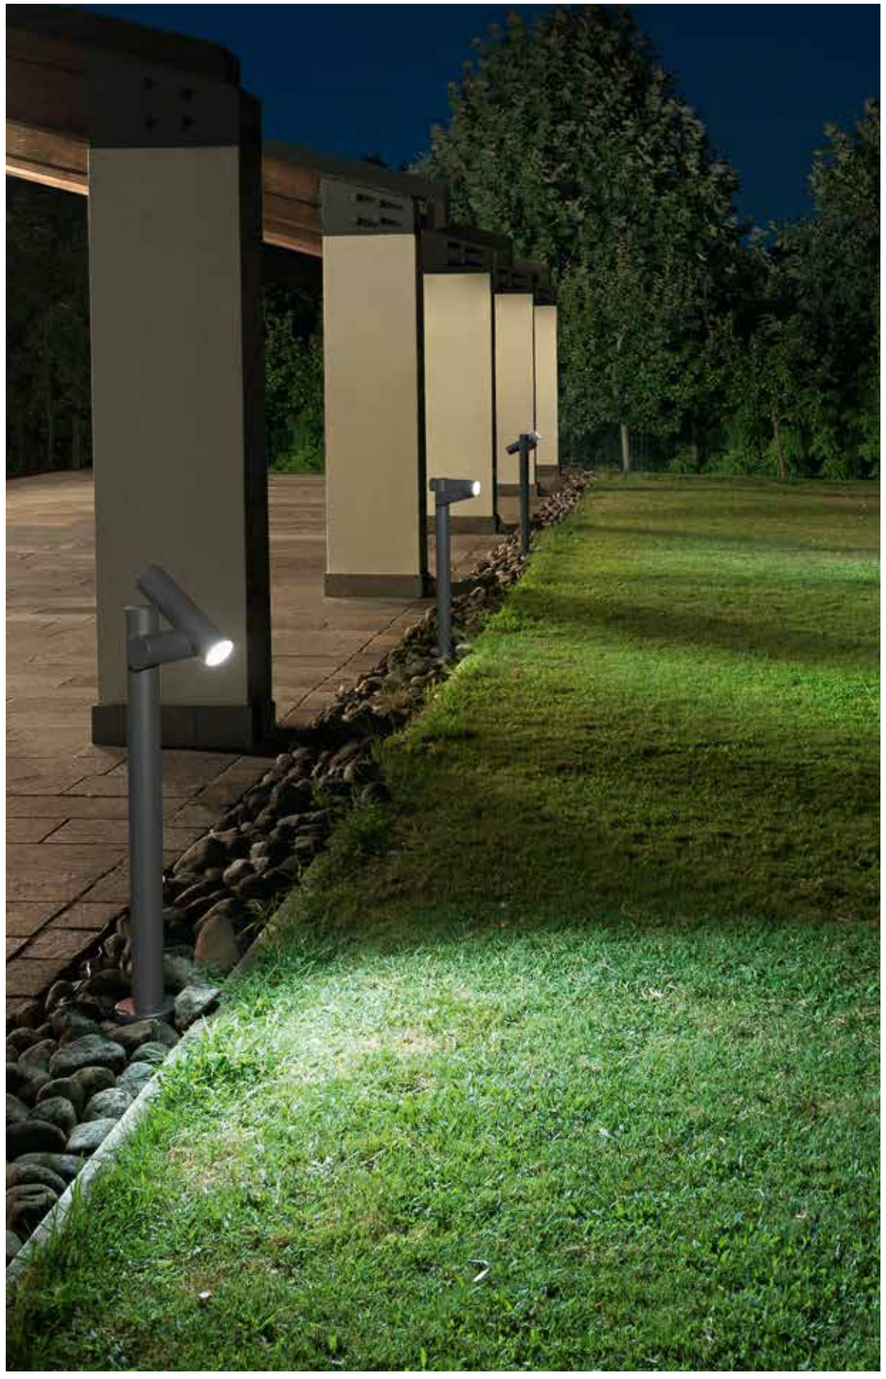


IP44 · degree IK07 · CRI >80 · LED SMD

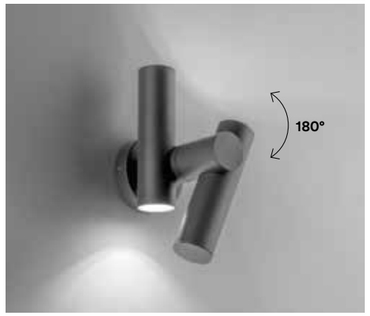

colour temp. | colour

LED-REVERSE-AP
8031414883127

lumen	620 lm
watt	7,5W
beam angle	120°






colour temp. | colour

LED-REVERSE-P1
8031414883134

lumen	460 lm
watt	5,3W
beam angle	120°



SINTESI

Lampada in alluminio a LED integrato con finitura bianco o nero goffrato.
Built in aluminum LED lamp white or black embossed finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
nero antracite

Temperatura colore
4000K


Driver
integrato

Material
aluminum

Colour
embossed white
embossed black

Colour temperature
4000K

Driver
built-in

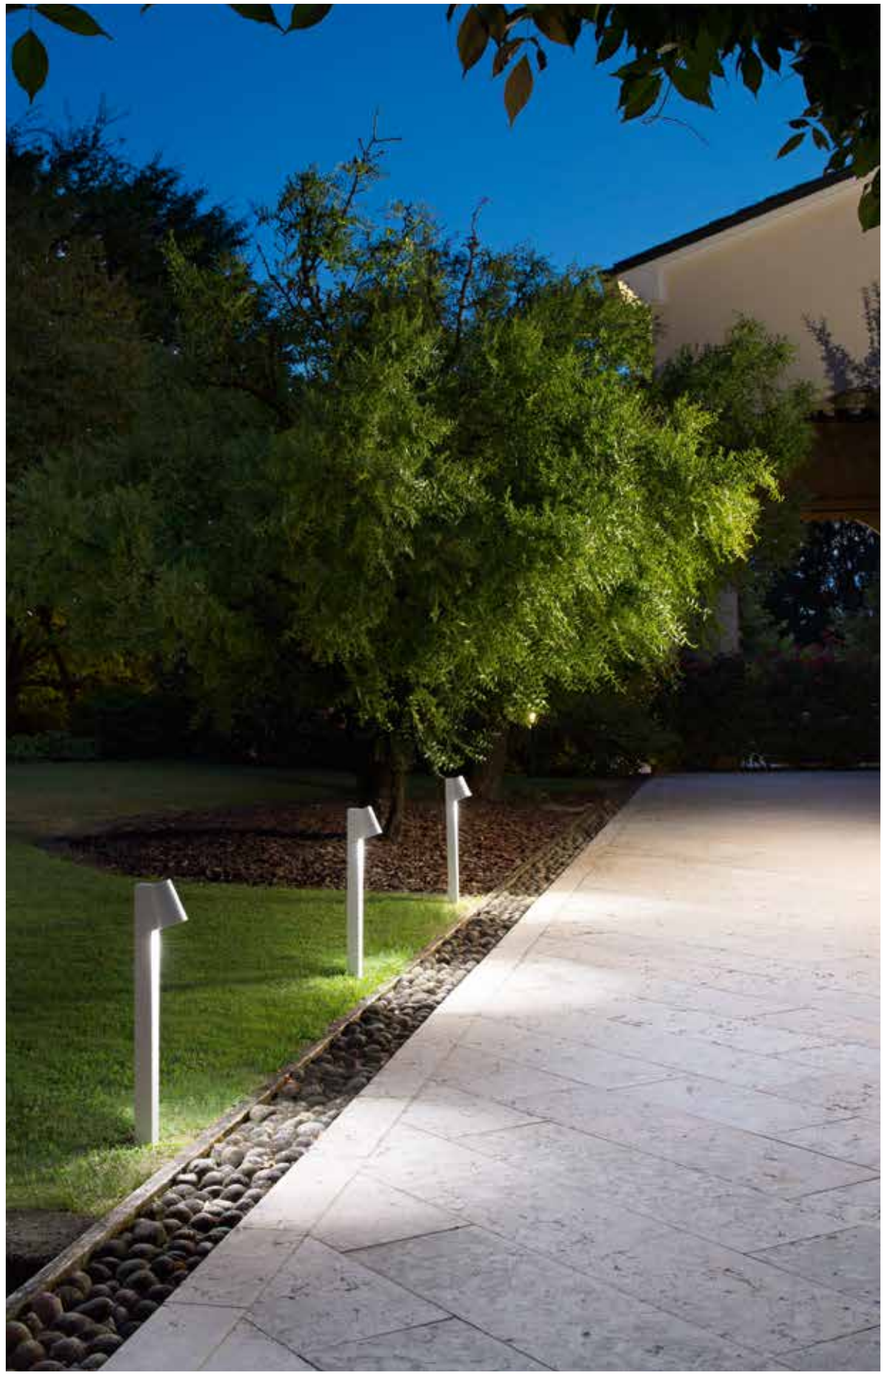






	colour temp.	colour
LED-SINTESI-AP BCO 8031414862207		
lumen	400 lm	
LED-SINTESI-AP NERO 8031414862221		
lumen	400 lm	
watt	6W	
beam angle	100°	







	colour temp.	colour
LED-SINTESI-P BCO 8031414862245		
lumen	400 lm	
LED-SINTESI-P NERO 8031414862252		
lumen	400 lm	
watt	6W	
beam angle	100°	



ALYSON

Lampada in alluminio pressofuso a LED integrato nei colori nero o bianco goffrato con diffusore il policarbonato.
Built in aluminum LED lamp white
or black embossed finish with PC diffuser.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed white
embossed black

Colour temperature
4000K

Driver
built-in

IP44 · degree IK07 · CRI >80 · LED SMD

technical information **ALYSON**






	colour temp.	colour
LANT-ALYSON/AP BCO		
8031440361514		
lumen	1300 lm	
LANT-ALYSON/AP		
8031440361552		
lumen	1300 lm	
watt	12W	
beam angle	120°	







	colour temp.	colour
LANT-ALYSON/P1 BCO		
8031440361538		
lumen	1300 lm	
LANT-ALYSON/P1		
8031440361569		
lumen	1300 lm	
watt	12W	
beam angle	120°	



BITT

Lampada in alluminio a LED integrato finitura antracite e corten goffrato.
Aluminum collection anthracite and corten colour built-in LED.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite
embossed corten

Colour temperature
4000K

Selectable color temperature
3000K / 4000K

Driver
built-in







	colour temp.	colour
LED-BITT-P28-ANT		
8031414883011		
lumen	1200 lm	
LED-BITT-P28-BRO		
8031414883028		
lumen	1284 lm	
watt	10W	
beam angle	120°	







	colour temp.	colour
LED-BITT-P76-ANT		
8031414883035		
lumen	1200 lm	
LED-BITT-P76-BRO		
8031414883042		
lumen	1284 lm	
watt	10W	
beam angle	120°	



NISMO

Collezione in alluminio a LED integrato finitura bianco goffrato.
Aluminum collection LED lamp white embossed finish.

outdoor use

accommodation areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed white

Colour temperature
4000K


Selectable color temperature
3000K / 4000K

Driver
built-in

IP54 · degree IK09 · CRI >85 · LED SMD



	colour temp.	colour
LED-NISMO-AP		
8031440361224		
lumen	1440 lm	
watt	12W	
beam angle	120°	





	colour temp.	colour
LED-NISMO-P60		
8031440361231		
lumen	1430 lm	
watt	12W	
beam angle	120°	







STATION

Collezione in acciaio finitura antracite.
Diffusore in policarbonato bianco.
Stainless steel collection anthracite finish.
White PC diffuser.

outdoor use | accommodation areas use | urban areas use

CE

IP44 | E27




colour

I-STATION-E27-SC2
8031414879571

1 x E27 MAX 60W

Plug 2X max 15A 250V 2500W






colour

I-STATION-SC2
8031414879564

Plug 2X max 15A 250V 2500W




Lampadina non inclusa /
Light bulb not included

UNDERWOOD

Collezione in metallo finitura antracite o corten.
Metal collection anthracite or corten finish.



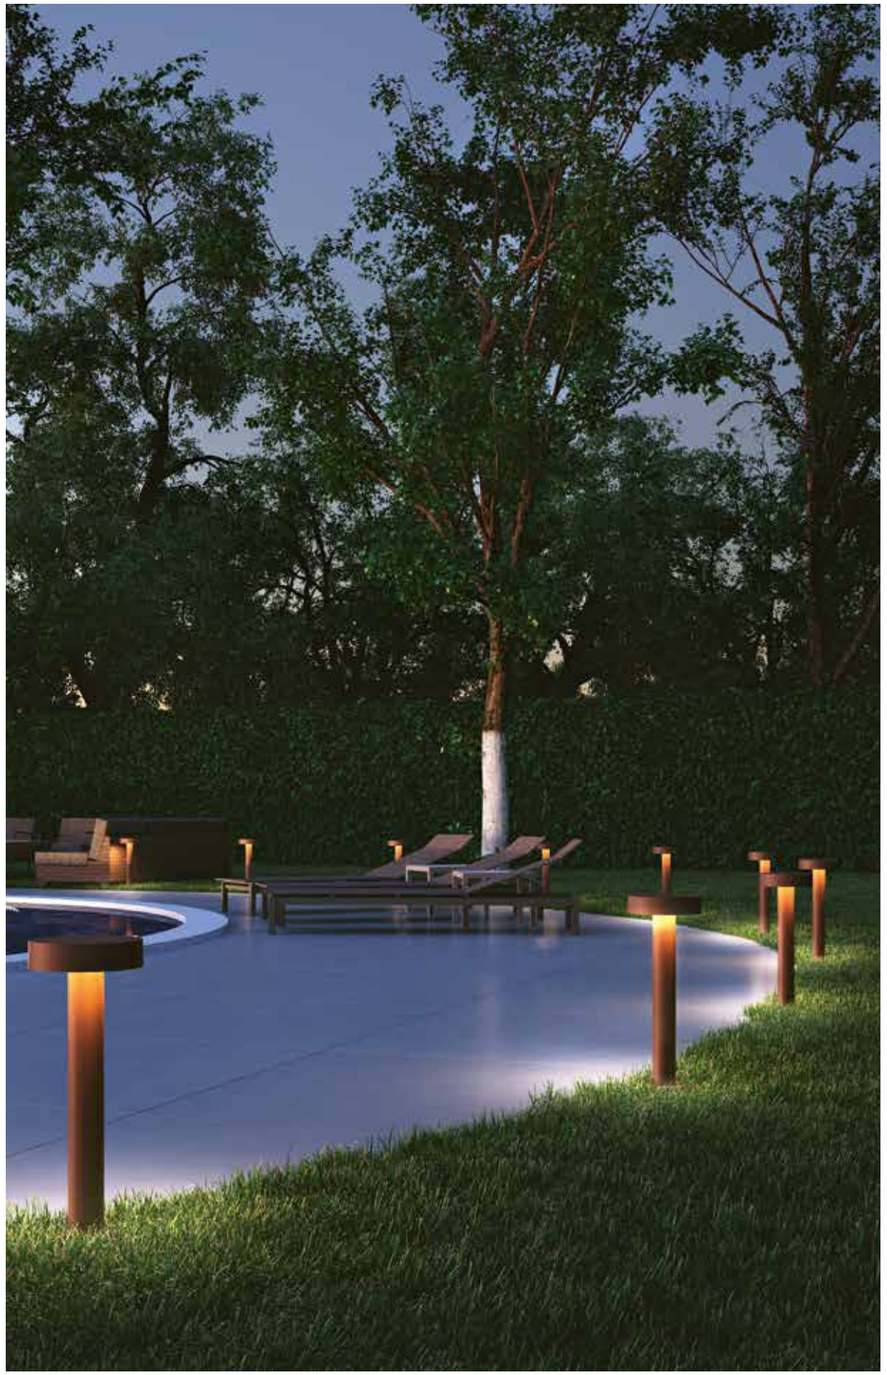


IP65 G9



	colour
I-UNDERWOOD-P70-ANT 8031414883059	
I-UNDERWOOD-P70-BRO 8031414883066	
4 x G9 LED	10W

Lampadina non inclusa / Light bulb not included




TOKYO

Collezione in acciaio inox con diffusore in policarbonato.
Finiture bianco, bronzo, nikel spazzolato e grigio antracite.
Stainless steel collection with polycarbonate diffuser.
White, bronze, brushed nikel and anthracite grey finishes.






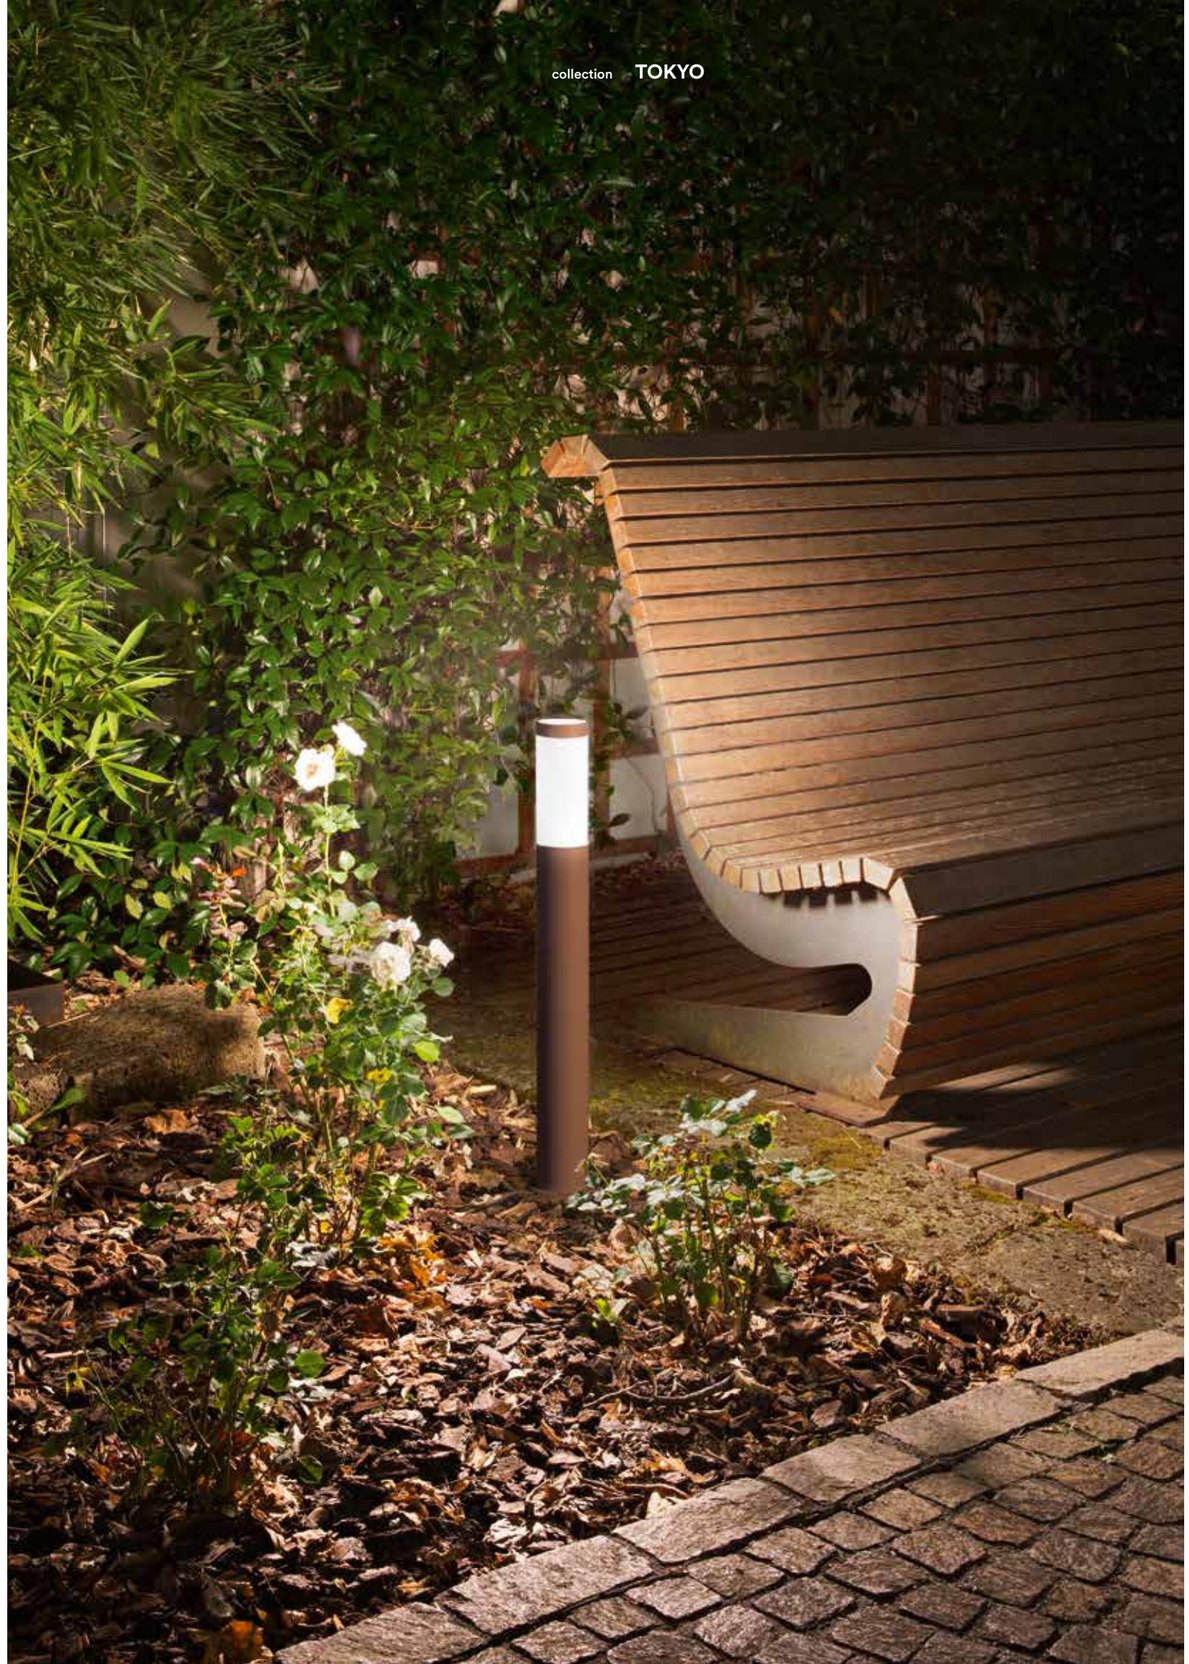

TOKYO



IP44 · degree IK07 · H160 Ø57 · E27

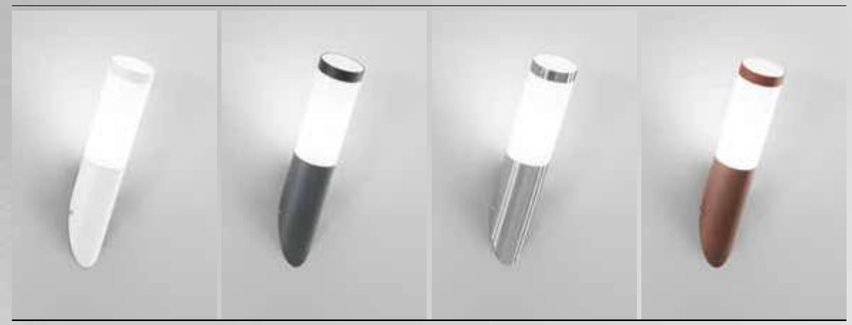




	colour
I-TOKYO-AP BCO 8031414864447	
I-TOKYO-AP ANT 8031414888795	
I-ST021 8031421451081	
I-TOKYO-AP BRO 8031414864423	

1 x E27 MAX 40W

H160 Ø57 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included






	colour
I-ST022-1100 8031421661084	
I-TOKYO-P BRO 8031414864393	

1 x E27 MAX 40W

H160 Ø57 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included





	colour
I-TOKYO-P70 BCO 8031414875320	
I-TOKYO-P70 ANT 8031414888818	
I-ST022-700 8031414877225	
I-TOKYO-P70 BRO 8031414871780	

1 x E27 MAX 40W

H160 Ø57 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

DROP

Collezione in alluminio finitura antracite con diffusore in policarbonato.
Aluminum collection anthracite finish with PC diffuser.

outdoor use | accommodation areas use | urban areas use



IP65 G9


CE

colour



I-DROP-P33-ANT
8031414883073

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb


Lampadina non inclusa / Light bulb not included

colour



I-DROP-P53-ANT
8031414883080

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb


Lampadina non inclusa / Light bulb not included

colour



I-DROP-P73-ANT
8031414882793

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

ETNA

Collezione in cemento grigio.
Gray concrete collection.

outdoor use · accommodation areas use · urban areas use

IP65 · concrete finish · GU10

CE




degree IK04

colour

I-ETNA-AP4
8031414866762

4 x GU10 MAX 10W



Connettore IP65 incluso / IP65 connector included


Lampadina non inclusa / Light bulb not included

degree IK05

colour

I-ETNA-P2
8031414867905

2 x GU10 MAX 10W



Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included

MASAI

Palo in cemento bianco.
Concrete post lamp white concrete colour.

outdoor use · accommodation areas use · urban areas use




IP65 · concrete finish · degree IK05 · R7s

colour

I-MASAI-P1
8031414868100

1 x R7S MAX 7W





PERRET

Collezione in cemento grigio con diffusore in acrilico.
Concrete collection gray finish with acrylic diffuser.

outdoor use · accommodation areas use · urban areas use

IP65 · concrete finish · degree IK04 · E14

colour

I-PERRET-AP
8031414871827

1 x E14 MAX 10W




IP65 · concrete finish · degree IK05 · E27

colour

I-PERRET-P60
8031414871834

1 x E27 MAX 15W





JAMMIN

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
metallo e PE

Colore
goffrato bianco
goffrato nero

Temperatura colore
3000K

Material
metal and PE


Colour
embossed white
embossed black

Colour temperature
3000K





	colour temp.	colour
LED-JAMMIN-L-BCO		
8031414884377		
lumen	60 lm - 9h	
LED-JAMMIN-L-NER		
8031414884384		
lumen	60 lm - 9h	
watt	2,2W	



IN&OUT | TOUCH DIMMER | IP54 | LED SMD

Accessori inclusi /
Included accessories

USB A 5V 2A
USB C 5V 2A
Cavo per ricarica /
Charging cable

5-7 hours
DC3.7V 4000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



BRIO

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale
PC

Colore
bianco
nero

Temperatura colore
3000K

Material
PC


Colour
white
black

Colour temperature
3000K





	colour temp.	colour
LED-BRIO-BCO		
8031414889594		
lumen	200 lm	
LED-BRIO-NER		
8031414889587		
lumen	200 lm	
watt	3,5W	



Accessori inclusi /
Included accessories

USB
Cavo per ricarica /
Charging cable

7 hours

DC3.7V 1200 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



DRINK

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato oro
goffrato corten

Temperatura colore
3000K

Material
metal


Colour
embossed white
embossed black
embossed gold
embossed corten

Colour temperature
3000K



IN&OUT · TOUCH DIMMER · IP54 · LED SMD

	colour temp.	colour
LED-DRINK-BCO 8031414885299		
lumen	190 lm - 9h	
LED-DRINK-NER 8031414885312		
lumen	190 lm - 9h	
LED-DRINK-ORO 8031414885329		
lumen	190 lm - 9h	
LED-DRINK-BRO 8031414885305		
lumen	190 lm - 9h	
watt	2,2W	



Accessori inclusi / Included accessories

Base per ricarica con USB e adattatore / Charging base with USB and adaptor

5-7 hours **DC3.7V 2×2200 mAh**
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

COCKTAIL

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato oro
goffrato corten

Temperatura colore
3000K

Material
metal

Colour
embossed white
embossed black
embossed gold
embossed corten

Colour temperature
3000K





IN&OUT · TOUCH DIMMER · IP54 · LED SMD

	colour temp.	colour
LED-COCKTAIL-BCO 8031414882496		
lumen	192 lm - 9h	
LED-COCKTAIL-NER 8031414882502		
lumen	192 lm - 9h	
LED-COCKTAIL-ORO 8031414885282		
lumen	192 lm - 9h	
LED-COCKTAIL-BRO 8031414882519		
lumen	192 lm - 9h	
watt	2,2W	



Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m

5-7 hours **DC3.7V 2×2200 mAh**
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

on photo: **DRINK**



on photo: **COCKTAIL**



CLIMAX

Lanterna ricaricabile.
Rechargeable lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo - acrilico

Colore
nero opaco

Temperatura colore
3000K

Material
metal - acrylic

Colour
matt black

Colour temperature
3000K



IN&OUT · TOUCH DIMMER · IP54 · LED SMD

	colour temp.	colour
LED-CLIMAX-L1		
8031414883141		
lumen	140 lm - 8h	
watt	2W	

	colour temp.	colour
LED-CLIMAX-LG1		
8031414883158		
lumen	140 lm - 8h	
watt	2W	





Accessori inclusi / Included accessories

USB
Cavo per ricarica /
Charging cable

5-7 hours

DC3.7V 2600 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable





OBERON

Lanterna ricaricabile.
Rechargeable lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
bianco

Temperatura colore
3000K

Material
metal

Colour
white

Colour temperature
3000K


IN&OUT · TOUCH DIMMER · IP54 · LED SMD







	colour temp.	colour
LANT-OBERON 8031414882526 lumen	168 lm - 9h	
watt	2,2W	




LANT-OBERON-KIT-AP
8031414882533

Kit staffa applique per lume /
Wall lamp bracket kit



LANT-OBERON-KIT-S
8031414882540

Kit sospensione per lume cavo 2 m /
Suspension kit 2 m cable



Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m

6 hours

DC3.7V 2×2200 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

GECO DJ

Lampada portatile LED RGBW in polietilene con speaker bluetooth incorporato.
LED portable RGBW lamp with speaker bluetooth included polyethylene material.

outdoor use · accommodation areas use · urban areas use

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE


Colour temperature
RGB + 4000K

Driver
included



CE · EMC · IN&OUT · IP44 · LED SMD

	colour temp.
I-GECO-DJ-L25 8031414862542	RGB +
lumen	180 lm - 8h
watt	3W



Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz — IP20

Telecomando infrarossi / IR remote control

Speaker 10W Bluetooth 4.0, distanza connessione max 15 m, durata 2h / 10w speaker bluetooth 4.0 connection distance max 15 m, lasting time 2h

6 hours — Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



GECO LED

Vaso e lampada LED RGBW in polietilene.
Vase and RGBW LED lamp in polyethylene.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP65 · LED SMD · RGB

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE

Colour temperature
RGB + 4000K


Driver
included






	colour temp.	
I-GECO-VASO-Q-L		
8031414862535		
lumen	RGB	+ 240 lm - 8h
I-GECO-VASO-Q-XL		
8031414864713		
lumen	RGB	+ 240 lm - 8h
watt		4W

	colour temp.	
I-GECO-VASO-R-L		
8031414862528		
lumen	RGB	+ 240 lm - 8h
I-GECO-VASO-R-XL		
8031414864720		
lumen	RGB	+ 240 lm - 8h
watt		4W





Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 5oHz — IP20

Telecomando infrarossi / IR remote control

6 hours — Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



	colour temp.	
I-GECO-SFERA-L30		
8031414862436		
lumen	RGB	+ 240 lm - 8h
I-GECO-SFERA-L40		
8031414862443		
lumen	RGB	+ 240 lm - 8h
I-GECO-SFERA-L50		
8031414862450		
lumen	RGB	+ 240 lm - 8h
watt		4W





	colour temp.	
I-GECO-CUBO-L30		
8031414862467		
lumen	RGB	+ 240 lm - 8h
I-GECO-CUBO-L40		
8031414862474		
lumen	RGB	+ 240 lm - 8h
I-GECO-CUBO-L50		
8031414862481		
lumen	RGB	+ 240 lm - 8h
watt		4W



GECO E27



outdoor use · accommodation areas use · urban areas use

Lampadine LED Intec consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION / Suggested LED Intec bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION

IN&OUT · IP65 · E27



SMART INTEC

Lampada LED SMART / LED SMART bulb	colour temp.
SMART-E27-RGBCCT 8031414872657	
watt	10W

Control system easy installation



Lampada LED RGBW classe F / LED RGBW bulb class F	colour temp.
I-LUMYA-E27-RGB 8031440354431	RGB + 935 lm
watt	10W

IR Control system

GECO E27

Collezione di lampade con attacco E27 in polietilene.
PE lamp with E27 lampholder.


outdoor use · accommodation areas use · urban areas use

IN&OUT · IP44 · E27



I-GECO-SFERA-S30
8031414864461


1 x E27 MAX 42W





I-GECO-SFERA-S40
8031414864454

1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



GECO E27

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP65 · E27

technical information **GECO E27**

CE



I-GECO-VASO-E-Q-L
8031414868506
I-GECO-VASO-E-Q-XL
8031414868131

1 x E27 MAX 42W



I-GECO-VASO-E-R-L
8031414868513
I-GECO-VASO-E-R-XL
8031414868520

1 x E27 MAX 42W



I-GECO-SFERA-E-L30
8031414868476
I-GECO-SFERA-E-L40
8031414868483
I-GECO-SFERA-E-L50
8031414868490

1 x E27 MAX 42W




I-GECO-SPK
8031414878437

Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family



I-GECO-CUBO-E-L30
8031414867943
I-GECO-CUBO-E-L40
8031414868117
I-GECO-CUBO-E-L50
8031414868124

1 x E27 MAX 42W



I-GECO-SPK
8031414878437


Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family


Accessori inclusi / Included accessories


Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug


IP44

Lampadina non inclusa /
Light bulb not included





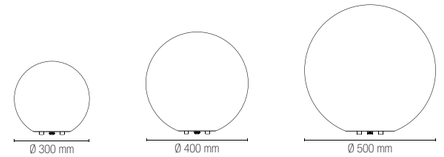

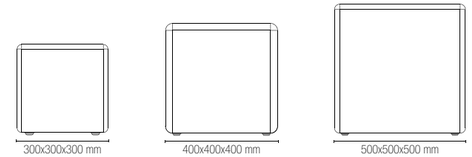

GECO E27

Piantana in polietilene con struttura in metallo bianco opaco o antracite.
PE floor lamp with metal structure white or anthracyte colour.

outdoor use · accommodation areas use · urban areas use






colour	Accessori inclusi / Included accessories
I-GECO-BAR-PT 8031414868599	Cavo 2,5 m con spina shuko / 2,5 m of cable with schuko plug IP44
1 x E27 MAX 42W	

Lampadina non inclusa /
Light bulb not included

IN&OUT · IP65 · E27

CE



colour	Accessori inclusi / Included accessories
I-GECO-SFERA-PT30 8031414864430	Cavo 2,5 m con spina shuko / 2,5 m of cable with schuko plug IP44
1 x E27 MAX 42W	

Lampadina non inclusa /
Light bulb not included



GECO LED SOLAR

Lampada portatile e gallegiante LED RGBW in polietilene con autoricarica solare.
PE LED portable and floating RGBW lamp with solar self charge.

outdoor use · accommodation areas use · urban areas use

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE

Colour temperature
RGB + 4000K

Driver
included

IP65 · LED SMD · RGB





	colour temp.	
I-GECO-CUBO-SOL30		
8031414870837		
lumen	RGB +	90 lm - 12h
I-GECO-CUBO-SOL40		
8031414870844		
lumen	RGB +	90 lm - 12h
watt		1,5W

	colour temp.	
I-GECO-SFERA-SOL30		
8031414870868		
lumen	RGB +	90 lm - 12h
I-GECO-SFERA-SOL40		
8031414870875		
lumen	RGB +	90 lm - 12h
watt		1,5W


Accessori inclusi / Included accessories


Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 5oHz — IP20

Telecomando infrarossi / IR remote control


>5 hours — **Carica alimentatore/ DC charge** Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

>15 hours — **Carica solare / Auto solar charge** Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable


Ø 300 mm
SFERA-SOL30


Ø 400 mm
SFERA-SOL40


300x300x300 mm
CUBO-SOL30


400x400x400 mm
CUBO-SOL40



MANDALA

Collezione in metallo antracite con diffusore in vetro trasparente.
Metal collection anthracite finish with trasparent glass diffuser.

outdoor use

accommodation areas use

CE

IN&OUT

IP44

E27





H115 Ø60


Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

colour

LANT-MANDALA/S1
8031414870684


1 x E27 MAX 60W



colour

LANT-MANDALA/AP
8031414862641

1 x E27 MAX 60W





YORK

Collezione in alluminio nero con diffusore in policarbonato.
Black aluminum collection with PC diffuser.

outdoor use

accommodation areas use

IN&OUT

IP44

E27





H115 Ø60


Lampadina consigliata /
Suggested light bulb

Lampadina non inclusa /
Light bulb not included

colour

LANT-YORK/S1
8031414862764


1 x E27 MAX 60W



colour

LANT-YORK/AP
8031414862757

1 x E27 MAX 60W



MIRAGE

Lanterna in metallo colore bianco o antracite diffusore in vetro trasparente.
Metal lantern white or anthracite finish with clear glass diffuser.

outdoor use · accommodation areas use · urban areas use






colour

LANT-MIRAGE-AP-BCO
8031414896394

LANT-MIRAGE-AP
8031414867059

1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included

IP44 · E27




colour

LANT-MIRAGE-S1-BCO
8031414896431

LANT-MIRAGE-S1
8031414867066

1 x E27 MAX 60W






colour

LANT-MIRAGE-L1-BCO
8031414896400

LANT-MIRAGE-L1
8031414869190

1 x E27 MAX 60W



Accessori inclusi / Included accessories

Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug

IP44




colour

LANT-MIRAGE-P90-BCO
8031414896424

LANT-MIRAGE-P90
8031414869206

1 x E27 MAX 60W





colour

LANT-MIRAGE-P200-BCO
8031414896417

LANT-MIRAGE-P200
8031414869213

1 x E27 MAX 60W



SKITTLE




Collezione in alluminio pressofuso colore antracite con diffusore in PC.
Collection in die-cast aluminum in anthracite colour with PC diffuser.



colour

I-SKITTLE-AP
8031414881819

1 x E27 MAX 28W






colour

I-SKITTLE-PL
8031414881826

1 x E27 MAX 28W






colour

I-SKITTLE-P65
8031414881833

1 x E27 MAX 28W





colour

I-SKITTLE-P100
8031414882434

1 x E27 MAX 28W





Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

ORBIT

Lanterna in acrilico PMMA e base in alluminio pressofuso nero.
Acrylic PMMA lantern with base in die cast aluminum black finish.



outdoor use · accommodation areas use · urban areas use

IP44 · E27


CE



colour

LANT-ORBIT/AP
8031414862658

1 x E27 MAX 60W





colour

LANT-ORBIT/S1
8031414862665

1 x E27 MAX 60W






colour

LANT-ORBIT/L1
8031414866335

1 x E27 MAX 60W






colour

LANT-ORBIT/P1
8031414862689

1 x E27 MAX 60W






colour

LANT-ORBIT/P3
8031414862702

3 x E27 MAX 60W

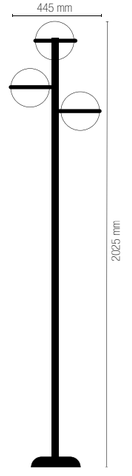

Lampadina non inclusa /
Light bulb not included

PRISMA

Lanterna in alluminio pressofuso colore antracite diffusore in vetro trasparente.
Die cast aluminum lantern anthracite finish with clear glass diffuser.





outdoor use · accommodation areas use · urban areas use


IP44 · E27




	colour	colour	colour	colour
	LANT-PRISMA/AP1A 8031414867103	**LANT-PRISMA/AP1B** 8031414867073	**LANT-PRISMA/S1** 8031414867080	**LANT-PRISMA/P1** 8031414869183
	1 x E27 MAX 60W	1 x E27 MAX 60W	1 x E27 MAX 60W	1 x E27 MAX 60W









H115 Ø60 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

CLOE

Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato.
Die cast aluminum built-in LED lantern
black embossed finish with PC diffuser.

outdoor use · accommodation areas use · urban areas use

IP44 · degree IK06 · CRI >80 · LED SMD

technical information **CLOE**

Materiale
alluminio pressofuso
+ policarbonato

Colore
goffrato nero

Temperatura colore
4000K

Driver
integrato

Material
die cast aluminum
+ polycarbonate

Colour
embossed black

Colour temperature
4000K

Driver
built-in

Life time and on/off
15.000h
>10.000 on/off











LANT-CLOE/AP1A
8031440361385

	colour temp.
lumen	1300 lm
watt	12W



LANT-CLOE/AP1A-S
8031440361408

	colour temp.
lumen	1300 lm
watt	12W



**Accessori integrati /
Built in accessories**

**Sensore di movimento regolabile /
Adjustable motion sensor**

ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	


LANT-CLOE/AP1B
8031440361392

	colour temp.
lumen	1300 lm
watt	12W



LANT-CLOE/S1
8031440361422

	colour temp.
lumen	1300 lm
watt	12W




LANT-CLOE/L1
8031440361415

	colour temp.
lumen	1300 lm
watt	12W




LANT-CLOE/P1
8031440361439

	colour temp.
lumen	1300 lm
watt	12W



LANT-CLOE/P3
8031440361446

	colour temp.
lumen	3900 lm
watt	3 × 12W

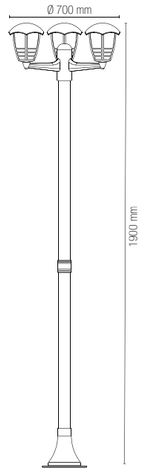

on photo: **CLOE**



on photo: **MEGAN**



MEGAN

Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato.
Die cast aluminum built-in LED lantern
black embossed finish with PC diffuser.

outdoor use · accommodation areas use · urban areas use

IP44 · degree IK06 · CRI >80 · LED SMD

CE · EMC

Materiale
alluminio pressofuso
+ policarbonato

Colore
goffrato nero

Temperatura colore
4000K

Driver
integrato

Material
die cast aluminum
+ polycarbonate

Colour
embossed black

Colour temperature
4000K

Driver
built-in



colour temp.

LANT-MEGAN/AP1A
8031440361453

lumen	1300 lm
watt	12W





colour temp.

LANT-MEGAN/AP1A-S
8031440361460

lumen	1300 lm
watt	12W



**Accessori integrati /
Built in accessories**

Sensore di movimento regolabile / Adjustable motion sensor


ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	



colour temp.

LANT-MEGAN/AP1B
8031440361477

lumen	1300 lm
watt	12W





colour temp.

LANT-MEGAN/S1
8031440361507

lumen	1300 lm
watt	12W






colour temp.

LANT-MEGAN/L1
8031440361484

lumen	1300 lm
watt	12W






colour temp.

LANT-MEGAN/P1
8031440361491

lumen	1300 lm
watt	12W






colour temp.

LANT-MEGAN/P3
8031440361606

lumen	3900 lm
	3 × 12W

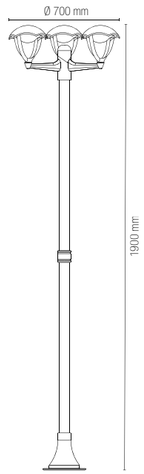

ROMA

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.
Die-cast aluminum lantern with clear glass diffuser.

outdoor use · accommodation areas use · urban areas use

IP44 · E27 · CE



colour

LANT-ROMA/AP1A BCO
8031434661217

LANT-ROMA/AP1A
8031430751172

1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included

colour

LANT-ROMA/AP1A-S
8031435921235

1 x E27 MAX 60W



**Accessori integrati /
Built in accessories**

Sensore di movimento regolabile / Adjustable motion sensor

ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	

colour

LANT-ROMA/AP1B BCO
8031434671216

LANT-ROMA/AP1B
8031430761171

1 x E27 MAX 60W



colour

LANT-ROMA/S1 BCO
8031434681215

LANT-ROMA/S1
8031430791178

1 x E27 MAX 60W





colour

LANT-ROMA/L1 BCO
8031436951248

LANT-PALETTO
8031414042203

1 x E27 MAX 60W




colour

LANT-ROMA/P1 BCO
8031436941249

LANT-ROMA/P1
8031430771170


1 x E27 MAX 60W



colour

LANT-ROMA/P3
8031430781179


3 x E27 MAX 60W

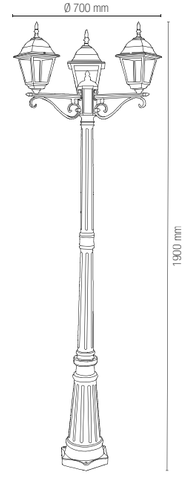

colour

LANT-ROMA-HEAD21
8031414878512

1 x E27 MAX 60W

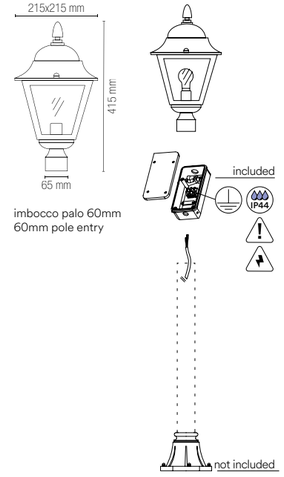

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

on photo: **ROMA**

on photo: **MILANO**



MILANO

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.
Die-cast aluminum lantern
with clear glass diffuser.







colour		colour	
LANT-MILANO/AP1A BCO 8031436931240		**LANT-MILANO/AP1B BCO** 8031436911242	
LANT-MILANO/AP1A 8031436921241	●	**LANT-MILANO/AP1B** 8031436901243	●
1 x E27 MAX 60W		1 x E27 MAX 60W	




Lampadina non inclusa /
Light bulb not included

IP44 E27

CE



colour		colour		colour		colour	
LANT-MILANO/S1 BCO 8031436851234		**LANT-MILANO/L1 BCO** 8031436891247		**LANT-MILANO/P1 BCO** 8031436871232			
LANT-MILANO/S1 8031436841235	●	**LANT-MILANO/L1** 8031436881248	●	**LANT-MILANO/P1** 8031436971246	●	**LANT-MILANO-HEAD23** 8031414878529	●
1 x E27 MAX 60W		1 x E27 MAX 60W		1 x E27 MAX 60W		1 x E27 MAX 60W	

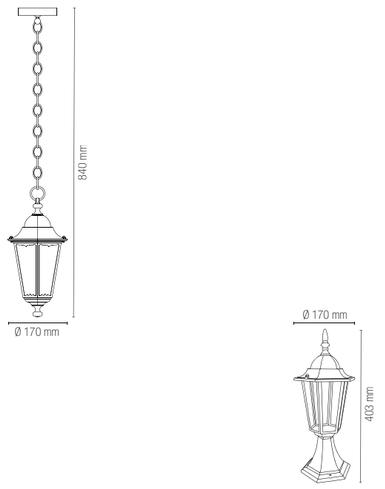

OUTDOOR APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

In.tec light

FIRENZE

Lanterne in alluminio pressofuso nero pennellato argento con diffusore in vetro trasparente.
Diecast aluminum lantern black
brush silver with clear glass diffuser.



outdoor use · accommodation areas use · urban areas use

IP44 · E27

CE



colour

LANT-FIRENZE/AP1A
8031430701177

1 x E27 MAX 60W





colour

LANT-FIRENZE/AP1B
8031430711176

1 x E27 MAX 60W






colour

LANT-FIRENZE/S1
8031430741173

1 x E27 MAX 60W






colour

LANT-FIRENZE/P1
8031430721175

1 x E27 MAX 60W






colour

LANT-FIRENZE/P3
8031430731174


3 x E27 MAX 60W

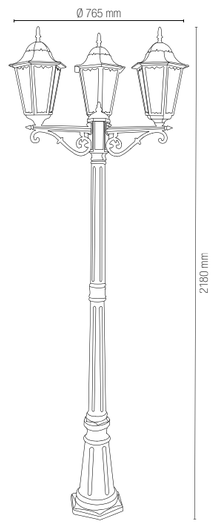

Lampadina non inclusa /
Light bulb not included

SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente.
Diecast aluminum lantern black
brush green with clear glass diffuser.

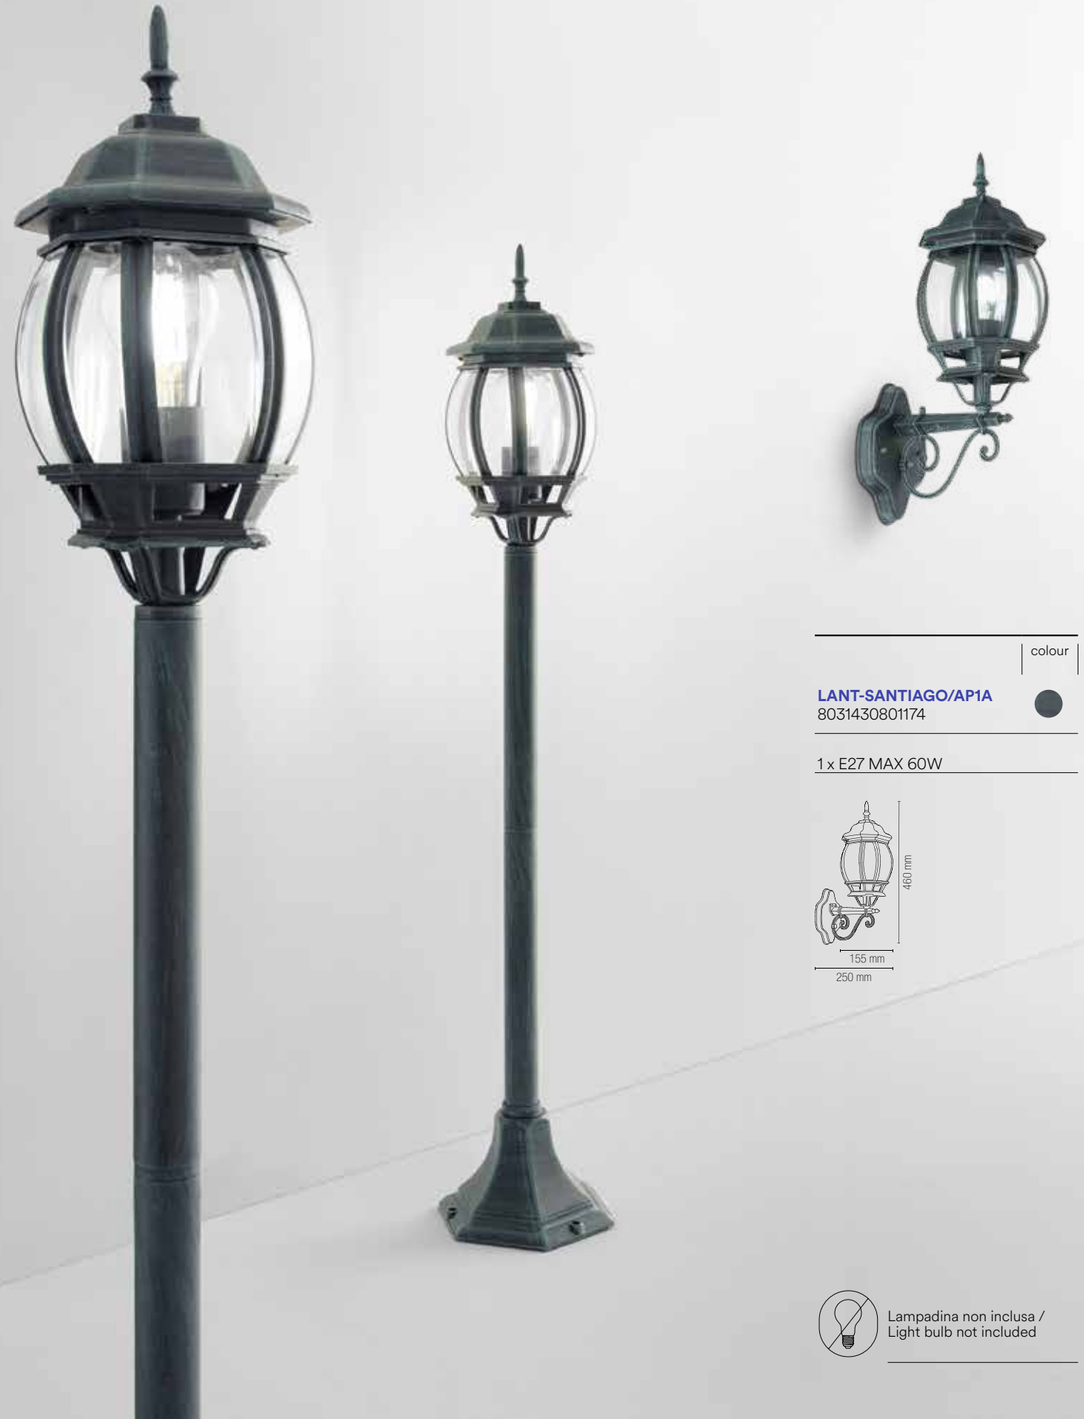

outdoor use | accommodation areas use | urban areas use

colour

LANT-SANTIAGO/AP1A
8031430801174

1 x E27 MAX 60W

Lampadina non inclusa /
Light bulb not included

IP44 E27



colour

LANT-SANTIAGO/AP1B
8031430811173

1 x E27 MAX 60W



colour

LANT-SANTIAGO/S1
8031430841170


1 x E27 MAX 60W



colour

LANT-SANTIAGO/P1
8031430821172


1 x E27 MAX 60W



colour

LANT-SANTIAGO/P3
8031430831171

3 x E27 MAX 60W

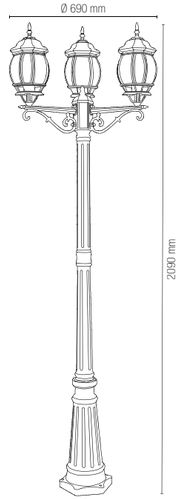

on photo: **SANTIAGO**



on photo: **VENEZIA**



VENEZIA

Lanterne in alluminio pressofuso con finiture in colore rame con diffusore in policarbonato trasparente.
Aluminum die-cast lantern with copper colour finish and clear polycarbonate diffuser.



outdoor use · accommodation areas use · urban areas use


IP44 · E27



colour

LANT-VENEZIA-AP1A
8031440312004

1 x E27 MAX 60W





colour

LANT-VENEZIA-AP1B
8031440311991

1 x E27 MAX 60W




Lampadina non inclusa /
Light bulb not included



colour

LANT-VENEZIA-S1
8031440313285

1 x E27 MAX 60W





colour

LANT-VENEZIA-L1
8031440311984

1 x E27 MAX 60W






colour

LANT-VENEZIA-P1
8031440313308

1 x E27 MAX 60W






colour

LANT-VENEZIA-P3
8031440313292

3 x E27 MAX 60W

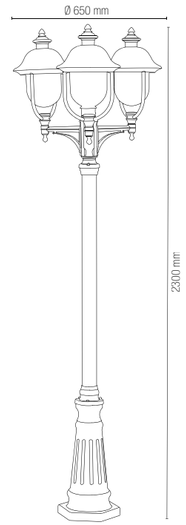

PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente.
Die-cast aluminum lantern in embossed black colour with clear acrylic diffuser.



outdoor use | accommodation areas use | urban areas use


IP44 E27



colour

LANT-PAVIA-AP1
8031440312028

1 x E27 MAX 60W






colour

LANT-PAVIA-S1
8031440312042

1 x E27 MAX 60W






colour

LANT-PAVIA-P1
8031440312035

1 x E27 MAX 60W

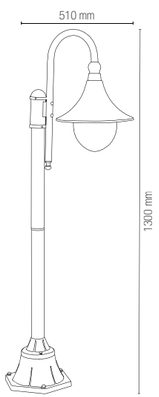




colour

LANT-PAVIA-P3
8031440312011

3 x E27 MAX 60W

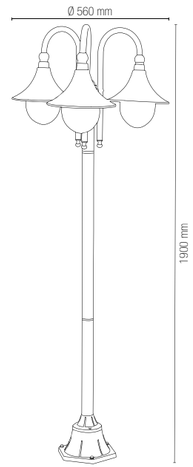

Lampadina non inclusa /
Light bulb not included

BRIGHTMAX

Modulo LED per lampioni con alimentatore OSRAM OT60 dali e mezzanotte virtuale
LED module for lampposts with OSRAM OT60 dali power supply and virtual midnight.



Materiale
alluminio

Colore
nero

Temperatura colore
2700K / 4000K

Driver
incluso
DALI

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
black

Colour temperature
2700K / 4000K


Driver
included
DALI


Life time and on/off
50.000h
>25.000 on/off

outdoor use · accommodation areas use · urban areas use

CRI >70 · LED SMD

CE EMC

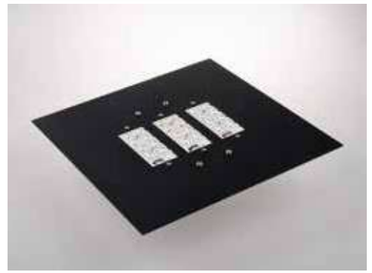




Staffa di fissaggio /
Mounitng bracket

* La piastra può essere tagliata fino a una dimensione di 220×220mm /
* The plate can be cut up to a size of 220×220mm

	colour temp.	colour
BRIGHTMAX-60C 8031414883899		
lumen	9600 lm	
BRIGHTMAX-60M 8031414883905		
lumen	9600 lm	
watt		60W
beam angle		360°


Fotometria del prodotto / Photometric curve




beam angle 360°

BRIGHTMAX-LENS
8031414883912
Lente bi-asimmetrico e tri-asimmetrico /
Be-asymmetric and three-asymmetric lens

Fotometria del prodotto / Photometric curve



beam angle be-asymmetric




beam angle three-asymmetric

Mezzanotte Virtuale / Virtual Midnight

Sistema indipendente della riduzione della luce in 5 STEP. Il modulo LED è programmato con un determinato programma (personalizzabile su richiesta) per ottimizzare il risparmio energetico durante le ore notturne. L'apparecchio prevede un sistema di autoapprendimento che determina in maniera autonoma, in base alle accensioni e agli spegnimenti pregressi, il punto di Mezzanotte Virtuale.
La Mezzanotte Virtuale è il punto che determina la riduzione di flusso in base al profilo impostato, lasciando invariato l'impianto. Per un corretto funzionamento del sistema Mezzanotte Virtuale è necessario un'accensione e uno spegnimento regolare quotidiano.

Indipendent system of light reduction in 5 steps. The LED module is set with a specific program (customizable) to optimize the energy saving time during night hours. The device is equipped with a outo-feedback system which determine indipendently, the Virtual Midnigh point based on the past switch on-switch-off time record.
Virtual Midnight is the point which determines the light flux reduction based on the set profile, keeping the electrical system untouched. For a correct working of the system of Virtual Midnight it is necessary a daily regular cycle of switching on-off.



Impostazioni di fabbrica / Default Settings

orario / hours	flusso / flux
ON ÷ 10:00	**100%**
10:00 ÷ 11:30	**75%**
11:30 ÷ 02:30	**50%**
02:30 ÷ 04:00	**75%**
04:00 ÷ OFF	**100%**



INCASSI E SEGNAPASSI
INGROUND AND WALK LIGHTS

BARRET

Segnapassi incasso.
Recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K


Driver
350mA 3,5V
corrente costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
350mA 3,5V
costant current
not included

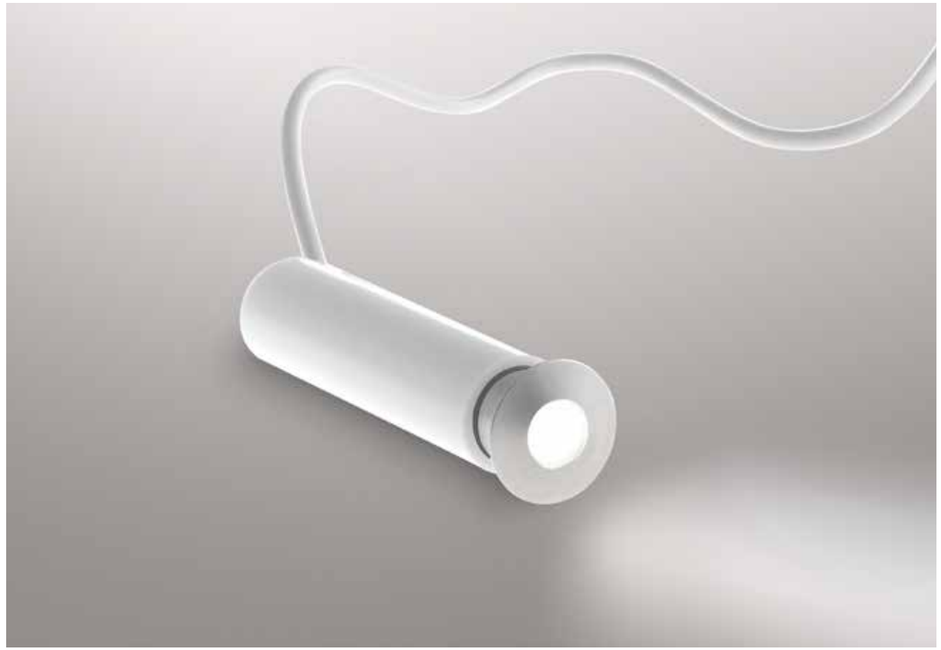


IP67 · CRI >80 · LED SMD




	colour temp.	colour	recessed box
LED-BARRET-R24C			
8031440355070			
lumen	85 lm		
LED-BARRET-R24			
8031440364416			
lumen	85 lm		

watt	1W
driver	3,5V DC
beam angle	40°
	Ø 16 mm




Fotometria del prodotto / Photometric curve



LED-BARRET-R24

Connessione in serie / Serie connection system **Driver p. 837-846**



Accessori inclusi / Included accessories



x1
Cavo 1 m /
1 m cable

SUBWAY

Segnapassi incasso.
Recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K / BLU

Driver
DC 12-24V
tensione costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
DC 12-24V
costant voltage
not included




IP67 · degree IK07 · CRI >80 · LED SMD




	colour temp.	colour
LED-SUBWAY-R1C		
8031414879342		
lumen	385 lm	
LED-SUBWAY-R1M		
8031414877263		
lumen	420 lm	
LED-SUBWAY-R1B		
8031414877270		
lumen	53 lm	

watt	12W
driver	24V
beam angle	15°
	Ø 24 mm




Fotometria del prodotto / Photometric curve



LED-SUBWAY-R1

Connessione in parallelo / Serie connection system **Driver p. 837-846 Controller p. 848-851**



Accessori inclusi / Included accessories



x1
Cavo 1 m /
1 m cable

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
acciaio

Colore
acciaio

Temperatura colore
4000K

Driver
12V 6W DC incluso

Material
steel

Colour
stainless steel

Colour temperature
4000K

Driver
12V 6W DC included




IP67 · CRI >80 · LED SMD




LED-RIDER-R6
8031436141236

	colour temp.	colour
lumen	360 lm	
watt	6 × 0,6W	
driver	12V 6W DC	
beam angle	120°	
	Ø 23 mm	



Fotometria del prodotto / Photometric curve



LED-RIDER-R6

Accessori inclusi / Included accessories

x6

x6
Cavo 1,5 m / 1,5 m cable

IP44

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
acciaio

Colore
acciaio

Temperatura colore
RGB

Driver
12V 6W incluso

Material
nikel

Colour
stainless steel

Colour temperature
RGB

Driver
12V 6W included




IP67 · RGB · CRI >80 · LED SMD



LED-RIDER-R6-RGB
8031439871260

	colour temp.	colour
lumen	RGB	
watt	6 × 0,6W	
driver	12V 6W DC	
beam angle	120°	
	Ø 23 mm	



Accessori inclusi / Included accessories

x6

x1
Cavo 1,5 m / 1,5 m cable

IR
Control system

IP44

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
lega di zinco

Colore
silver

Temperatura colore
4000K

Driver
12V 6W DC
incluso

Material
zinc alloy

Colour
silver


Colour temperature
4000K

Driver
12V 6W DC
included


IP65 · CRI >80 · LED SMD

	colour temp.	colour
LED-RIDER-R6-DIR		
8031439921279		
lumen	100 lm	

watt	6 × 0,6W
driver	12V 6W DC
beam angle	105°
	Ø 23 mm



Fotometria del prodotto / Photometric curve



LED-RIDER-R6-DIR

Accessori inclusi / Included accessories



x6



x1
Cavo 1,5 m /
1,5 m cable

IP44

IMPACT

Segnpassi incasso in alluminio.
Aluminum recessed steplight.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



Connessione in parallelo / Serie connection system
Driver p. 837-846
Controller p. 848-851

IP67 · degree IK10 · CRI >80 · LED SMD

EASY DOMOTICA



	colour temp.	colour	recessed box
LED-IMPACT24V-R1C			
8031414879298			
lumen	170 lm		
LED-IMPACT24V-R1M			
8031414879304			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
	Ø 35 mm









	colour temp.	colour	recessed box
LED-IMPACT24V-Q1C			
8031414879311			
lumen	170 lm		
LED-IMPACT24V-Q1M			
8031414879328			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
	Ø 35 mm






Fotometria del prodotto / Photometric curve



LED-IMPACT24V-R1C
LED-IMPACT24V-Q1C



LED-IMPACT24V-R1M
LED-IMPACT24V-Q1M

Accessori inclusi / Included accessories



x1
Cavo 1 m / 1 m cable

IP44

STEP

Segnpassi incasso in alluminio.
Aluminum recessed steplight.

outdoor use · accommodation areas use · urban areas use

IP67 · degree IK10 · CRI >80 · LED SMD

technical information **STEP**

EASY DOMOTICA

Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K


Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
silver

Colour temperature
3000K / 4000K


Driver
DC 24V
costant voltage
not included

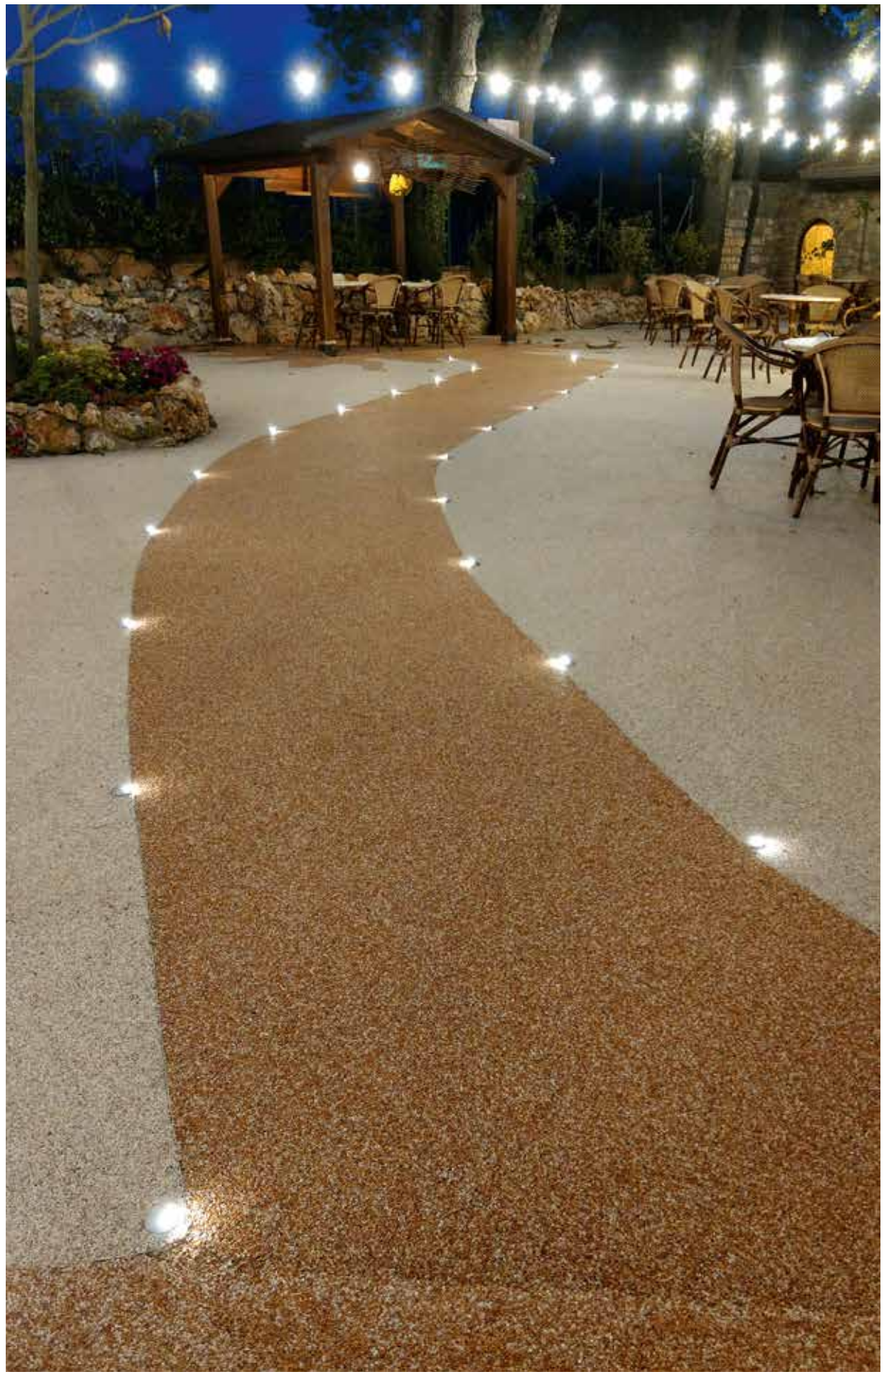



	colour temp.	colour	recessed box
LED-STEP24V-R1C			
8031414879250			
lumen	170 lm		
LED-STEP24V-R1M			
8031414879267			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
	Ø 35 mm








	colour temp.	colour	recessed box
LED-STEP24V-R4C			
8031414879274			
lumen	170 lm		
LED-STEP24V-R4M			
8031414879281			
lumen	170 lm		


watt	2W
driver	DC 24V
beam angle	105°
	Ø 35 mm








Connessione in parallelo /
Serie connection system
Driver p. 837-846
Controller p. 848-851

Fotometria del prodotto / Photometric curve


LED-STEP24V-R1C


LED-STEP24V-R1M


LED-STEP24V-R4C


LED-STEP24V-R4M

Accessori inclusi /
Included accessories



x1
Cavo 1 m /
1 m cable

WALK

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.

outdoor use | accommodation areas use | urban areas use

Materiale
acciaio inox

Temperatura colore
4000K

Driver
integrato

Material
stainless steel

Colour temperature
4000K


Driver
built-in



IP67 | degree IK10 | CRI >80 | LED COB



	colour temp.	colour	recessed box
LED-WALK-RT			
8031414882816			
lumen	1500 lm		
watt	12W		
beam angle	30°		



WALK






	colour temp.	colour
LED-WALK-Q7C		
8031414885824		
lumen	345 lm	
LED-WALK-Q7		
8031440355599		
lumen	375 lm	
watt	3W	
beam angle	30°	

recessed box










	colour temp.	colour
LED-WALK-R7C		
8031414885855		
lumen	345 lm	
LED-WALK-R7		
8031440355582		
lumen	375 lm	
watt	3W	
beam angle	30°	

recessed box










	colour temp.	colour
LED-WALK-Q11C		
8031414885800		
lumen	930 lm	
LED-WALK-Q11		
8031440355575		
lumen	990 lm	
watt	8W	
beam angle	30°	

recessed box











	colour temp.	colour
LED-WALK-R11C		
8031414885831		
lumen	930 lm	
LED-WALK-R11		
8031440355568		
lumen	990 lm	
watt	8W	
beam angle	30°	

recessed box





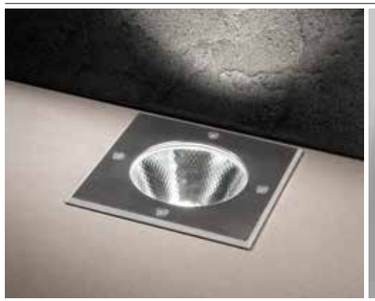




	colour temp.	colour
LED-WALK-Q14C		
8031414885817		
lumen	1400 lm	
LED-WALK-Q14		
8031440355551		
lumen	1500 lm	
watt	12W	
beam angle	30°	

recessed box











	colour temp.	colour
LED-WALK-R14C		
8031414885848		
lumen	1400 lm	
LED-WALK-R14		
8031440355544		
lumen	1500 lm	
watt	12W	
beam angle	30°	

recessed box







Fotometria del prodotto / Photometric curve



LED-WALK-Q7




LED-WALK-Q11




LED-WALK-Q14


Fotometria del prodotto / Photometric curve



LED-WALK-R7



LED-WALK-R11



LED-WALK-R14

HUMMER

Faro carrabile ad incasso in acciaio inox.
Driveover recessed light in stainless steel.



outdoor use · accommodation areas use · urban areas use

IP67 · degree IK10 · GU10

CE



	colour	recessed box	
I-HUMMER-R1 8031414893188		115 mm	144 mm Ø 105 mm Ø 105 mm
I-HUMMER-R1-ANT 8031414895830			
I-HUMMER-R1-BRO 8031414893195			

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included



	colour	recessed box	
I-HUMMER-R2 8031414893201		115 mm	144 mm Ø 105 mm Ø 105 mm
I-HUMMER-R2-ANT 8031414895847			
I-HUMMER-R2-BRO 8031414893218			

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included



	colour	recessed box	
I-HUMMER-R4 80314148772249		115 mm	144 mm Ø 105 mm Ø 105 mm
I-HUMMER-R4-ANT 8031414895854			
I-HUMMER-R4-BRO 8031414893225			

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included



	colour	recessed box	
I-HUMMER-UP 8031414893232		115 mm	145 mm Ø 105 mm Ø 105 mm
I-HUMMER-UP-ANT 8031414895861			
I-HUMMER-UP-BRO 8031414893249			

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included

DRIVE

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.

outdoor use | accommodation areas use | urban areas use






colour | recessed box

I-DRIVE-R1
8031440313261

1 x GU10 MAX 42W



Lampadina non inclusa / Light bulb not included






colour | recessed box

I-DRIVE-Q1
8031440313254

1 x GU10 MAX 42W



Lampadina non inclusa / Light bulb not included






colour | recessed box

I-DRIVE-M-R1
8031440313247

1 x GU10 MAX 42W



Lampadina non inclusa / Light bulb not included








colour | recessed box


I-DRIVE-E27
8031440313230

1 x E27 MAX 60W



Lampadina non inclusa / Light bulb not included

IP67 | degree IK10 | GU10 | E27

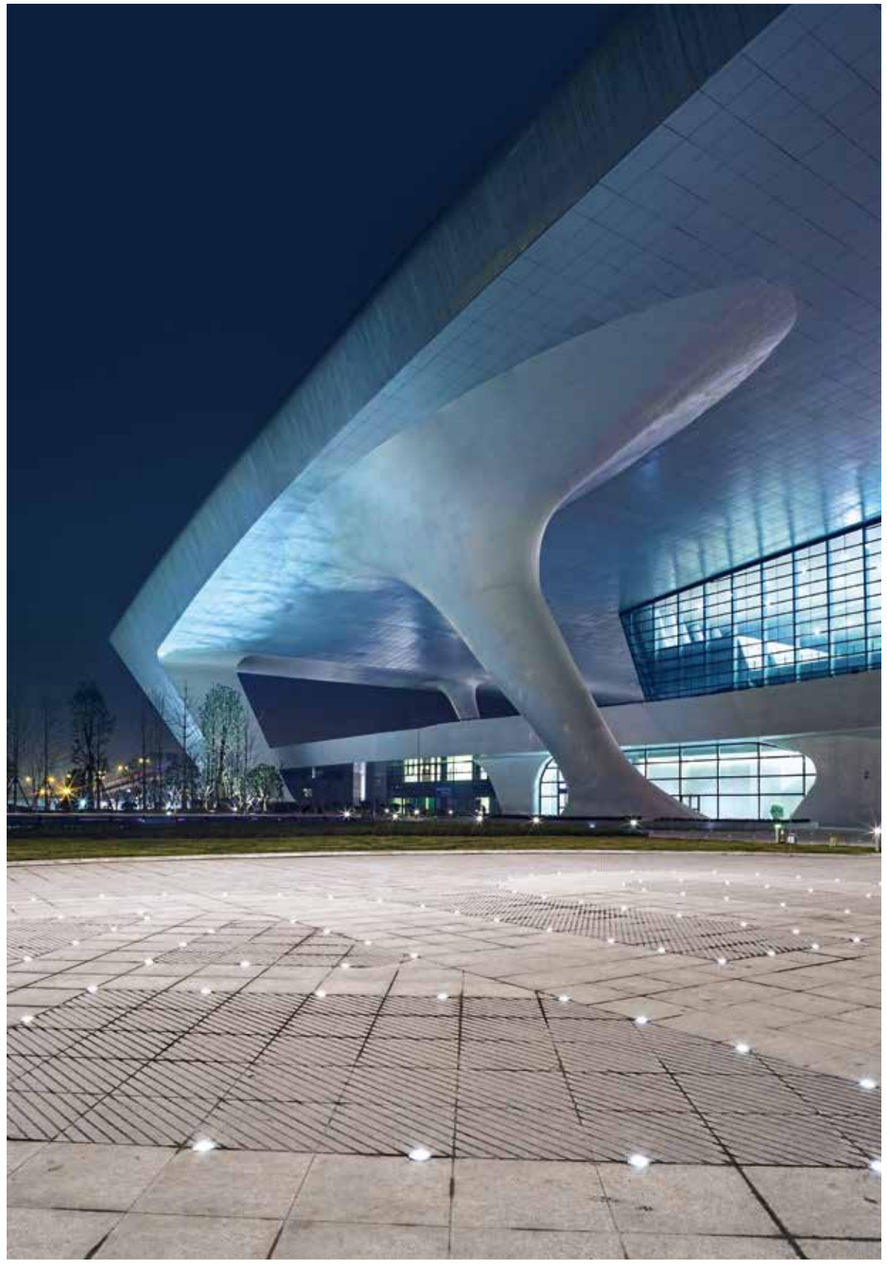

ELMO

Segnapassi in alluminio pressofuso.
Die-cast aluminum steplight.

outdoor use · accommodation areas use · urban areas use

IP54 · degree IK09 · LED SMD

Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K


Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
silver

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included

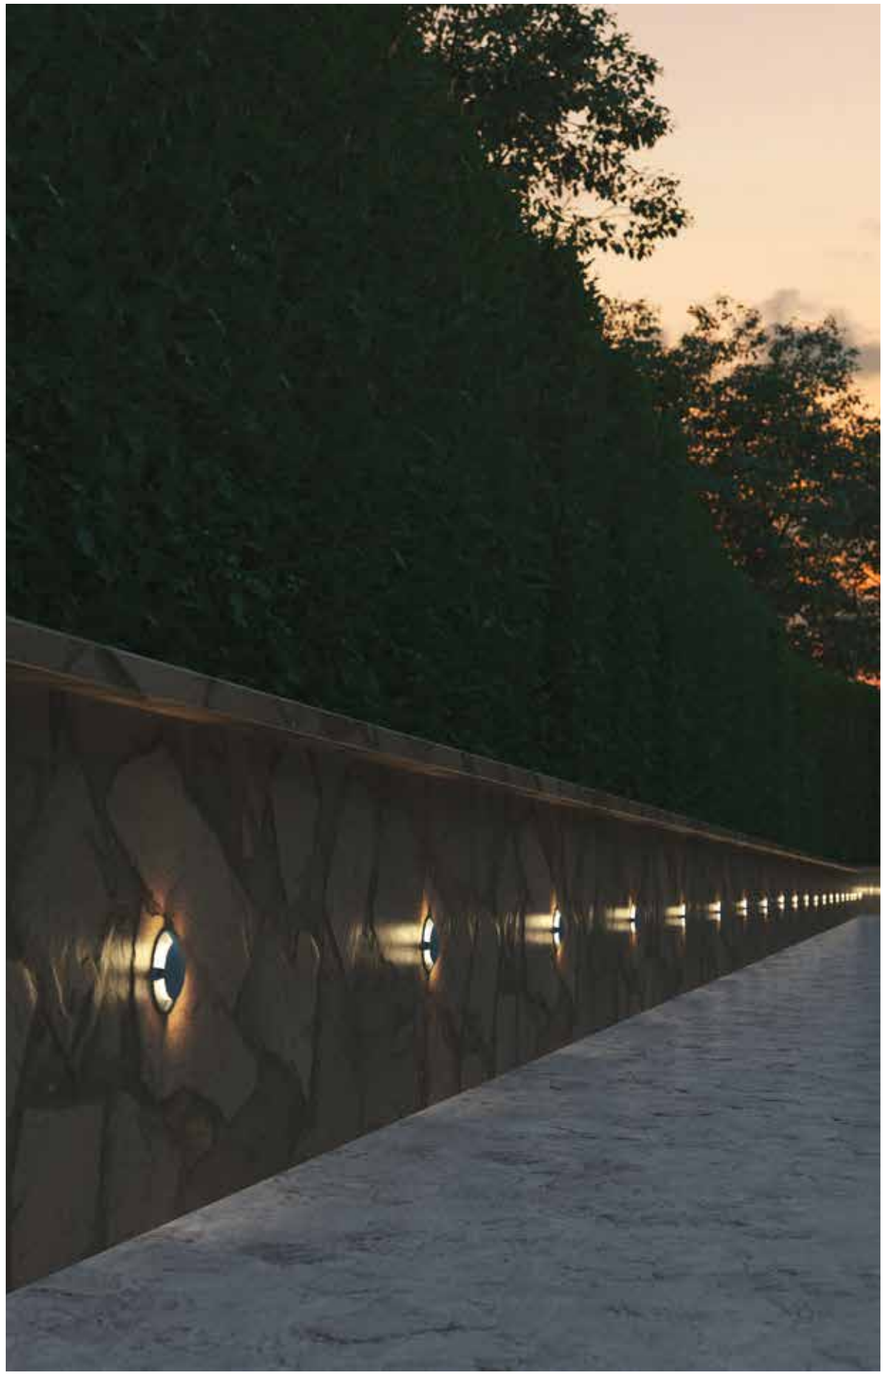

CE



	colour temp.	colour
LED-ELMO-R1C		
8031414882823		
lumen	59 lm	
LED-ELMO-R1M		
8031414882830		
lumen	65 lm	
watt	0,5W	
beam angle	90°	

Ø 70 mm · 15 mm



	colour temp.	colour
LED-ELMO-R2C		
8031414882847		
lumen	116 lm	
LED-ELMO-R2M		
8031414882854		
lumen	121 lm	
watt	1W	
beam angle	90° x 2	

Ø 70 mm · 15 mm



	colour temp.	colour
LED-ELMO-R4C		
8031414882861		
lumen	226 lm	
LED-ELMO-R4M		
8031414882878		
lumen	236 lm	
watt	2W	
beam angle	90° x 4	

Ø 70 mm · 15 mm



	colour temp.	colour
LED-ELMO-UPC		
8031414897247		
lumen	360 lm	
LED-ELMO-UPM		
8031414897254		
lumen	380 lm	
watt	3W	
beam angle	180°	

Ø 70 mm · 15 mm



I-ELMO-SPK
8031414888092

Accessori inclusi / Included accessories



x1
Cavo 30 cm /
30 cm cable

GROUND

Segnapassi in alluminio pressofuso colore antracite.
Die-cast aluminum steplight in anthracite colour.



outdoor use
accommodation areas use
urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
anthracite

Selectable color temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included


IP65 · degree IK10 · CRI >80 · LED SMD

technical information **GROUND**



LED-GROUND-R1
8031414897261


	colour temp.	colour
lumen	730 lm	
watt	6W	
beam angle	120°	





LED-GROUND-R2
8031414897278

	colour temp.	colour
lumen	1460 lm	
watt	12W	
beam angle	120°	





LED-GROUND-R4
8031414897285


	colour temp.	colour
lumen	1960 lm	
watt	16W	
beam angle	120°	





LED-GROUND-UP
8031414897292

	colour temp.	colour
lumen	1480 lm	
watt	12W	
beam angle	120°	





LED-GROUND-SPK
8031414897308

Accessori inclusi / Included accessories



x1
Cavo 1 m /
1 m cable

ONYX

Segnapassi in alluminio pressofuso finitura nero o bianco goffrato.
Die-cast aluminum steplight in embossed black or white finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
4000K


Driver
integrato

Material
aluminum

Colour
white
black

Colour temperature
4000K

Driver
built-in

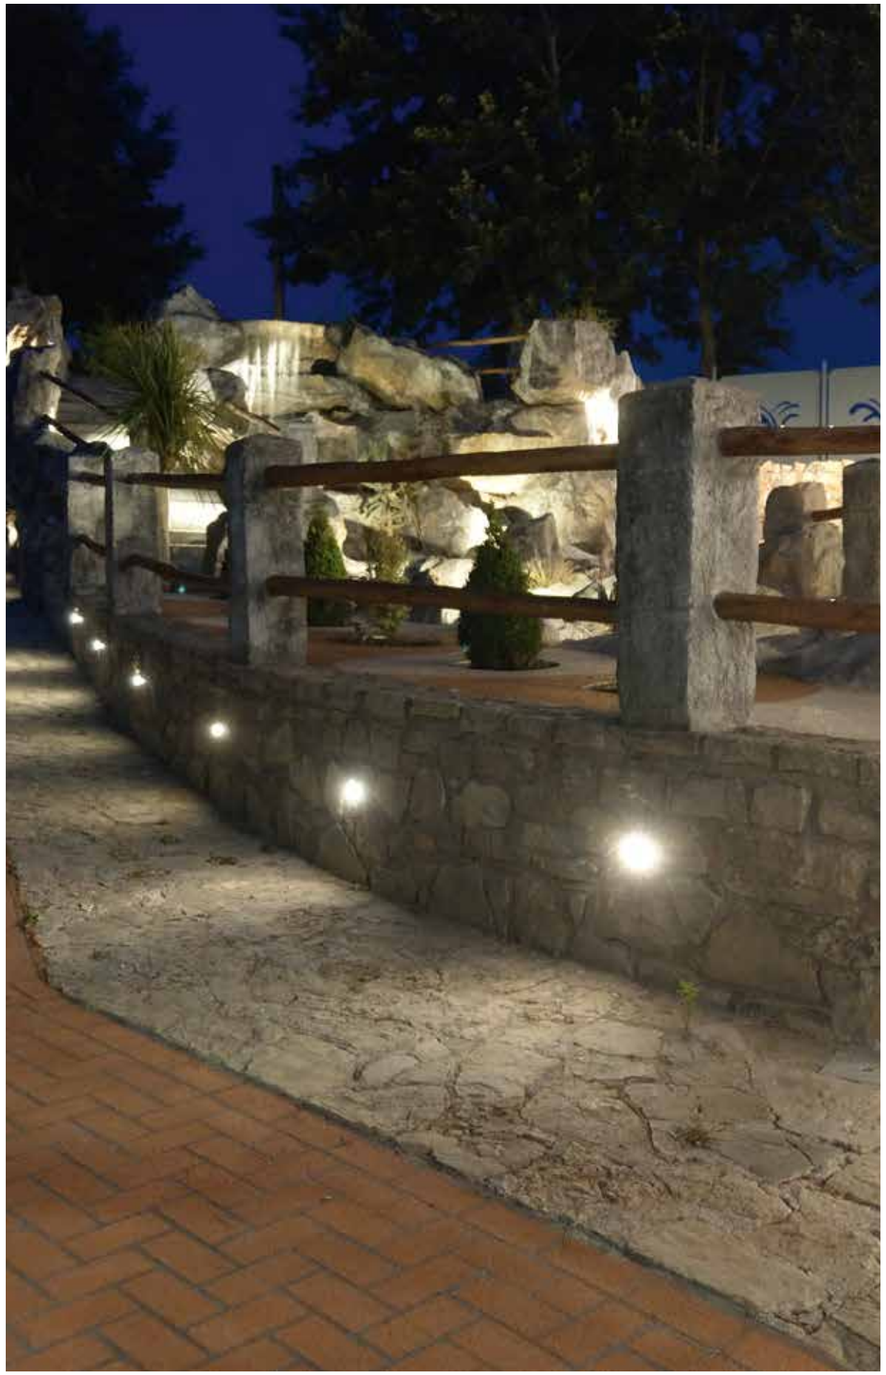

IN&OUT · IP54 · degree IK10 · CRI >80 · LED COB




	colour temp.	colour	recessed box
INC-ONYX-Q1 BCO			
8031414864089			
lumen	420 lm		
INC-ONYX-Q1 NERO			
8031440361262			
lumen	420 lm		
watt	2W		
beam angle	45°		
	Ø 68 mm		












	colour temp.	colour	recessed box
INC-ONYX-R1 BCO			
8031440361248			
lumen	420 lm		
INC-ONYX-R1 NERO			
8031440361255			
lumen	420 lm		
watt	2W		
beam angle	45°		
	Ø 68 mm		









STRATOS

Incasso segnapassi alloggio in cassetta di derivazione 503 o 504 o 506, con mascherine in alluminio nei colori bianco, antracite, silver o corten.
Downlight for recess box 503, 504 or 506, with aluminum masks in white, anthracite, silver or corten.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco
silver
nero
corten

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
integrato

Materiale
aluminum

Colore
bianco
silver
nero
corten

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
built-in



IN&OUT · IP65 · CRI >80 · LED SMD



INC-STRATOS-503
8031414888184
lumen 360 lm
watt 3W
beam angle 120°




INC-STRATOS-504
8031414888221
lumen 360 lm
watt 3W
beam angle 120°




INC-STRATOS-506
8031414888276
lumen 600 lm
watt 5W
beam angle 120°

colour temp.


colour	
INC-STRATOS-503W 8031414886890	
INC-STRATOS-503S 8031414888214	
INC-STRATOS-503B 8031414888191	
INC-STRATOS-503C 8031414888207	




scatola derivazione 503
503 junction box
non inclusa / not included




colour	
INC-STRATOS-504W 8031414888269	
INC-STRATOS-504S 8031414888252	
INC-STRATOS-504B 8031414888238	
INC-STRATOS-504C 8031414888245	




scatola derivazione 503
503 junction box
non inclusa / not included




scatola derivazione 504
504 junction box
non inclusa / not included



colour	
INC-STRATOS-506W 8031414888313	
INC-STRATOS-506S 8031414888306	
INC-STRATOS-506B 8031414888283	
INC-STRATOS-506C 8031414888290	



scatola derivazione 506L
506L junction box
non inclusa / not included



SLAB

Incasso segnapassi alloggio in cassetta di derivazione 503 o 502 o 506, con diffusore in vetro temperato bianco.
Down light for recess box 503 or 502 or 506 with white tempered glass diffuser.



Materiale
struttura in alluminio e diffusore in vetro temperato

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K / 5500K

Driver
integrato

Material
structure in aluminum and tempered glass diffuser

Colour temperature
4000K


Selectable color temperature
3000K / 4000K / 5500K

Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD




	colour temp.	colour
INC-SLAB-502		
8031414888177		
lumen	360 lm	
watt	3W	
beam angle	120°	
	Ø 60 mm	



molle incluse / spring included




	colour temp.	colour
INC-SLAB-503		
8031414864683		
lumen	440 lm	
watt	3W	
beam angle	120°	
	92 × 55 × 31 mm	






	colour temp.	colour
INC-SLAB-506		
8031414877232		
lumen	730 lm	
watt	5W	
beam angle	120°	
	163 × 60 × 50 mm	




Doppio sistema di fissaggio / Double fixing system




fissaggio incasso a muro o soffitto / Recessed wall or ceiling mounting

scatola derivazione 502E
502E junction box
non inclusa / not included

scatola derivazione 503
503 junction box
non inclusa / not included



scatola derivazione 506L
506L junction box
non inclusa / not included





BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506, nei colori bianco, antracite goffrato o corten.
Downlight for recess box 503 or 506 in white, embossed anthracite or corten.

indoor use · outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco goffrato
antracite goffrato
corten

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 3500K / 4000K

Driver
integrato

Material
polycarbonate

Colour
embossed white
embossed antracyte
corten

Colour temperature
4000K

Selectable color temperature
3000K / 3500K / 4000K

Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD






	colour temp.	colour
INC-BREEN-503 BCO		
8031414864690		
lumen	290 lm	
INC-BREEN-503 ANT		
8031414866809		
lumen	300 lm	
INC-BREEN-503 BRO		
8031414888139		
lumen	290 lm	
watt	3W	

	colour temp.	colour
INC-BREEN-506 BCO		
8031414888153		
lumen	380 lm	
INC-BREEN-506 ANT		
8031414888146		
lumen	380 lm	
INC-BREEN-506 BRO		
8031414888160		
lumen	380 lm	
watt	4W	


Doppio sistema di fissaggio / Double fixing system




fissaggio a muro / wall fixing




fissaggio su cassetta 503 / fixing on box 503
non inclusa / not included




scatola derivazione 503
503 junction box
non inclusa / not included





scatola derivazione 506L
506L junction box
non inclusa / not included



SMILE

Applique segnapassi a LED doppio fissaggio.
Fissaggio a muro e su cassetta 502E.
Aluminum LED walk light double mounting system.
Wall or 502E junction box mounting.

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
4000K


Driver
integrato

Material
aluminum

Colour
white
black

Colour temperature
4000K

Driver
built-in

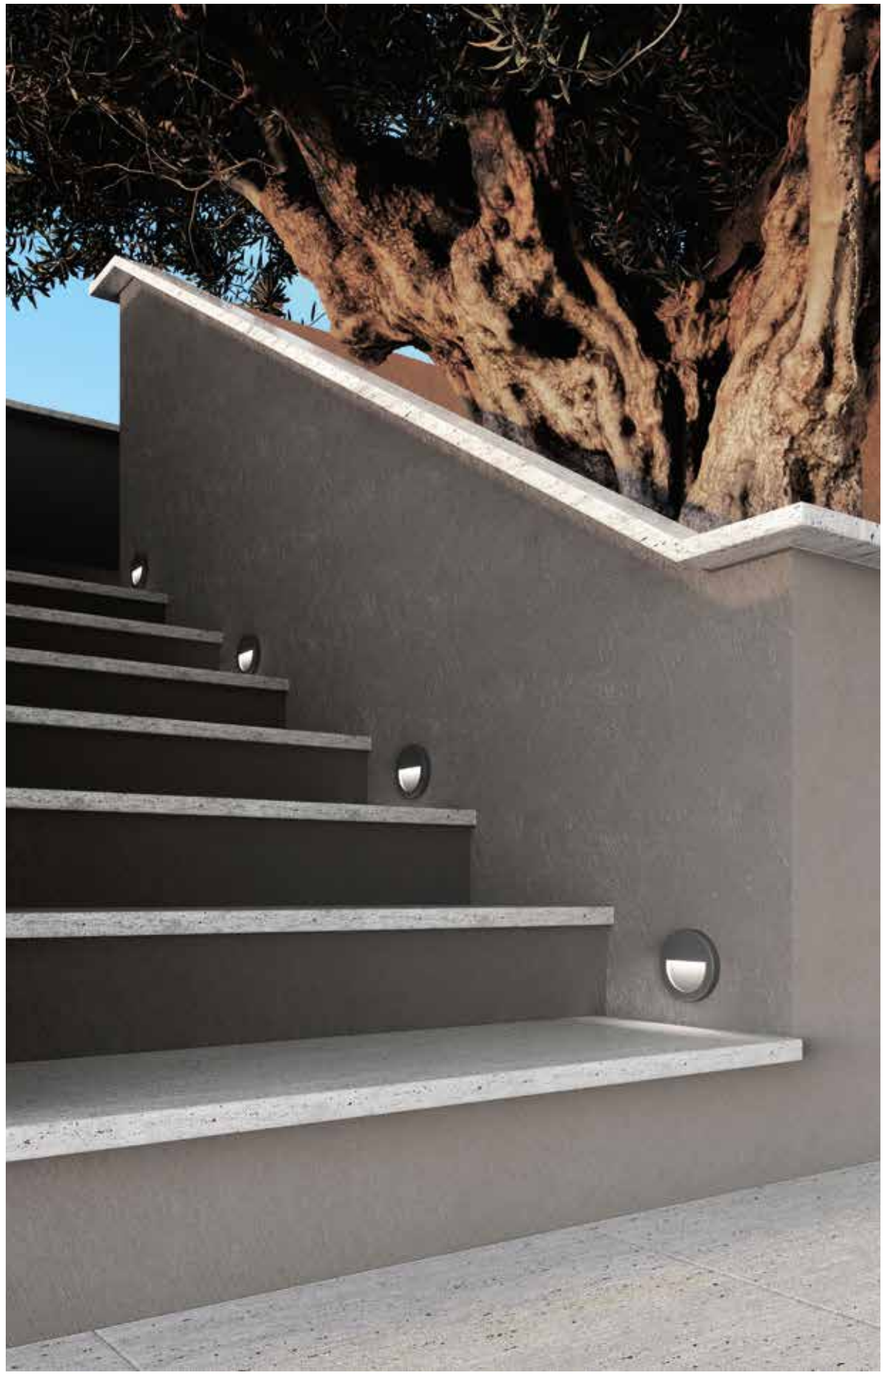

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · CRI >80 · LED SMD

technical information **SMILE**



LED-SMILE-BCO
8031414881574

	colour temp.	colour
lumen	300 lm	
watt	2,5W	
beam angle	100°	

Ø 110 mm · 15 mm

Doppio sistema di fissaggio / Double fixing system



fissaggio a muro / wall fixing

fissaggio su cassetta 502E / fixing on box 502E
non inclusa / not included



LED-SMILE-ANT
8031414881567

	colour temp.	colour
lumen	300 lm	
watt	2,5W	
beam angle	100°	

Ø 110 mm · 15 mm

Doppio sistema di fissaggio / Double fixing system



fissaggio a muro / wall fixing

fissaggio su cassetta 502E / fixing on box 502E
non inclusa / not included

indoor use · outdoor use · accommodation areas use · office use · commercial areas use

IN&OUT · IP65 · CRI >80 · LED SMD

Materiale
alluminio e placchette in acciaio

Colore
nikel
bianco

Temperatura colore
4000K

Driver
integrato

Material
aluminum and steel frames

Colour
nikel
white

Colour temperature
4000K

Driver
built-in

Accessori inclusi / Included accessories

2x placchette / frames

2x staffette / brackets


5m 120° **60"**
Sensore di movimento regolabile / Adjustable motion sensor

on 2 LUX
off 1000 LUX
Sensore crepuscolare / Crepuscolar sensor


Incasso segnapassi alloggio in cassetta di derivazione 503 funzione con sensore di movimento e crepuscolare con doppia placchetta in acciao intercambiabile nei colori nikel o bianco.
Down light for recess box 503 and double sensor function motion and crepuscular with double interchangeable steel frame in nikel or white colours.



	colour temp.	colour
INC-BOLT-503S		
8031414866281		
lumen	200 lm	
watt		3W
beam angle		120°



scatola derivazione 503
503 junction box
non inclusa / not included



Installare più prodotti lateralmente ad una distanza minimo di 2 m / Install multiple bolt 503S within 2 m of each other



Non installare i prodotti uno di fronte all'altro per possibile conflitto / Do not install products one of facing each other for possible conflict



Il prodotto non va installato vicino ad una fonte di luce intensa e costante superiore di 20 LUX / Do not install the bolt 503S near a light source with intensity over 20 LUX



Materiale
PC e placchette in acciaio

Colore
nikel
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PC and steel frames

Colour
nikel
white

Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in

Accessori inclusi / Included accessories


2x placchette / frames

2x staffette / brackets


Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciao intercambiabile nei colori nikel o bianco.
Down light for recess box 503 or 506L with double interchangeable steel frame in nikel or white colours.



	colour temp.	colour
INC-BOLT-503CCT		
8031414881543		
lumen	350 lm	
watt		3W
beam angle		120°




scatola derivazione 503
503 junction box
non inclusa / not included






	colour temp.	colour
INC-BOLT-506CCT		
8031414881550		
lumen	650 lm	
watt		5W
beam angle		120°



scatola derivazione 506L
506L junction box
non inclusa / not included



STEPLIGHT

Applique segnapassi a LED in termoplastica antracite.
Thermoplastic LED walk light anthracite finish.

outdoor use | accommodation areas use | urban areas use

IN&OUT | IP65 | degree IK07 | CRI >80 | LED SMD

Materiale
termoplastica

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic


Colour
embossed antracyte

Colour temperature
4000K

Driver
built-in



	colour temp.	colour
LED-STEPLIGHT		
8031414882304		
lumen	95 lm	
watt	1,5W	
beam angle	120°	





SHELBY

Applique segnapassi a LED in alluminio antracite.
Aluminum LED walk light anthracite finish.

outdoor use | accommodation areas use | urban areas use

IN&OUT | IP54 | degree IK07 | CRI >80 | LED SMD

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed antracyte


Selectable color temperature
3000K / 4000K

Driver
built-in



LED-W-SHELBY-130
8031440361002


	colour temp.	colour
lumen	445 lm	
watt	4W	
beam angle	120°	






LED-W-SHELBY-170
8031440361019

	colour temp.	colour
lumen	670 lm	
watt	6W	
beam angle	120°	





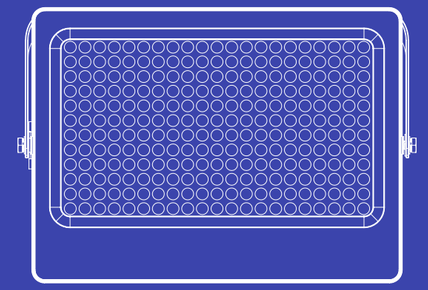

SOLARI

SOLAR LAMPS

KIOTO

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
alluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in






IP44 | LED SMD

	colour temp.	colour
LED-KYOTO-AP 8031414883868		
lumen	300 lm	
watt	2,5W	
beam angle	120°	



	colour temp.	colour
LED-KYOTO-P80 8031414883875		
lumen	300 lm	
watt	2,5W	
beam angle	120°	




Accessori inclusi / Included accessories

Pannello solare / Solar panel

Lithium 3,7V 2200mAh
Batteria non sostituibile / Battery non replaceable

max 4m 90° **25"**
Sensore di movimento / Adjustable motion sensor

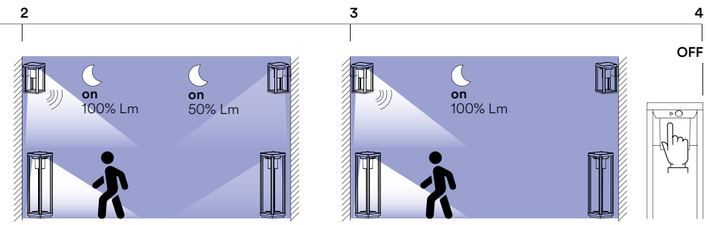

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

ENYA

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
alluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in






IP44 | LED SMD

	colour temp.	colour
LED-ENYA-AP 8031414883844		
lumen	600 lm	
watt	5W	
beam angle	120°	



	colour temp.	colour
LED-ENYA-P80 8031414883851		
lumen	600 lm	
watt	5W	
beam angle	120°	




Accessori inclusi / Included accessories

Pannello solare / Solar panel

Lithium 3,7V 2200mAh
Batteria non sostituibile / Battery non replaceable

max 4m 90° **25"**
Sensore di movimento / Adjustable motion sensor

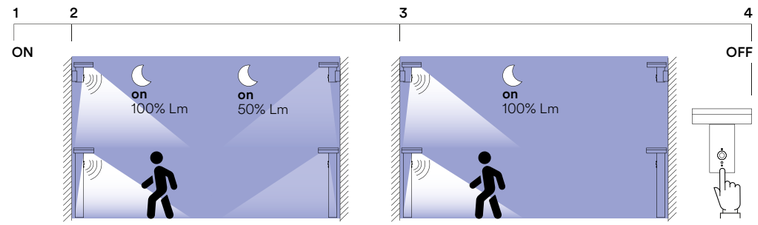

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

TED

Applique LED in alluminio antracite con sensore e pannello solare.
Applique LED in alluminio antracite con sensore e pannello solare.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
alluminum

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP54 · LED SMD

	colour temp.	colour
LED-TED-AP 8031414883837		
lumen	300 lm	
watt	3W	
beam angle	120°	

75 mm · 173 mm · 143 mm


Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 2200 mAh
Batteria non sostituibile /
Battery non replaceable

Sensore di movimento /
Adjustable motion sensor

max 4m 90° **25"**

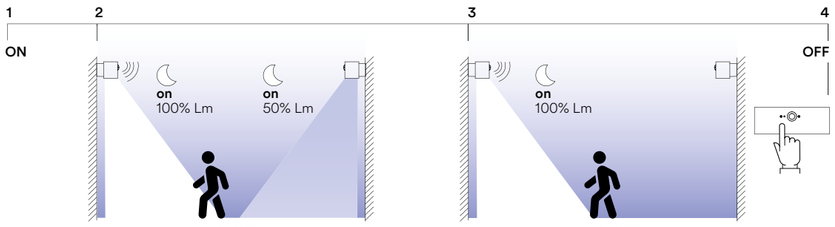

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

ALBERT

Applique LED in alluminio antracite con sensore e pannello solare.
Aluminum LED wall light antracyte finish with sensor and solar panel.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
alluminum

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP54 · LED SMD

	colour temp.	colour
LED-ALBERT-AP 8031414058716		
lumen	300 lm	
watt	2,5W	
beam angle	120°	

181 mm · 91 mm · 66 mm


Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 2000 mAh
Batteria non sostituibile /
Battery non replaceable

Sensore di movimento /
Adjustable motion sensor

max 4m 90° **25"**

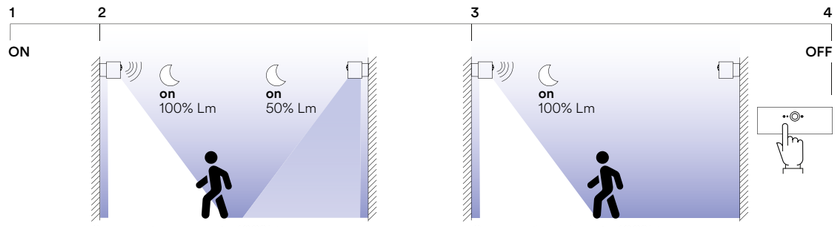

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento regolabile.
Flood light with battery power in black thermoplastic with adjustable motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Temperatura colore
6500K

Driver
integrato

Material
thermoplastic

Colour temperature
6500K

Driver
built-in



CE


IP44 · LED SMD



	colour temp.	colour
LED-COSMO/S		
8031439841263		
lumen	80 lm	
watt	1W	
beam angle	120°	



Accessori inclusi / Included accessories



Sensore di movimento regolabile / Adjustable motion sensor

Accessori non inclusi / Not included accessories



3 × 1,2V AAA
Batteria / Battery

COSMO

Proiettore in termoplastica nero con pannello solare e sensore di movimento.
Black thermoplastic flood light with solar panel and motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Temperatura colore
6500K

Driver
integrato

Material
thermoplastic

Colour temperature
6500K

Driver
built-in




CE

IP44 · LED SMD



	colour temp.	colour
LED-COSMO/S-FV		
8031439821265		
lumen	80 lm	
watt	1W	
beam angle	120°	



Accessori inclusi / Included accessories



Pannello solare / Solar panel



Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /



Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux



Cavo 3,4 m / 3,4 m cable

ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento regolabile.
Silver aluminium flood light with solar panel and adjustable motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
5000K

Driver
integrato

Material
aluminium

Colour
anthracite


Colour temperature
5000K


Driver
built-in



IP44 · LED SMD

	colour temp.	colour
LED-ELIOS-SOLAR 8031440355124		
lumen	620 lm	
watt	9W	
beam angle	120°	





Accessori inclusi / Included accessories

- Pannello solare / Solar panel
- **Lithium 7,4V 1800 mAh** Batteria non sostituibile / Battery non replaceable / (12 hours)
- off 2 LUX · on 2000 LUX · 12m 120° · 10-60" — Sensore di movimento regolabile / Adjustable motion sensor
- Cavo 3,2 m / 3,2 m cable

EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.
Silver thermoplastic flood light with solar panel, motion and crepuscolar sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Colore
silver

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
silver

Colour temperature
4000K


Driver
built-in






IP66 · LED SMD

	colour temp.	colour
LED-EOS-SOLAR 8031414862740		
lumen	450 lm	
watt	4W	
beam angle	100°	



Accessori inclusi / Included accessories

- Pannello solare / Solar panel
- **lithium 3,9V 4400mAh** Batteria non sostituibile / Battery non replaceable (6 hours)
- max 6m 120° — Sensore di movimento regolabile distanza max 6m 120° / Adjustable motion sensor max distance 6m 120°

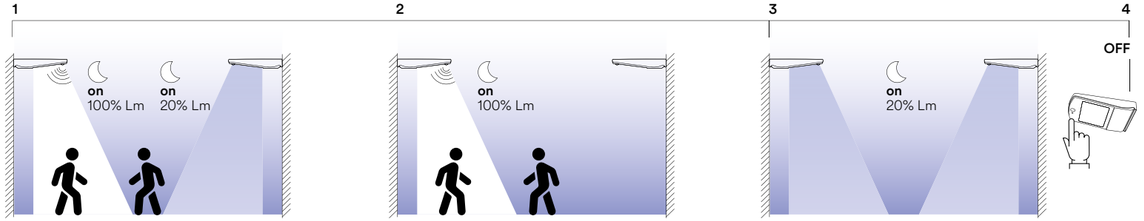

1. Sensore di movimento 100% luce
   Sensore crepuscolare 20% luce / Motion sensor 100% light. Crepuscolar sensor 20% light
2. Sensore di movimento 100% luce
   No sensore crepuscolare / Motion sensor 100% light No crepuscolar sensor
3. Sensore crepuscolare 20% luce
   No sensore movimento / Crepuscolar sensor 20% light No motion sensor
4. OFF

OPEN

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour temperature
4000K


Driver
built-in



IP54 | LED SMD



	colour temp.	colour
LED-OPEN-AP		
8031414870752		
lumen	300 lm	
watt	3W	
beam angle	120°	



Accessori inclusi / Included accessories


Pannello solare / Solar panel

Li-ion 1200 mAh
Batteria
non sostituibile /
Battery
non replaceable /

8-10 hours

4-6m
100°
30"
off
15 LUX
on
<15 LUX

Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp, as wall and portable lamp

SKYP

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour temperature
4000K


Driver
built-in



IP54 | LED SMD



	colour temp.	colour
LED-SKYP-AP		
8031414870783		
lumen	130 lm	
watt	3W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 1200 mAh
Batteria
non sostituibile /
Battery
non replaceable /

8-10 hours

4-6m
100°
30"
off
15 LUX
on
<15 LUX

Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp, as wall and portable lamp



ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare, sensore di movimento e crepuscolare.
Anthracite aluminum flood light with acrylic diffuser, solar panel, motion and crepuscolar sensor.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio e acrilico

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum and acrylic

Colour
anthracite

Colour temperature
4000K

Driver
built-in


180°



IP54 | LED SMD



	colour temp.	colour
LED-ARGO-SOLAR 8031414865345		
lumen	130 lm	
watt	1,8W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 2200 mAh
Batteria non sostituibile / Battery non replaceable /

Sensore di movimento / Motion sensor

Sensore crepuscolare / Crepuscolar sensor

SHIVA

Proiettore in termoplastica antracite con pannello solare e sensore di movimento.
Anthracite thermoplastic flood light with solar panel and motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum and acrylic

Colour
anthracite


Colour temperature
4000K

Driver
built-in



IP54 · LED COB

	colour temp.	colour
LED-SHIVA-SOLAR 8031414870769		
lumen	230 lm	
watt	2 × 1,5W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /
8 hours



Sensore di movimento accensione <15 lux / Motion sensor switch on <15 lux

Cavo 1,9 m / 1,9 m cable



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp, as wall and portable lamp

3 × 1,2V AAA
non inclusa / not included

Doppia funzione: auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse) /
Double function: auto recharge by solar panel or power by AAA battery (not included)

ULYSSE

Proiettore in termoplastica antracite con pannello solare e sensore di movimento regolabile.
Anthracite thermoplastic flood light with solar panel and adjustable motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
anthracite


Colour temperature
4000K

Driver
built-in



IP54 · LED SMD

	colour temp.	colour
LED-ULYSSE-SOLAR 8031414882588		
lumen	1000 lm	
watt	10W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare / Solar panel


lithium 3,7V 3000 mAh
Batteria non sostituibile / Battery non replaceable




Sensore di movimento e crepuscolare regolabili / Adjustable motion and crepuscolar sensor


Cavo 2 m / 2 m cable

Doppio sistema di montaggio / Double mounting system





Sensore di movimento 100% di luce
No sensore crepuscolare /
Motion sensor 100% light
No crepuscolar sensor

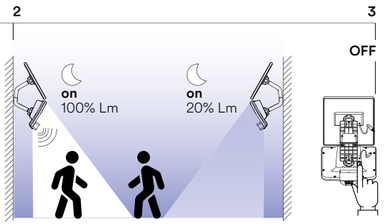

Sensore di movimento 100% luce
Sensore crepuscolare 20% luce /
Motion sensor 100% light
Crepuscolar sensor 20% light

ATHOS SOLAR

Proiettore in alluminio silver con pannello solare.
Silver aluminum flood light with solar panel.

outdoor use | accommodation areas use | urban areas use



Materiale
alluminio

Colore
silver

Temperatura colore
4000K

Driver
integrato

Materiale
aluminum

Colore
silver

Temperatura colore
4000K

Driver
built-in


IP65 | degree IK07 | CRI >80 | LED SMD

technical information **ATHOS**



LED-ATHOS-SOL100
8031414884247


	colour temp.	colour
lumen	1400 lm	
watt	100W	
beam angle	80°	





LED-ATHOS-SOL200
8031414884254


	colour temp.	colour
lumen	2900 lm	
watt	200W	
beam angle	80°	





LED-ATHOS-SOL300
8031414884261

	colour temp.	colour
lumen	4800 lm	
watt	300W	
beam angle	80°	

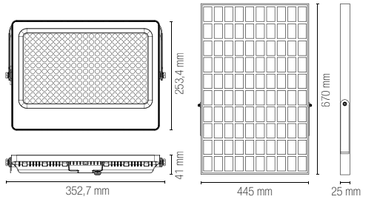

**Accessorio non incluso /
Not included accessory**

LED-ATHOS-CABLE
8031414886975

Cavo 2 m per pannello solare con attacco maschio/femmina
2m extension cable for solar / panel with male/female extend


**Accessori inclusi /
Included accessories**



Telecomando / Remote control

Pannello solare / Solar panel

Li-ion 3,2V 2500 mAh
Batteria, non sostituibile / Battery, non replaceable

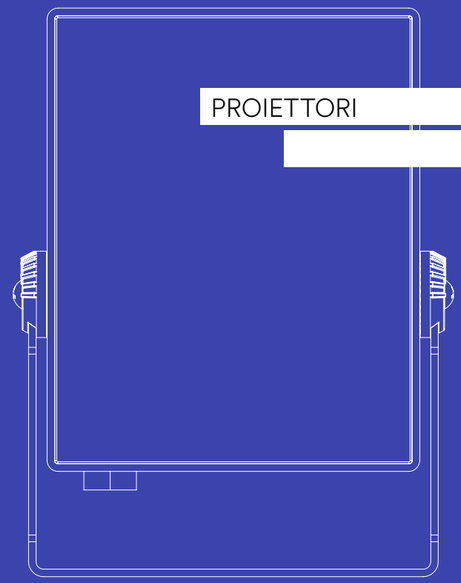

PROIETTORI

FLOOD LIGHTS

VYSOR

Proiettore con telecamera di sicurezza colore antracite con funzione smart Wi-Fi, compatibili con dispositivi iOS, android e VOICE CONTROL.
Flood light with security camera, anthracite, smart Wi-Fi, compatible with iOS devices, android and VOICE CONTROL devices.



Materiale
alluminio + PC

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium + PC

Colour
anthracite

Colour temperature
4000K


Driver
built-in



SECURITY CAMERA · IP54 · degree IK08 · CRI >85 · LED SMD · WI-FI SMART INTEC · CE EMC





	colour temp.	colour
LED-VYSOR-SECURITY		
8031414871810		
lumen	2640 lm	
watt	20W	
beam angle	120°	



on
<100 LUX PIR

off
>100 LUX PIR






Tipo di sensore video Video sensor type	**1/2,9" CMOS**
Pixel	**2.0 Mega**
Illuminazione minima Min illuminance	**Color 0.10lux @F2.0, black and white 0.01lux @F2.0**
Angolo vista camera Camera view angle	**135°**
Otturatore Shutter	**1/25-1/100,000 per second**
Infrarossi IR	**High power LED with ICR**
WDR	**Digital WDR**
Video compression standard	**H.264 32Kbps - 2Mbps**
Risoluzione video Max picture size	**1920×1080**
Frequenza fotogrammi Frame rate	**1-20 per second**
Audio	**Full duplex audio (doppio sistema di comunicazione)**
Memoria (non inclusa) Storage (not included)	**Support SD card (MAX 128Gb) Cloud storage NVR**
Impostazione immagine Image setting	**Support HD/SD; support mirror**
Reset	**Support**
Controllo della luce Lighting control	**Support manual, sensor, plan switch light (gestione accensioni)**
Interfaccia di protocollo Interface protocol	**Private**
Comunicazione di protocollo Communication protocol	**TCP/IP, HTTP, DHCP, DNS, RTSP**
Funzioni generali General function	**Dual stream, password protection**
Wi-Fi	**IEEE802.11b/g/n**
PIR	**Support PIR and motion detection**

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI · RF 2.4G control system · ALEXA e GOOGLE HOME voice control · compatible with AMAZON ECHO SHOW GOOGLE CHROME CAST

Full duplex audio



BANNER



IP55 GU10

outdoor use · accommodation areas use · urban areas use


Materiale
metallo

Colore
nero satinato

Materiale
metal

Colour
satin black

Proiettore in metallo nero satinato con struttura flessibile e punto luce orientabile.
Black satin metal projector with flexible structure and adjustable light point.

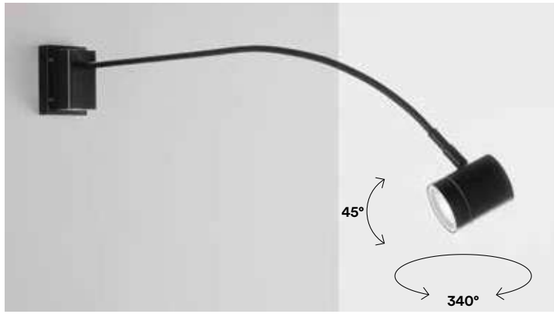


colour

I-BANNER-AP
8031414883004

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included



SAT

Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare regolabile.
Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with adjustable night and motion sensor.

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
anthracite

Colour temperature
4000K

Driver
included



outdoor use | accommodation areas use | urban areas use

IP54 | CRI >80 | LED SMD




Accessori inclusi / Included accessories


Sensore di movimento regolabile / Adjustable motion sensor



LED-SAT-10
8031414868261

	colour temp.	colour
lumen	1200 lm	
watt	10W	
beam angle	120°	








Accessori inclusi / Included accessories


Sensore di movimento regolabile / Adjustable motion sensor



LED-SAT-20
8031414868278

	colour temp.	colour
lumen	2400 lm	
watt	2 × 10W	
beam angle	120°	



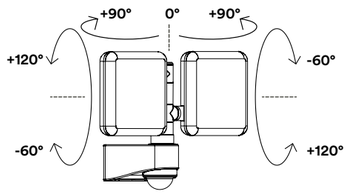

KRONOS

Proiettore in alluminio LED integrato finitura bianco goffrato.
Built-in LED aluminium flood lamp embossed white finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio
diffusore acrilico

Colore
bianco
goffrato

Temperatura colore
4000K

Driver
integrato

Material
aluminium
acrylic diffuser


Colour
embossed
white

Colour temperature
4000K

Driver
built-in



Fotometria del prodotto / Photometric curve

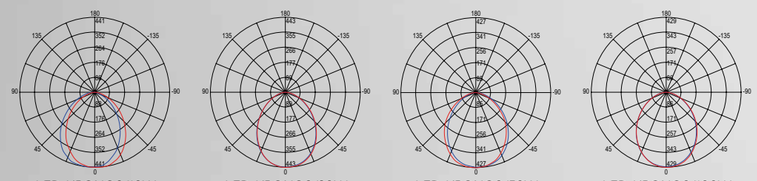

LED-KRONOS/10W · LED-KRONOS/20W · LED-KRONOS/50W · LED-KRONOS/100W

IP65 · CRI >80 · LED SMD


technical information **KRONOS**



colour temp. | colour

LED-KRONOS/10W
8031436031230
lumen 800 lm

watt 10W
beam angle 120°
pf -






colour temp. | colour

LED-KRONOS/20W
8031436001233
lumen 1300 lm

watt 20W
beam angle 120°
pf -






colour temp. | colour

LED-KRONOS/50W
8031436011232
lumen 3400 lm

watt 50W
beam angle 120°
pf 0.90






colour temp. | colour

LED-KRONOS/100W
8031414018932
lumen 8000 lm

watt 100W
beam angle 120°
pf 0.90



ELIOS

Proiettore in alluminio LED integrato finitura silver.
Built-in LED aluminium flood lamp embossed silver finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio
diffusore acrilico

Colore
silver
goffrato

Temperatura colore
4000K

Driver
integrato

Material
aluminium
acrylic diffuser


Colour
embossed
silver

Colour temperature
4000K

Driver
built-in



Fotometria del prodotto / Photometric curve

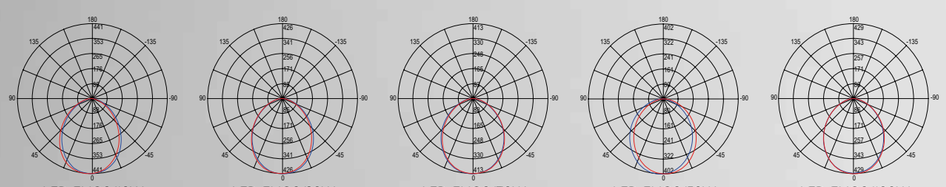


LED-ELIOS/10W · LED-ELIOS/20W · LED-ELIOS/30W · LED-ELIOS/50W · LED-ELIOS/100W

IP65 · CRI >80 · LED COB



LED-ELIOS/10W
8031431291189


	colour temp.	colour
lumen	800 lm	
watt	10	
beam angle	120°	
pf	-	





LED-ELIOS/20W
8031431281180


	colour temp.	colour
lumen	1300 lm	
watt	20W	
beam angle	120°	
pf	-	





LED-ELIOS/30W
8031437391241


	colour temp.	colour
lumen	2000 lm	
watt	30W	
beam angle	120°	
pf	0.90	





LED-ELIOS/50W
8031432091191


	colour temp.	colour
lumen	3400 lm	
watt	50W	
beam angle	120°	
pf	0.90	





LED-ELIOS/100W
8031440357159

	colour temp.	colour
lumen	8000 lm	
watt	100W	
beam angle	120°	
pf	0.90	



ELIOS

Proiettore in alluminio LED integrato finitura silver con sensore di movimento e crepuscolare regolabile.
Built-in LED aluminium flood lamp embossed silver finish with adjustable night and motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP44 · CRI >80 · LED SMD

Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor

max 8m 120° · 10"-7' sec min · off · on 3-2000 LUX



LED-ELIOS-S/10W
8031437381242
lumen 800 lm

colour temp. · colour





LED-ELIOS-S/10W

watt 10W
beam angle 120°

Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor

max 8m 120° · 10"-7' sec min · off · on 3-2000 LUX



LED-ELIOS-S/30W
8031436391235
lumen 2000 lm

colour temp. · colour



LED-ELIOS-S/30W

watt 30W
beam angle 120°

ELIOS

Proiettore LED portatile.
LED portable flood light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
4000K

Driver
integrato

Material
aluminium

Colour
black

Colour temperature
4000K

Driver
built-in




Accessori inclusi / Included accessories


Cavo 1,6 metri con spina / 1,6 meter cable with plug — IP44

IP65 · CRI >80 · LED SMD

LED-ELIOS-P/20W
8031436381236
lumen 1300 lm

colour temp. · colour





LED-ELIOS-P/20W

watt 20W
beam angle 120°

ATHOS

Proiettore a led integrato in allumino silver e diffusore satinato.
Built-in LED aluminium flood lamp silvefr finish with satin diffuser.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
silver

Temperatura colore
4000K / 6000K

Driver
integrato

Material
aluminium

Colour
silver

Colour temperature
4000K / 6000K


Driver
built-in



IP65 | degree IK10 | CRI >80 | LED SMD




	colour temp.	colour
LED-ATHOS-100		
8031414884186		
lumen	10115 lm	
LED-ATHOS-100F		
8031414884193		
lumen	9624 lm	
watt	100W	
beam angle	90°	
pf	0.90	






	colour temp.	colour
LED-ATHOS-150		
8031414884209		
lumen	14557 lm	
LED-ATHOS-150F		
8031414884216		
lumen	14388 lm	
watt	150W	
beam angle	90°	
pf	0.90	








	colour temp.	colour
LED-ATHOS-200		
8031414884223		
lumen	20371 lm	
LED-ATHOS-200F		
8031414884230		
lumen	20310 lm	
watt	300W	
beam angle	90°	
pf	0.90	



Fotometria del prodotto / Photometric curve


LED-ATHOS-100


LED-ATHOS-150


LED-ATHOS-200

PLUTONE

Proiettore a led integrato in allumino antracite e diffusore in acrilico bianco.
Built-in LED aluminium flood lamp antharacyte finish with acrylic white diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio
diffusore in acrilico

Colore
antracite

Temperatura colore
3000K / 4000K / 6500K

Driver
integrato

Material
aluminium
acrylic diffuser


Colour
anthracite

Colour temperature
3000K / 4000K / 6500K

Driver
built-in



Fotometria del prodotto / Photometric curve

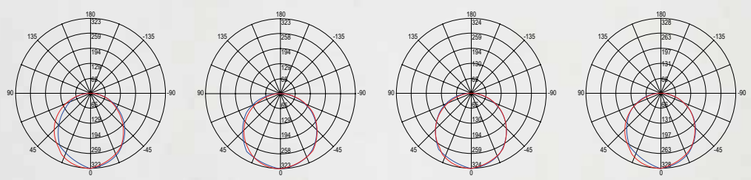


LED-PLUTONE-10 · LED-PLUTONE-20 · LED-PLUTONE-30 · LED-PLUTONE-50

IP65 · CRI >80 · LED SMD






	colour temp.	colour
LED-PLUTONE-10		
8031414875887		
lumen	800 lm	
watt	10W	
beam angle	120°	
pf	-	






	colour temp.	colour
LED-PLUTONE-20C		
8031414876099		
lumen	1600 lm	
LED-PLUTONE-20		
8031414875894		
lumen	1600 lm	
LED-PLUTONE-20F		
8031414876112		
lumen	1600 lm	
watt	20W	
beam angle	120°	
pf	-	






	colour temp.	colour
LED-PLUTONE-30		
8031414875900		
lumen	2400 lm	
watt	30W	
beam angle	120°	
pf	0.90	





	colour temp.	colour
LED-PLUTONE-50C		
8031414879144		
lumen	4000 lm	
LED-PLUTONE-50		
8031414875917		
lumen	4000 lm	
LED-PLUTONE-50F		
8031414879120		
lumen	4000 lm	
watt	50W	
beam angle	120°	
pf	0.90	



PLUTONE

Proiettore a LED integrato in allumino antracite e diffusore in acrilico bianco con sensore di movimento e crepuscolare regolabile.
Built-in LED aluminum flood lamp anthracyite finish with acrylic white diffuser with adjustable night and motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio
diffusore in acrilico

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium
acrylic diffuser

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP65 · CRI >80 · LED SMD

Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor


max 8m 120° · 10 sec – 7 min · off · on 3-2000 LUX



LED-PLUTONE-S20
8031414875924

	colour temp.	colour
lumen	1600 lm	





LED-PLUTONE-S20

watt	20W
beam angle	120°

Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor


max 8m 120° · 10 sec – 7 min · off · on 3-2000 LUX



LED-PLUTONE-S50
8031414875931

	colour temp.	colour
lumen	4000 lm	





LED-PLUTONE-S50

watt	50W
beam angle	120°

PLUTONE

Proiettore LED portatile.
LED portable flood light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium

Colour
anthracite

Colour temperature
4000K

Driver
built-in




Accessori inclusi / Included accessories


Cavo 1,6 metri con spina / 1,6 meter cable with plug
IP44

IP65 · CRI >80 · LED SMD

LED-PLUTONE-P20
8031414875948

	colour temp.	colour
lumen	1600 lm	





LED-PLUTONE-P20

watt	20W
beam angle	120°

TAURUS

Proiettore a led integrato in allumino nero diffusore in vetro temperato.
Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
4000K / 6500K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black


Colour temperature
4000K / 6500K


Driver
built-in


Life time and on/off
50.000 h
>25.000 on/off




Fotometria del prodotto / Photometric curve


LED-TAURUS-70


LED-TAURUS-100


LED-TAURUS-150



LED-TAURUS-200

5 YEARS WARRANTY · IP65 · degree IK07 · CRI >80 · LED SMD






	colour temp.	colour
LED-TAURUS-70		
8031414875757		
lumen	8400 lm	
LED-TAURUS-70F		
8031414876662		
lumen	8400 lm	
watt	70W	
beam angle	110°	






	colour temp.	colour
LED-TAURUS-100		
8031414875764		
lumen	12000 lm	
LED-TAURUS-100F		
8031414876631		
lumen	12000 lm	
watt	100W	
beam angle	110°	






	colour temp.	colour
LED-TAURUS-150		
8031414875771		
lumen	18000 lm	
LED-TAURUS-150F		
8031414876648		
lumen	18000 lm	
watt	150W	
beam angle	110°	





	colour temp.	colour
LED-TAURUS-200		
8031414875788		
lumen	26000 lm	
LED-TAURUS-200F		
8031414876655		
lumen	26000 lm	
watt	200W	
beam angle	110°	







I-FRAME-L-BCO
8031440364577

Staffa fissaggio angolare colore bianco — Metal corner wall arms white color



I-FRAME-L-GR
8031440361880

Staffa fissaggio angolare colore grigio — Metal corner wall arms gray color





I-FRAME-V-BCO
8031440364553

Staffa V movibile 30° fissaggio parete colore bianco — Metal wall arms orientable 30° white color



I-FRAME-V-GR
8031440364584

Staffa V movibile 30° fissaggio parete colore grigio — Metal wall arms orientable 30° gray color



LED-TRACK-NEST NERO
8031440360418


Accessori per proiettori Sistema di fissaggio singolo e doppio — Flood light accessories Single and double connection system

Accessori inclusi / Included accessories



Cavo 1,6 metri con spina / 1,6 meter cable with plug

IP44





I-SPIKE-ANT
8031414877973

Picchetto alluminio antracite — Anthracite aluminum spike



I-SENSORE-360
8031435901237

IP44

Sensore PIR 230V max 1600W 360° distanza massima 5m. time 10 sec. - 4 min. lux 2 - 2000 — PIR sensor 230V max 1600W 360° max 5m. time 10 sec. - 4 min. lux 2 - 2000






I-SENSORE-130
8031434401219

IP44

Sensore PIR 230V max 1000W 130° distanza massima 12m. time 10 sec. - 4 min. lux 2 - 2000 base accessoria angolare — PIR sensor 230V max 1000W 130° max 12m. time 10 sec. - 4 min. lux 2 - 2000 corner accessory base





I-SENSORE-180
8031434411218

IP44

Sensore PIR 230V max 1000W 180° distanza massima 12m. time 10 sec. - 4 min. lux 2 - 2000 — PIR sensor 230V max 1000W 180° max 12m. time 10 sec. - 4 min. lux 2 - 2000



GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato.
Built-in LED floor light die-cast aluminium body and tempered glass diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
6000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black


Colour temperature
6000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off



Fotometria del prodotto
Photometric curve

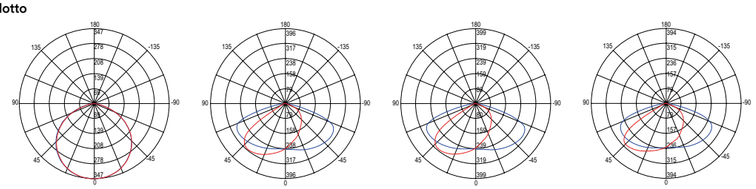


LED-GIOVE-100 · LED-GIOVE-200 · LED-GIOVE-300 · LED-GIOVE-400

LED PERFORMANCE · 5 YEARS WARRANTY · IP66 · degree IK08 · CRI >70 · LED SMD




	colour temp.	beam angle	colour
LED-GIOVE-100 8031414882557			
lumen	15670 lm	150° x 80°	
watt		100W	
pf		0.90	






	colour temp.	beam angle	colour
LED-GIOVE-200 8031414876365			
lumen	32666 lm	150° x 80°	
LED-GIOVE-200-30 8031414885138			
lumen	32666 lm	30°	
LED-GIOVE-200-60 8031414885145			
lumen	32666 lm	60°	
LED-GIOVE-200R-30 8031414885152			
lumen	RED	30°	
LED-GIOVE-200R-60 8031414885169			
lumen	RED	60°	
LED-GIOVE-200V-30 8031414885176			
lumen	GREEN	30°	
LED-GIOVE-200V-60 8031414885183			
lumen	GREEN	60°	
watt		200W	
pf		0.90	






	colour temp.	beam angle	colour
LED-GIOVE-300 8031414876372			
lumen	47150 lm	150° x 80°	
watt		300W	
pf		0.90	





	colour temp.	beam angle	colour
LED-GIOVE-400 8031414876389			
lumen	66031 lm	150° x 80°	
watt		400W	
pf		0.90	



MASTER



Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
5700K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off


Material
aluminium

Colour
black

Colour temperature
5700K


Driver
included

Life time and on/off
50.000 h
>25.000 on/off

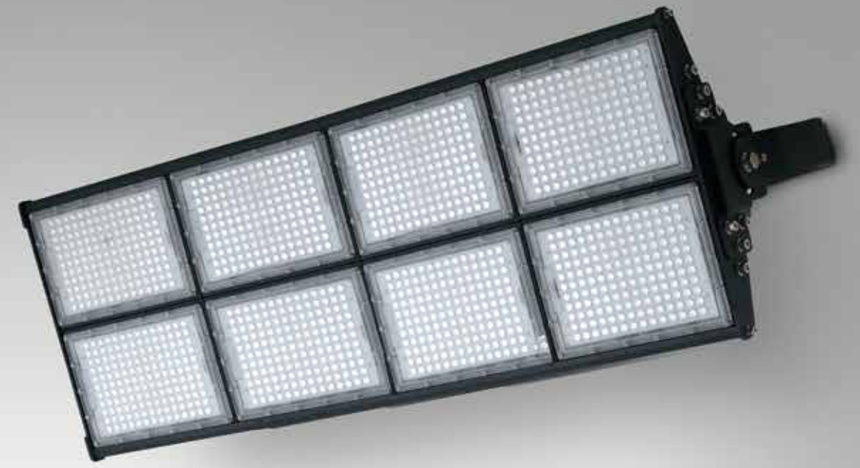


LED PERFORMANCE | IP65 | degree IK10 | CRI >80 | LED SMD

	colour temp.	colour
LED-MASTER-960		
8031414862122		
lumen	129600 lm	
watt	960W	
beam angle	60° x 100°	
pf	0.90	



LED-MASTER-960

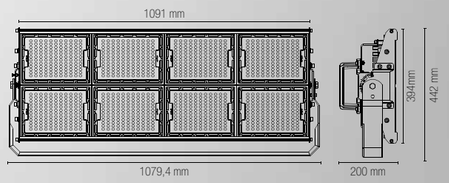

ENERGY

Faro LED integrato per pensiline struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.

Materiale
alluminio

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
white

Colour temperature
4000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off



outdoor use
accommodation areas use
urban areas use


LED PERFORMANCE · IP65 · degree IK10 · CRI >80 · LED SMD



colour temp. | colour

LED-ENERGY-80-INC
8031414862085

lumen	11100 lm
watt	80W
beam angle	80°
pf	0.90







colour temp. | colour

LED-ENERGY-80-PL
8031414862078


lumen	11100 lm
watt	80W
beam angle	80°
pf	0.90




Fotometria del prodotto / Photometric curve



LED-ENERGY-80-INC



LED-ENERGY-80-PL

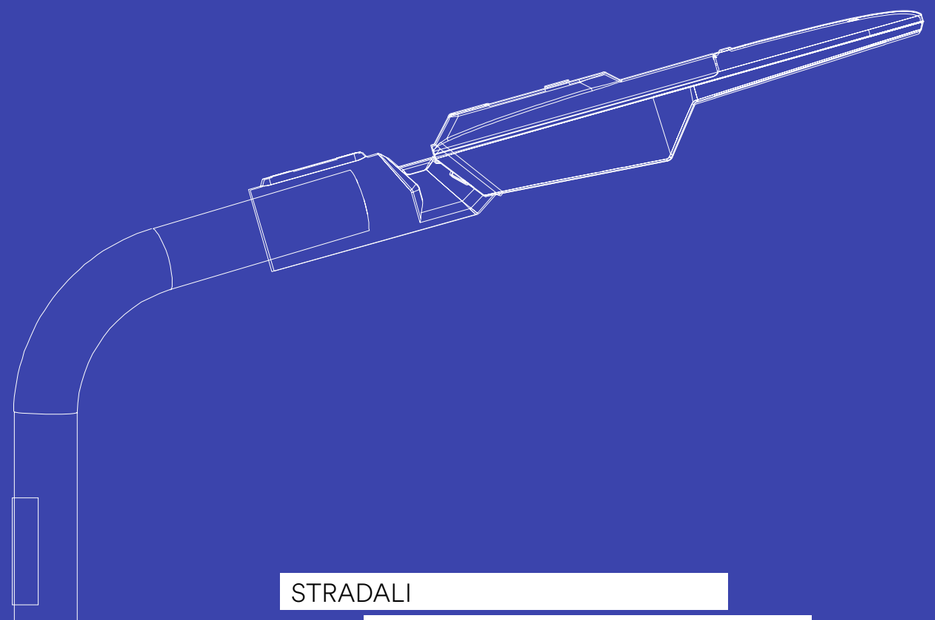

STRADALI

PROFILES AND STRIP LED

INVICTUS

Faro stradale LED in alluminio silver con pannello solare, diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Silver aluminium LED street light with solar panel and lens in anti-UV, self-extinguishing, shockproof material.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Materiale pannello solare
celle in silicio monocristallino

Colore
silver

Temperatura colore
4000K

Material
aluminium

Solar panel material
monocrystalline silicon

Colour
silver

Colour temperature
4000K





	colour temp.	colour
LED-INVICTUS-SOLAR		
8031414879090		
lumen	2400 lm	
watt	15W	
beam angle	90° x 120°	
pf	0.90	

imbocco palo 60mm
60mm pole entry


Accessori inclusi / Included accessories

Radiocomando / Remote control

Pannello solare / Solar panel

Lithium 3.2V 36000 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

Fotometria del prodotto / Photometric curve



LED-INVICTUS-SOLAR

IPERION

Faro stradale LED in alluminio silver con pannello solare.
Silver aluminium LED street light with solar panel.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Materiale pannello solare
celle in silicio monocristallino

Colore
silver

Temperatura colore
4000K

Material
aluminium

Solar panel material
monocrystalline silicon

Colour
silver

Colour temperature
4000K




Lenti in materiale autoestinguente, antiurto, anti-UV / Lens in anti-UV, self-extinguishing, shockproof material

Sensore microwave
max altezza 6m
raggio 7m /
Microwave sensor
max height 6m
radius 7m

IP65 · LED SMD

	colour temp.
LED-IPERION-50-SOLAR	
8031414879069	
lumen	9000 lm
LED-IPERION-75-SOLAR	
8031414879076	
lumen	13500 lm
watt	50W
beam angle	156° x 71°



imbocco palo 60 mm /
60 mm pole entry

Accessori inclusi / Included accessories

Palo 60 cm / Pole 60 cm



Pannello solare / Solar panel



50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

Accessorio non incluso / Not included accessory

LED-IPERION-REMOTE
8031414879083




Radiocomando multifunzione / Remote control multi-mode control


*regolabile solo con radiocomando multifunzione LED-IPERION-REMOTE /
* adjustable only with LED-IPERION-REMOTE remote control

IP65 · LED SMD

Fotometria del prodotto / Photometric curve



LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR

FEBO

Faro stradale LED in alluminio con pannello solare.
Aluminium LED street light with solar panel.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Materiale pannello solare
celle in silicio monocristallino

Colore
silver

Temperatura colore
4000K

Material
aluminium

Solar panel material
monocrystalline silicon

Colour
silver

Colour temperature
4000K




Lenti in materiale autoestinguente, antiurto, anti-UV / Lens in anti-UV, self-extinguishing, shockproof material



IP66 · LED SMD

	colour temp.	colour
LED-FEBO-SOLAR		
8031414879052		
lumen	6800 lm	
watt	40W	
beam angle	140° x 85°	

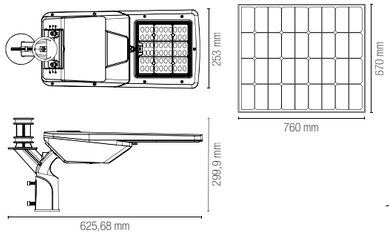

imbocco palo 60 mm /
60 mm pole entry

Accessori inclusi / Included accessories


Pannello solare / Solar panel




Lithium 12,8V 30AH
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



Fotometria del prodotto / Photometric curve



LED-FEBO-SOLAR



Impostazioni di fabbrica / Default Settings

	orario / hours	flusso / flux
T1	<20lux ÷ +2h	**100%**
T2	T1 ÷ +2h	**60%**
T3	T2 ÷ +7h	**10%**
T4	T3 ÷ +2h	**50%**
	+12h off	

STREETWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
silver

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
silver

Colour temperature
4000K

Driver
included


Life time and on/off
50.000 h
>25.000 on/off



LED PERFORMANCE · IP65 · degree IK10 · CRI >70 · LED SMD




	colour temp.	colour
LED-STREETWAY-50		
8031414876334		
lumen	7800 lm	
watt	50W	
beam angle	80° x 140°	
pf	0.90	






	colour temp.	colour
LED-STREETWAY-100		
8031414876341		
lumen	15500 lm	
LED-STREETWAY-100FC		
8031414879113		
lumen	15500 lm	
crepuscolar sensor	on 6 lux	off 50 lux
watt	100W	
beam angle	80° x 140°	
pf	0.90	






	colour temp.	colour
LED-STREETWAY-150		
8031414876358		
lumen	22000 lm	
watt	150W	
beam angle	80° x 140°	
pf	0.90	








	colour temp.	colour
LED-STREETWAY-200		
8031414879106		
lumen	29900 lm	
watt	200W	
beam angle	80° x 140°	
pf	0.90	





Fotometria del prodotto / Photometric curve


LED-STREETWAY-50W


LED-STREETWAY-100W


LED-STREETWAY-150W


LED-STREETWAY-200W

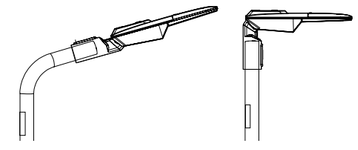

Doppio sistema di montaggio. Per palo Ø 60 mm /
Double mounting system. Fit for Ø 60 mm pole

HIGHWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
incluso

Durata e on/off
30.000 h
>15.000 on/off

Material
aluminium

Colour
antracite

Colour temperature
4000K

Driver
included

Life time and on/off
30.000 h
>15.000 on/off




LED PERFORMANCE · IP65 · degree IK06 · CRI >70 · LED SMD



LED-HIGHWAY-50
8031414877034


	colour temp.	colour
lumen	7500 lm	
watt	50W	
beam angle	135° x 80°	
pf	0.90	





LED-HIGHWAY-100
8031414877041


	colour temp.	colour
lumen	14000 lm	
watt	100W	
beam angle	135° x 80°	
pf	0.90	





LED-HIGHWAY-150
8031414877058


	colour temp.	colour
lumen	20000 lm	
watt	150W	
beam angle	135° x 80°	
pf	0.90	







LED-HIGHWAY-ADAT
8031414877904


Adattatore 90° armature stradali highway imbocco palo 60 mm/
90° adapter 60 mm pole entry for street light



Fotometria del prodotto / Photometric curve


LED-HIGHWAY-50


LED-HIGHWAY-100


LED-HIGHWAY-150

POLIS

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato.
Built-in LED street light die-cast aluminium body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket.



Materiale
alluminio pressofuso

Colore
silver

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off


Material
die-cust aluminium

Colour
silver

Colour temperature
4000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off

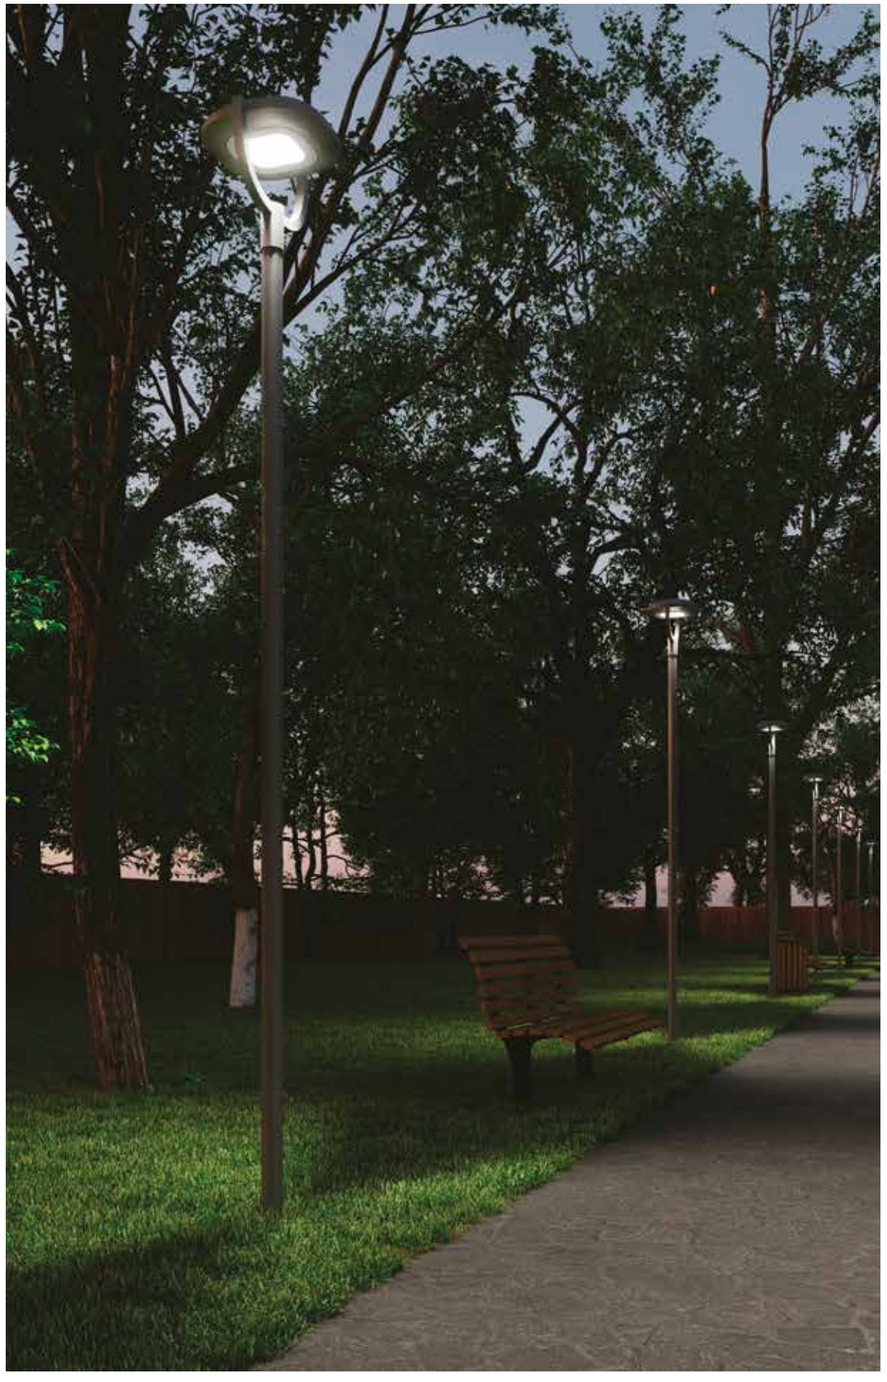


IP67 · degree IK08 · CRI >80 · LED SMD






	colour temp.	colour
LED-POLIS-50		
8031414879465		
lumen	7000 lm	
watt	50W	
beam angle	155° x 75°	
pf	0.90	

imbocco palo 60mm
60mm pole entry












	colour temp.	colour
LED-POLIS-S50		
8031414879472		
lumen	7000 lm	
watt	50W	
beam angle	155° x 75°	
pf	0.90	




Fotometria del prodotto / Photometric curve



LED-POLIS-50



LED-POLIS-S50

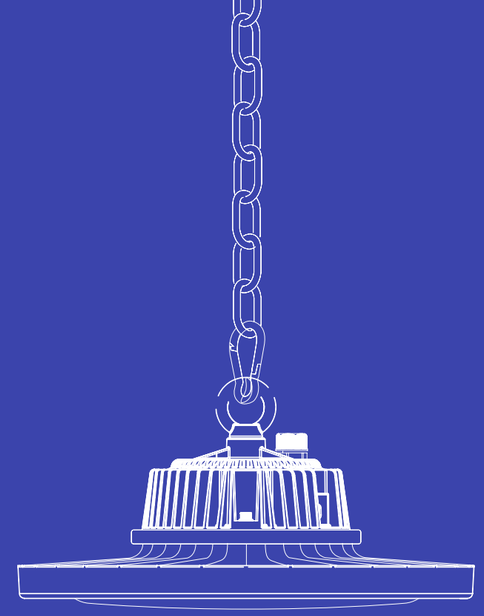

HIGH BAY & TRI-PROOF

STARGATE XP

Lampada LED high bay in alluminio nero.
Black aluminium high bay LED lamp.

industrial use · commercial areas use

Materiale
alluminio

Colore
nero

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminum

Colour
black

Colour temperature
4000K

Driver
included


Life time and on/off
50.000 h
>25.000 on/off



CE · EMC

LED PERFORMANCE · IP65 · degree IK10 · CRI >80 · LED SMD

	colour temp.
LED-STARGATE-100XP	
8031414877799	
lumen	14800 lm
watt	100W
beam angle	110°
pf	0.90



	colour temp.
LED-STARGATE-150XP	
8031414877805	
lumen	22200 lm
watt	150W
beam angle	110°
pf	0.90




	colour temp.
LED-STARGATE-200XP	
8031414877812	
lumen	29500 lm
watt	200W
beam angle	110°
pf	0.90




Fotometria del prodotto / Photometric curve



LED-STARGATE-100XP



LED-STARGATE-150XP



LED-STARGATE-200XP

ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC.
Waterproof lamp for double LED tube in PC+PC.

industrial use · commercial areas use · urban areas use




CE


IP65 · LED T8 · PC + PC

Lampadina non inclusa / Light bulb not included


LED-ATLANTIC-ST-60
8031440355315
2 x T8 230V




LED-ATLANTIC-ST-120
8031440355322
2 x T8 230V



LED-ATLANTIC-ST-150
8031440355292
2 x T8 230V








LED-SENSOR-HB-DIM
8031414879748

IP65

120-277V
Load capacity
120VAC: 4A
277VAC: 3A

1 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.


With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

2 / function




Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità.

If there is motion detected, the light will be remained at a low light level all the time.



Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità.

When motion is detected, the sensor will switch on the light to 100% brightness.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.


After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.

3 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.



Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.

After elapse of standby period, the sensor switches off the light if no motion is detected.



LED-SENSOR-HB
8031414879731

Accessori inclusi / Included accessories



Load capacity
400W
220V - 1240V

1 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.




LED-SENSOR-TP
8031414879724

IP65

Load capacity
no limitation
220V - 240V

1 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.



LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali.

Industrial sensor remote control.

NAUTILUS

Plafoniere stagno in policarbonato.
Waterproof ceiling lamps in polycarbonate.

industrial use · commercial areas use · urban areas use

Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
silver


Colour temperature
4000K

Driver
built-in

Life time and on/off
50.000 h
>25.000 on/off



Fotometria del prodotto
Photometric curve

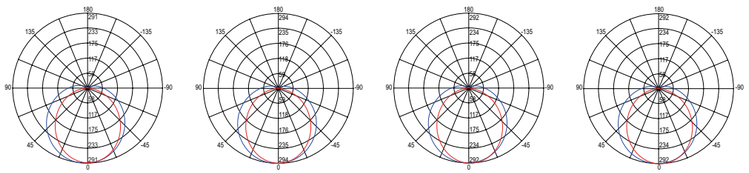


LED-NAUTILUS-60 · LED-NAUTILUS-120 · LED-NAUTILUS-150 · LED-NAUTILUS-PRO

LED PERFORMANCE · IP65 · degree IK08 · CRI >80 · LED SMD



LED-NAUTILUS-60
8031414876501


	colour temp.	colour
lumen	2900 lm	
watt	21W	
beam angle	120°	
pf	-	





LED-NAUTILUS-120
8031414876518


	colour temp.	colour
lumen	5400 lm	
watt	40W	
beam angle	120°	
pf	0.90	





LED-NAUTILUS-150
8031414876525


	colour temp.	colour
lumen	7500 lm	
watt	55W	
beam angle	120°	
pf	0.90	





LED-NAUTILUS-PRO
8031414876532

	colour temp.	colour
lumen	10600 lm	
watt	80W	
beam angle	120°	
pf	0.90	





NAUTILUS-SENS
8031414878758



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

ARTIC

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.

industrial use · commercial areas use · urban areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
bianco

Colour temperature
4000K

Driver
built-in


Life time and on/off
50.000 h
>25.000 on/off






AC230V MULTI-CONNECT

	colour temp.	watt	pf	colour
LED-ARTIC-30 8031414882625				
lumen	1200 lm	9W	-	
LED-ARTIC-60 8031414882632				
lumen	1800 lm	15W	-	
LED-ARTIC-120 8031414882601				
lumen	4000 lm	30W	0.90	
LED-ARTIC-150 8031414882618				
lumen	5500 lm	45W	0.90	
beam angle				120°



Fotometria del prodotto / Photometric curve

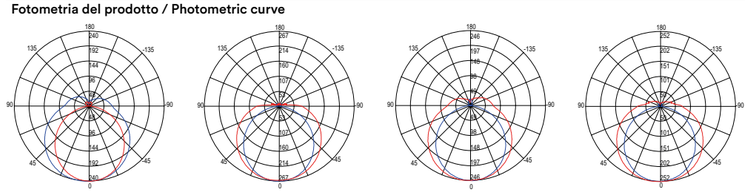

LED-ARTIC-30 · LED-ARTIC-60 · LED-ARTIC-120 · LED-ARTIC-150

OCEAN

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.

industrial use · commercial areas use · urban areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Durata e on/off
30.000 h
>15.000 on/off

Material
polycarbonate

Colour
bianco

Colour temperature
4000K


Driver
built-in

Life time and on/off
30.000 h
>15.000 on/off





	colour temp.	colour
LED-OCEAN-SENS 8031414868858		
lumen	3240 lm	
watt	36W	
beam angle	120°	
pf	0.90	



Accessori inclusi / Included accessories	crepuscolar sensor	motion sensor
Sensore microonde di movimento / Microwave motion sensor	off / on 20% Lm / < 30 LUX	3-8m 100° · 60" · on 100% Lm / on 20% Lm

CONCORDE

Plafoniera stagna in policarbonato LED integrato.
PC LED TRI PROOF light.

industrial use · commercial areas use · urban areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
white

Colour temperature
4000K

Driver
built-in


Life time and on/off
50.000 h
>25.000 on/off




LED PERFORMANCE · IP65 · degree IK10 · CRI >80 · LED SMD



	colour temp.	watt	pf	colour
LED-CONCORDE-70 8031414868346 lumen	3900 lm	30W	0.90	
LED-CONCORDE-130 8031414066766 lumen	7800 lm	60W	0.90	
LED-CONCORDE-160 8031414868353 lumen	9700 lm	75W	0.90	
beam angle				120°



Fotometria del prodotto / Photometric curve

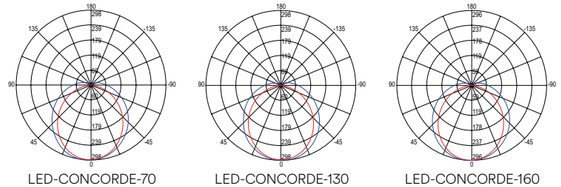

LED-CONCORDE-70 · LED-CONCORDE-130 · LED-CONCORDE-160

SUPERIA

Lampada LED high bay in alluminio silver.
Aluminium linear high bay LED lamp Silver finish.

industrial use · commercial areas use · urban areas use

Materiale
alluminio

Colore
silver

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
silver

Colour temperature
4000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off



LED PERFORMANCE · IP65 · degree IK10 · CRI >80 · LED SMD

Accessori inclusi / Included accessories

Cavo 1m /
1m cable

Kit sospensione /
Suspension kit



Accessori non inclusi / Not included accessories

LED-SUPERIA-PL
8031414870899
Kit 2 pz orientabile 60°± /
Kit 2 pcs adjustable 60°±



LED-SUPERIA-SOSP
8031414871803
Kit fissaggio a sospensione
2 cavi 5m /
Suspension mounting kit 2
cables 5m




I-DRIVER-SUPERIA-HELP
8031414868339




emergency light — IP20 - 3 h - 20W




	colour temp.	watt	pf	colour
LED-SUPERIA-100 8031414868315 lumen	15000 lm	100W	0.90	
LED-SUPERIA-150 8031414868865 lumen	22500 lm	150W	0.90	
LED-SUPERIA-200 8031414868322 lumen	30000 lm	200W	0.90	
beam angle				120°




Fotometria del prodotto / Photometric curve

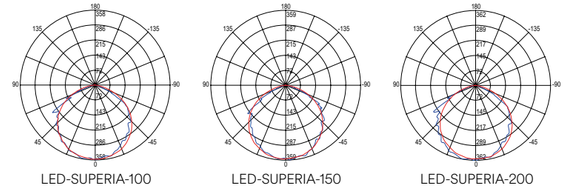

LED-SUPERIA-100 · LED-SUPERIA-150 · LED-SUPERIA-200

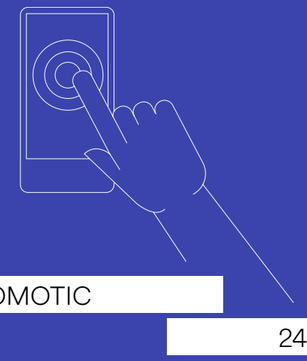
EASY DOMOTIC
24V

EASY DOMOTICA **24V**



Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo. Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Buetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups 24V products (for example indoor or outdoor) that, thanks to easy connector accessories, can be connected each other for simultaneous control.
Devices control becomes easy: constant voltage power supply in parallel connection system are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units and the control units can be controlled by wifi, bluetooth devices or via a wall pad or remote control.



CAVO-4CH-CONN-MF
8031414878772
IP67

100 cm Cavo di connessione connettore M+F	100 cm Connection cable M+F connector




CAVO-4CH-CONN-T
8031414878789
IP67

40+20 cm Cavo di connessione a T connettore M+F+F	40+20 cm T connection cable M+F+F connector



CAVO-4CH-CONN-M
8031414878796
IP67

50 cm Cavo di connessione connettore M+cavi sciolti	50 cm Connection cable M+cables

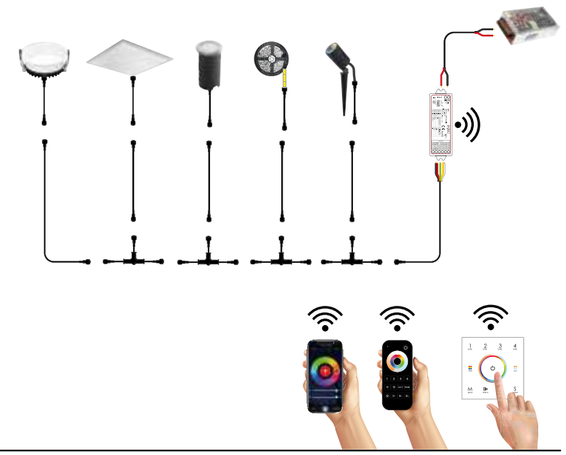

XANTO-RF

Incasso in alluminio pressofuso antiriflesso con cavo easy connection integrato.
Diecast aluminum anti-glare down-light with built-in easy domotic cable.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore
RGB + 4000K

Driver
DC 24V non incluso
Tensione costante
connessione
in parallelo

Durata e on/off
25.000h
>15.000 on/off

Material
die cast aluminum

Colour
white

Colour temperature
RGB + 4000K

Driver
DC 24V not included
Costant voltage
parallel connecting
system

Durata e on/off
25.000 h
>15.000 on/off



CRI >80 · LED SMD · RGB


EASY DOMOTICA 24V

Driver p. 837-846
Controller p. 848-851



INC-XANTO-R120-24V
8031414877942


	colour temp.
lumen	1120 lm
watt	12W
beam angle	120°
pf	-
	Ø 110 mm






INC-XANTO-R220-24V
8031414878697


	colour temp.
lumen	3000 lm
watt	30W
beam angle	120°
pf	0.90
	Ø 200 mm



Fotometria del prodotto / Photometric curve



INC-XANTO-R120-24V



INC-XANTO-R220-24V

PANEL

Pannello LED con struttura in alluminio diffusore in acrilico con cavo easy connection integrato.
LED panel with aluminum structure and acrylic diffuser with built-in easy domotic cable.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio
diffusore in acrilico

Colore
bianco

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
acrylic diffuser

Colour
white

Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included

Durata e on/off
20.000h
>10.000 on/off



CRI >80 · LED SMD · RGB


EASY DOMOTICA 24V

Driver p. 837-846
Controller p. 848-851




LED-PANEL-60X60-24V
8031414875313

	colour temp.
lumen	4150 lm
watt	30W
beam angle	120°
pf	0.90
	590 × 590 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60×60-24V

STRIP

indoor use · accommodation areas use · office use · commercial areas use

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA 24V

CE

Driver p. 837-846
Controller p. 848-851

IP20 · CRI >80 · LED SMD · RGB

Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
without silicone


Temperatura colore
RGB + 4000K

Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off



STRIP24V-5050-RGBW



misura taglio /
cut size



	colour temp.
STRIP24V-5050-RGBW	
8031414871384	
lumen	5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA 24V

CE

Driver p. 837-846
Controller p. 848-851

IP68 · CRI >80 · LED SMD · RGB

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Materiale
kapton
with silicone
cover

Temperatura colore
RGB + 4000K

Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off



STRIP24V-5050RGBW-IP68



misura taglio /
cut size



	colour temp.
STRIP24V-5050RGBW-IP68	
8031414871407	
lumen	5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

TARGET

Faro proiettore in alluminio con picchetto incluso, cavo easy connection integrato.
Aluminum flood light with spike included, built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/off

Material
aluminum

Colour
black

Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included

Durata e on/off
30.000h
>15.000 on/off



CE

IP67 · degree IK10 · CRI >80 · LED COB · RGB

EASY DOMOTICA 24V

Driver p. 837-846
Controller p. 848-851



	colour temp.
LED-TARGET-8-24V	
8031414878604	
lumen	190 lm

watt	8W
beam angle	30°






	colour temp.
LED-TARGET-30-24V	
8031414878550	
lumen	468 lm


watt	30W
beam angle	30°



Fotometria del prodotto / Photometric curve



LED-TARGET-8-24V



LED-TARGET-30-24V

EASY DOMOTIC 24V
In.tec light

SPRINT

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.
Inground and wall recessed light with built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
acciaio

Temperatura colore
RGB + 4000K

Driver
DC 24V
tensione costante
non incluso

Durata e on/off
25.000h
>10.000 on/off

Material
aluminum

Colour
stainless steel

Colour temperature
RGB + 4000K

Driver
DC 24V
costant voltage
not included

Durata e on/off
25.000h
>10.000 on/off



IP67 · degree IK08 · CRI >80 · RGB

EASY DOMOTICA 24V


Driver p. 837-846
Controller p. 848-851



LED-SPRINT-R5-24V
8031414878543

	colour temp.
lumen	60 lm
watt	1,5W
beam angle	108°
	Ø 42 mm

Fotometria del prodotto / Photometric curve



LED-SPRINT-R5-24V

Accessori inclusi / Included accessories

x1
Cassetta di derivazione / Recessed box





RUNNER

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.
Inground and wall recessed light with built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nickel spazzolato

Temperatura colore
RGB + 4000K

Driver
DC 24V
tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/of

Material
aluminum

Colour
brushed nickel

Colour temperature
RGB + 4000K

Driver
DC 24V
costant voltage
not included

Durata e on/off
30.000h
>15.000 on/of



IP67 · degree IK08 · CRI >80 · RGB

EASY DOMOTICA 24V

Driver p. 837-846
Controller p. 848-851



LED-RUNNER-Q8-24V
8031414878536


	colour temp.
lumen	1020 lm
watt	10W
beam angle	30°
	Ø 63 mm



LED-RUNNER-R8-24V
8031414878567

	colour temp.
lumen	1020 lm
watt	10W
beam angle	30°
	Ø 63 mm

Fotometria del prodotto / Photometric curve



LED-RUNNER-Q8-24V
LED-RUNNER-R8-24V


Accessori inclusi / Included accessories

x1
Cassetta di derivazione / Recessed box









LUCI DECORATIVE TECNICHE DMX

DMX TECHNICAL DECORATION LIGHTING

RAYS

outdoor use · accommodation areas use · office use · commercial areas use



RAYS

Proiettore LED RGB full color in alluminio
LED RGB full color lamp in aluminium

IP65 · IK10 · RGB · 10-100%

Materiale
alluminio

Temperatura colore
RGB full color

Driver
incluso

Durata e on/off
50.000h
>25.000 on/offf


Material
aluminum

Colour temperature
RGB full color

Driver
included

Life time and on/off
50.000h
>25.000 on/off







LED-RAYS-30P

8031440358071

	colour temp.	colour
lumen	RGB	
watt	30 × 1W	
beam angle	45°	










LED-RAYS-36P

8031440355445

	colour temp.	colour
lumen	RGB	
watt	30 × 1W	
beam angle	45°	












LED-RAYS-72P

8031440358040

	colour temp.	colour
lumen	RGB	
watt	72 × 2W	
beam angle	45°	







WALLWASHER

Proiettore LED RGB full color in alluminio.
LED RGB full color lamp in aluminium.



Materiale
alluminio

Temperatura colore
RGB full color

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum


Colour temperature
RGB full color


Driver
built-in

Life time and on/off
50.000h
>25.000 on/off










colour temp. | colour


LED-WALLWASHER-18
8031440359559
lumen — RGB

watt — 18 × 2W
beam angle — 45°









colour temp. | colour

LED-WALLWASHER-36
8031440359528
lumen — RGB

watt — 36 × 2W
beam angle — 45°



IRIDE

outdoor use · accommodation areas use · office use · commercial areas use



10-100% · IP65 · degree IK10 · CRI >80 · RGB

technical information

IRIDE

Proiettore LED monocolore o RGB FULL COLOR in alluminio.
LED single colour or RGB full color lamp in aluminium.

Materiale
alluminio

Temperatura colore
RGB full color + 6000K

Driver
DC 12/24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
aluminum

Colour temperature
RGB full color + 6000K

Driver
DC 12/24V
not included

Life time and on/off
50.000h
>25.000 on/offf



LED-IRIDE-3P


8031440358101


	colour temp.	colour
lumen	RGB	
watt	3 × 1W	
driver	DC12/24V	
beam angle	45°	

LED-IRIDE-3P-BCO

8031440359719

	colour temp.	colour
lumen	240 lm	
watt	3 × 1W	
driver	DC12/24V	
beam angle	30°	

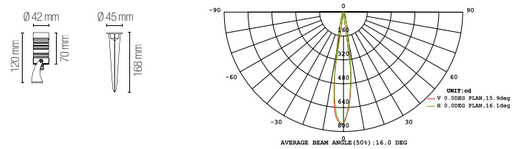





LED-IRIDE-9P


8031440358118


	colour temp.	colour
lumen	RGB	
watt	9 × 1W	
driver	DC12/24V	
beam angle	40°	

LED-IRIDE-9P-BCO

8031440359702

	colour temp.	colour
lumen	720 lm	
watt	9 × 1W	
driver	DC12/24V	
beam angle	30°	

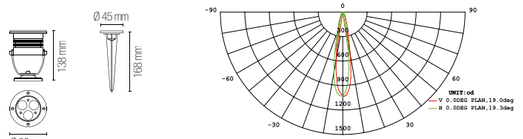





LED-IRIDE-18P


8031440358088


	colour temp.	colour
lumen	RGB	
watt	18 × 1W	
driver	DC24V	
beam angle	40°	

LED-IRIDE-18P-BCO

8031440359689

	colour temp.	colour
lumen	1620 lm	
watt	18 × 1W	
driver	DC24V	
beam angle	30°	

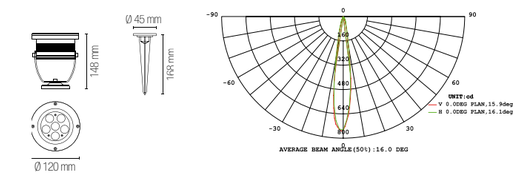



IRIDE







technical information

IRIDE

Incassi calpestabili LED RGB FULL COLOR corpo in lega di alluminio, ghiera in acciaio 316.
Walkable built-in LED RGB FULL COLOR light 316 stainless steel cover and aluminium alloy housing.

Materiale
alluminio pressofuso

Temperatura colore
RGB full color

Driver
DC 12/24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
die cast aluminum

Colour temperature
RGB full color

Driver
DC 12/24V
not included

Life time and on/off
50.000h
>25.000 on/offf





colour temp. | colour | recessed box


LED-IRIDE-R6
8031414868971

lumen	RGB
watt	3 × 1W
driver	DC12/24V
beam angle	15°













colour temp. | colour | recessed box


LED-IRIDE-R12
8031414868988

lumen	RGB
watt	9 × 1W
driver	DC12/24V
beam angle	15°













colour temp. | colour | recessed box


LED-IRIDE-R14
8031414868995

lumen	RGB
watt	18 × 1W
driver	DC12/24V
beam angle	15°









NEPTUNE

outdoor use · accommodation areas use · office use · commercial areas use

Materiale
acciaio inox 316

Colore
silver
nero

Temperatura colore
RGB full color

Driver
DC24V
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
316 stainless steel

Colour
black
silver

Colour temperature
RGB full color

Driver
DC24V
not included

Life time and on/off
50.000h
>25.000 on/off

Proiettori per fontane LED RGB full color.
LED RGB full color fountain flood lamp.


+10-100% · IP68 · degree IK10 · RGB








	colour temp.	colour
LED-NEPTUNE-3P		
8031414869008		
lumen	RGB	
watt	3 × 3W	
beam angle	25°	


	colour temp.	colour
LED-NEPTUNE-36P		
8031440358057		
lumen	RGB	
watt	36 × 1W	
beam angle	45°	























CROWN


outdoor use · accommodation areas use · office use · commercial areas use

Incasso per fontane LED RGB full color.
LED RGB full color fountain recess lamp.

+10-100% · IP68 · degree IK10 · RGB




	colour temp.	colour
LED-CROWN-R14		
8031414869015		
lumen	RGB	
watt	9 × 2W	
beam angle	25°	





TREVIS

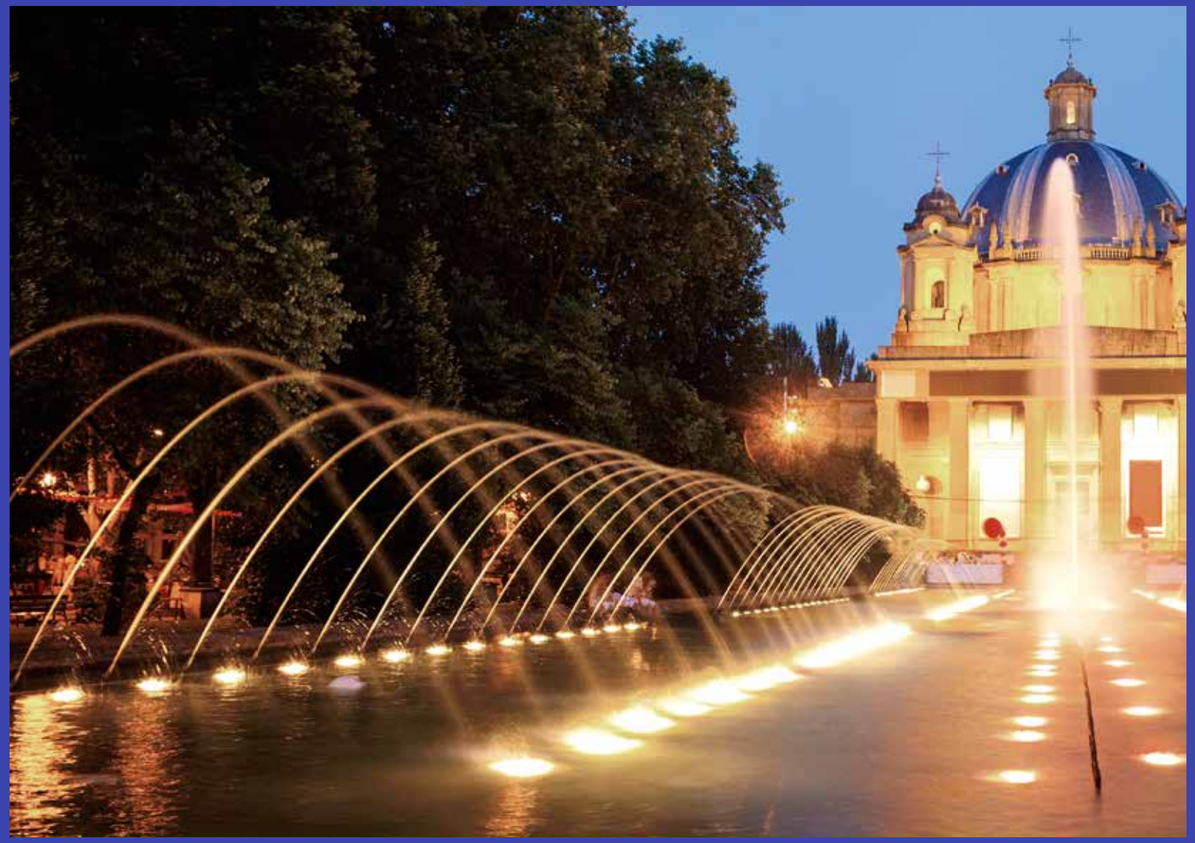

TREVIS

Incasso immersione LED RGB full color.
Immersion recessed light LED RGB full color.

Materiale
acciaio inox 316

Temperatura colore
RGB full color

Driver
DC 24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
316 stainless steel

Colour temperature
RGB full color

Driver
DC 24V
not included


Life time and on/off
50.000h
>25.000 on/offf





colour temp. | colour | recessed box

LED-TREVIS-R7
8031414869022

lumen	RGB
watt	3W
beam angle	25°



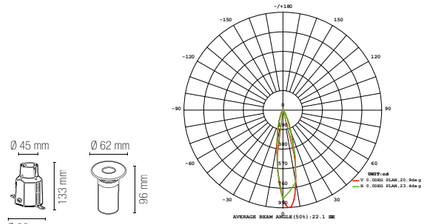







colour temp. | colour | recessed box

LED-TREVIS-R11
8031414869039

lumen	RGB
watt	9W
beam angle	25°







PAR56

outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Temperatura colore
RGB full color + 5700K

Driver
AC 12V non incluso
DC 24V non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
PC

Colour temperature
RGB full color + 5700K

Driver
AC 12V not included
DC 24V not included

Life time and on/off
50.000h
>25.000 on/offf

Incasso LED a immersione per piscine.
Pool immersion LED down light.

CE · 10-100% · IP68 · degree IK10 · CRI >80 · RGB







	colour temp.	colour
LED-PAR56-24V-RGB		
8031414879755		
lumen	RGB	
watt	21W	
driver	DC24V	
beam angle	45°	
1 m cable included		


	colour temp.	colour
LED-PAR56-BCO		
8031440359504		
lumen	1050 lm	
watt	21W	
driver	DC24V	
beam angle	45°	


INC-POOL-PAR56
8031440359511

Struttura incasso per PAR 56
per piscine in cemento /
Recessed structure for
PAR56 for concrete swimming pool


1 m cable included


Ø 260 mm











PELPS

outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Temperatura colore
RGB full color + 5700K

Driver
AC 12V non incluso
DC 24V non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
PC

Colour temperature
RGB full color + 5700K

Driver
AC 12V not included
DC 24V not included

Life time and on/off
50.000h
>25.000 on/offf

Lampada LED per piscine con fissaggio a parete.
Pool LED wall lamp.

CE · 10-100% · IP68 · degree IK10 · CRI >80 · RGB








	colour temp.	colour
LED-PELPS24V-RGB		
8031414868872		
lumen	RGB	
watt	18W	
driver	DC24V	
beam angle	45°	
1 m cable included		

	colour temp.	colour
LED-PELPS-RGB		
8031414865406		
lumen	RGB	
watt	18W	
driver	AC12V	
beam angle	45°	

	colour temp.	colour
LED-PELPS-BCO		
8031414865420		
lumen	1122 lm	
watt	18W	
driver	AC12V	
beam angle	45°	








CONTROLLER-POOL
8031440359481


Controller 240V
AC MAX 5A/1100W
IP65 distanza max 30M

Controller 240V
AC max 5A/1100W
IP65 max distance 30M





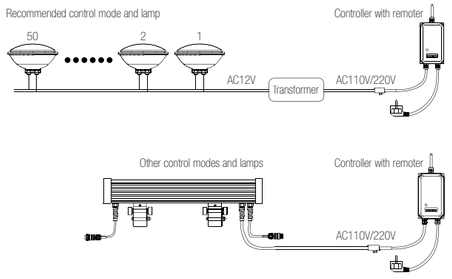

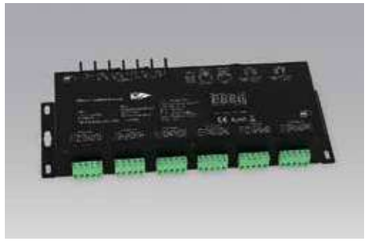

CONTROLLER-DMX-24
8031414872718

Controller DMX 24 canali
Tensione costante 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

Controller DMX 24 channels
Constant voltage 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

264,5 × 83 × 42 mm



SPLITTER-DMX-4
8031440359542

SPLITTER DMX
6W XLR-3X4PCS XLR-5X4PCS

DMX SPLITTER
6W XLR-3X4PCS XLR-5X4PCS






CONTROLLER-CTR-RGB
8031440358026

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 porte da 3 canali RGB


Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 ports 3 RGB channels



CONTROLLER-CTR-RGB12
8031440355438

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 300W)
6 porte da 3 canali RGB

Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC 12V 300W
6 ports 3 RGB channels

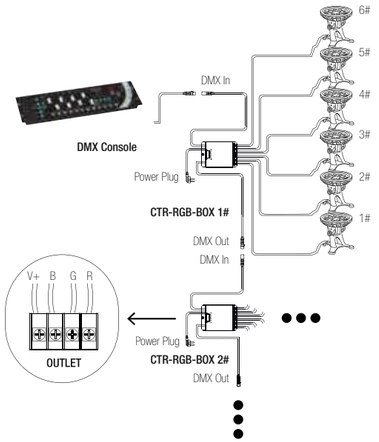




CONTROLLER-PRO-3
8031440358033

Controller Master 3 canali
per uso proiettori
in modalità EASY
IN 230V OUT DMX/XLR-3
2 canali IP20

Controller Master 3 channels
for flood in EASY MODE
IN 230V OUT DMX/XLR-3
2 channels IP20







CONTROLLER-PRO-2
8031440358002

Controller DMX LED
3 canali RGB SEGNALE OUTPUT
DMX/XLR-3 (due uscite)
IP20 con cavo di ricarica

Controller DMX LED
3 channels RGB OUTPUT SIGNAL
DMX/XLR-3 (two port)
IP20 with charge cable




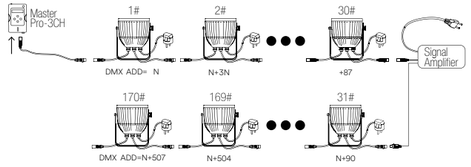

CONTROLLER



LED-SUNLITE-DE3
8031440359498
SUNLITE 2X512 DMX ESA PRO/SUITE 2







CONTROLLER



LED-SUNLITE-U9
8031440359467

SUNLITE Controller
256 canali Input
(218 steps max)

SUNLITE Controller
256 channels Input
(218 steps max)








LED-SUNLITE-GU2
8031422251093

SUNLITE DMX STICK-GU2
128 canali Input 240V

SUNLITE DMX STICK-GU2
128 channels Input 240V





COMPONENTISTICA

LIGHTING COMPONENTS



TRASFORMATORE-120
8031440355094
IP44

Trasformatore di tensione 120W Input 240V AC Output 12V AC IP44 10A	Voltage power supply 120W Input 240V AC Output 12V AC IP44 10A	180 × 134 × 63 mm



LED-IRIDE-CAVO-2M-2P
8031440355452
IP65

Cavo 2 poli per faro IRIDE bianco alluminio	Cable 2 poles for IRIDE white headlight aluminium	2 metri / 2 meters



LED-IRIDE-CAVO-2M
8031440358095
IP65

Cavo RGB 4 poli per faro IRIDE RGB bianco alluminio	RGB cable 4 poles for IRIDE RGB white headlight aluminium	2 metri / 2 meters



CONNETTORE-M
8031440355469
IP68

Connettore maschio per DMX	Male connector for DMX



CONNETTORE-F
8031440355476
IP68

Connettore femmina per DMX	Female connector for DMX



CONNECTBOX-IP68-3
8031440358903
IP68

Scatola connessione a tre poli	Connection box with three poles

35 × 115 × 71 mm



CONNECTBOX-IP68-2
8031440358927
IP68

Scatola connessione a due poli	Connection box with two poles

30 × 115 × 41 mm



GUAINA
8031440355483
IP65

Guaina isolante	Insulating sheath



CONNETTORE-IP20
8031414897681

Connettore IP20 2L+2N	IP20 2L+2N Connector



CONNETTORE-IP65
8031414897698
IP65

Connettore IP65	IP65 Connector



CONNETTORE-IP68
8031414897704
IP68

Connettore IP68	IP68 Connector

DRIVER



I-DRIVER/4W
8031414862801
IP65

MINI Driver corrente costante Output 2-12V 350mA 4W Input 100 ~ 240V	MINI constant current driver Output 2-12V 350mA 4W Input 100 ~ 240V	38 × 27 × 21 mm



I-DRIVER/4W-24V
8031414871797
IP65

MINI Driver corrente costante Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	MINI constant voltage driver Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	38 × 27 × 21 mm



I-DRIVER-LT-75-24
8031414876822

LT Driver tensione costante Output 24VDC 3.12A 75W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 3.12A 75W Input 220 ~ 240V AC	305 × 30 × 17 mm



I-DRIVER-LT-150-24
8031414876846

LT Driver tensione costante Output 24V DC 6.25A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 24V DC 6.25A 150W Input 220 ~ 240V AC	336 × 30 × 17 mm



I-DRIVER-LT-30-24
8031414896196

LT Driver tensione costante Output 24VDC 1.25A 30W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 1.25A 30W Input 220 ~ 240V AC	251 × 30 × 16 mm



I-DRIVER-LT-60-24
8031414896202

LT Driver tensione costante Output 24VDC 2.5A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 2.5A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm



I-DRIVER-LT-100-24
8031414896226

LT Driver tensione costante Output 24VDC 4.17A 100W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 4.17A 100W Input 220 ~ 240V AC	312 × 30 × 18,2 mm



I-DRIVER-LT-200-24
8031414896240

LT Driver tensione costante Output 24VDC 8.34A 200W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 8.34A 200W Input 220 ~ 240V AC	335 × 30 × 21,6 mm



I-DRIVER-LT-60-48
8031414896219

LT Driver tensione costante Output 48VDC 1.25A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 1.25A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm



I-DRIVER-LT-150-48
8031414896233

LT Driver tensione costante Output 48VDC 3.125A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 3.125A 150W Input 220 ~ 240V AC	335 × 30 × 21,6 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 12V / Constant voltage power supply LRS and RSP 12V



STRIP-DRIVER12V-35W
8031440360265
Output 12V 3A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER12V-50W
8031414866779
Output 12V 4.2A 50W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER12V-75W
8031439581268
Output 12V 6A 72W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 97 × 30 mm



STRIP-DRIVER12V-100W
8031440359368
Output 12V 8.5A 102W
Input 85 ~ 264VAC 120 ~ 373VDC
129 × 97 × 30 mm



STRIP-DRIVER12V-150W
8031439611262
Output 12V 12.5A 150W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
159 × 97 × 30 mm



STRIP-DRIVER12V-200W
8031440359375
Output 12V 16,7A 200W
Input 85 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER12V-320W
8031440359344
Output 12V 26,7A 320W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 24V / Constant voltage power supply LRS and RSP 24V



STRIP-DRIVER24V-35W
8031414870943
Output 24V 1,5A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER24V-50W
8031440364744
Output 24V 2,2A 52W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER24V-75W
8031414870950
Output 24V 3,2A 76W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 97 × 30 mm



STRIP-DRIVER24V-100W
8031440364751
Output 24V 4.5A 108W
Input 85 ~ 264VAC 120 ~ 373VDC
129 × 97 × 30 mm



STRIP-DRIVER24V-150W
8031414870967
Output 24V 6.5A 156W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
159 × 97 × 30 mm



STRIP-DRIVER24V-200W
8031440364737
Output 24V 8,4A 201W
Input 85 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER24V-320W
8031414864959
Output 24V 13,4A 321W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

ALIMENTATORI
POWER SUPPLY



I-DRIVER-UHP-200-24
8031414896387
Output 24V 8.4A 200W
Input 90 ~ 264VAC 127 ~ 370VDC
194 × 55 × 26 mm

Alimentatori tensione costante UHP 24V / Costant voltage power supply UHP 24V



I-DRIVER-UHP-350-24
8031414879618
Output 24V 14.6A 350W
Input 90 ~ 264VAC 127 ~ 370VDC
220 × 62 × 31 mm
senza ventola / without fan



I-DRIVER-UHP-500-24
8031414879625
Output 24V 20.9A 501W
Input 90 ~ 264VAC 127 ~ 370VDC
220 × 62 × 31 mm
senza ventola / without fan

Alimentatori tensione costante RSP 36V / Costant voltage power supply RSP 36V



STRIP-DRIVER36V-200W
8031414870974
Output 36V 5.56A 200W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER36V-320W
8031414864829
Output 36V 8.9A 320W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

Alimentatori tensione costante RSP 48V / Costant voltage power supply RSP 48V



STRIP-DRIVER48V-75W
8031414881536
Output 48V 1.6A 76,8W
Input 88 ~ 264VAC 124 ~ 370VDC
99 × 97 × 30 mm



STRIP-DRIVER48V-150W
8031414881529
Output 48V 3.3A 158,4W
Input 85 ~ 132VAC 240 ~ 370VDC
159 × 97 × 30 mm



STRIP-DRIVER48V-200W
8031414878307
Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER48V-320W
8031414878314
Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

DRIVER

Driver LPHC LPH and LCM



I-DRIVER/18W-24V
8031414875351
IP67
LPH
Output 24V 0.75A 18W
Input 180 ~ 264VAC 254 ~ 370VDC
140 × 30 × 22 mm



I-DRIVER/18W
8031439571269
IP67
LPHC
Output 6~48V 350mA 16,8W
Input 180 ~ 264VAC
140 × 30 × 22 mm



I-DRIVER-DIMM-LCM40
8031439591267
LCM dimmerabile 42W
Output DC 2~100V 350mA; 2~80V
500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V
1050mA
Input 180 ~ 295VAC 254~417VDC
123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM60
8031439561260
LCM dimmerabile 60W
Output DC 2~90V 500mA; 2~90V
600mA; 2~86V 700mA; 2~67V
900mA; 2~57V 1050mA; 2~42V
1400mA
Input 180 ~ 295VAC 254~417VDC
123,5 × 81,5 × 23 mm

DRIVER

Driver HLG IP67 12-24V



I-DRIVER-HLG-120-12
8031440360272
IP67
Output 12V 10A 120W
Input 90 ~ 305VAC 127 ~ 431VDC
220 × 68 × 38,8 mm



I-DRIVER-HLG-120-24
8031440360241
IP67
Output 24V 5A 120W
Input 90 ~ 305VAC 127 ~ 431VDC
220 × 68 × 38,8 mm



I-DRIVER-HLG-320-12
8031440360258
IP67
Output 12V 22A 264W
Input 90 ~ 305VAC 127 ~ 431VDC
252 × 90 × 43,8 mm



I-DRIVER-HLG-320-24
8031440360227
IP67
Output 24V 13.34A 320W
Input 90 ~ 305VAC 127 ~ 431VDC
252 × 90 × 43,8 mm

DRIVER

Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 / Dimmable driver ELG 24V IP67 and LPV 24V IP67



I-DRIVER-ELG-100-24
8031414876914
IP67
ELG Dimmerabile
Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC
continue,
320VAC for 24Hrs; 360VAC for 1Hr
199 × 63 × 35,5 mm



I-DRIVER-ELG-100-24DA DALI
8031414876921
IP67
ELG Dimmerabile DALI
Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC
continue
320VAC for 24Hrs; 360VAC for 1Hr
199 × 63 × 35,5 mm



I-DRIVER-ELG-150-24
8031414876891
IP67
ELG Dimmerabile
Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC
219 × 63 × 35,5 mm



I-DRIVER-ELG-150-24DA DALI
8031414876907
IP67
ELG Dimmerabile DALI
Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC
219 × 63 × 35,5 mm



I-DRIVER-ELG-240-24
8031414876877
IP67
ELG Dimmerabile
Output 24V 10A 240W
Input 100 ~ 305VAC 142 ~ 431VDC
244 × 71 × 37,5 mm



I-DRIVER-ELG-240-24DA DALI
8031414876884
IP67
ELG Dimmerabile DALI
Output 24V 10A 240W
Input 100 ~ 305VAC 142 ~ 431VDC
244 × 71 × 37,5 mm



I-DRIVER-LPV-60-24
8031414876839
IP67
LPV Output 24V 2.5A 60W
Input 90 ~ 264VAC 127 ~ 370VDC
162,5 × 42,5 × 32 mm



I-DRIVER-LPV-100-24
8031414876853
IP67
LPV Output 24V 4.2A 100W
Input 90 ~ 264VAC 127 ~ 370VDC
190 × 52 × 37 mm



I-DRIVER-LPV-150-24
8031414876860
IP67
LPV Output 24V 6.3A 150W
Input 180 ~ 305VAC 254 ~ 431VDC
191 × 63 × 37,5 mm

DRIVER

Driver XLG 24V IP67



I-DRIVER-XLG-75-24
8031414873708
IP67
Output 24V 3.1A 75W
Input 100 ~ 305VAC 142 ~ 431VDC
140 × 63 × 32 mm



I-DRIVER-XLG-100-24
8031414879595
IP67
Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC
140 × 63 × 32 mm



I-DRIVER-XLG-150-24
8031414879601
IP67
Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC
180 × 63 × 35,5 mm



I-DRIVER-XLG-200-24
8031414879588
IP67
Output 24V 8.3A 200W
Input 100 ~ 305VAC 142 ~ 431VDC
199 × 63 × 35,5 mm

DRIVER

Driver PWM DALI2



I-DRIVER-PWM-60-24DA DALI
8031414896356
IP67
Output 24V 2.5A 60W
Input 90 ~ 305VAC 127 ~ 431VDC
DALI2
150 × 53 × 35 mm



I-DRIVER-PWM-120-24DA DALI
8031414896363
IP67
Output 24V 5A 120W
Input 90 ~ 305VAC 127 ~ 431VDC
DALI2
191 × 63 × 37,5 mm



I-DRIVER-PWM-200-24DA DALI
8031414896370
IP67
Output 24V 8.3A 200W
Input 100 ~ 305VAC 142 ~ 431VDC
DALI2
195 × 68 × 39,5 mm

DRIVER

Guida DIN a forma di gradino ultra sottile /
Ultra Slim Step Shape DIN Rail



I-DRIVER-HDR-60-24
8031414896271

Output 24V 2.5A 60W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

52,5 × 90 × 54,5 mm



I-DRIVER-HDR-100-24
8031414896288

Output 24V 3.83A 100W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

70 × 90 × 54,5 mm



I-DRIVER-HDR-150-24
8031414896295

Output 24V 6.25A 150W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

105 × 90 × 54,5 mm

DRIVER

GUIDA DIN industriale a uscita singola /
Single Output Industrial DIN RAIL



I-DRIVER-NDR-240-24
8031414896301

Output 24V 10A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-24
8031414896325

Output 24V 20A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm



I-DRIVER-NDR-240-48
8031414896318

Output 48V 5A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-48
8031414896332

Output 48V 10A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm

DRIVER

GUIDA DIN industriale a uscita singola con funzione PFC /
Single Output Industrial DIN RAIL with PFC Function



I-DRIVER-SDR-960-24
8031414896349

Output 24V 40A 960W
Input 180 ~ 264VAC 254 ~ 370VDC

110 × 125,2 × 150 mm

DIMMER



I-DIMMER-D1-10
8031414877959

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

22,5 × 22,5 × 48,6 mm



I-DIMMER-D1-10S
8031414896257

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

83,5 × 83,5 × 44 mm



I-DIMMER-D350S
8031414896264

Dimmer a taglio di fase
220~240VAC
10~350W 1.5A

Trailing edge dimmer
220~240VAC
10~350W 1.5A

83,5 × 83,5 × 44 mm

DRIVER

Driver emergenza /
Emergency driver



I-DRIVER-EMERGENCY
8031414864751

Driver di emergenza
6-60V 400-40mA 4W 180Min
Batteria 3,6V 3.0Ah Ni-Cd

Emergency driver
6-60V 400-40mA 4W 180Min
Battery 3,6V 3.0Ah Ni-Cd

160 × 38 × 28 mm



I-DRIVER-HELP
8031414862559

Driver di emergenza
Output Voltage 10-120V
Input Voltage 85-265V
3-40W. emergenza 120 min.
18650 Li-Ion Battery
3,7V 2.4Ah

Emergency driver
Output Voltage 10-120V
Input Voltage 85-265V
3-40W. emergency 120 min.
18650 Li-Ion Battery
3,7V 2.4Ah

131 × 55 × 21 mm



I-DRIVER-HELP-HV
8031414882595

Emergency output
voltage 230V AC, adatto per:

2,5W emergency power
3 hours emergency time

3,5W emergency power
2 hours emergency time

5W emergency power
1,5 hours emergency time

Battery 18650 LiFePO4 6.4V 1500mAh

Emergency output
voltage 230V AC, suitable for:

2,5W emergency power
3 hours emergency time

3,5W emergency power
2 hours emergency time

5W emergency power
1,5 hours emergency time

Battery 18650 LiFePO4 6.4V 1500mAh

160 × 38 × 28 mm

DRIVER



I-DRIVER-60-24
8031414897797
Output 24V 2.5A 60W
Input 176 ~ 264VAC 176~370VDC
178 × 53 × 23 mm



I-DRIVER-60-24-IP67
8031414897841
IP67
Output 24V 2.5A 60W
Input 176 ~ 264VAC
160 × 50 × 31 mm



I-DRIVER-100-24
8031414897803
Output 24V 4.1A 100W
Input 176 ~ 264VAC 250 ~ 360VDC
188 × 53 × 23 mm



I-DRIVER-100-24-IP67
8031414897858
IP67
Output 24V 4.2A 100W
Input 176 ~ 264VAC
220 × 50 × 31 mm



I-DRIVER-150-24
8031414897810
Output 24V 6.3A 150W
Input 175 ~ 264VAC 176 ~ 370VDC
220 × 53 × 23 mm



I-DRIVER-150-24-IP67
8031414897865
IP67
Output 24V 6.25A 150W
Input 176 ~ 264VAC
230 × 65 × 21 mm



I-DRIVER-200-24
8031414897827
Output 24V 8.3A 200W
Input 175 ~ 264VAC 175 ~ 370VDC
274 × 53 × 23 mm



I-DRIVER-200-24-IP67
8031414897872
IP67
Output 24V 8.3A 200W
Input 175 ~ 264VAC
230 × 65 × 31 mm



I-DRIVER-300-24
8031414897834
Output 22-24V 11.5A 300W
Input 175 ~ 264VAC 175 ~ 370VDC
230 × 65 × 31 mm



I-DRIVER-DEL042
8031414897667
Output 6-38/40/42 VDC
0.45-1.10A 42W
Input 220 ~ 240VAC
DALI2 PUSH DIM
103 × 68,5 × 30,5 mm

DIMMER



STRIP-CONTROL-WIFI
8031440359474
Kit controller + radiocomando 2.4G per prodotti LED RGBW
DC 12/24V 6Ax3ch
Max Distanza 20 m
Controller + 2.4G remote control kit for LED RGBW items
DC 12/24V 6Ax3ch
Max distance 20 m
81 × 84 × 32 mm



STRIP-SOUND
8031434531213
Ricevitore musicale + telecomando
RGB 12V per strip LED
Musical control receiver RGB 12V for strip LED + remote control
50 × 70 × 20 mm

ADATTATORI POWER SUPPLY

Adattatore tensione costante / Costant voltage power supply



STRIP-ADAT-12W
8031433141208
12V 12W - Spina CEE 7/16 IP20
Output 12V 1A
Input 110-240V 0,5A
IP20 - CLASSE 2
38 × 67 × 42 mm
cavo 1500 mm



STRIP-ADAT-24W
8031433251204
12V 24W - Spina CEE 7/16 IP20
Output 12V 2A
Input 110-240V 0,6A
IP20 - CLASSE 2
38 × 80 × 50 mm
cavo 1500 mm



STRIP-ADAT-36W
8031436601235
LED 12V 36W - Spina CEE 7/16 IP20
Output 12V 3A
Input 110-240V 0,6A
IP20 - CLASSE 2
35 × 100 × 50 mm
cavo 1500 mm

REMOTE CONTROL



RF-WALLPAD-1CH
8031414876426

Wallpad RF 2.4G controllo
dimmer-varialuce 4 zone
1 canale 2xAAA non incluse

RF 2.4G wallpad
dimming light 4 zone
1 channel 2xAAA not included

86 × 86 × 36,5 mm



RF-WALLPAD-2CH
8031414876433

Wallpad RF 2.4G controllo
CCT bianco dinamico 4 zone
2 canali 2xAAA non incluse

RF 2.4G wallpad CCT
adjustable white 4 zone
2 channels 2xAAA not included

86 × 86 × 36,5 mm




RF-WALLPAD-5CH
8031414876440

Wallpad RF 2.4G
controllo RGB/RGBW/RGB+CCT
4 zone 5 canali
2xAAA non incluse

RF 2.4G wallpad
RGB/RGBW/RGB+CCT
4 zone 5 channels
2xAAA not included

86 × 86 × 36,5 mm

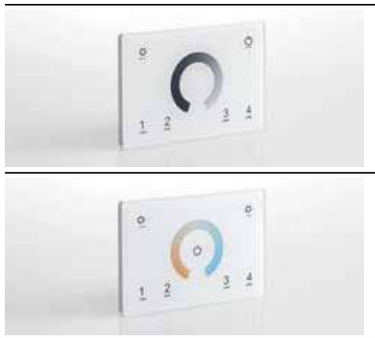

RF-DMXPAD-1CH
8031414876457

Wallpad RF 2.4G controllo
dimmer-varialuce 4 zone
1 canale 230V collegabile
con protocollo DMX 512

RF 2.4G wallpad
dimming light 4 zone
1 channel 230V linkable
with DMX512 protocol

120 × 80 × 37 mm

formato universale
per cassetta 503 /
universal size
for 503 box



RF-DMXPAD-2CH
8031414876464

Wallpad RF 2.4G controllo
CCT bianco dinamico 4 zone
2 canali 230V collegabile
con protocollo DMX 512

RF 2.4G wallpad CCT
adjustable white 4 zone
2 channels 230V collegabile
con protocollo DMX 512

120 × 80 × 37 mm

formato universale
per cassetta 503 /
universal size
for 503 box

RF-DMXPAD-5CH
8031414876471

Wallpad RF 2.4G controllo
RGB/RGBW/RGB+CCT 4 zone
5 canali 230V collegabile
con protocollo DMX 512

RF 2.4G wallpad
RGB/RGBW/RGB+CCT 4 zone
5 channels 230V collegabile
con protocollo DMX 512

120 × 80 × 37 mm

formato universale
per cassetta 503 /
universal size
for 503 box

REMOTE CONTROL



RF-COM-1CH
8031414876402

Radiocomando RF 2.4G controllo
dimmer-varialuce 4 zone
1 canale 2xAAA non incluse

RF 2.4G remote control
dimming light 4 zone
1 channel 2xAAA not included



RF-COM-2CH
8031414876396

Radiocomando RF 2.4G controllo
CCT bianco dinamico 4 zone
2 canali 2xAAA non incluse

RF 2.4G remote control
CCT adjustable white 4 zone
2 channels 2xAAA not included



RF-COM-5CH
8031414876419

Radiocomando RF 2.4G controllo
RGB/RGBW/RGB+CCT 4 zone
5 canali 2xAAA non incluse

RF 2.4G remote control
CCT adjustable white 4 zone
2 channels 2xAAA not included



RF-COM-5CH-1ZN
8031414897919

Controllo RGB+CCT 1 zone
Batteria CR2032

RGB+CCT Remote Control 1 zone
Battery CR2032

RF-COM-1CH-1ZN
8031414897896

Controllo luminosità 1 zone
Batteria CR2032

Brightness Remote Control 1 zone
Battery CR2032



RF-COM-2CH-1ZN
8031414897902

Controllo CCT 1 zone
Batteria CR2032

CCT Remote Control 1 zone
Battery CR2032



RF-COM-5CH-8ZN
8031414897926

Radiocomando RF 2.4G
controllo RGB/RGBW/RGB+CCT 8 zone

8 scene 2xAAA non incluse
RF Remote Controller 8 zones 8 scenes
Battery: 2xAAA not included



RF-RICEVITORE-1CH
8031414897933

Ricevitore RF 2.4G
1 canale per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO COLORE
Input 8.5A 12-24V
Output 1CH 8A - 40W/96W/192W/288W

RF 2.4G receiver box
2 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE COLOR
Input 8.5A 12-24V
Output 1CH 8A - 40W/96W/192W/288W

97 × 33 × 18 mm



RF-RICEVITORE-2CH
8031414876488

Ricevitore RF 2.4G
2 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT
Input 10.5A 12-24V
Output 2CH;5A/CH - 2x(60-120)W

RF 2.4G receiver box
2 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE COLOR/CCT
Input 10.5A 12-24V
Output 2CH;5A/CH - 2x(60-120)W

97 × 33 × 18 mm



RF-RICEVITORE-5CH
8031414876495

Ricevitore RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

F 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm



RF-RICEVITORE-5CH-PRO
8031414882724

IP67

Ricevitore RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 30.5A 12-48V
Output 5CH;6A/CH 12/24V 5 x (72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W

RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/RGB/RGBW/RGB+CCT
Input 30.5A 12-48V
Output 5CH;6A/CH 12/24V 5x(72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W

179 × 56 × 30 mm



RF-RICEVITORE-4CH-IP67
8031414882717

Ricevitore RF 2.4G
4 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW
Input 20.5A 12-36V
Output 4CH;5A/CH - 4x(60-180)W

RF 2.4G receiver box
4 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/
RGB/RGBW/RGB+CCT
Input 20.5A 12-36V
Output 4CH;5A/CH - 4x(60-180)W

176 × 78 × 38 mm



RF-WIFI-CONTROL-5CH
8031414878710

Ricevitore Wi-Fi + RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

Wi-Fi + RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm



RF-BT-CONTROL-5CH
8031414878826

Ricevitore Bluetooth + RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

Bluetooth + RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm



RF-AMPLIFICATORE-5CH
8031414882700

Amplificatore 5 canali
Input 25.5A 12-24VDC
Output 5CH;5A/
CH 12/24V - 5x(60-120)W

5 Channel amplifier
Input 25.5A 12-24VDC
Output 5CH;5A/
CH 12/24V - 5x(60-120)W

107 × 75 × 24,5 mm



RF-AMPLIFICATORE-2CH
8031414882694

Amplificatore 2 canali
Input 16.5A 12-36VDC
Output 2CH;8A/
CH 12/36V - 2x(96-288)W

2 Channel amplifier
Input 16.5A 12-36VDC
Output 2CH;8A/
CH 12/36V - 2x(96-288)W

175 × 45 × 27 mm



RF-RIPETITORE
8031414882731

Ripetitore di segnale RF 2.4G
AC100-240V DC12-24V

RF 2.4G signal Repeater
AC100-240V DC12-24V

52 × 52 × 26 mm

AMPLIFICATORE
AMPLIFIER

Amplificatore segnale /
Signal amplifier



STRIP-AMPLIFIER-5C
8031414871858

5 Canali Dc 12-24V
Output Current < 3A/Ch (5 Channel)
Output Power: 12V <180W; 24V<360W

81 × 64 × 25 mm



I-CLAY-SCADER
8031414865031

Scatola di derivazione elettrica CLAY in porcellana bianca

White porcelain external junction box CLAY

Ø 80 x H 45 mm



I-CLAY-INTERRUTTORE
8031414865048

Interruttore rotativo CLAY in porcellana bianca 10A AC230V 50Hz

White porcelain rotating switch CLAY 10A AC230V 50Hz

Ø 65 x H 60 mm



I-CLAY-PRESA
8031414865055

Presa elettrica CLAY polivalente in porcellana bianca 10/16A AC230V 50Hz

White porcelain universal socket CLAY 10/16A AC230V 50Hz

Ø 65 x H 37 mm



I-CLAY-PRESA-F
8031414865062

Presa elettrica Schuko CLAY in porcellana bianca

White porcelaine Schuko socket CLAY

Ø 65 x H 50 mm



I-CLAY-E27
8031414871117

Portalampada CLAY in porcellana bianca E27 AC230V 50Hz

White porcelaine E27 lamp-holder AC230V 50Hz

Ø 45 x H 60 mm



I-CLAY-E14
8031414870929

Portalampada CLAY in porcellana bianca E14 AC230V 50Hz

White porcelaine E14 lamp-holder AC230V 50Hz

Ø 35 - H 60 mm



I-CLAY-BASE
8031414870936

Rosone in porcellana bianca

White porcelain canopy

Ø 105 x H 30 mm



I-CLAY-ISOLATORI
8031414865079

Kit 4 pz isolatori CLAY in porcellana bianca

White porcelain pulleys CLAY set 4 pcs

Ø 18 x H 20 mm



I-CLAY-CAVO-BCO
8031414865086

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

5 m
3 × 0,75 mm

I-CLAY-CAVO-2P-BCO
8031414865277

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

5 m
2 × 0,75 mm

I-CLAY-CAVO-R25 BCO
8031414871162

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

25 m
2 × 0,75 mm



I-CLAY-CAVO-ORO
8031414865093

Cavo elettrico CLAY trecciato con rivestimento tessile in oro

Gold twisted fabric wire CLAY

5 m
3 × 0,75 mm

I-CLAY-CAVO-2P-ORO
8031414865284

Cavo elettrico CLAY trecciato con rivestimento tessile oro

Gold twisted fabric wire CLAY

5 m
2 × 0,75 mm

I-CLAY-CAVO-R25 ORO
8031414871131

Cavo elettrico CLAY trecciato con rivestimento tessile oro

Gold twisted fabric wire CLAY

25 m
2 × 0,75 mm



I-CLAY-CAVO-R25 MAR
8031414871148

Cavo elettrico CLAY trecciato con rivestimento tessile marrone

Brown twisted fabric wire CLAY

25 m
3 × 0,75 mm



I-CLAY-CAVO3X1,5 BCO
8031414877980

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

White porcelain canopy

25 m
3 × 1,5 mm



I-CLAY-CAVO3X1,5 MAR
8031414878000

Cavo elettrico CLAY trecciato con rivestimento tessile in marrone

Brown twisted fabric wire CLAY

25 m
3 × 1,5 mm



I-CLAY-CAVO3X1,5 ORO
8031414877997

Cavo elettrico CLAY trecciato con rivestimento tessile in oro

Gold twisted fabric wire CLAY

25 m
3 × 1,5 mm



I-PORTALAMPADE-E14-L
8031440354592

Portalampada E14 con copertura liscia in PET	E14 lamp holder with smooth PET cover



I-PORTALAMPADE-E14-S
8031440354578

Portalampada E14 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring



I-PORTALAMPADE-E14-T
8031440354585

Portalampada E14 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded



I-PORTALAMPADE-E27-L
8031440354554

Portalampada E27 con copertura liscia in PET	E27 lamp holder with smooth PET cover



I-PORTALAMPADE-E27-P
8031440354561

Portalampada E27 in PBT	E27 lamp holder in PBT



I-PORTALAMPADE-E27-S
8031440354530

Portalampada E27 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring



I-PORTALAMPADE-E27-T
8031440354547

Portalampada E27 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded



I-PORTALAMPADE-GU10
8031435751221

Portalamapada GU10 in PBT con cavo di 12 cm	GU10 lamp holder in PBT with 12 cm cable



I-PORTALAMPADE-MR16
8031439761264

Portalampada MR16 in PBT con cavo di 10 cm	Lamp holder MR16 in PBT with 10 cm cable



I-PORTALAMPADE-T8
8031439851262

Portalampada T8 in PBT fissaggio a clip	Lamp holder T8 in PBT clip fixing




I-PORTALAMPADE-R7S
8031414861491

Portalampada R7S 118 mm in PBT incluso filo da 15 cm	Lamp holder R7S 118 mm in PBT including 15 cm wire



I-PORTALAMPADE-G9
8031414862962

Portalampada G9 in PBT con cavo di 10 cm	Lamp holder G9 in PBT with 10 cm cable



INC-MATRIX-KIT
8031436551233

Kit molle e anello per faretti incasso GU10	Kit springs and ring for recessed spotlights GU10



CABLAGGIO
8031414865499

Cabl. trip. cavo tondo bianco H05VV-F spina Italia 10A, 250V	White round cable harness H05VV-F plug Italy 10A, 250V	2,5 m 3 × 0,75 mm

ADATTATORI
LAMP HOLDER ADAPTERS



ADATTATORE-E14-E27
8031439351267

Adattatore da
E14 a E27 in PET

Lamp holder adapter
from E14 to E27 in PET



ADATTATORE-E27-E14
8031439391263

Adattatore da
E27 a E14 in PET

Lamp holder adapter
from E27 to E14 in PET



ADATTATORE-E27-2E27
80314439371265

Adattatore da
E27 a 2 E27 in PET

Lamp holder adapter
from E27 to E27 in PET



ADATTATORE-E27-GU10
8031436171233

Adattatore da
E27 a GU10 in PET

Lamp holder adapter
from E27 to GU10 in PET



ADATTATORE-E14-GU10
8031439361266

Adattatore da
E14 a GU10 in PET

Lamp holder adapter
from E14 to GU10 in PET



ADATTATORE-GU10-E14
8031439431266

Adattatore da
GU10 a E14 in PET

Lamp holder adapter
from GU10 to E14 in PET



ADATTATORE-GU10-E27
8031439421267

Adattatore da
GU10 a E27 in PET

Lamp holder adapter
from GU10 to E27 in PET



ADATTATORE-G9-E27
8031439411268

Adattatore da
G9 a E27 in PET

Lamp holder adapter
from G9 to E27 in PET

ADATTATORI
LAMP HOLDER ADAPTERS



ADATTATORE-G9-E14
8031439401269

Adattatore da
G9 a E14 in PET

Lamp holder adapter
from G9 to E14 in PET



ADATTATORE-E27-E27
8031439451264

Adattatore da E27 a E27
in PET con flessibile
20 cm in metallo

Lamp holder adapter
from E27 to E27 in PET with
20 cm metal flexible tube



ADATTATORE-EUC-UKG
8031414879809

Adattatore presa (EU) tipo C
a presa (UK) tipo G

Adaptor (EU) C to (UK) G



ADATTATORE-EUF-UKG
8031414879816

Adattatore (EU) F a (UK) G

Adaptor (EU) F to (UK) G

WI-FI
SMART INTEC

SMART INTEC SMART LIFE Powered by tuya Intelligence Inside

SMART INTEC

SMART HUB

SMART INTEC BLUETOOTH SIG MESH

SMART-GATEWAY-BT
8031414878970

Interfaccia di collegamento dispositivi bluetooth con rete wifi

Device connection interface bluetooth with wifi network



SMART PLUG

WI-FI SMART INTEC

SMART-IR
8031414878703





SMART PLUG

WI-FI SMART INTEC



SMART-POWER-SC4USB3
8031414879014

Adattatore multipresa WIFI
4 Schuko 3 USB 1000-2400W 10A
Input 100-240V
WIFI 2.4GHZ

WIFI multi-socket adapter
4 Schuko 3 USB 1000-2400W 10A
Input 100-240V
2.4GHZ WIFI

WI-FI SMART INTEC



SMART-PRESA
8031414878987

Adattatore presa
WIFI 230V 50HZ 16A
Frequenza 2.4GHz

WIFI socket adapter
230V 50HZ 16A
2.4GHz frequency

COMMUTATORI SMART

WI-FI SMART INTEC



SMART-SWITCH-2
8031414879045

Controller WIFI 2.4GHZ
per accensione e timer
Interruttori 2 vie 230V max 10A

2.4GHZ WIFI Controller
for ignition and timer
2-way switches 230V max 10A

WI-FI SMART INTEC



SMART-SWITCH-1
8031414879038

Controller WIFI 2.4GHZ
per accensione e timer
Interruttori 1 via 230V max 10A

2.4GHZ WIFI Controller
for ignition and timer
1-way switches 230V max 10A

WI-FI SMART INTEC



SMART-START
8031414879021

Controller WIFI 2.4GHz
per accensione e timer prodotti
230V max 2200W/10A

2.4GHZ WIFI Controller
for ignition and timer products
230V max 2200W/10A

SMART SENSOR

WI-FI SMART INTEC



SMART-SENSOR
8031414879007

Sensore infrarossi
WIFI 2.4GHz

Infrared sensor
WIFI 2.4GHz

WI-FI SMART INTEC



SMART-PORTER
8031414878994

Sensore porte e finestre
WIFI 2.4GHz alimentato
a batterie AAA1,5V2

Sensor for door and windows
WIFI 2.4ghz battery
powered AAA1,5V2

Notes

Notes

Notes

Notes

divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico

Agglomerato A.S.I

NAPOLI
Località Bosco Fangone
80035 Nola (NA)

T +39 081 3151017
T +39 081 8210771

MILANO
Via Monzoro, 46
20007 Cornaredo (MI)

T +39 02 84345083

info@faneurope.it
www.faneurope.it

Download Catalogue

SMART INTEC

Download App Smart Intec on:

SMART LIFE

Powered by tuya

concept
DITRE IDEAS MAKERS

graphic artwork & photo editing
Ditre.com

photo
Quasarfoto.com
F.A.N. Europe photographic archive

imagebank
shutterstock.com
istockphoto.com
unsplash.com

styling
Cristina Romanello

credits
Infiniti Design
Pointhouse
Studio Menguante
Paolo Loschi
Gressoni
Vbc ceramiche

printed in Italy
Graficametelliana.com
October 2022

L'azienda si riserva il diritto
di effettuare modifiche ai
prodotti presenti in questo
catalogo senza preavviso alcuno
/
The company reserves
the right to make changes
to the products in this
catalog without prior notice

fan europe®

8 031414 898459