

Lamps & Lighting Collection

2021 2022

VK Leading Light

U M I

**VK Leading Light**

Since 1978

***UMI is the Japanese word for "sea", a Sea of Light by VK Leading Light Since 1978.***

*UMI είναι η ιαπωνική λέξη για τη «θάλασσα», μια Θάλασσα Φωτός από τη VK Leading Light Since 1978.*



*The trip to Sarakiniko, a short journey of observation and medit*  
Το ταξίδι στο Σαρακήνικο, ένα μικρό ταξίδι άσκησης παρατηρητικότητας και περ

**VK Leading Light**

Since 1978



**VK Leading Light**

Since 1978

*ation together, aims at highlighting the deeper essence of things.*

*ισυλλογής μαζί, στοχεύει στην ανάδειξη της βαθύτερης ουσίας των πραγμάτων.*



*The hither to remote acquaintance with light, finds its true meaning*  
Η μέχρι τότε εξ αποστάσεως γνωριμία με το φως, βρίσκει εκεί το πραγματικό

**VK Leading Light**

Since 1978




**VK Leading Light**

Since 1978

*there. Where light and time are born, reflected, and diffused together.*

*της νόημα. Εκεί όπου γεννιέται, αντανακλάται και διαχέεται φως και χρόνος μαζί.*

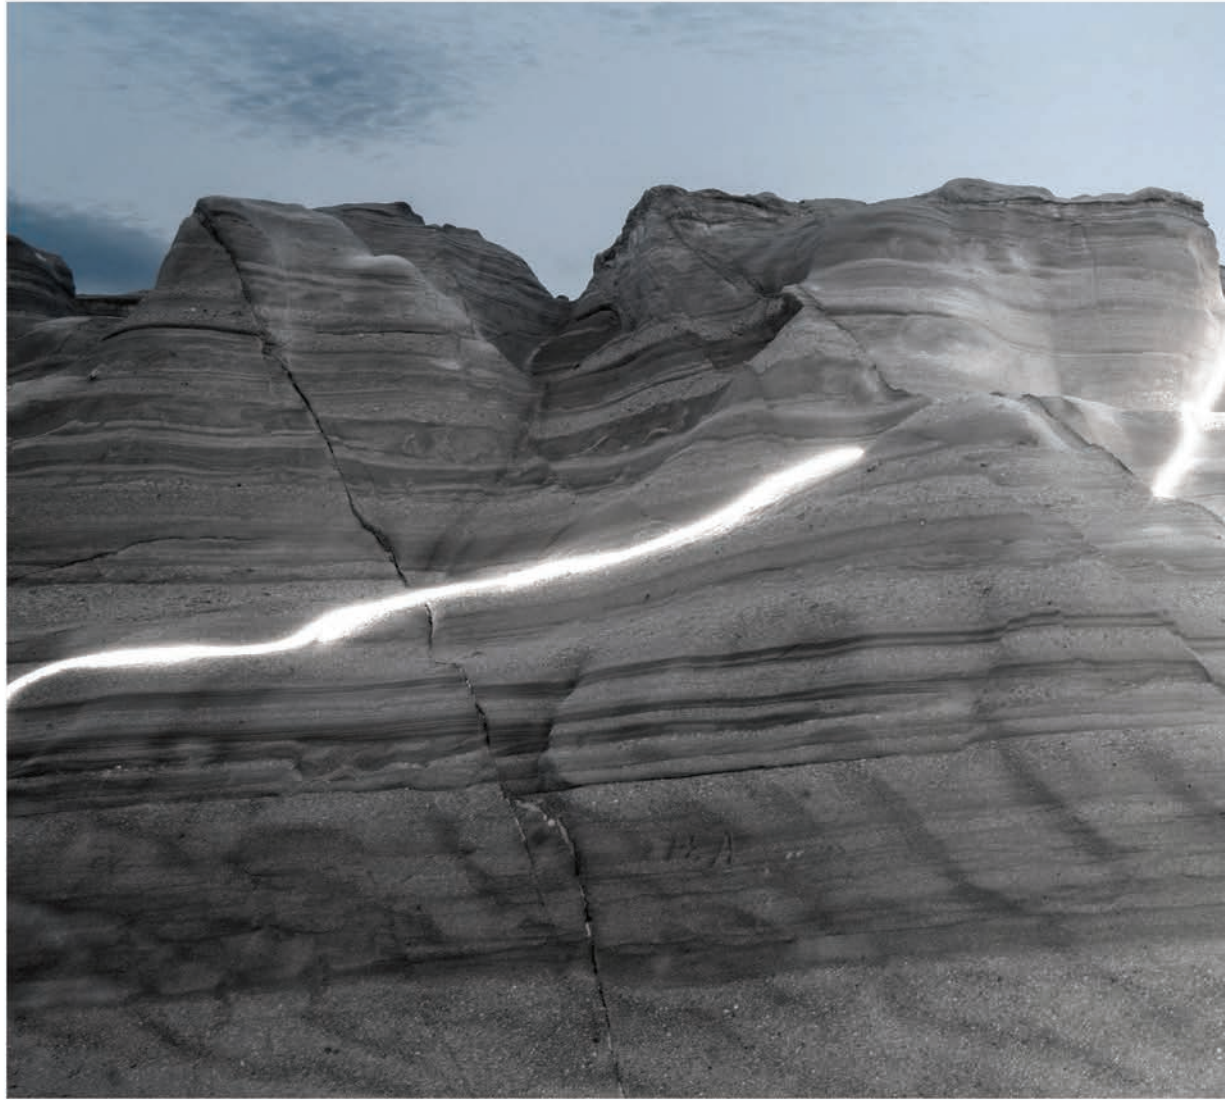

*Everything on display there is aware of their temporary nature and has certainly*  
Όλα όσα εκτίθενται εκεί, έχουν επίγνωση της προσωρινότητάς τους και έχουν σίγουρα

**VK Leading Light**

Since 1978



**VK Leading Light**

Since 1978

*benefited from the lesson of Time. Until they all disappear and become light again.  
ωφεληθεί από το μάθημα του Χρόνου. Μέχρι να εξαφανιστούν και να ξαναγίνουν όλα φως.*





# VK Leading Light

Since 1978

**A:** 8 Aristotelous St, Tavros, 177 78 Athens, Greece  
**T:** +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075  
**F:** +30 210 99 58 374  
**E:** info@vkled.gr, info@vk-hellaselectric.gr  
**W:** vkled.gr vk-hellaselectric.gr

**Entrance:** 13 Petrou Ralli St

**Working Hours**

Monday - Friday 8:00 - 18:00

Saturday 9:00 - 14:00







































































































# *index*

*περιεχόμενα*

01 Led strips

Pages 31-139

36  VK/24/2835W/11	37  VK/24/2835W/19	38  VK/24/5050W/19	40  VK/24/2835W/240	41  VK/24/2835W/ACCESS	44  VK/24/2216/.../60	45  VK/24/2216/.../120	46  VK/24/2216/.../180	47  VK/24/2216/.../240	48  VK/24/2216W/.../60
49  VK/24/2216W/.../120	50  VK/24/2216W/.../180	51  VK/24/2216W/.../240	52  VK/12/3528/60	53  VK/24/3528/60	54  VK/12/5050/30	55  VK/24/5050/30	56  VK/12/3528/96	57  VK/24/3528/96	58  VK/12/3528/120
59  VK/24/3528/120	60  VK/12/5050/60	61  VK/24/5050/60	62  VK/24/2835/240	63  VK/24/2835/120	64  VK/12/3528J/60	65  VK/24/3528J/60	66  VK/24/5050J/30	67  VK/12/5050J/30	68  VK/24/5050J/96
70  VK/12/5050J/96	70  VK/24/3528J/120	71  VK/12/3528J/120	72  VK/24/5050J/60	73  VK/12/5050J/60	74  VK/24/3528W/60	75  VK/12/3528W/60	76  VK/24/3528W/96	77  VK/12/3528W/96	78  VK/24/3528W/120
80  VK/12/3528W/120	80  VK/24/5050W/60	81  VK/12/5050W/60	82  VK/24/5050/CCT/60	83  VK/FUT092	84  VK/FUT039S	84  VK/5050/RGB/30	85  VK/5050/RGB/60	86  VK/3838/RGB/240	87  VK/5050/RGBW/60
88  VK/5050/MC/30	89  VK/12/MC/25M	89  VK/12/MC/100M	89  VK/12/MC/AMP	92  VK/08/11/AL	93  VK/08/19/AL	94  VK/00/AL	94  VK/01/SLIM/AL	94  VK/01/DEEP/SLIM/AL	95  VK/K01/SLIM
96  VK/01/AL	96  VK/D1/AL	96  VK/03/SLIM/AL	96  VK/D2/AL	96  VK/02/AL	97  VK/K01	97  VK/K01/NEON	97  VK/K01U	98  VK/04R/AL	98  VK/04/AL
99  VK/06/AL	99  VK/K04	100  VK/01R/DEEP/TRIMLESS/AL	100  VK/07R/TRIMLESS/AL	101  VK/K01	101  VK/K07	104  VK/LRS-50	104  VK/LRS-100	104  VK/LRS-150	105  VK/LRS-200
106  VK/LRS-350	106  VK/HDR-60	106  VK/HDR-100	108  VK/15-25-36	108  VK/60-75-100-120	109  VK/150-200	109  VK/250-350	109  VK/600	110  VK/LV12	110  VK/LV26
111  VK/LV36	111  VK/LV50	111  VK/LV75	111  VK/LV100	111  VK/LV120	112  VK/LV150	112  VK/APV-16	112  VK/APV-25	112  VK/LPV-20	112  VK/LPV-35

<b>113</b>			<b>114</b>			<b>115</b>			
VK/LPV-60	VK/LPV-100	VK/LPV-150	VK/10E	VK/30E	VK/45E	VK/60E	VK/100E	VK/150E	VK/200E
<b>117</b>			<b>118</b>			<b>119</b>			<b>120</b>
VK/10082	VK/10083	VK/10084	VK/10085	VK/LVD50	VK/LVD75	VK/LVD100	VK/LVD120	VK/LVD150	VK/10076/PD
<b>121</b>			<b>122</b>			<b>123</b>			
VK/CV/DIM/DALI	VK/10077/DIN	VK/ELG-100-24DA	VK/ELG-150-24DA	VK/10081/0-10V	LD-250W-RF	DM-400B-RF	DM-DGL/B	RF-CTRL	VK/53008/D
<b>126</b>			<b>127</b>		<b>128</b>		<b>130</b>		
GALAXY	DIM MCU	VK/FUT095	VK/FUT092	VK/FUT006	VK/FUT/TR/RCS	VK/FUT/TR/BAT	VK/FUT036S	VK/FUT037S	VK/FUT038S
<b>131</b>		<b>132</b>		<b>133</b>		<b>134</b>		<b>135</b>	
VK/FUT039S	VK/iBOX2	VK/P/24506	VK/P/24606	VK/10074/DMX	VK/10075/DMX	VK/DIM500-PWM	VK/DM/24350	VK/DM/24700	VK/10080/RP
<b>136</b>		<b>137</b>			<b>138</b>				
VK/10078/RP	VK/RP308	Oti Dali 50w/Oti Dali 80w	Oti Dali 160w	Oti Dali 210w	VK/10079/DALI	VK/10073/DALI	VK/DALI/PCU	VK/LC350PWM	VK/LC700PWM
<b>139</b>									
VK/L3-5-360	VK/CT309RF	VK/LC350	VK/LC500	VK/LC630	VK/LC700				

**O2 Recessed**  
Pages 141-231

<b>142</b>		<b>143</b>		<b>144</b>		<b>148</b>		<b>152</b>		<b>153</b>		<b>154</b>		<b>156</b>	
VK/04347/.../33-43	VK/04347/.../53	VK/04347/73-103	VK/04348/.../35-55	VK/04267/6	VK/04267/9	VK/04267/12	VK/04266TR/3	VK/04266TR/6	VK/04299						
<b>160</b>			<b>162</b>			<b>164</b>			<b>165</b>		<b>166</b>				
VK/04299/2	VK/04345	VK/04346	VK/04339	VK/04340	VK/04147	VK/04148	VK/04265	VK/04261	VK/04262						

168  VK/04263	 VK/04264	170  VK/04218	 VK/04219	171  VK/04220	 VK/04221	172  VK/04128	 VK/04146	173  VK/04097	 VK/04127
174  VK/04222	 VK/04225	175  VK/04126	176  VK/04123	 VK/04124	 VK/04125	178  VK/04108	 VK/04290	 VK/04291	 VK/04292
179  VK/04135	 VK/04136	 VK/04137	180  VK/04083/W	 VK/04084/W	181  VK/04145	182  VK/04149	 VK/04150	186  VK/04019/W	187  VK/04041/W
 VK/04051/W	188  VK/04019/W/C/19	189  VK/04424	190  VK/04019/W/RGB	191  VK/04019/W/RC	 VK/LVD/PANEL	 OTI DALI 35/LT2	192  VK/04019/SRK	 VK/04041/SRK	193  VK/04019/MF
194  VK/04019/RF	 VK/04051/MF	195  VK/04041/MF	 VK/04051/RF	 VK/04041/RF	198  VK/04072	 VK/04073	 VK/04048	 VK/04074	 VK/04049
 VK/04050	 VK/04017	200  VK/04075	 VK/04076	 VK/04077	 VK/04078	 VK/04079	 VK/04080	 VK/04018	202  VK/04015
203  VK/04014	204  VK/04287	205  VK/04286	206  VK/04289, VK/04288	207  VK/04289/2, VK/04288/2	210  VK/03009G	 VK/03010G	 VK/03008G	211  VK/03011G	212  VK/03012G
213  VK/03013G	214  VK/030113G	 VK/03114G	 VK/03065G	215  VK/03068	 VK/03069	 VK/03070	216  VK/03071	 VK/03015G	 VK/03014G
217  VK/03014G/2	 VK/03014G/3	218  VK/03192G	219  VK/03191G	220  VK/03193G	221  VK/03194G	222  VK/03184	223  VK/03185	224  VK/03116	 VK/03116/2
225  VK/03116/3	226  VK/11110D	 VK/03115	227  VK/03017	228  VK/03059	 VK/03058	 VK/03034	 VK/03035	229  VK/03195	230  VK/03196
231  VK/03197	 VK/03208								

**03 Track lighting**

Pages 233-265


<b>234</b>			<b>235</b>			<b>236</b>			
<b>237</b>			<b>238</b>			<b>239</b>			
<b>240</b>			<b>242</b>			<b>243</b>			<b>244</b>
<b>245</b>	<b>246</b>	<b>247</b>	<b>248</b>			<b>249</b>			
<b>250</b>	<b>251</b>	<b>252</b>	<b>253</b>	<b>254</b>	<b>255</b>	<b>256</b>	<b>257</b>	<b>258</b>	<b>259</b>
<b>260</b>	<b>261</b>	<b>262</b>	<b>263</b>	<b>264</b>	<b>265</b>	<b>266</b>	<b>267</b>	<b>268</b>	<b>269</b>

**04 Magnetic track lighting**

Pages 266-314

<b>268</b>			<b>269</b>			<b>270</b>			<b>271</b>		
<b>272</b>	<b>273</b>	<b>274</b>	<b>275</b>			<b>276</b>					



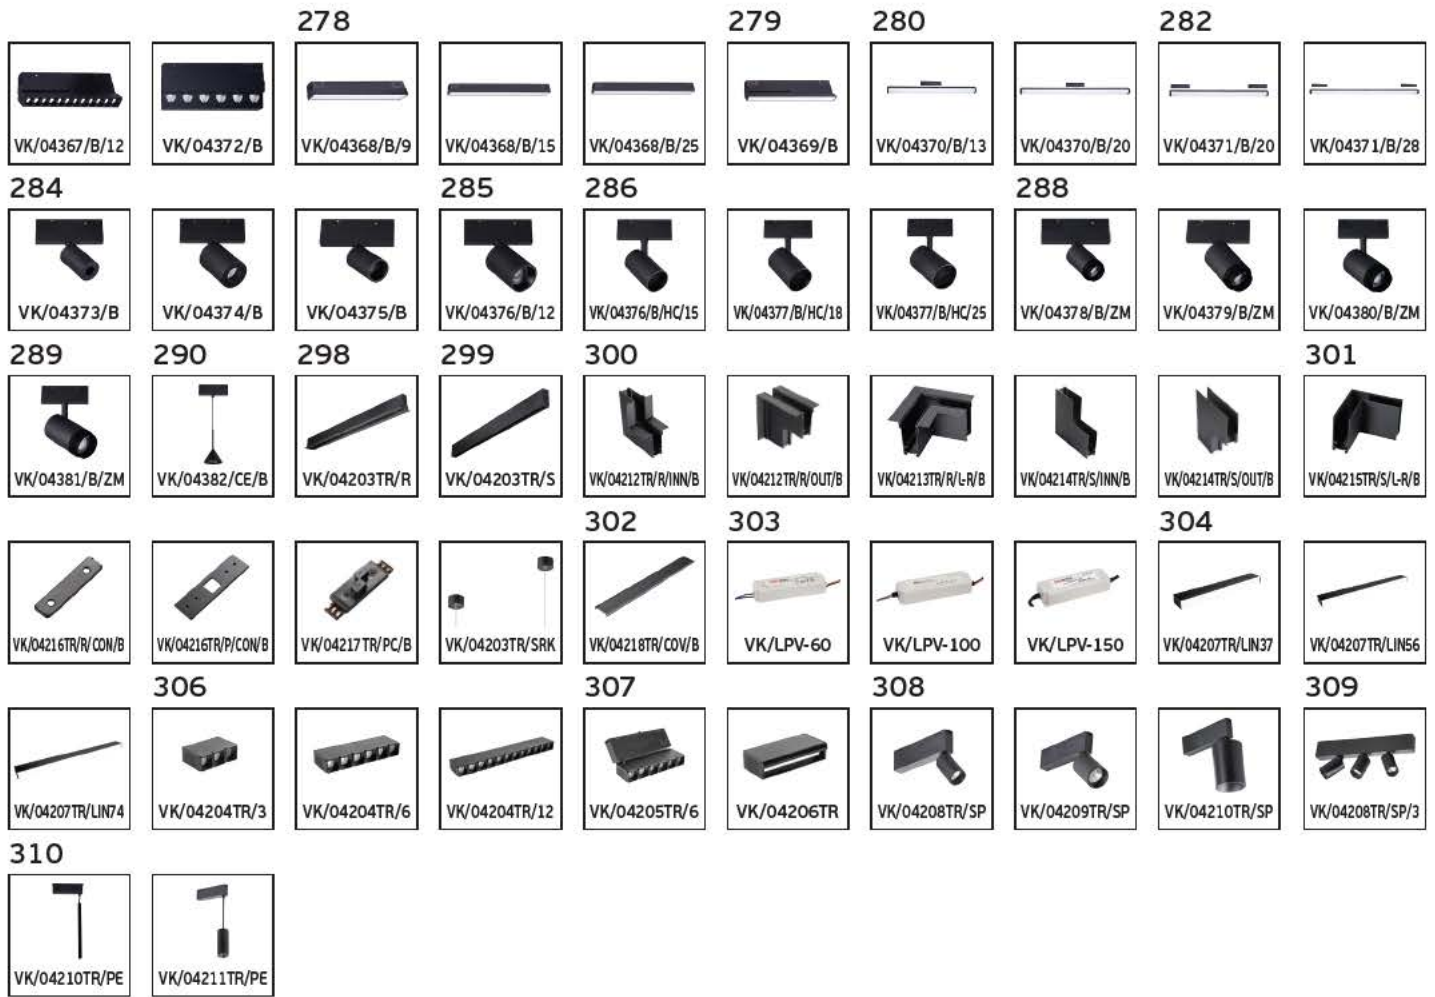

05 Linear lighting

Pages 316-355



06 Tubes & squares

Pages 356-403



<b>368</b>  VK/04167CE	<b>369</b>  VK/04168CE	 VK/04169CE	 VK/04170CE	<b>370</b>  VK/04300	<b>372</b>  VK/03139CE	 VK/03139/R	<b>373</b>  VK/03140CE	 VK/03140/R	<b>374</b>  VK/03087CE/13
 VK/03087CE/20	<b>375</b>  VK/03087CE/30	<b>376</b>  VK/03091CE/25	 VK/03091CE/50	<b>378</b>  VK/03084CE	 VK/03006	<b>379</b>  VK/03082CE	 VK/03054	<b>380</b>  VK/04052CE/S	 VK/04052CE/L
<b>381</b>  VK/03056	 VK/04062CE	<b>382</b>  VK/03002	<b>383</b>  VK/03001	<b>384</b>  VK/03005	 VK/03081CE	<b>385</b>  VK/03086CE	 VK/03085CE	<b>386</b>  VK/03083CE	 VK/03057
<b>387</b>  VK/03055	<b>388</b>  VK/03090CE	 VK/03110CE	<b>389</b>  VK/03095CE	<b>390</b>  VK/03108CE	<b>392</b>  VK/043516/WA	 VK/04053WA	<b>393</b>  VK/043516/PE	 VK/043516/CE	<b>394</b>  VK/04194CE
 VK/04195CE	<b>395</b>  VK/03190CE	 VK/03190	<b>396</b>  VK/03093WA	 VK/04052WA	<b>397</b>  VK/04043WA	 VK/03094CE	<b>398</b>  VK/04053CE/S	 VK/04053CE/L	<b>399</b>  VK/03109CE
 VK/03097CE	<b>400</b>  VK/03111CE	 VK/03111CE/2	<b>401</b>  VK/03111CE/3	<b>402</b>  VK/03107CE	 VK/03107CE/2	<b>403</b>  VK/03107CE/3			

**07 Reading lights**  
Pages 404-427

<b>406</b>  VK/04229	<b>407</b>  VK/04233	<b>408</b>  VK/04230/30/L	 VK/04230/60/L	<b>409</b>  VK/04230/30/R	 VK/04230/60/R	<b>410</b>  VK/04231/40/L	<b>411</b>  VK/04231/40/R	<b>412</b>  VK/04151	 VK/04153
<b>413</b>  VK/04152	<b>414</b>  VK/04178	 VK/04155	<b>415</b>  VK/04154	<b>416</b>  VK/04176	 VK/04177	<b>417</b>  VK/04175	<b>418</b>  VK/04232	 VK/04236	<b>419</b>  VK/04110
 VK/04110NS	 VK/03096WA	<b>420</b>  VK/04224	<b>421</b>  VK/04225	<b>422</b>  VK/04023	 VK/04031/SPIRAL	 VK/04031/CREE	 VK/04031/LENS	<b>423</b>  VK/04031/DRIVER	 VK/SW1/1
 VK/SW1/2	 VK/SW2/1	<b>424</b>  VK/04032	 VK/04033	<b>425</b>  VK/04034	<b>426</b>  VK/04245	 VK/04244	 VK/04246		

### 08 Ceiling fans

Pages 429-431

430



### 09 Gypsum

Pages 433-456

434



435



436



437



438



439



440



441



442



443



444



445



446



447



448



449



450



451



452



453



454



455




456




### 10 Decorative lighting

Pages 457-623


458



460




462



464



466



468



















































































































470



472










474  VK/04402/120/...	476  VK/04404PE/.../53	478  VK/04405PE/.../66	480  VK/04406PE/.../92	482  VK/04407PE/.../3C	484  VK/04251PE	486  VK/04252PE	489  VK/04243PE	 VK/04243CE	490  VK/04131PE VK/04132PE
 VK/04129CE VK/04130CE	492  VK/04415PE	494  VK/04242PE	 VK/04242CE	496  VK/04347/CE/.../45-95	498  VK/04416CE	500  VK/04418CE	502  VK/03152/CE	 VK/03151/CE	504  VK/04133CE
 VK/04134CE	505  VK/04253CE	 VK/03098CE	508  VK/04389/PE/.../W VK/04390/PE/.../W	510  VK/04388/PE/.../W	512  VK/04254PE	 VK/04255WA	 VK/04396	 VK/04396CAN/1	516  VK/04396CAN/3
 VK/04396CAN/5	517  VK/04253CE	 VK/04396CAN/10	518  VK/04396CAN/15	 VK/04396CAN/8	 VK/04396CAN/14	520  VK/04396LIN/3	 VK/04396LIN/5	 VK/04396LIN/7	521  VK/04413PE
 VK/04305PE	 VK/04305PE	 VK/04305PE	524  VK/04305PE	 VK/04016	526  VK/04016	528  VK/04256PE	 VK/04257PE	 VK/04392/PE	532  VK/04393/PE
 VK/04391/PE	534  VK/04391/PE	 VK/04391/PE	536  VK/04391/PE	 VK/03153/PE	538  VK/03153/PE	540  VK/09066	 VK/09063	 VK/09067/W	541  VK/09067/W
 VK/09067/G	542  VK/03166/BR	 VK/03166/BR	544  VK/03166/G	 VK/03167/G	546  VK/03105PE	 VK/03105PE/2	 VK/03105PE/3	 VK/04011	 VK/04043PE
 VK/04053PE/L	549  VK/04053PE/L	 VK/03163	550  VK/03163	 VK/03099PE	553  VK/03099PE	 VK/03088/20	 VK/03088/24	 VK/03092/50	 VK/03080/30
 VK/03079/35	 VK/03079/55	558  VK/03160PE	560  VK/03117/PE	 VK/03068/PE	562  VK/03068/PE	 VK/03069/PE	 VK/03069/PE	 VK/03069/WA	 VK/03069/2/WA
 VK/03154PE	564  VK/03154PE	 VK/03156/WA	 VK/03155PE	565  VK/03155PE	566  VK/03173/PE	 VK/03177/PE	 VK/03175/PE	 VK/03172/PE	 VK/03176/PE
 VK/03171/PE	570  VK/03171/PE	 VK/03170/PE	573  VK/03170/PE	 VK/03118PE	574  VK/03118PE	 VK/03119PE	 VK/03120PE	575  VK/03120PE	576  VK/03121PE
 VK/03181PE	577  VK/03181PE	 VK/03182PE	579  VK/03182PE	 VK/03180PE	581  VK/03180PE	 VK/03122PE	 VK/03125PE/30	 VK/03125PE/35	 VK/03126PE/30
 VK/03126PE/30	585  VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30	 VK/03126PE/30







































































































 VK/03123PE/55	 VK/03124PE/70	 VK/03146PE/35	 VK/03146PE/60	 VK/03146PE/80	 VK/03148PE/73	 VK/03147PE/78	 VK/04223/W/15	 VK/04223/W/25	 VK/04223/W/35
 VK/04133WA	 VK/04009	 VK/04010	 VK/04008	 VK/04180/WA	 VK/03072WA	 VK/03073WA	 VK/03074WA	 VK/03075WA	 VK/03076WA
 VK/03127WA	 VK/03128WA	 VK/03077WA	 VK/03174/WA	 VK/03149/WA	 VK/03161/WA	 VK/03106CE	 VK/03106CE/2	 VK/03016	 VK/03078CE
 VK/03078CE/2	 VK/03078CE/3	 VK/04385/B	 VK/04387/CE/B	 VK/04386/WA/B	 VK/04258	 VK/03131	 VK/03168	 VK/03169	 VK/03157/WD
 VK/03158/WD	 VK/03159	 VK/04161	 VK/04234	 VK/04238	 VK/04239	 VK/04240	 VK/04237	 VK/03096	


**11 Cabinet**  
Pages 625-631

 VK/04308	 VK/04308/PIR	 VK/04309/PIR	 VK/04310/PIR	 VK/04311/CON	 VK/04312/CON	 VK/04163	 VK/04164	 VK/04165	 VK/04162
--	---	---	---	---	---	--	---	---	---

**12 Outdoor lights**  
Pages 632-795









 VK/02154	 VK/02154/PEN	 VK/03210	 VK/03211	 VK/03214	 VK/03141	 VK/03209	 VK/03212	 VK/03213	 VK/02109
 VK/02110	 VK/02108	 VK/02106	 VK/04138	 VK/04139	 VK/02107	 VK/02055	 VK/02111	 VK/02147	 VK/02007
 VK/02013	 VK/02057	 VK/02056	 VK/02148	 VK/02149	 VK/02058	 VK/02094	 VK/02145	 VK/02144	 VK/02146

<b>658</b>  VK/02027	<b>660</b>  VK/02017	 VK/02018	<b>661</b>  VK/02019	<b>662</b>  VK/02022	 VK/02023	<b>663</b>  VK/02020	 VK/02021	<b>664</b>  VK/02026	 VK/02025
<b>665</b>  VK/02024	<b>666</b>  VK/02091	 VK/02051	 VK/02088	<b>668</b>  VK/02092	 VK/02087	<b>669</b>  VK/02116	 VK/02093	<b>670</b>  VK/02047	 VK/02048
 VK/02049	<b>671</b>  VK/02115	<b>672</b>  VK/02090	<b>673</b>  VK/02089	<b>674</b>  VK/02095	 VK/02054	 VK/02053	<b>676</b>  VK/04179WA	 VK/02045	<b>677</b>  VK/02044
<b>678</b>  VK/02076	 VK/02043	<b>679</b>  VK/02075	 VK/02050	<b>680</b>  VK/02046	 VK/02133	<b>681</b>  VK/02086	<b>682</b>  VK/02041	 VK/02074	<b>683</b>  VK/02052
 VK/02112	<b>684</b>  VK/02155/WA	 VK/02156	<b>686</b>  VK/02105	 VK/02083	<b>687</b>  VK/02082	 VK/02081	<b>688</b>  VK/02067	 VK/02068	<b>689</b>  VK/02069
 VK/02070	<b>690</b>  VK/02084	 VK/02122	<b>691</b>  VK/02080	 VK/02085	<b>692</b>  VK/01056	 VK/01057	<b>693</b>  VK/01067	 VK/01068	<b>694</b>  VK/01058
 VK/01059	<b>695</b>  VK/01064	 VK/01065	<b>696</b>  VK/01095	<b>697</b>  VK/01037/S	 VK/01038	<b>698</b>  VK/01045	 VK/01046	<b>699</b>  VK/01092	 VK/01093
<b>700</b>  VK/01090	 VK/01077	 VK/01078	<b>701</b>  VK/01079	 VK/01080	 VK/01081	<b>702</b>  VK/01082	 VK/01084	 VK/01083	<b>703</b>  VK/01001
<b>706</b>  VK/02152CE	 VK/02151CE	<b>708</b>  VK/02077	 VK/02079	 VK/02061	<b>709</b>  VK/02078	<b>710</b>  VK/02062	 VK/02063	 VK/02064	<b>711</b>  VK/02065
 VK/02066	<b>712</b>  VK/01061	 VK/01060	<b>713</b>  VK/01048	 VK/01106	<b>714</b>  VK/01069	 VK/01066	 VK/01086	<b>715</b>  VK/02131/45	<b>718</b>  VK/02131/70
<b>719</b>  VK/02132/25	 VK/02132/45	 VK/02142/45	 VK/02142/75	<b>721</b>  VK/02124	 VK/02100	<b>722</b>  VK/02097	 VK/02098	<b>723</b>  VK/02102	<b>724</b>  VK/02101


























 VK/02140	 VK/02099	 VK/02104	 VK/02103	 VK/02158	 VK/02159	 VK/02157	 VK/02134	 VK/02135	 VK/01091/35
 VK/01091/75	 VK/01085	 VK/01074	 VK/01075	 VK/03203/PE	 VK/03203/WA	 VK/03203	 VK/03203/100	 VK/03204/PE	 VK/03204/WA
 VK/03204	 VK/02125	 VK/02126	 VK/02127	 VK/03066/PE	 VK/03066/WA	 VK/03066/28	 VK/03066/60	 VK/03066/80	 VK/03067/PE
 VK/03067/WA	 VK/03067/35	 VK/03067/80	 VK/02136	 VK/02042/P	 VK/02042	 VK/02114	 VK/02113	 VK/02073	 VK/02096
 VK/02128	 VK/02123	 VK/02130	 VK/01047	 VK/01094	 VK/01047/SPIKE	 VK/02129/1	 VK/02129/2	 VK/02129/4	 VK/02117
 VK/02118	 VK/02118/RGB	 VK/01096	 VK/01097	 VK/01052	 VK/01054	 VK/01054/70	 VK/01053	 VK/01055	 VK/01055/70
 VK/02012	 VK/02012/RGB	 VK/05016	 VK/ULFD-2	 VK/02167/S/8	 VK/02167/S/14	 VK/02167/S/38	 VK/02167/S/73	 VK/02167/S/108	 VK/02008
 VK/02009	 VK/02010	 VK/02011	 VK/02014R	 VK/02015R	 VK/02016R	 VK/02137/30	 VK/02137/50	 VK/02137/100	 VK/02138/G/RGB
 VK/02139/G/RGB	 VK/02120	 VK/02160	 VK/02166	 VK/02168					

13 Lamps-modules

Pages 797-848

<b>798</b>		<b>800</b>				<b>802</b>		<b>803</b>	
									
		<b>804</b>						<b>806</b>	
									
<b>807</b>		<b>808</b>		<b>809</b>		<b>810</b>		<b>811</b>	
									
									
<b>812</b>		<b>813</b>		<b>814</b>		<b>815</b>		<b>816</b>	
									
									
<b>817</b>		<b>818</b>		<b>819</b>		<b>820</b>		<b>821</b>	
									
									
<b>824</b>		<b>825</b>		<b>826</b>		<b>827</b>		<b>828</b>	
									
									
<b>830</b>		<b>831</b>		<b>832</b>		<b>833</b>		<b>829</b>	
									



<b>834</b>  VK/050976				<b>836</b>  VK/051126				<b>837</b>  VK/05112D				<b>838</b>  VK/051466				 VK/05145/E					
<b>840</b>  VK/PL-CN35-COB 600 G2		<b>841</b>  VK/OT FIT 8/180 CS I MINI		<b>842</b>  VK/PL-CN50DC-COB 900 G1		<b>843</b>  VK/ELEMENT 12/220-240/300 G3		 VK/ELEMENT 15/220-240/350 G3		 VK/OT FIT 18/220-240/450 CS PC											
<b>844</b>  OTI DALI 15/220-240/1A0 NFC				 VK/PL-CN111DC-COB-1800-G1		 VK/PL-CN111DC-COB-2800-G1		 VK/PL-CN111-COB-2800-G2		<b>845</b>  VK/ELEMENT 28/220-240/700 G3		 VK/OT FIT 30/220-240/700 CS PC		 VK/OTI DALI 25/220-240/700 NFC L		<b>846</b>  VK/PL-CN111DC-COB-4300-G1		 VK/PL-CN111-COB-4300-G2		<b>847</b>  ELEMENT 42/220-240/1050 G3	
<b>848</b>  OT FIT 40/220-240/1A0 PC SC				 OTI DALI 35/220-240/1A0 NFC TW		 O299		 XR-E54													













14 Accessories

Pages 849-854

<b>850</b>  VK/Fortimo/14			 VK/Fortimo/28			 VK/Fortimo/56			<b>851</b>  VK/8183/56			 VK/7183/111			<b>852</b>  VK/XITANIUM /35W/100V			 VK/XITANIUM /35W/150V			 VK/XITANIUM /36W/57V			 VK/XITANIUM /60W/170V			<b>853</b>  VK/XITANIUM /60W/220V		
 VK/XITANIUM /60W/DALI			 VK/XITANIUM /100W/220V			 VK/XITANIUM /100W/DALI			<b>854</b>  VK/COV/14/56			 VK/END/14/TR			 VK/HOLD/14/W			 VK/FIXEL/P2F											

*notes*

## Symbols

<b>IP20</b>	IP protection class (indoor)		maximum height		on front side radiant lamp
<b>IP44</b>	IP protection class (outdoor)		adjustable downward radiating luminaire		on both sides radiant lamp (top & bottom)
<b>IP45</b>	IP protection class (outdoor)		gypsum lamps paintable		wall lamp with light beam down
<b>IP54</b>	IP protection class (outdoor)		luminaire type - LED either halogen useable		ceiling downward radiant luminaire
<b>IP65</b>	IP protection class (outdoor)		indicates temperature		upward radiant luminaire
<b>IP68</b>	IP protection class (outdoor)		indicates energy efficiency Class		pendant radiant lamp

## IP Rate

### Αναλυτική εξήγηση του βαθμού στεγανότητας IPXX

Σίγουρα έχετε δει σε διάφορα φωτιστικά να αναφέρεται κάποιος βαθμός προστασίας IP, όπως IP54, IPX8 κ.λπ. Οι αριθμοί αυτοί υποδηλώνουν μια συγκεκριμένη πιστοποίηση για το φωτιστικό, στο κατά πόσον αυτό είναι αδιάβροχο και προστατευμένο. Για παράδειγμα, ένα φωτιστικό μπορεί να είναι αδιάβροχο όταν ψιχαλίζει, αλλά να μην είναι αδιάβροχο όταν αυτό πέσει/βυθιστεί στο νερό.

Με την κατάλληλη πιστοποίηση, ο καταναλωτής είναι σε θέση να γνωρίζει ακριβώς τον βαθμό αδιαβροχοποίησης του φωτιστικού που αγοράζει και ότι εάν είναι αδιάβροχο, γενικά και αόριστα.

Ο έλεγχος της πιστοποίησης πραγματοποιείται σε εργαστήρια, σύμφωνα με συγκεκριμένες διαδικασίες, οι οποίες ακολουθούν το πρότυπο IEC 60529, ώστε να είναι πάντα οι ίδιες, ανεξαρτήτως του προϊόντος ή του κατασκευαστή. Η κωδικοποίηση IPXX, που ακολουθείται πιο συχνά, έχει 2 ψηφία, τα οποία παίρνουν συγκεκριμένες τιμές και ενημερώνουν τον καταναλωτή για την πιστοποίηση που φέρει το προϊόν.

## Συγκεκριμένα

A. Το πρώτο X πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο στερεών σωματιδίων. Παίρνει τιμές από 0-6, όπως αναλύεται παρακάτω:

0 = Καμία προστασία.

1 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 50,00 χιλιοστών.

2 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 12,00 χιλιοστών.

3 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 2,50 χιλιοστών.

4 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω του 1,00 χιλιοστού.

5 = Προστασία από την ποσότητα της σκόνης όπου θα ήταν ικανή να επηρεάσει τη φυσιολογική λειτουργία της συσκευής.

6 = Δεν μπαίνει καθόλου σκόνη.

B. Το δεύτερο X πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο νερού. Παίρνει τιμές από 0-8, όπως αναλύεται παρακάτω.

0 = Καμία προστασία.

1 = Προστασία από σταγόνες νερού που πέφτουν κατακόρυφα.

2 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 15 μοίρες ως προς την κατακόρυφο.

3 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 60 μοίρες ως προς την κατακόρυφο.



















4 = Προστασία από νερό που ψεκάζεται από πάσα κατεύθυνση.

5 = Προστασία από πίδακες νερού που πέφτουν υπό χαμηλή πίεση, από πάσα κατεύθυνση.

6 = Προστασία από πίδακες νερού που πέφτουν υπό υψηλή πίεση.

7 = Προστασία από το νερό, σε βύθισμα βάθους από 15 εκατοστά έως ένα μέτρο, έως και 30 λεπτά.

8 = Προστασία από το νερό, σε βύθισμα για μεγάλες χρονικές περιόδους, υπό δοσμένη πίεση.

	dimmable		guaranty		neckline of article
	no dimmable		beam angle		neckline of article
	average service life in hours		grounding		indicates the installation depth
	average service life in clicks		incl. motion sensor		WiFi control
	chip on board				indicates rechargeable battery
	max. load on the article				adaptor

## IP Rate

## Analytical explanation of IPXX protection degree

You have certainly seen in some luminaires the reference to some degree of IP protection, such as IPX54, IPX8 etc. These numbers imply a specific certification for the luminaire, whether it is waterproof and protected. For example, a luminaire may be waterproof when it is under drizzling rain, but may not be when dropped/sunk into the water.

With the proper certification, the consumer is able to know the exact degree of water resistance of the luminaire he is buying, not only if it's water resistant, in general.

The certification testing is carried out in laboratories, followed by specific procedures, according to the International Standard IEC 60529, which (procedures) are always the same, regardless of the product or the manufacturer. The most frequently followed IPXX encoding has 2 digits, which get specific values and inform the consumer of the certification that the product carries.

### More specifically

A. The first digit (X) of the IP code indicates the degree of protection of the product against solid particles intruding into an enclosure. It takes values from 0-6, as analyzed below:

0 = No special protection.

1 = Protection from entry by solid particles with a diameter of thickness greater than 50,00mm.

2 = Protection from entry by solid particles with a diameter of thickness greater than 12,00mm.

3 = Protection from entry by solid particles with a diameter of thickness greater than 2,50mm.

4 = Protection from entry by solid particles with a diameter of thickness greater than 1,00mm.

5 = Protection from the amount of dust that would interfere with the operation of the equipment.

6 = Dust tight.

B. The second digit (X) of the IP code indicates the degree of protection of the product inside an enclosure against the harmful entry of various forms of moisture. It takes values from 0-8, as analyzed below:

0 = No special protection.

1 = Protection against vertically falling drops of water.

2 = Protection against direct sprays of water up to 15 degrees from vertical angle.

3 = Protection against direct sprays of water up to 60 degrees from vertical angle.

4 = Protection against water splashed from all directions.

5 = Protection against low pressure jets of water from all directions.

6 = Protection against powerful jets of water.

7 = Protection against the effect of immersion between 15,00cm and 1,00m for up to 30 minutes.

8 = Protection against long periods of immersion under pressure.

## Κλάση I & II

### Κλάση I

Αυτές οι συσκευές πρέπει να έχουν το σασί τους συνδεδεμένο με ηλεκτρική γείωση (ΗΠΑ: γείωση) με ξεχωριστό καλώδιο γείωσης (χρώματος πράσινου/κίτρινου στις περισσότερες χώρες, πράσινου στις ΗΠΑ, τον Καναδά και την Ιαπωνία). Η σύνδεση γείωσης επιτυγχάνεται με ένα καλώδιο τριών αγωγών, το οποίο τυπικά τελειώνει με υποδοχή εναλλασσόμενου ρεύματος (AC) τριών (3) ακίδων, που συνδέεται σε αντίστοιχη έξοδο εναλλασσόμενου ρεύματος. Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει σε έκθεση σε επικίνδυνη τάση, ώστε να προκληθεί ηλεκτροπληξία και ότι σε περίπτωση βλάβης, η τροφοδοσία θα αφαιρεθεί αυτόματα [μερικές φορές αναφέρεται ως αυτόματη αποσύνδεση τροφοδοσίας (ADS)]. Ένα σφάλμα στη συσκευή που προκαλεί την επαφή ενός ενεργού αγωγού με το περίβλημα, θα προκαλέσει τη ροή ρεύματος στον αγωγό γείωσης. Εάν είναι αρκετά μεγάλο, αυτό το ρεύμα θα σθήσει μία συσκευή υπερβολικής τάσης ρεύματος [ασφάλεια ή διακόπτης κυκλώματος (CB)] και θα αποσυνδέσει την παροχή. Ο χρόνος αποσύνδεσης πρέπει να είναι αρκετά γρήγορος ώστε να μην επιτρέπεται η έναρξη της μαρμαρυγής εάν ένα άτομο έρχεται σε επαφή με το περίβλημα τη δεδομένη στιγμή. Αυτή τη φορά και η τρέχουσα διαβάθμιση με τη σειρά της επιτρέπει τη μέγιστη αντίσταση γείωσης. Για να παρέχεται συμπληρωματική προστασία έναντι ασφαλήτων υψηλής σύνθεσης αντίστασης, είναι σύνθετες να συνιστούμε μία συσκευή υπολειπόμενου ρεύματος (RCD), γνωστή και ως διακόπτης προστασίας υπολειπόμενου ρεύματος (RCCB), διακόπτης κυκλώματος βλάβης γείωσης (GFCI), ή διακόπτης προστασίας από υπολειμματικό ρεύμα με ενσωματωμένη προστασία υπέρτασης ρεύματος (RCBO), ο οποίος θα διακόψει την παροχή ηλεκτρικού ρεύματος στη συσκευή εάν τα ρεύματα στους δύο πόλους της παροχής δεν είναι ίσα και αντίθετα.

### Κλάση II

Μια ηλεκτρική συσκευή "Κλάσης II" ή με διπλή μόνωση, είναι εκείνη που έχει σχεδιαστεί κατά τέτοιο τρόπο, ώστε να μην απαιτεί τη σύνδεση ασφαλείας σε ηλεκτρική γείωση.

Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει στην έκθεση σε επικίνδυνη τάση ώστε να προκληθεί ηλεκτροπληξία και ότι αυτό θα πρέπει να επιτυγχάνεται δίχως να στηρίζεται σε γεωμένο μεταλλικό περίβλημα. Αυτό συνήθως επιτυγχάνεται τουλάχιστον εν μέρει με την ύπαρξη τουλάχιστον δύο στρώσεων μονωτικού υλικού μεταξύ των ενεργών τμημάτων και του χρήστη, ή με τη χρήση ενισχυμένης μόνωσης.

Στην Ευρώπη, μία συσκευή με διπλή μόνωση πρέπει να φέρει την ετικέτα "Κλάση II" (Class II) ή "διπλής μόνωσης" ή να φέρει το σύμβολο διπλής μόνωσης ( ένα τετράγωνο μέσα σε ένα άλλο τετράγωνο).

Τα μονωμένα τροφοδοτικά εναλλασσόμενου ρεύματος (όπως φορτιστές κινητού τηλεφώνου), τυπικά χαρακτηρίζονται ως "Κλάση II", πράγμα που σημαίνει ότι τα καλώδια εξόδου συνεχούς ρεύματος (DC) απομονώνονται από την είσοδο εναλλασσόμενου ρεύματος. Η ονομασία "Κλάση II" δεν πρέπει να συγχέεται με την ονομασία "Κλάση 2", καθώς η τελευταία δεν σχετίζεται με τη μόνωση (προέρχεται από το πρότυπο UL 1310, καθορίζοντας τα όρια μέγιστης τάσης/ρεύματος/ισχύος).

### Colour Codes

### Decoding our colours

	ABS Bronze		ACOP Antique Copper		PCOP Pink Copper		BBS Brushed Brass
	BS Brass		MC Brushed Chrome		NB Natural Brass		BR Rust Brown
	AL Aluminium		C Chrome		G Grey		GD Gold
	COP Copper		AN Anthracite		TC Terracotta		GB Golden Black
	R Red		GR Green		BL Blue		Y Yellow
	B Black		W White				

## Class I & II

### Class I

These appliances must have their chassis connected to electrical earth (US: ground) by a separate earth conductor (colored green/ yellow in most countries, green in the US, Canada and Japan). The earth connection is achieved with a 3-conductor mains cable, typically ending with 3-prong AC connector which plugs into corresponding AC outlet. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that if a fault occurs the supply will be removed automatically (this is sometimes referred to as ADS = Automatic Disconnection of Supply).

A fault in the appliance which causes a live conductor to contact the casing will cause a current to flow in the earth conductor. If large enough, this current will trip an over current device [fuse or circuit breaker (CB)] and disconnect the supply. The disconnection time has to be fast enough not to allow fibrillation to start if a person is in contact with the casing at the time. This time and the current rating in turn sets a maximum earth resistance permissible. To provide supplementary protection against high-impedance faults, it is common to recommend a residual current operated circuit-breaker with integral over-current protection (RCBO), which will cut off the supply of electricity to the appliance if the currents in the two poles of the supply are not equal and opposite.

### Class II

A Class II or double insulated electrical appliance, is one which has been designed in such a way that it does not require a safety connection to electrical earth (ground).

The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that is achieved without relying on an earthed metal casing. This is usually achieved at least in part by having at least two layers of insulating material between live parts and the user, or by using reinforced insulation.

In Europe, a double insulated appliance must be labelled "Class II" or double insulated or bear the double insulation symbol (a square inside another square).

Insulated AC/DC power supplies (such as cell-phone chargers), are typically designated as "Class II", meaning that the DC output wires are isolated from the AC input. The designation "Class II" should not be confused with the designation of "Class 2", as the latter is unrelated to insulation (it originates from standard UL 1310, setting limits on maximum output voltage/ current/ power).

Graphic Department

*Graphic Designer - Photo Editing* Litsa Brami, Frosso Notara

*Photographer* Anita Szlachta

*Cover* NotoriusGrey

*Stock Images* Shutterstock



# 01 *led silicon phototubes*

---





# Keiso™

High quality, Flexible LED, silicone phototube





Suitable for use in hidden outdoor lighting applications such as stairs, perimeter

in pool overflow, flower beds, window frames, light floor lining, and many more.

VK/24/2835W/140/11 24V


Product Models

Code	Model	24V	3000K	700lm/m	CRI>80	7w/m	Box 10m/roll
78001-635126	VK/24/2835W/W/140/11	24V	3000K	700lm/m	CRI>80	7w/m	10m/roll
78001-636126	VK/24/2835W/C/140/11	24V	4000K	700lm/m	CRI>80	7w/m	10m/roll
78001-637126	VK/24/2835W/D/140/11	24V	6000K	700lm/m	CRI>80	7w/m	10m/roll


Details

Led type SMD 2835. Watt 7 w/m. Led qty 140pcs/m. CRI>80. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

Silicon, metallic brackets and end-cups including in the package



LED's/m 140pcs  
 A  
 IP65

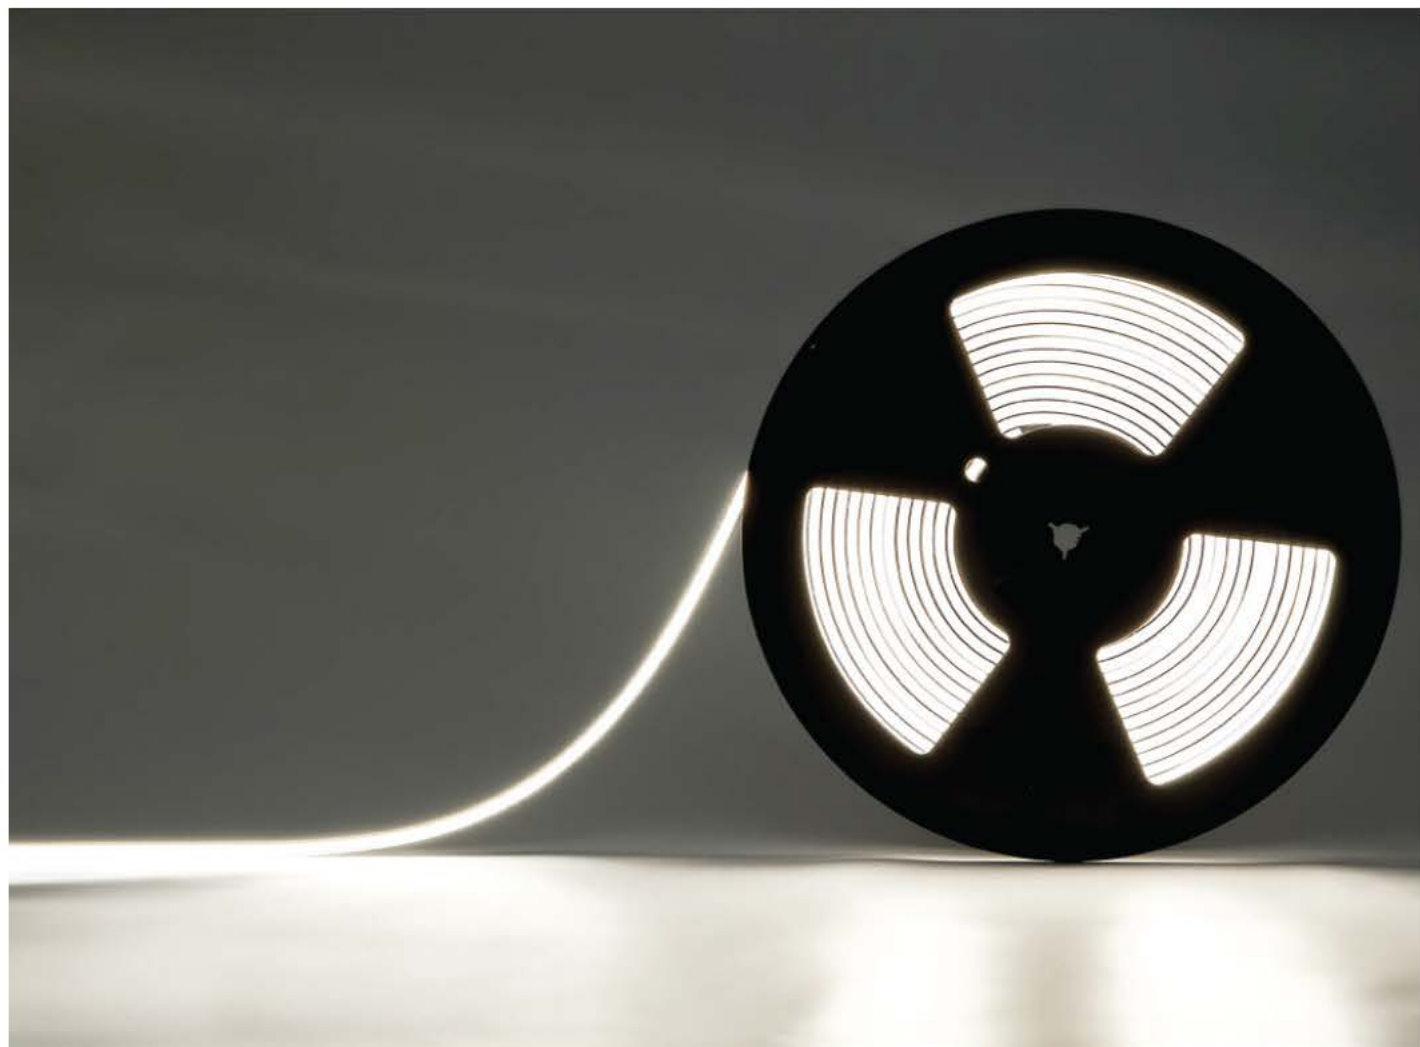

VK/24/2835W/140/19 24V


Product Models

Code	Model	24V	3000K	900lm/m	CRI>80	9w/m	Box 10m/roll
78001-638126	VK/24/2835W/W/140/19	24V	3000K	900lm/m	CRI>80	9w/m	10m/roll
78001-639126	VK/24/2835W/C/140/19	24V	4000K	900lm/m	CRI>80	9w/m	10m/roll
78001-640126	VK/24/2835W/D/140/19	24V	6000K	900lm/m	CRI>80	9w/m	10m/roll

Details


Led type SMD 2835. Watt 9w/m. Led qty 140pcs/m. CRI>80. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

Silicon, metallic brackets and end-cups including in the package



Profiles in pages 93

in the box

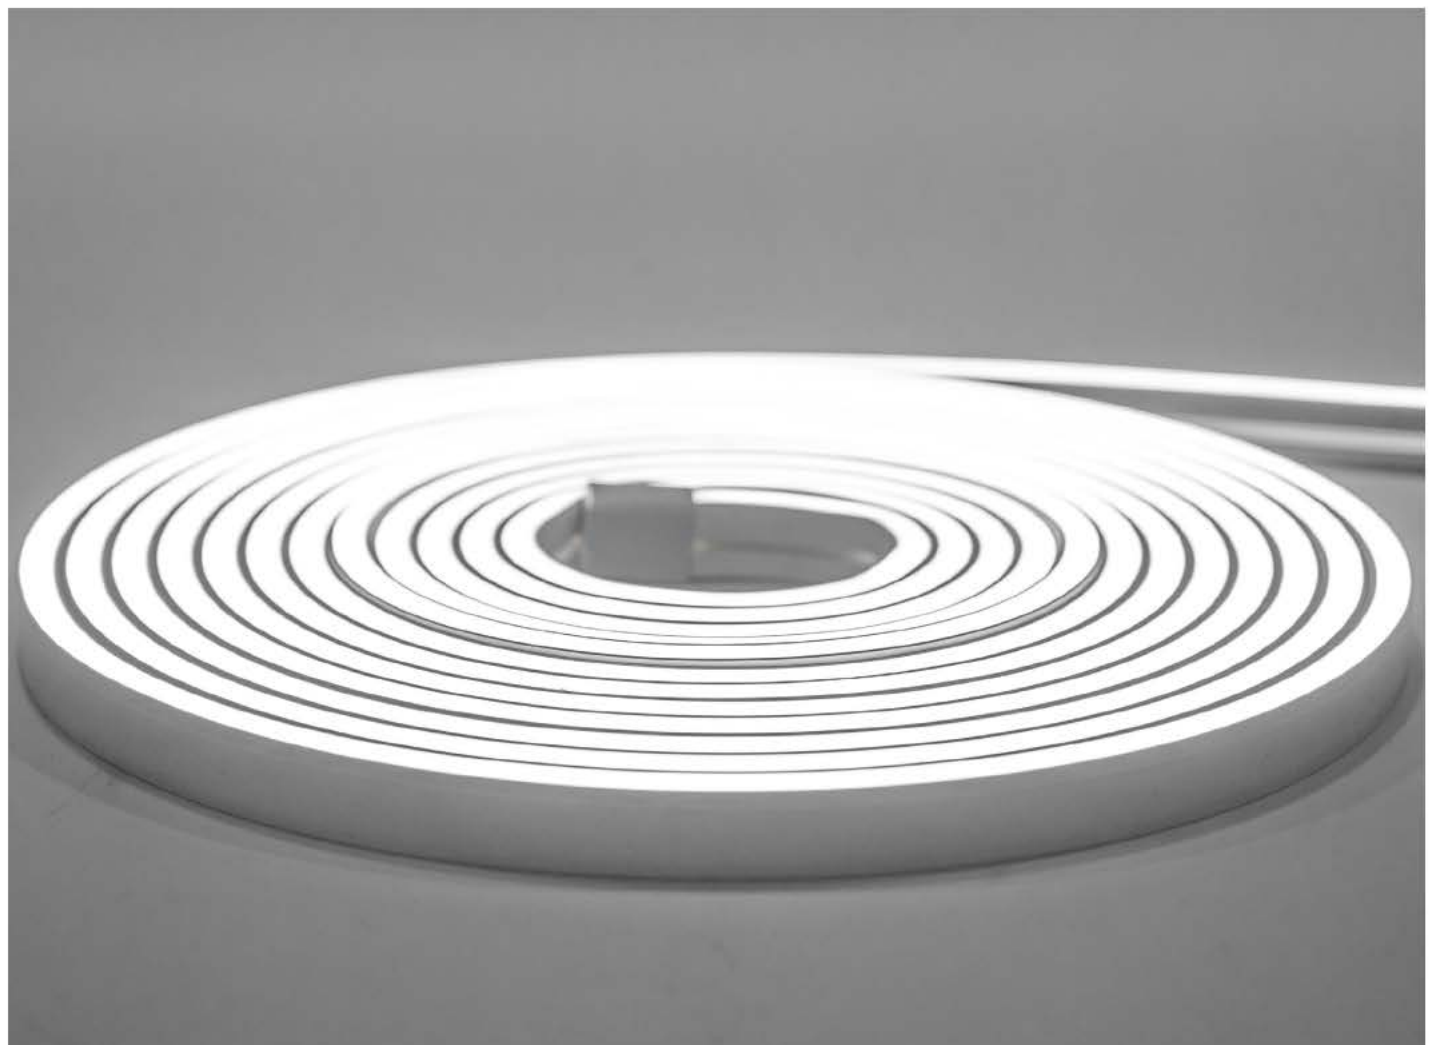


VK/24/5050W/RGB/96/19 24V

Product Models

Code	Model	Voltage	Color	Length	CRI	Power	Box
78001-641126	VK/24/5050W/RGB/96/19	24V	RGB	900lm/m	CRI>80	9w/m	10m/roll
78001-642126	VK/24/2835W/BL/140/19	24V	BLUE	900lm/m	CRI>80	9w/m	10m/roll
78001-643126	VK/24/2835W/R/140/19	24V	RED	900lm/m	CRI>80	9w/m	10m/roll
78001-644126	VK/24/2835W/GR/140/19	24V	GREEN	900lm/m	CRI>80	9w/m	10m/roll
78001-645126	VK/24/2835W/Y/140/19	24V	YELLOW	900lm/m	CRI>80	9w/m	10m/roll

Details

RGB: Led type SMD 5050. Watt 9w/m. Led qty 96pcs/m. COLORS: Led type SMD 2835. Watt 9w/m. Led qty 140pcs/m. CRI>80. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee. Silicon, metallic brackets and end-cups including in the package




- LED's/m  
96pcs or  
140pcs
- A
- IP65



Profiles in pages 93

in the box

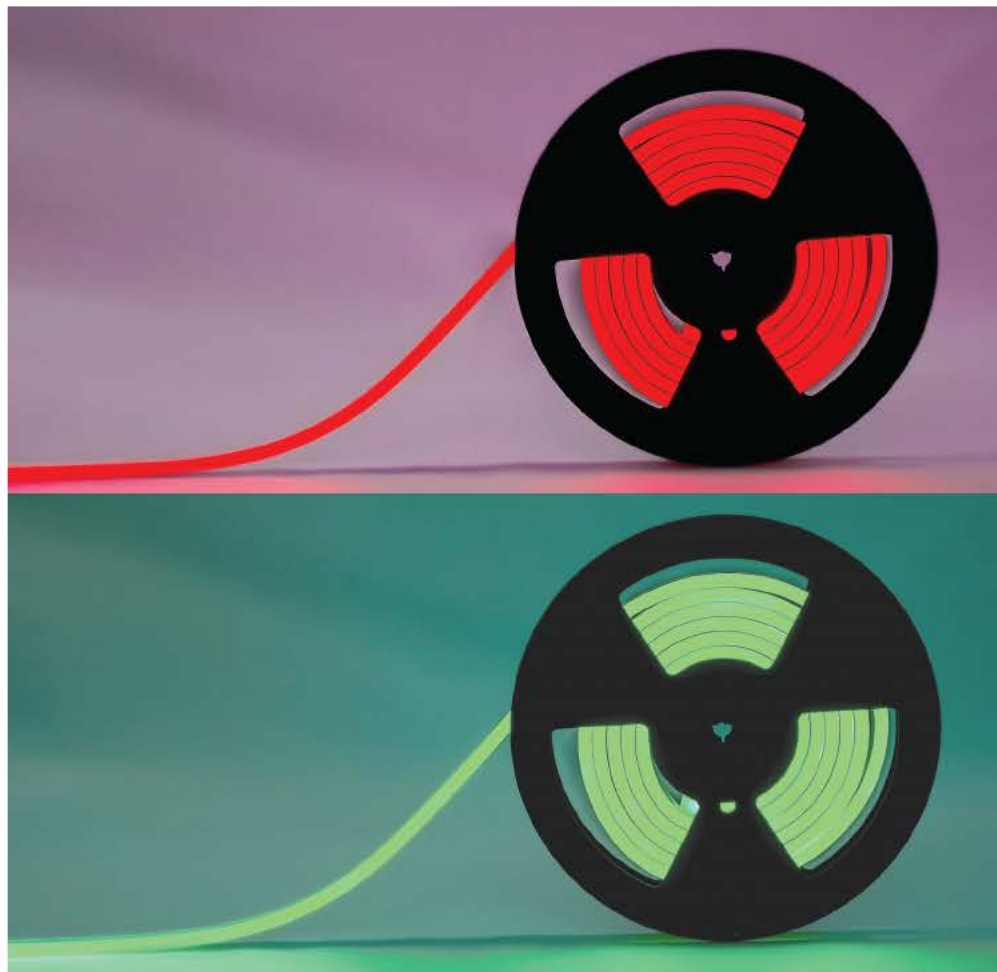



High quality,  
flexible silicone,  
LED phototube  
waterproof appl

High quality, flexible, LED, silicone phototube suitable for  
waterproof applications. Can be used in hidden, outdoor  
lighting applications such as stairs,  
pool overflow perimeters, tower beds, window frames,  
luminous floor linings and many more.



# Keiso™

by VK Leading Light







VK/24/2835W/240 24V

Product Models


Code	Model						Box
78001-699115	VK/24/2835W/W/240	24V	3000K	975lm/m	CRI>80	15w/m	10m/roll
78001-695115	VK/24/2835W/C/240	24V	4000K	975lm/m	CRI>80	15w/m	10m/roll

Details

Led type SMD 2835. Watt 15w/m. Led qty 240pcs/m. CRI>80. Dimmable. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. Silicon end-cups including in the package. 2 years guarantee.



LED's/m  
240pcs



ø2.5cm





## VK/24/2835W/ACCESSORIES

## Product Models

Code	Model		Box
78001-696115	VK/24/2835W/EC	End cup	1pc
78001-697115	VK/24/2835W/BR	Big ring	1pc
78001-694115	VK/24/2835W/SR	Small ring	1pc
78001-698115	VK/24/2835W/SRK/2	2m suspension wire kit	1pc

### Details

Accessories for Flexible Led tube. Silicon, metallic brackets and end-cups.





*led strips*



VK/24/2216/.../60

Product Models


Code	Model	Voltage	Color	Length	Brand	Quality	Power	Box
78001-695724	VK/24/2216/927/60	24V	2700K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll
78001-696724	VK/24/2216/930/60	24V	3000K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll
78001-697724	VK/24/2216/940/60	24V	4000K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll

Details

Led type SMD 2216. Watt 6w/m. Led qty 60pcs/m. Tape 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    *Super bright!!!*

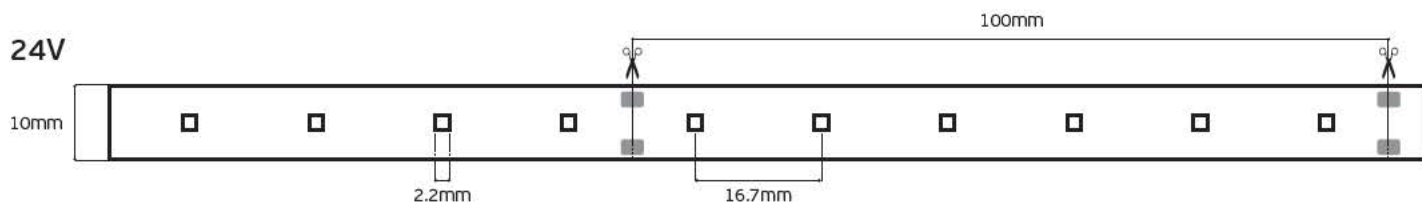

IP20. 6w/m



VK/24/2216/.../120

Product Models


Code	Model	Voltage	Color	Length	Brand	CRI	Power	Box
78001-698724	VK/24/2216/927/120	24V	2700K	1380lm/m	EPISTAR	CRI>90	12w/m	5m/roll
78001-699724	VK/24/2216/930/120	24V	3000K	1380lm/m.	EPISTAR	CRI>90	12w/m	5m/roll
78001-700724	VK/24/2216/940/120	24V	4000K	1380lm/m.	EPISTAR	CRI>90	12w/m	5m/roll

Details

Led type SMD 2216. Watt 12w/m. Led qty 120pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    **Super bright!!!**

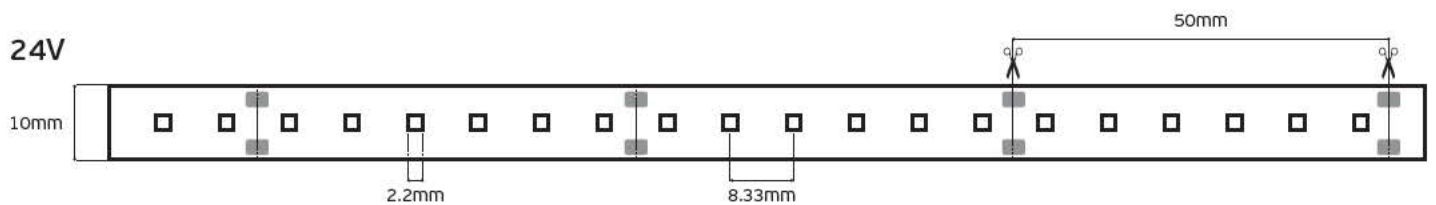

IP20. 12w/m



VK/24/2216/.../180

Product Models


Code	Model	Voltage	Color	Lumen	Brand	Efficiency	Power	Box
78001-701724	VK/24/2216/927/180	24V	2700K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll
78001-702724	VK/24/2216/930/180	24V	3000K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll
78001-703724	VK/24/2216/940/180	24V	4000K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll

Details

Led type SMD 2216. Watt 18w/m. Led qty 180pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    *Super bright!!!*

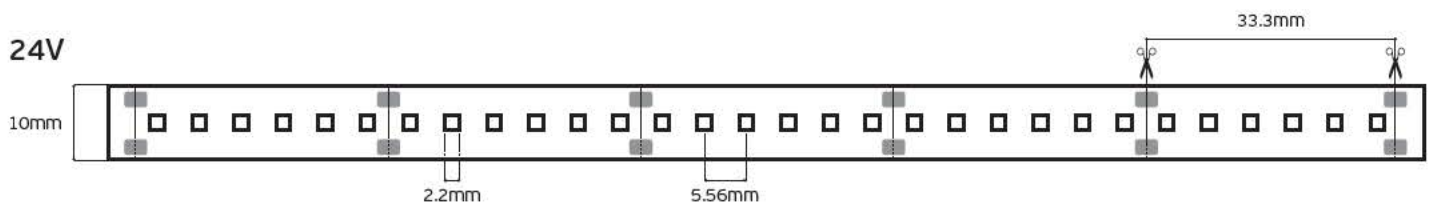

VK/24/2216/.../240

Product Models


Code	Model	Voltage	Color	Lumen	Brand	CRI	Power	Box
78001-704724	VK/24/2216/927/240	24V	2700K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll
78001-705724	VK/24/2216/930/240	24V	3000K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll
78001-706724	VK/24/2216/940/240	24V	4000K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll

Details

Led type SMD 2216. Watt 24w/m. Led qty 240pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    **Super bright!!!**

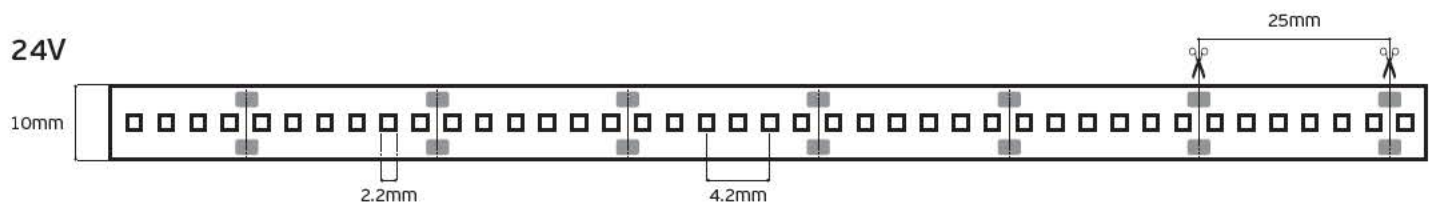



VK/24/2216W/.../60

Product Models


Code	Model	Voltage	Color	Length	Brand	CRI	Power	Box
78001-710724	VK/24/2216W/927/60	24V	2700K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll
78001-711724	VK/24/2216W/930/60	24V	3000K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll
78001-712724	VK/24/2216W/940/60	24V	4000K	700lm/m	EPISTAR	CRI>90	6w/m	5m/roll

Details

Led type SMD 2216. Watt 6w/m. Led qty 60pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    *Super bright!!!*

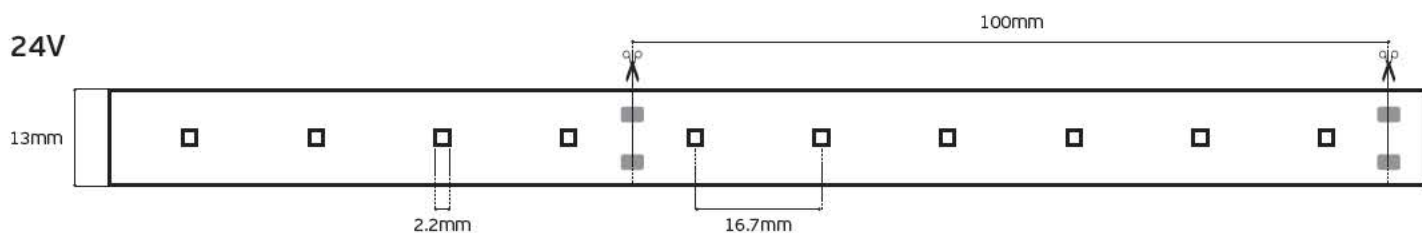

IP66. 6w/m



VK/24/2216W/.../120

Product Models


Code	Model	Voltage	Color	Length	Brand	CRI	Power	Box
78001-713724	VK/24/2216W/927/120	24V	2700K	1380lm/m	EPISTAR	CRI>90	12w/m	5m/roll
78001-714724	VK/24/2216W/930/120	24V	3000K	1380lm/m	EPISTAR	CRI>90	12w/m	5m/roll
78001-715724	VK/24/2216W/940/120	24V	4000K	1380lm/m	EPISTAR	CRI>90	12w/m	5m/roll

Details

Led type SMD 2216. Watt 12w/m. Led qty 120pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    *Super bright!!!*

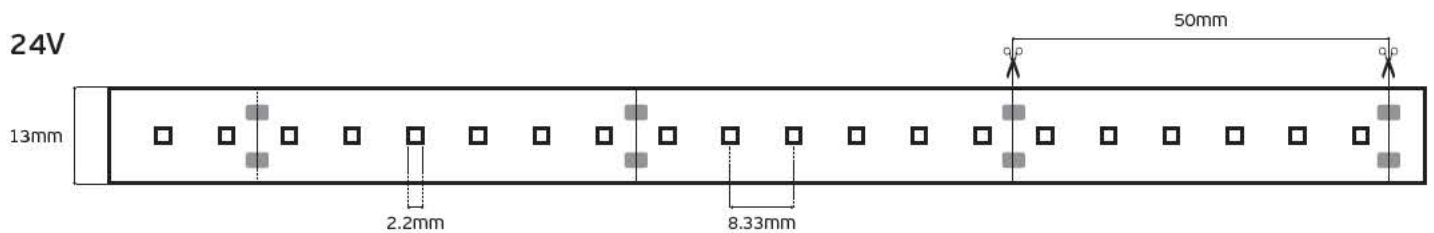

IP66. 12w/m



VK/24/2216W/.../180

Product Models

Code	Model	Voltage	Color	Lumen	Brand	CRI	Power	Box
78001-716724	VK/24/2216W/927/180	24V	2700K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll
78001-717724	VK/24/2216W/930/180	24V	3000K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll
78001-718724	VK/24/2216W/940/180	24V	4000K	2050lm/m	EPISTAR	CRI>90	18w/m	5m/roll

Details

Led type SMD 2216. Watt 18w/m. Led qty 180pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.




LED's/m  
180spcs



IP66

**5** years guarantee    *Super bright!!!*

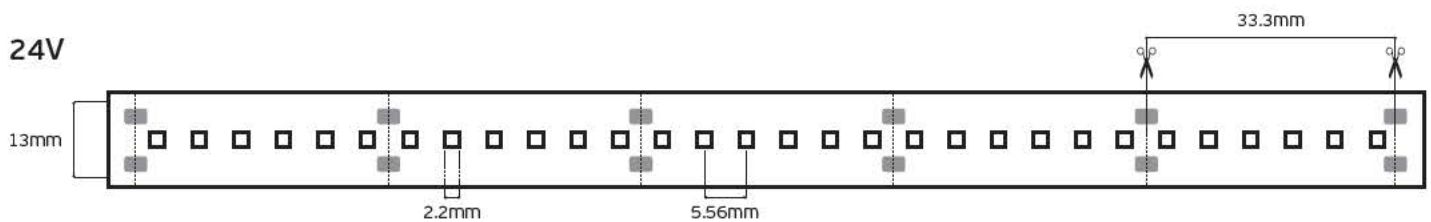

IP66. 18w/m



VK/24/2216W/.../240

Product Models


Code	Model	Voltage	Color	Lumen	Brand	CRI	Power	Box
78001-719724	VK/24/2216W/927/240	24V	2700K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll
78001-720724	VK/24/2216W/930/240	24V	3000K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll
78001-721724	VK/24/2216W/940/240	24V	4000K	2750lm/m	EPISTAR	CRI>90	24w/m	5m/roll

Details

Led type SMD 2216. Watt 24w/m. Led qty 240pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



**5** years guarantee    **Super bright!!!**

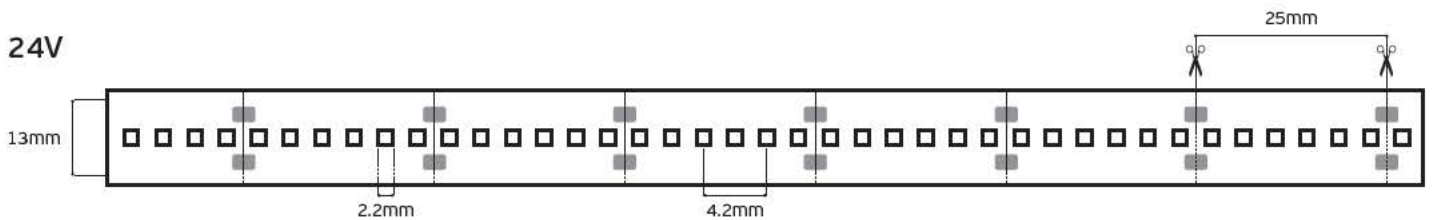

IP66. 24w/m




VK/3528/60 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-243123	VK/12/3528/WW/60	12V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-034719	VK/12/3528/W/60	12V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-244123	VK/12/3528/C/60	12V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-033719	VK/12/3528/D/60	12V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-104719	VK/12/3528/BL/60	12V	BLUE	336lm/m	CRI>80	4.8w/m	5m/roll
78001-105719	VK/12/3528/R/60	12V	RED	336lm/m	CRI>80	4.8w/m	5m/roll
78001-106719	VK/12/3528/Y/60	12V	YELLOW	336lm/m	CRI>80	4.8w/m	5m/roll
78001-107719	VK/12/3528/GR/60	12V	GREEN	336lm/m	CRI>80	4.8w/m	5m/roll
78001-249123	VK/12/3528/A/60	12V	AMBER	336lm/m	CRI>80	4.8w/m	5m/roll
78001-250123	VK/12/3528/P/60	12V	PURPLE	336lm/m	CRI>80	4.8w/m	5m/roll

Details

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

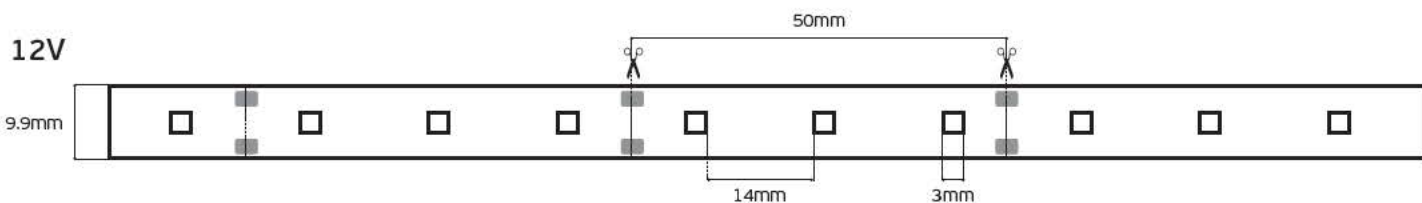


VK/3528/60 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-245123	VK/24/3528/WW/60	24V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-051719	VK/24/3528/W/60	24V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-238123	VK/24/3528/C/60	24V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-052719	VK/24/3528/D/60	24V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-626126	VK/24/3528/BL/60	24V	BLUE	336lm/m	CRI>80	4.8w/m	5m/roll

Details

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

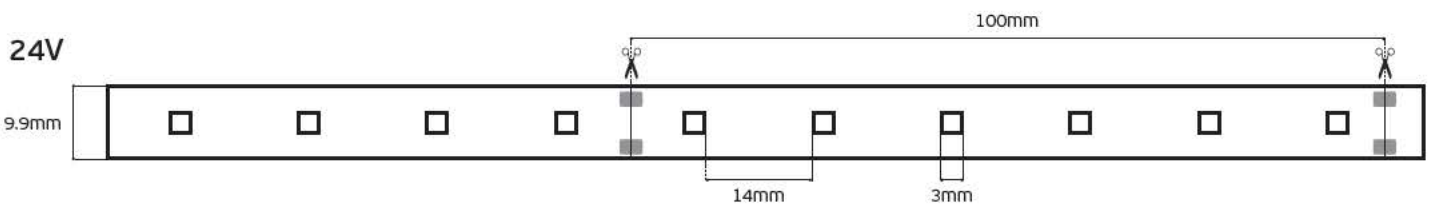

IP20. 4.8w/m. 24V




VK/5050/30 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-036719	VK/12/5050/W/30	12V	3000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-035719	VK/12/5050/D/30	12V	6000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-108719	VK/12/5050/BL/30	12V	BLUE	504lm/m	CRI>80	7.2w/m	5m/roll

Details

Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

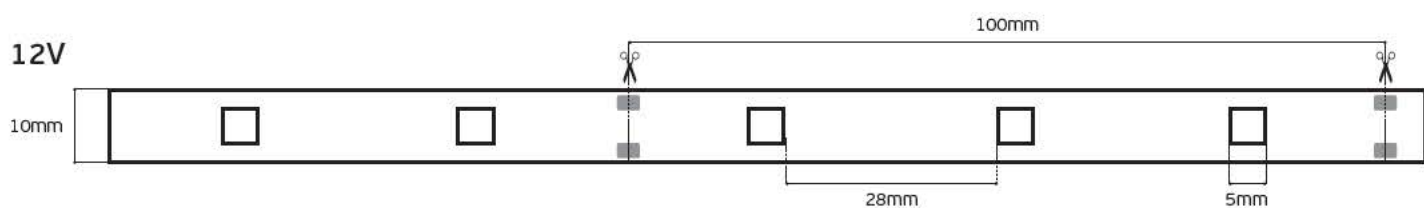


VK/5050/30 24V

Product Models

Code	Model	Voltage	Color	Beam Angle	CRI	Power	Box
78001-055719	VK/24/5050/W/30	24V	3000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-054719	VK/24/5050/D/30	24V	6000K	720lm/m	CRI>80	7.2w/m	5m/roll

Details

Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

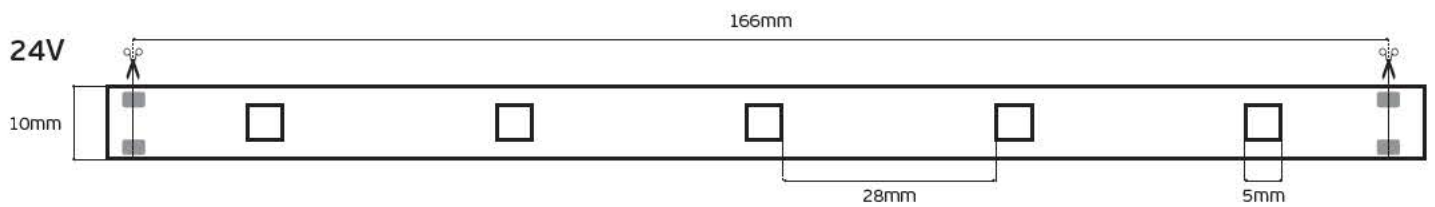

IP20. 7.2w/m. 24V




VK/3528/96 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-145719	VK/12/3528/WW/96	12V	2700K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-109719	VK/12/3528/W/96	12V	3000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-161719	VK/12/3528/C/96	12V	4000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-110719	VK/12/3528/D/96	12V	6000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-611719	VK/12/3528/BL/96	12V	Blue	770lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 2835. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

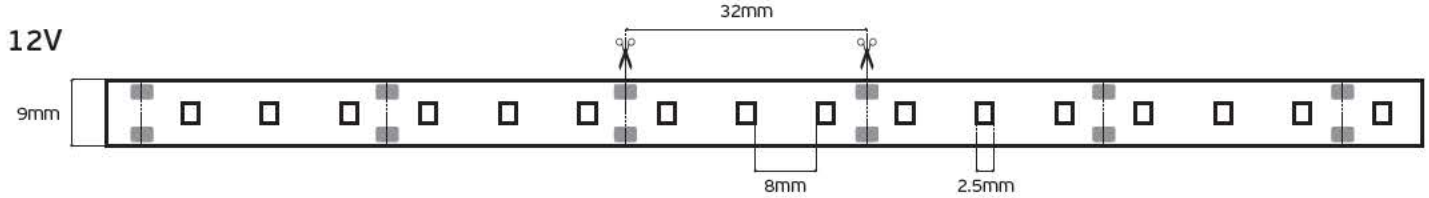


VK/3528/96 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-147719	VK/24/3528/WW/96	24V	2700K	770lm/m	CRI>80	7.68w/m	5m/roll
78001-111719	VK/24/3528/W/96	24V	3000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-237123	VK/24/3528/C/96	24V	4000K	770lm/m	CRI>80	7.68w/m	5m/roll
78001-099719	VK/24/3528/D/96	24V	6000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-646126	VK/24/3528/BL/96	24V	BLUE	770lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 2835. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

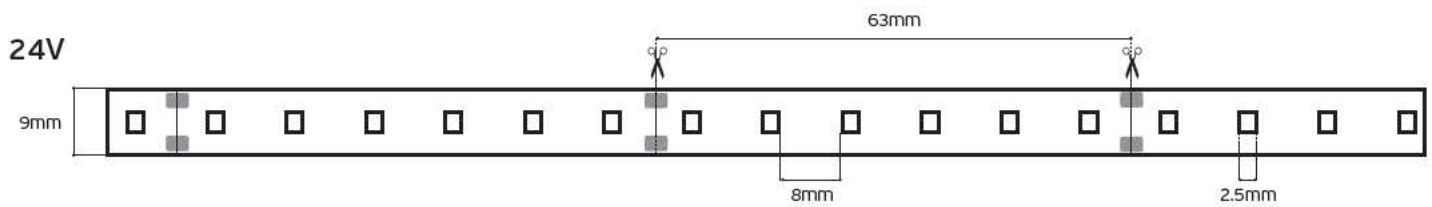

IP20. 7.68w/m. 24V




VK/3528/120 12V

Product Models

Code	Model	Voltage	Color	Beam Angle	CRI	Power	Box
78001-162719	VK/12/3528/WW/120	12V	2700K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-072719	VK/12/3528/W/120	12V	3000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-163719	VK/12/3528/C/120	12V	4000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-101719	VK/12/3528/D/120	12V	6000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-647126	VK/12/3528/BL/120	12V	BLUE	970lm/m	CRI>80	9.68w/m	5m/roll

Details

Led type SMD 2835. Watt 9.68w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

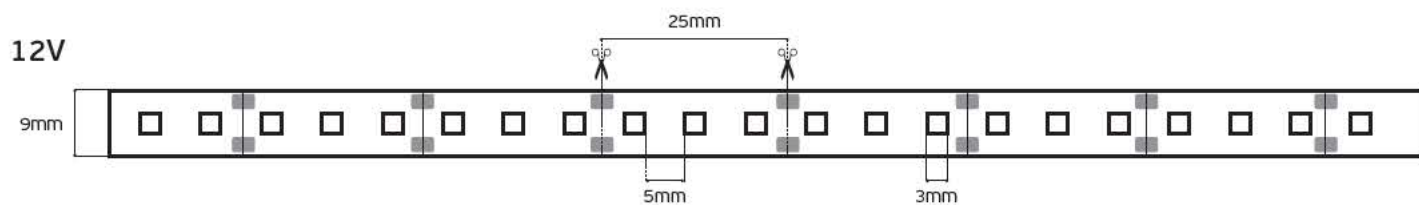


VK/3528/120 24V

Product Models

Code	Model	Voltage	Color	Beam Angle	CRI	Power	Box
78001-164719	VK/24/3528/WW/120	24V	2700K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-079719	VK/24/3528/W/120	24V	3000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-240123	VK/24/3528/C/120	24V	4000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-080719	VK/24/3528/D/120	24V	6000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-606719	VK/24/3528/WD/120	24V	3000K-6000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-648126	VK/24/3528/BL/120	24V	BLUE	970lm/m	CRI>80	9.68w/m	5m/roll

Details

Led type SMD 2835. Watt 9.68w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

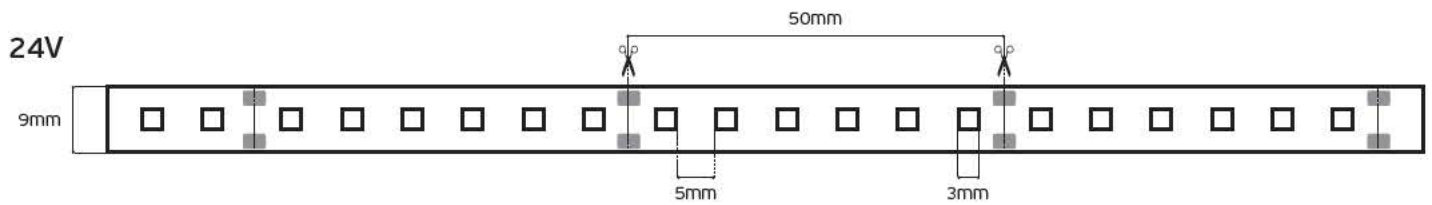

IP20. 9.68w/m. 24V




VK/5050/60 12V

Product Models

Code	Model	Voltage	Color	Lumen/m	CRI	Power/m	Box
78001-246123	VK/12/5050/WW/60	12V	2700K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-038719	VK/12/5050/W/60	12V	3000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-247123	VK/12/5050/C/60	12V	4000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-037719	VK/12/5050/D/60	12V	6000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-112719	VK/12/5050/BL/60	12V	BLUE	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-113719	VK/12/5050/R/60	12V	RED	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-114719	VK/12/5050/Y/60	12V	YELLOW	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-115719	VK/12/5050/GR/60	12V	GREEN	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-251123	VK/12/5050/A/60	12V	AMBER	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-252123	VK/12/5050/P/60	12V	PURPLE	1.008lm/m	CRI>80	14.4w/m	5m/roll

Details

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

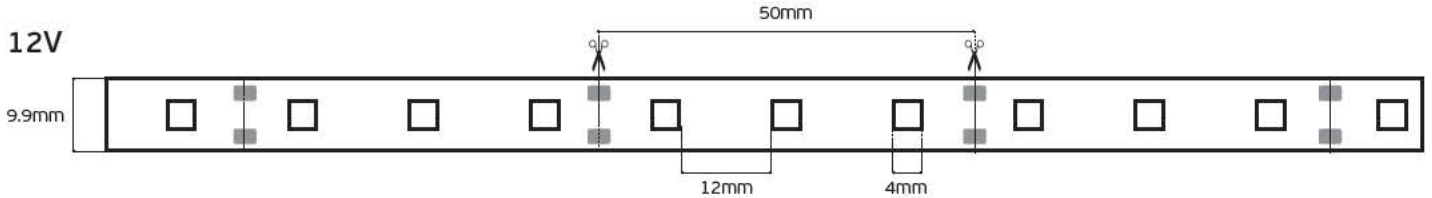


VK/5050/60 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-248123	VK/24/5050/WW/60	24V	2700K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-056719	VK/24/5050/W/60	24V	3000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-239123	VK/24/5050/C/60	24V	4000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-053719	VK/24/5050/D/60	24V	6000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-607719	VK/24/5050/WD/60	24V	3000-6000K	1.440lm/m	CRI>80	14.4w/m	5m/roll
78001-649126	VK/24/5050/BL/60	24V	BLUE	1.440lm/m	CRI>80	14.4w/m	5m/roll

Details

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

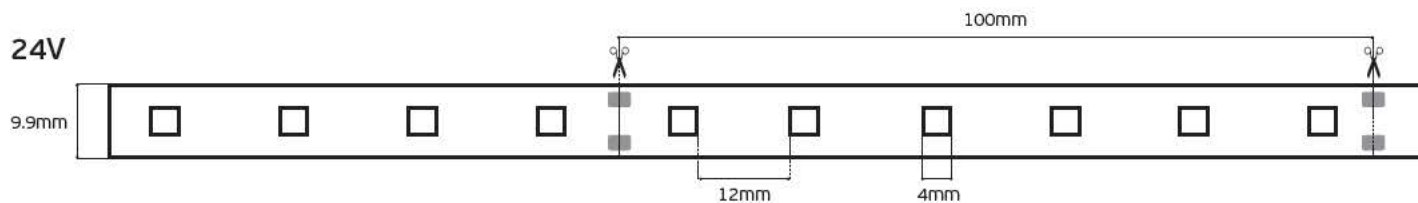

IP20. 14.4w/m. 24V





**VK/2835/240 24V**  
**SUPER BRIGHT!!!**

**Product Models**

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-622126	VK/24/2835/WW/240	24V	2700K	1.600lm/m	CRI>80	16w/m	5m/roll
78001-623126	VK/24/2835/W/240	24V	3000K	1.600lm/m	CRI>80	16w/m	5m/roll
78001-624126	VK/24/2835/C/240	24V	4000K	1.600lm/m	CRI>80	16w/m	5m/roll
78001-625126	VK/24/2835/D/240	24V	6000K	1.600lm/m	CRI>80	16w/m	5m/roll

**Details**

Led type SMD 2835. Watt 16w/m. Led qty 240pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

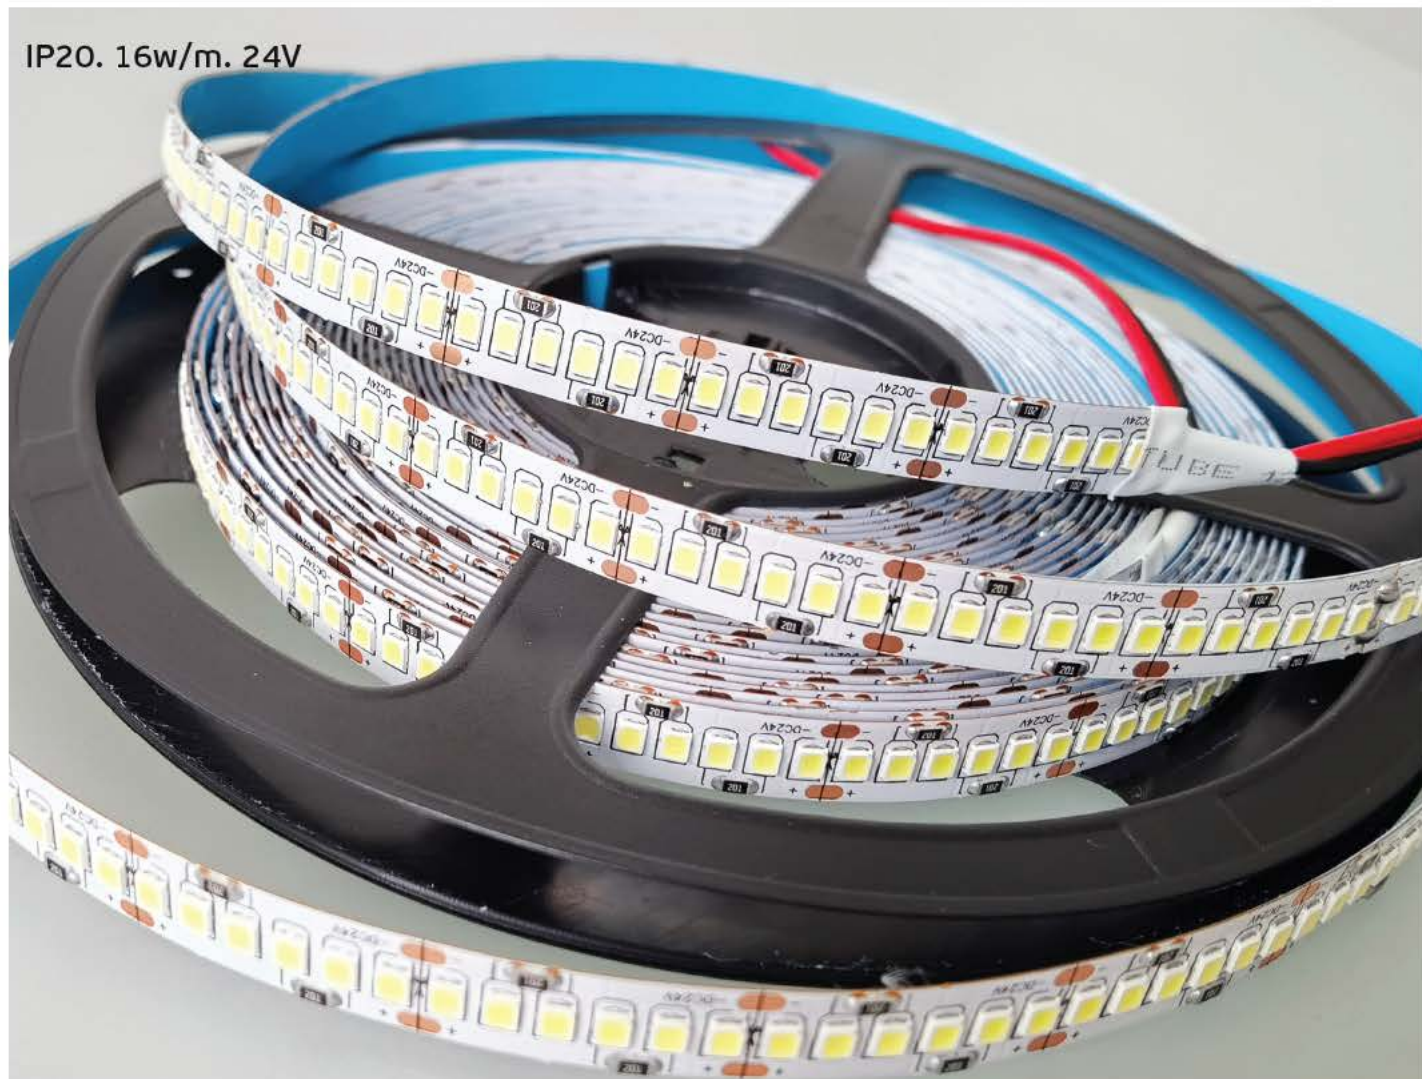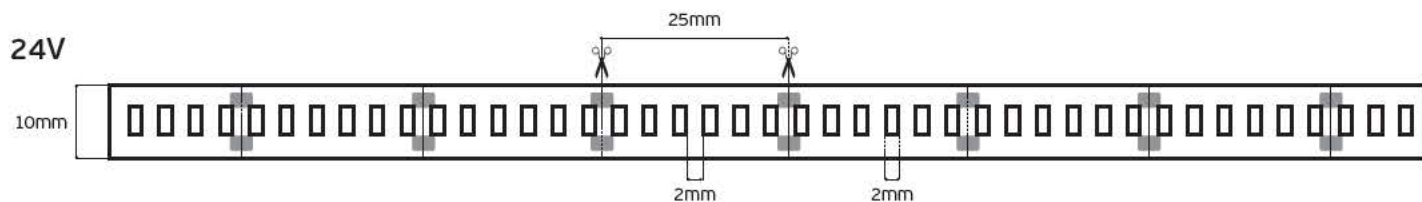

**VK/2835/120 24V**  
**SUPER BRIGHT!!! SUPER SLIM!!!**

*Product Models*


Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-650126	VK/24/2835/W/120/4MM	24V	3000K	969lm/m	CRI>80	9.69w/m	5m/roll
78001-627126	VK/24/2835/C/120/4MM	24V	4000K	969lm/m	CRI>80	9.69w/m	5m/roll

*Details*

Led type **SMD 2835**. Watt **9.69w/m**. Led qty **120pcs/m**. CRI>80. Tape on back **3M**. Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**. 2 years guarantee.



24V

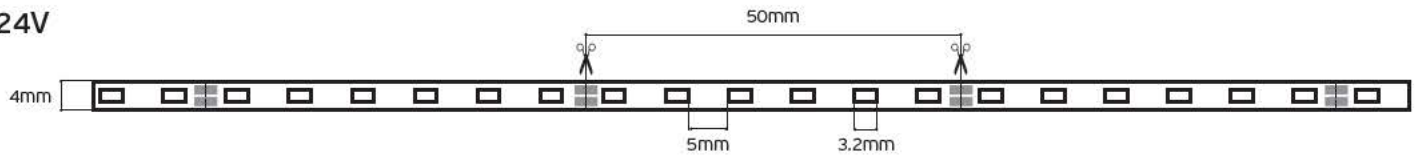

IP20. 9.69w/m. 24V






VK/3528J/60 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-253123	VK/12/3528J/WW/60	12V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-041719	VK/12/3528J/W/60	12V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-254123	VK/12/3528J/C/60	12V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-040719	VK/12/3528J/D/60	12V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-049719	VK/12/3528J/BL/60	12V	BLUE	336lm/m	CRI>80	4.8w/m	5m/roll
78001-116719	VK/12/3528J/R/60	12V	RED	336lm/m	CRI>80	4.8w/m	5m/roll
78001-117719	VK/12/3528J/Y/60	12V	YELLOW	336lm/m	CRI>80	4.8w/m	5m/roll
78001-118719	VK/12/3528J/GR/60	12V	GREEN	336lm/m	CRI>80	4.8w/m	5m/roll
78001-255123	VK/12/3528J/A/60	12V	AMBER	336lm/m	CRI>80	4.8w/m	5m/roll
78001-256123	VK/12/3528J/P/60	12V	PURPLE	336lm/m	CRI>80	4.8w/m	5m/roll

Details

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.



IP55. 4.8w/m. 12V




VK/3528J/60 24V

Product Models

Code	Model	Voltage	Color	Brightness	CRI	Power	Box
78001-257123	VK/24/3528J/WW/60	24V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-058719	VK/24/3528J/W/60	24V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-258123	VK/24/3528J/C/60	24V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-057719	VK/24/3528J/D/60	24V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-651126	VK/24/3528J/BL/60	24V	BLUE	480lm/m	CRI>80	4.8w/m	5m/roll

Details

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

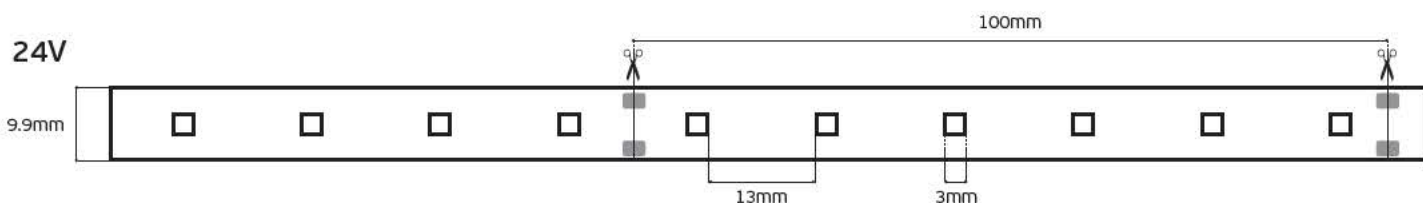


VK/5050J/30 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-600719	VK/24/5050J/W/30	24V	3000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-059719	VK/24/5050J/D/30	24V	6000K	720lm/m	CRI>80	7.2w/m	5m/roll

Details

Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

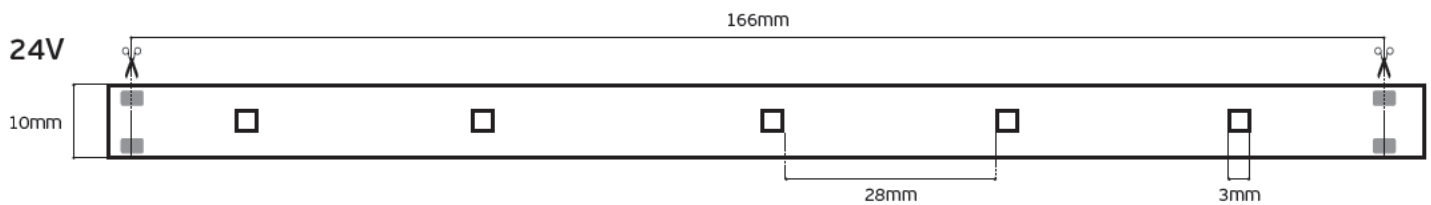


VK/5050J/30 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-043719	VK/12/5050J/W/30	12V	3000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-042719	VK/12/5050J/D/30	12V	6000K	720lm/m	CRI>80	7.2w/m	5m/roll
78001-050719	VK/12/5050J/BL/30	12V	BLUE	720lm/m	CRI>80	7.2w/m	5m/roll

Details

Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

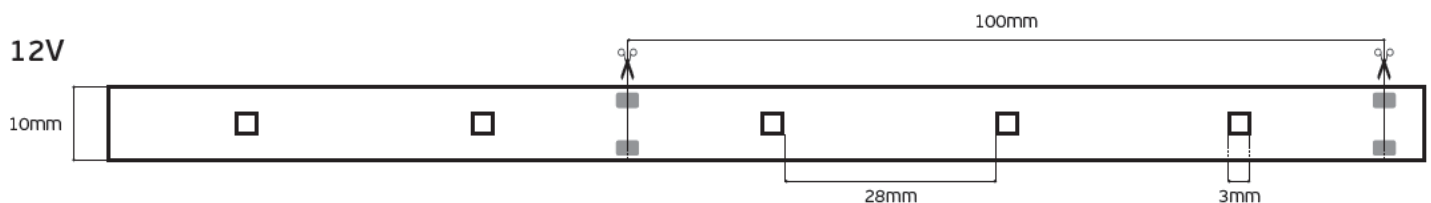



IP55. 7.2w/m. 12V


VK/3528J/96 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Wattage	Box
78001-156719	VK/24/3528J/WW/96	24V	2700K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-120719	VK/24/3528J/W/96	24V	3000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-166719	VK/24/3528J/C/96	24V	4000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-121719	VK/24/3528J/D/96	24V	6000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-653126	VK/24/3528J/BL/96	24V	BLUE	768lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 2835. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

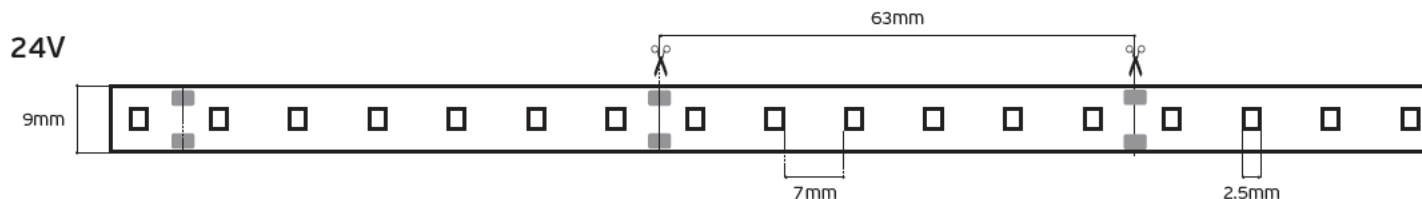


VK/3528J/96 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Wattage	Box
78001-155719	VK/12/3528J/WW/96	12V	2700K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-119719	VK/12/3528J/W/96	12V	3000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-165719	VK/12/3528J/C/96	12V	4000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-098719	VK/12/3528J/D/96	12V	6000K	768lm/m	CRI>80	7.68w/m	5m/roll
78001-652126	VK/12/3528J/BL/96	12V	BLUE	768lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 2835. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

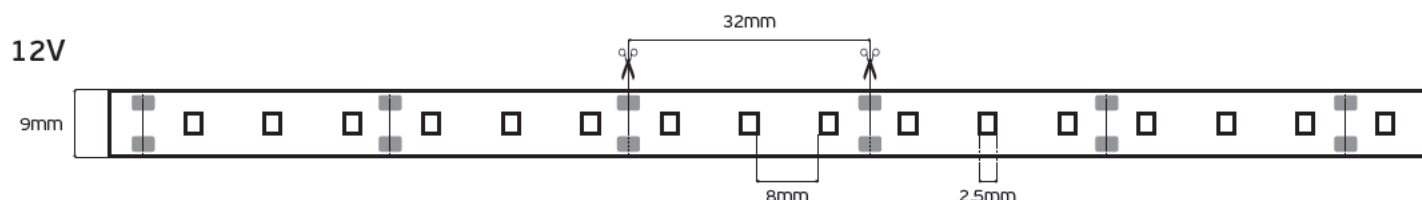



IP55. 7.68w/m. 12V


VK/3528J/120 24V

Product Models

Code	Model	Voltage	Color	Beam Angle	CRI	Power	Box
78001-168719	VK/24/3528J/WW/120	24V	2700K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-103719	VK/24/3528J/W/120	24V	3000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-169719	VK/24/3528J/C/120	24V	4000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-102719	VK/24/3528J/D/120	24V	6000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-655126	VK/24/3528J/BL/120	24V	BLUE	960lm/m	CRI>80	9.6w/m	5m/roll

Details

Led type SMD 2835. Watt 9.6w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

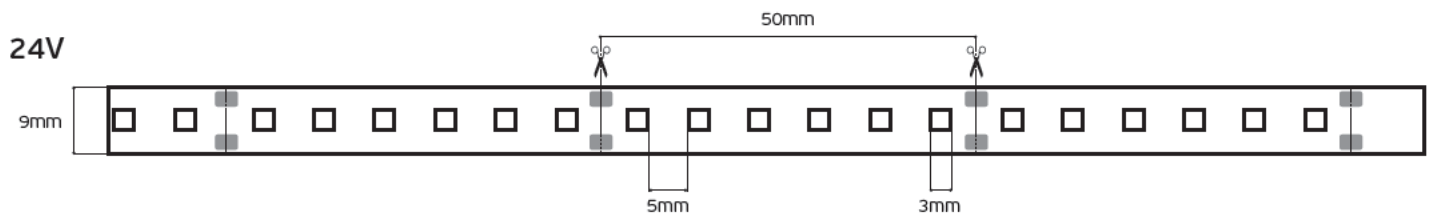


VK/3528J/120 12V

Product Models

Code	Model	Voltage	Color	Beam Angle	CRI	Power	Box
78001-067719	VK/12/3528J/WW/120	12V	2700K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-074719	VK/12/3528J/W/120	12V	3000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-167719	VK/12/3528J/C/120	12V	4000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-075719	VK/12/3528J/D/120	12V	6000K	960lm/m	CRI>80	9.6w/m	5m/roll
78001-654126	VK/12/3528J/BL/120	12V	BLUE	960lm/m	CRI>80	9.6w/m	5m/roll

Details

Led type SMD 2835. Watt 9.6w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

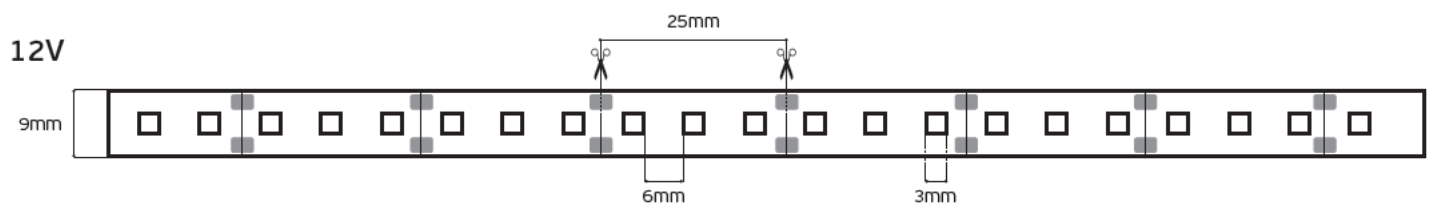



IP55. 9.6w/m. 12V




VK/5050J/60 24V

Product Models


Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-263123	VK/24/5050J/WW/60	24V	2700K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-061719	VK/24/5050J/W/60	24V	3000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-264123	VK/24/5050J/C/60	24V	4000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-060719	VK/24/5050J/D/60	24V	6000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-656126	VK/24/5050J/BL/60	24V	BLUE	1440lm/m	CRI>80	14.4w/m	5m/roll

Details

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.



IP55. 14.4w/m. 24V

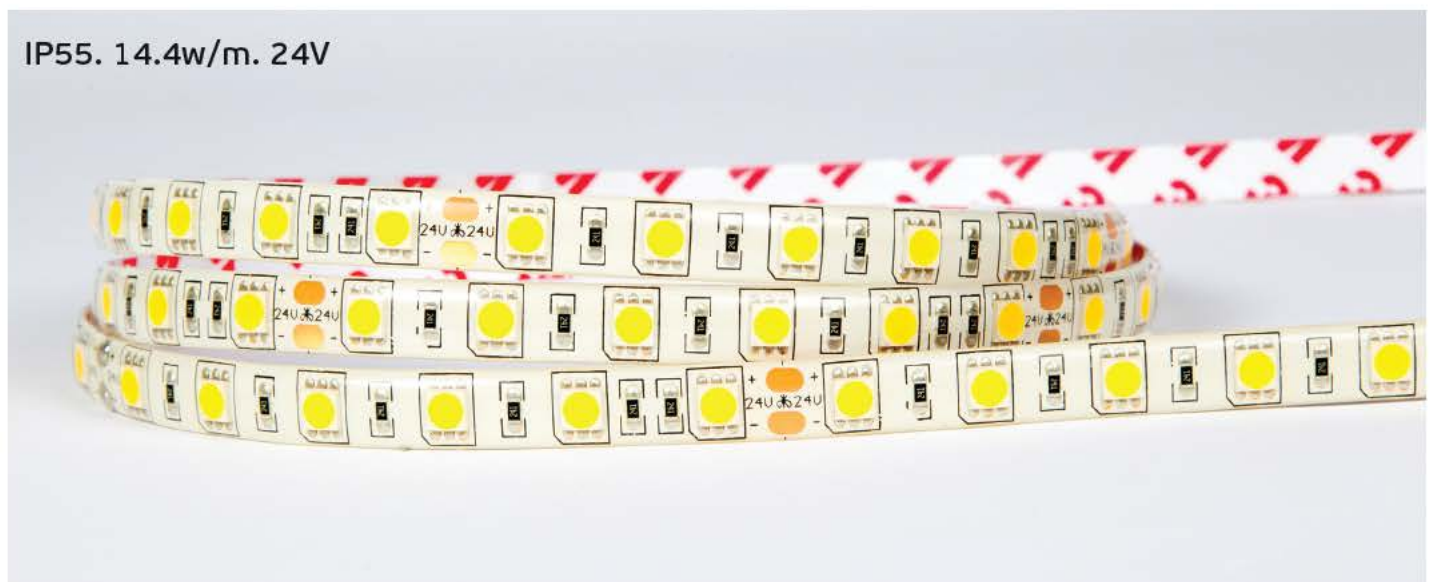


VK/5050J/60 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-259123	VK/12/5050J/WW/60	12V	2700K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-045719	VK/12/5050J/W/60	12V	3000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-260123	VK/12/5050J/C/60	12V	4000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-044719	VK/12/5050J/D/60	12V	6000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-100719	VK/12/5050J/BL/60	12V	BLUE	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-122719	VK/12/5050J/R/60	12V	RED	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-123719	VK/12/5050J/Y/60	12V	YELLOW	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-124719	VK/12/5050J/GR/60	12V	GREEN	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-261123	VK/12/5050J/A/60	12V	AMBER	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-262123	VK/12/5050J/P/60	12V	PURPLE	1008lm/m	CRI>80	14.4w/m	5m/roll

Details

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

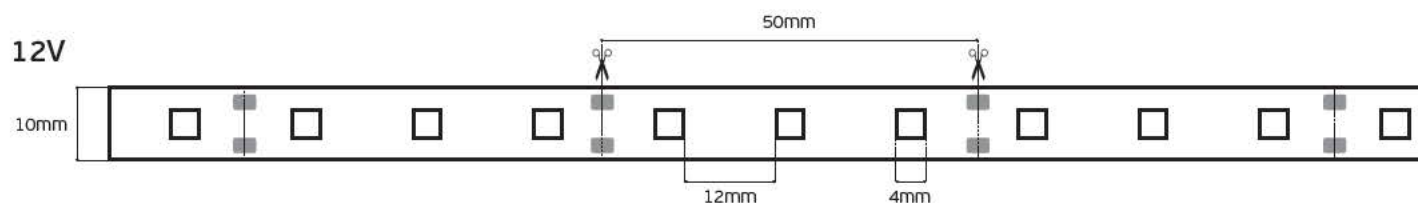


**VK/3528W/60 24V**

**Product Models**

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-274123	VK/24/3528W/WW/60	24V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-275123	VK/24/3528W/W/60	24V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-276123	VK/24/3528W/C/60	24V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-277123	VK/24/3528W/D/60	24V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-278123	VK/24/3528W/BL/60	24V	BLUE	336lm/m	CRI>80	4.8w/m	5m/roll

**Details**

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

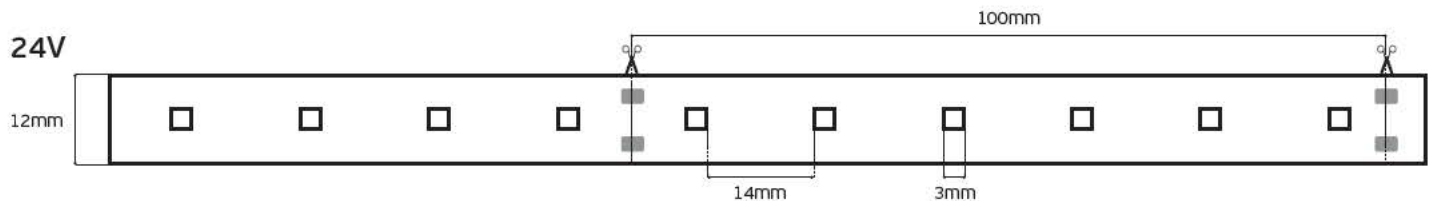


**VK/3528W/60 12V**

**Product Models**

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-241123	VK/12/3528W/WW/60	12V	2700K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-228123	VK/12/3528W/W/60	12V	3000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-229123	VK/12/3528W/C/60	12V	4000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-230123	VK/12/3528W/D/60	12V	6000K	480lm/m	CRI>80	4.8w/m	5m/roll
78001-231123	VK/12/3528W/BL/60	12V	BLUE	336lm/m	CRI>80	4.8w/m	5m/roll
78001-265123	VK/12/3528W/A/60	12V	AMBER	336lm/m	CRI>80	4.8w/m	5m/roll
78001-266123	VK/12/3528W/P/60	12V	PURPLE	336lm/m	CRI>80	4.8w/m	5m/roll

**Details**

Led type SMD 2835. Watt 4.8w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

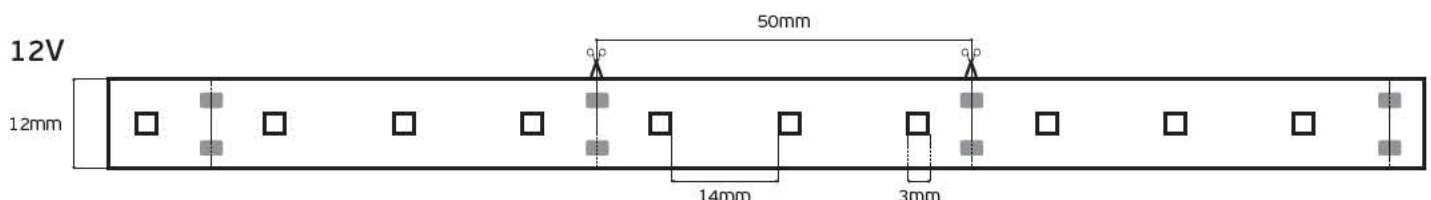



IP68. 4.8w/m. 12V


VK/3528W/96 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-284123	VK/24/3528W/WW/96	24V	2700K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-285123	VK/24/3528W/W/96	24V	3000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-286123	VK/24/3528W/C/96	24V	4000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-287123	VK/24/3528W/D/96	24V	6000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-288123	VK/24/3528W/BL/96	24V	BLUE	780lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 3528. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

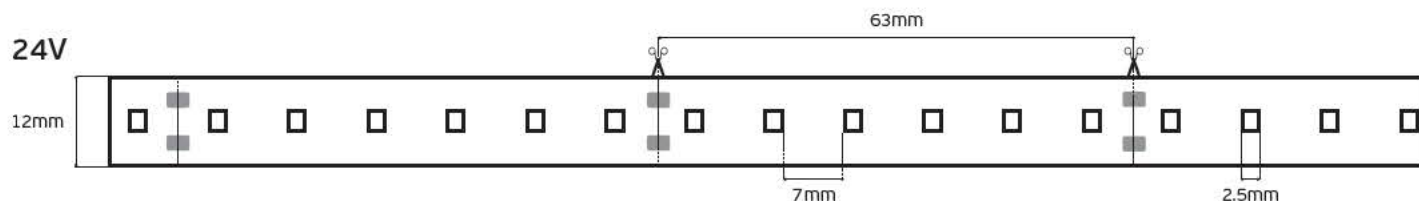


VK/3528W/96 12V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-657126	VK/12/3528W/WW/96	12V	2700K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-658126	VK/12/3528W/W/96	12V	3000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-659126	VK/12/3528W/C/96	12V	4000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-660126	VK/12/3528W/D/96	12V	6000K	780lm/m	CRI>80	7.68w/m	5m/roll
78001-661126	VK/12/3528W/BL/96	12V	BLUE	780lm/m	CRI>80	7.68w/m	5m/roll

Details

Led type SMD 3528. Watt 7.68w/m. Led qty 96pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

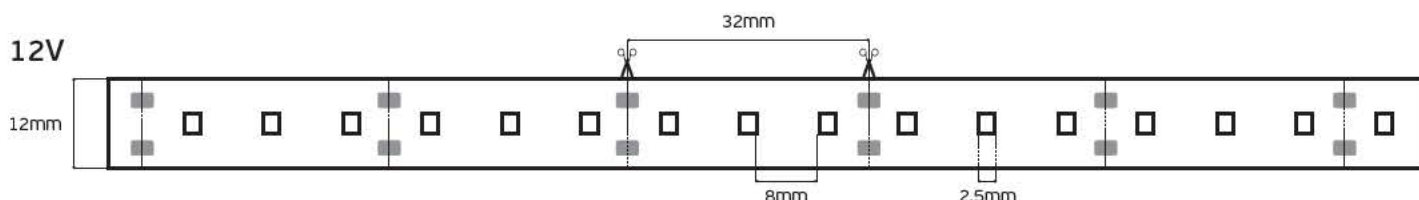



IP68. 7.68w/m. 12V


VK/3528W/120 24V

Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-289123	VK/24/3528W/WW/120	24V	2700K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-290123	VK/24/3528W/W/120	24V	3000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-291123	VK/24/3528W/C/120	24V	4000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-292123	VK/24/3528W/D/120	24V	6000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-293123	VK/24/3528W/BL/120	24V	BLUE	970lm/m	CRI>80	9.68w/m	5m/roll

Details

Led type SMD 3528. Watt 9.68w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

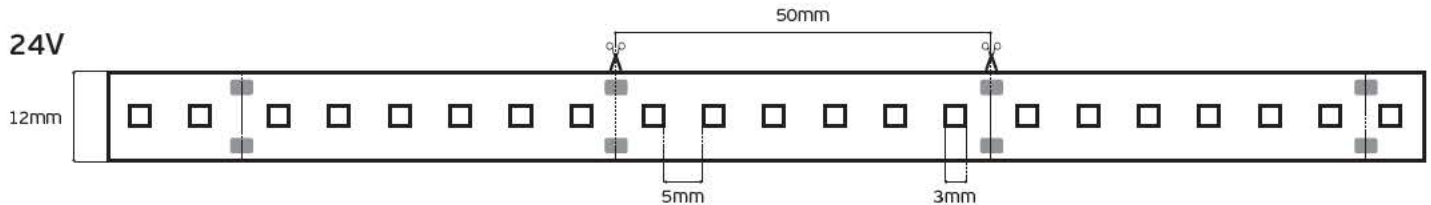


VK/3528W/120 12V


Product Models

Code	Model	Voltage	Color	Lumen	CRI	Power	Box
78001-662126	VK/12/3528W/WW/120	12V	2700K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-663126	VK/12/3528W/W/120	12V	3000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-664126	VK/12/3528W/C/120	12V	4000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-665126	VK/12/3528W/D/120	12V	6000K	970lm/m	CRI>80	9.68w/m	5m/roll
78001-666126	VK/12/3528W/BL/120	12V	BLUE	970lm/m	CRI>80	9.68w/m	5m/roll

Details

Led type SMD 3528. Watt 9.68w/m. Led qty 120pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

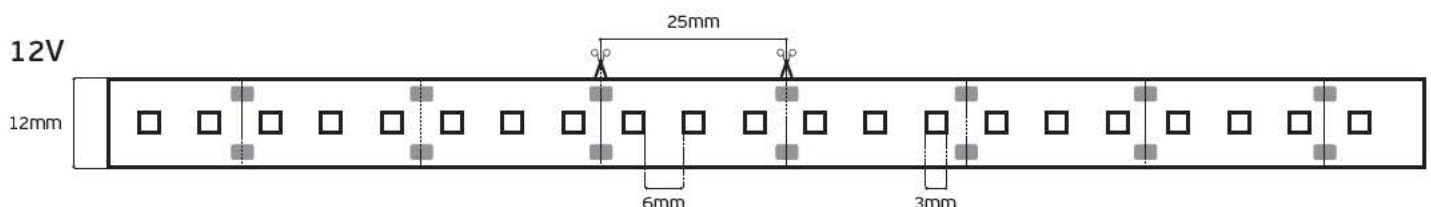

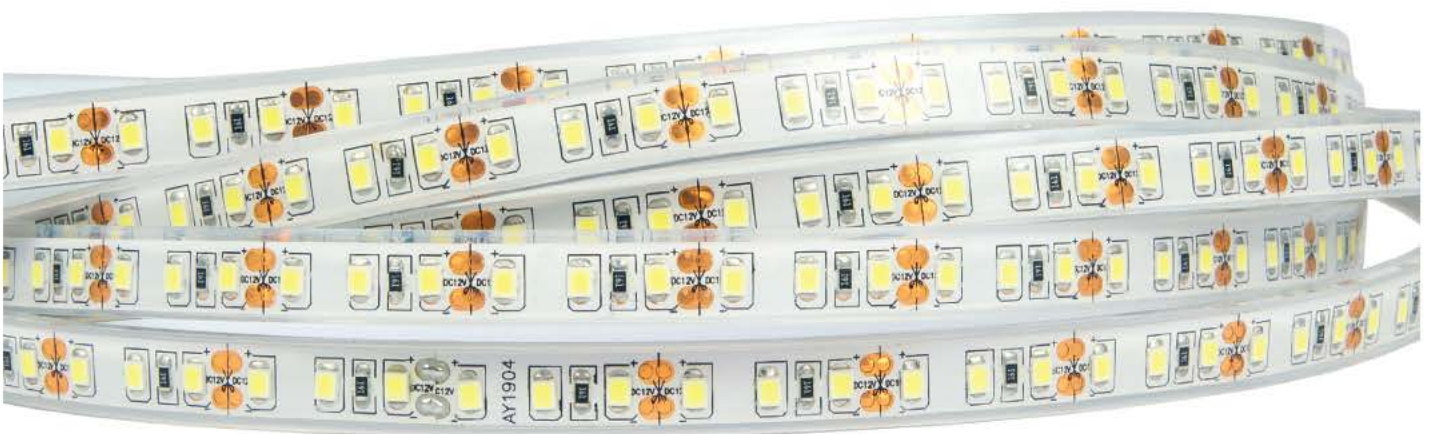

IP68. 9.68w/m. 12V




**VK/5050W/60 24V**

**Product Models**

Code	Model	Voltage	Color	Light Output	CRI	Power	Box
78001-279123	VK/24/5050W/WW/60	24V	2700K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-280123	VK/24/5050W/W/60	24V	3000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-281123	VK/24/5050W/C/60	24V	4000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-282123	VK/24/5050W/D/60	24V	6000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-283123	VK/24/5050W/BL/60	24V	BLUE	1.008lm/m	CRI>80	14.4w/m	5m/roll

**Details**

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

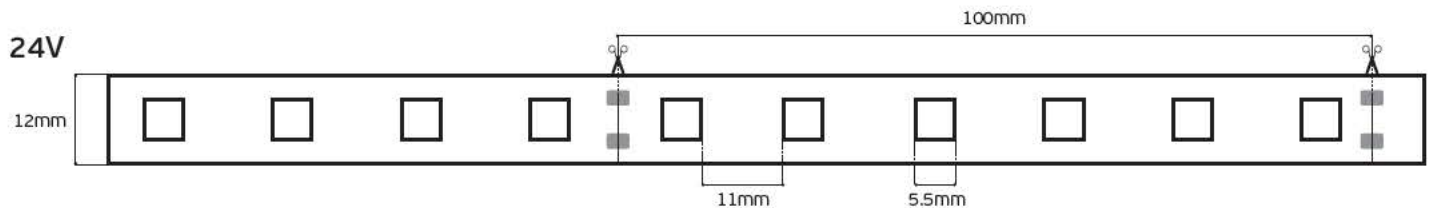


**VK/5050W/60 12V**

**Product Models**

Code	Model	Voltage	Color	Light Output	CRI	Power	Box
78001-242123	VK/12/5050W/WW/60	12V	2700K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-232123	VK/12/5050W/W/60	12V	3000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-233123	VK/12/5050W/C/60	12V	4000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-234123	VK/12/5050W/D/60	12V	6000K	1440lm/m	CRI>80	14.4w/m	5m/roll
78001-235123	VK/12/5050W/BL/60	12V	BLUE	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-267123	VK/12/5050W/A/60	12V	AMBER	1.008lm/m	CRI>80	14.4w/m	5m/roll
78001-268123	VK/12/5050W/P/60	12V	PURPLE	1.008lm/m	CRI>80	14.4w/m	5m/roll

**Details**

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.

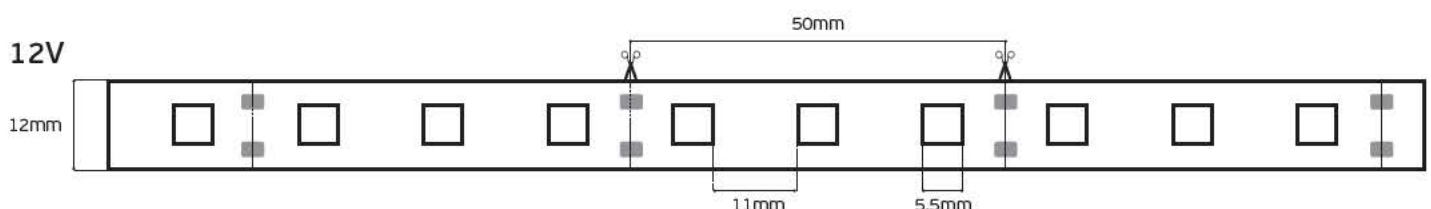



IP68. 14.4w/m. 12V

VK/24/5050/CCT/60

Product Models


Code	Model	IP	V	Color	lm/m	CRI	W/m	Box
78001-693724	VK/24/5050/CCT/60	IP20	24V	2400K+6000K (RGB+WW)	800-950lm/m	CRI>90	18w/m	5m/roll
78001-694724	VK/24/5050W/CCT/60	IP65	24V	2400K+6000K (RGB+WW)	800-950lm/m	CRI>90	18w/m	5m/roll

Details

Led type SMD 2835. Watt 18w/m. Led qty 60pcs/m. Tape on back 3M. Working temperature -10°C → 40°C. Storage temperature -20°C → 60°C.



5 years guarantee

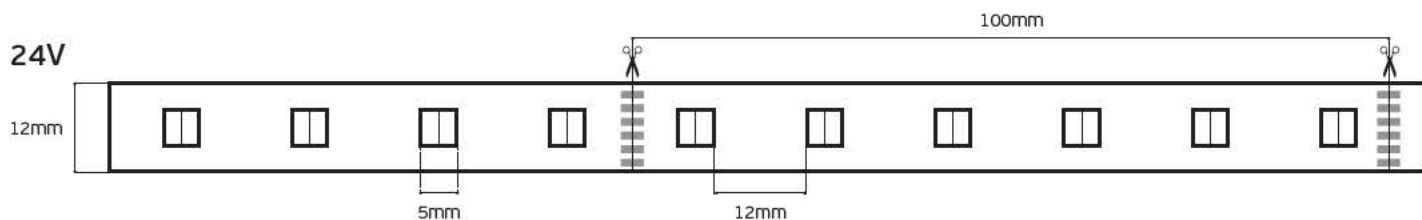

IP20. 18w/m



**VK/FUT092**  
4 Zone Remote controller RGB+CCT




**Product Models**

Code	Model	Box
90004-037698	VK/FUT092 2.4GHz. 3V. 6dBm. 20uA.	1pc

**Details**  
Voltage **3V**. Frequency **2.4GHz**. Transmitting power **6dBm**. Standby Power **20uA**. Distance **30m**. Material **Plastic**. Dimmable **RGB+CCT**. Working temperature **-20~60°C**. 2 years guarantee.

 **IP20. 3V.**  
RGB+CCT




**VK/FUT039S**  
Controller RGB+CCT




**Product Models**

Code	Model	Box
90004-039698	VK/FUT039S 6A/Channel. 12-24V. Max 12A.	1pc

**Details**  
Voltage **12-24V**. Output **6A/channel**. Total output **Max 12A**. **2.4G RF RGB+CCT** Distance **30m**. Material **Plastic**. Dimmable **RGB+CCT, 4 channels**. Working temperature **-10~40°C**. 2 years guarantee.

 **IP20. 12/24V.**  
RGB+CCT



VK/5050/RGB/30 12V/24V

Product Models

Code	Model	IP20	12V	RGB	504lm/m	CRI>80	7.2w/m	Box 5m/roll
78001-048719	VK/12/5050/RGB/30	IP20	12V	RGB	504lm/m	CRI>80	7.2w/m	5m/roll
78001-081719	VK/24/5050/RGB/30	IP20	24V	RGB	504lm/m	CRI>80	7.2w/m	5m/roll
78001-047719	VK/12/5050J/RGB/30	IP55	12V	RGB	504lm/m	CRI>80	7.2w/m	5m/roll
78001-082719	VK/24/5050J/RGB/30	IP55	24V	RGB	504lm/m	CRI>80	7.2w/m	5m/roll

Details


Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.




LED's/m  
30pcs




12V. IP20/IP55. 7.2w

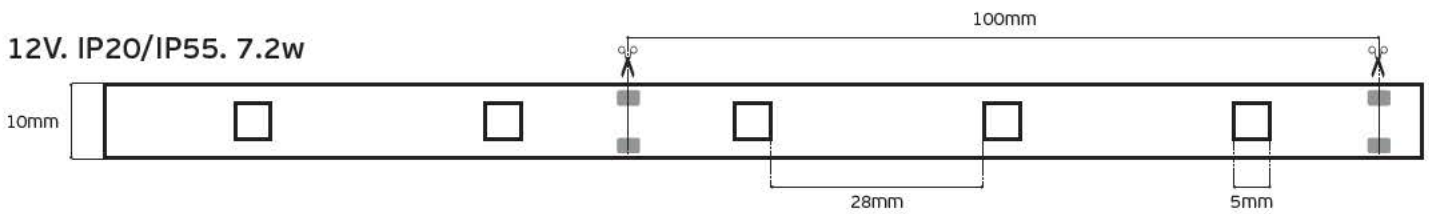

24V. IP20/IP55. 7.2w

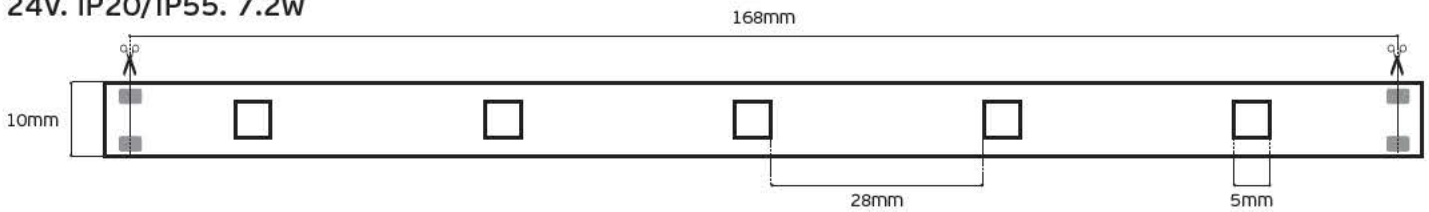

IP20. 7.2w/m. 12V

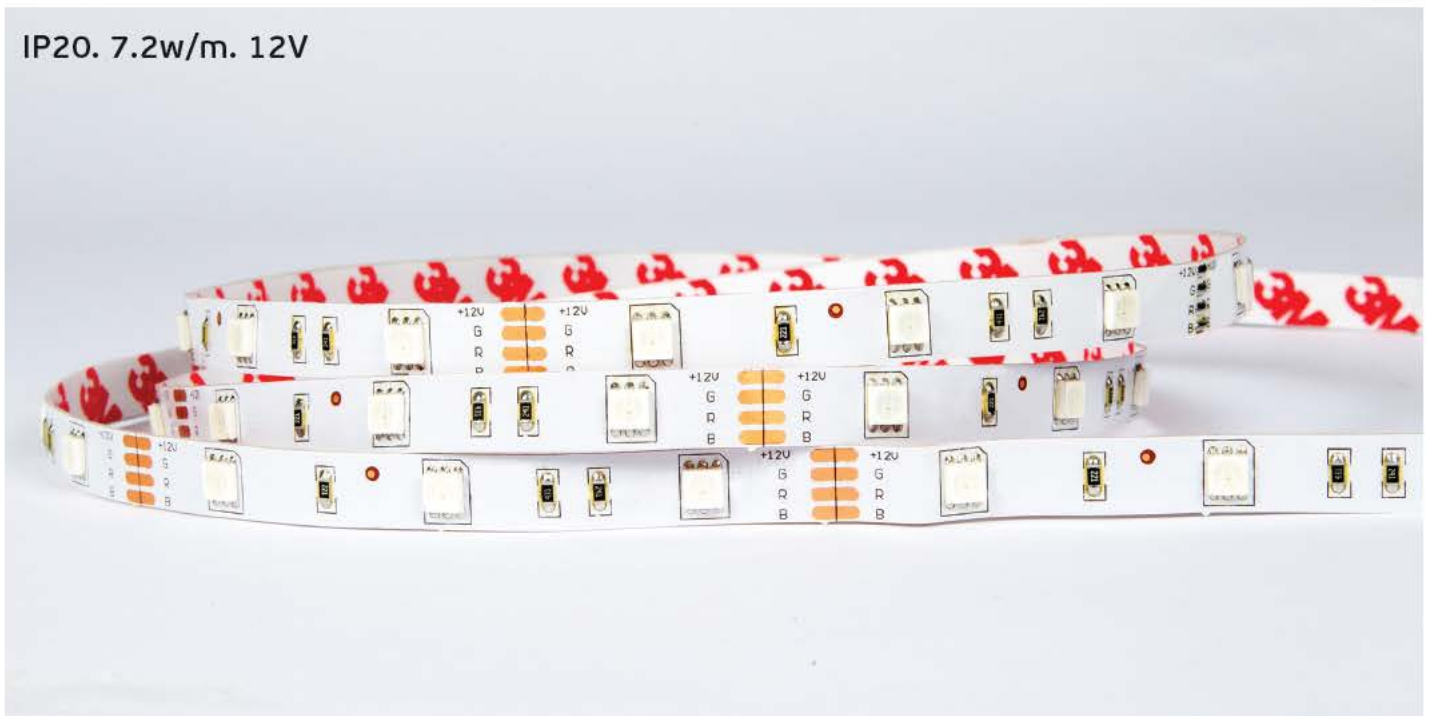


VK/5050/RGB/60 12V/24V

Product Models


Code	Model	IP	V	RGB	lm/m	CRI	W/m	Box
78001-039719	VK/12/5050/RGB/60	IP20	12V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-076719	VK/24/5050/RGB/60	IP20	24V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-046719	VK/12/5050J/RGB/60	IP55	12V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-083719	VK/24/5050J/RGB/60	IP55	24V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-236123	VK/12/5050W/RGB/60	IP68	12V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-294123	VK/24/5050W/RGB/60	IP68	24V	RGB	1008lm/m	CRI>80	14.4w/m	5m/roll

Details


Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.




12V. IP20/IP55. 14.4W

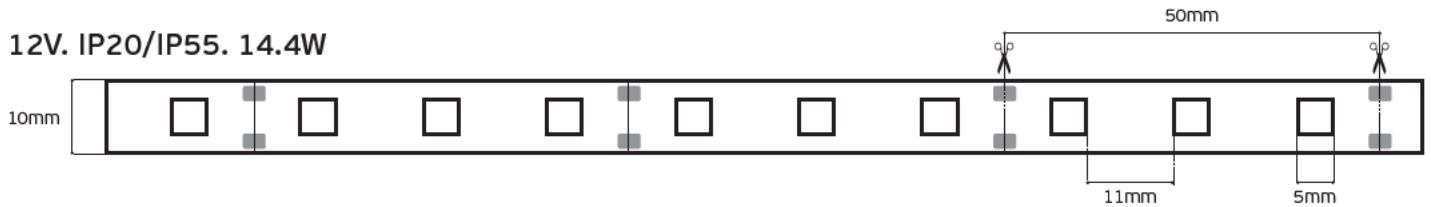



24V. IP20/IP55. 14.4W

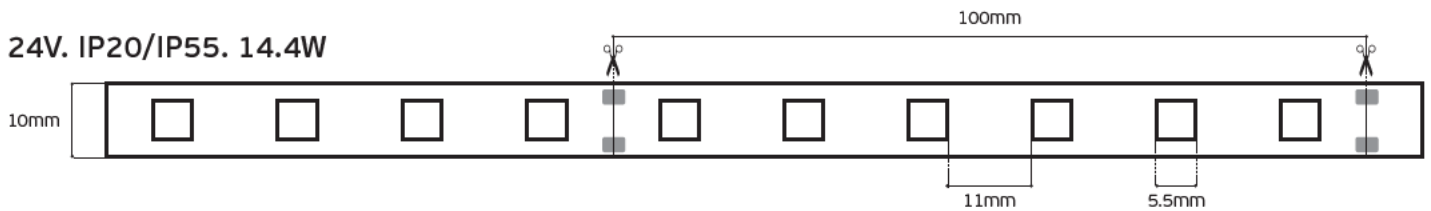

12V. IP68. 14.4W

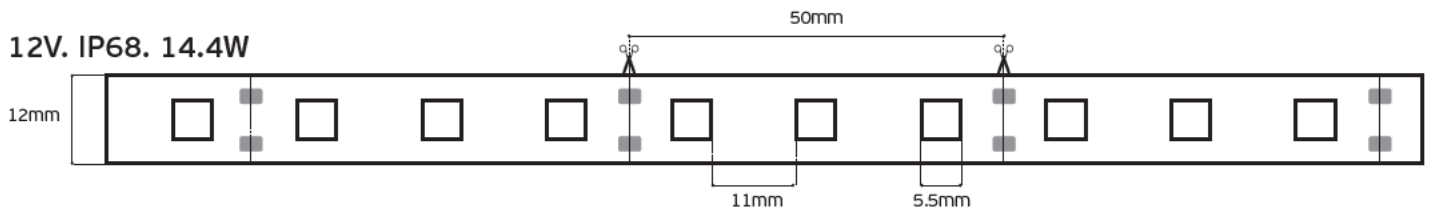

24V. IP68. 14.4W

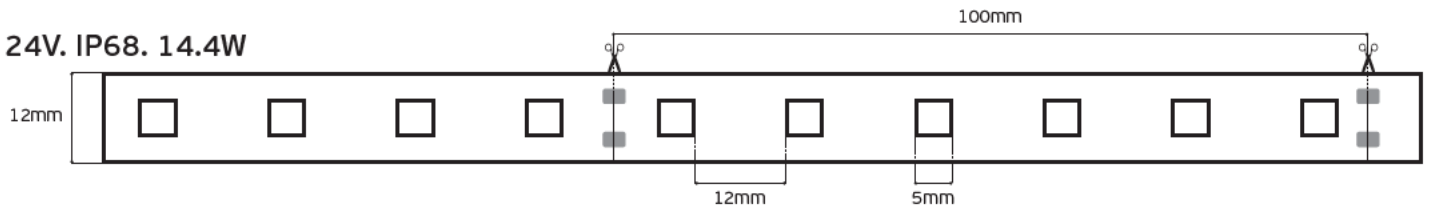

VK/FUT/TR/RCS  
VK/FUT/TR/BAT



VK/FUT095

Check our controllers in pages 126-128


VK/3838/RGB/240 24V  
VK/3838W/RGB/240 24V

Product Models

Code	Model									Box
78001-725724	VK/24/3838/RGB/240	IP20	24V	RGB	800lm/m	EPISTAR	CRI>80	24w/m		5m/roll
78001-726724	VK/24/3838W/RGB/240	IP67	24V	RGB	800lm/m	EPISTAR	CRI>80	24w/m		5m/roll


Details

Led type SMD 3838. Watt 24w/m. Led qty 240pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C.




5 years guarantee

24V. IP20/IP67. 24W

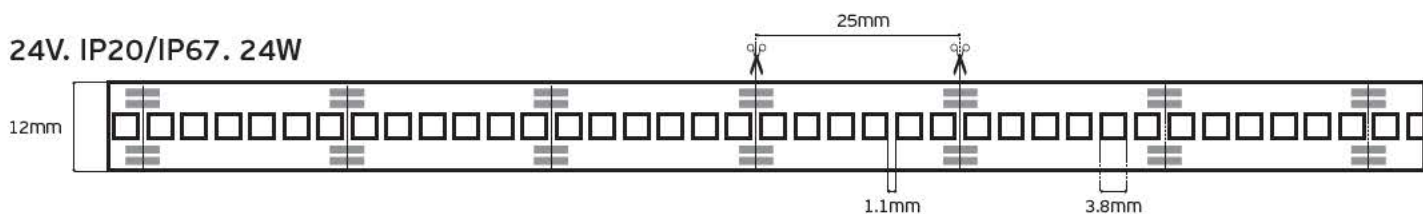

RGB/24w 800lm/m



VK/FUT/TR/RCS  
VK/FUT/TR/BAT



VK/FUT095

IP20. 24w/m. 24V




VK/5050/RGBW/60 12V/24V

Product Models



Code	Model	IP20	24V	RGB+W(3000K)	1008lm/m	CRI>80	14.4w/m	Box 5m/roll
78001-269123	VK/24/5050/RGBW/60	IP20	24V	RGB+W(3000K)	1008lm/m	CRI>80	14.4w/m	5m/roll
78001-634126	VK/24/5050J/RGBW/60	IP55	24V	RGB+W(3000K)	1008lm/m	CRI>80	14.4w/m	5m/roll

Details

Led type SMD 5050. Watt 14.4w/m. Led qty 60pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.



24V. IP20/IP55. 14.4W

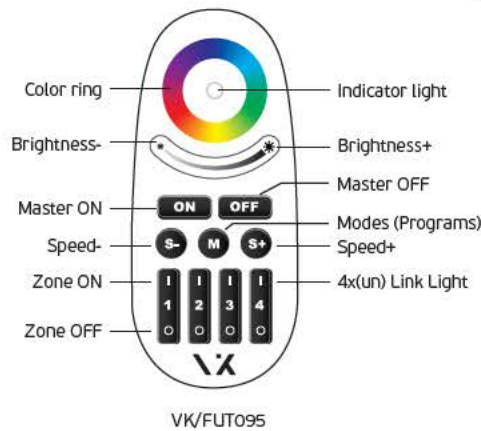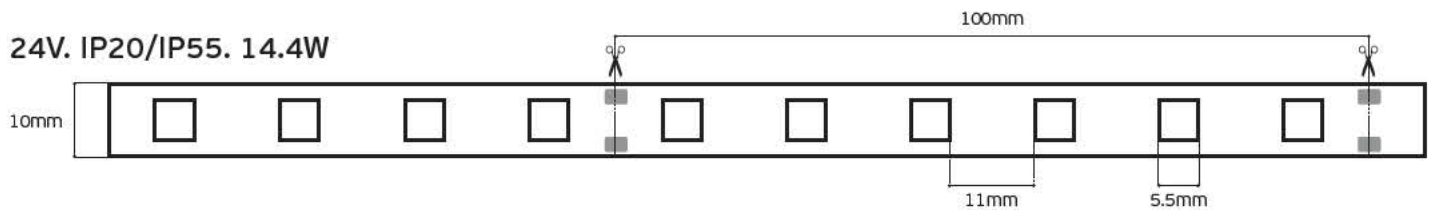

Check our controllers in pages 126-128

IP20. 14.4w/m. 24V





# Ledstrips MULTI IP20/IP65

VK/5050/MC/30 12V

## Product Models

Code	Model	IP	V	Color	lm/m	CRI	W/m	Box
78001-270126	VK/12/5050/MC/30	IP20	12V	MULTICOLOR	504lm/m	CRI>80	7.2w/m	5m/roll
78001-269126	VK/12/5050W/MC/30	IP65	12V	MULTICOLOR	504lm/m	CRI>80	7.2w/m	5m/roll

### Details


Led type SMD 5050. Watt 7.2w/m. Led qty 30pcs/m. CRI>80. Tape on back 3M. Working temperature -25°C → 60°C. Storage temperature -40°C → 80°C. 2 years guarantee.




LED's/m  
30pcs



12V. IP20. 7.2w

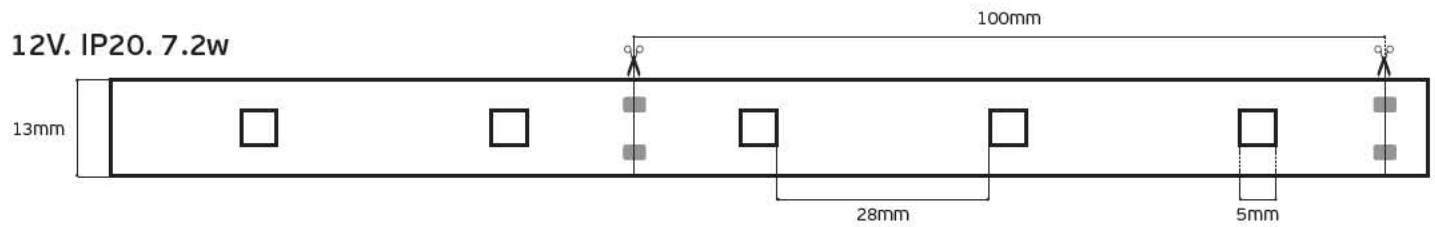

12V. IP65. 7.2w

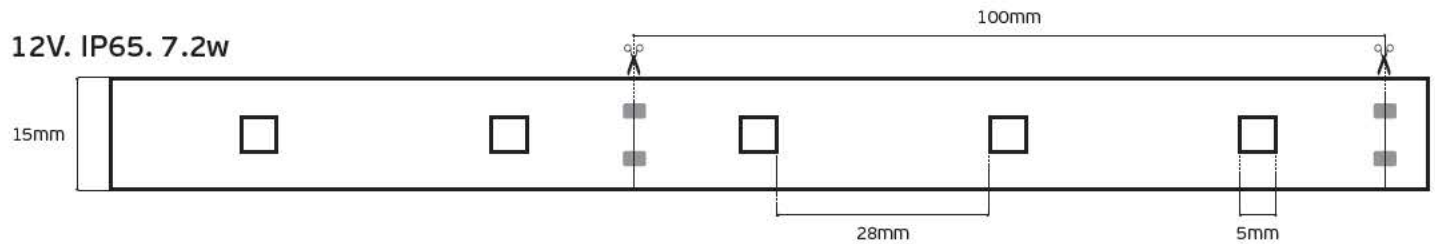

**VK/12/MC/25M**  
Transmitter-remote control



**Product Models**

Code	Model	Box
90004-029126	VK/12/MC/25M 12V. 25m (max range)	1pc

**Details**

Use: multicolor led strip max 25 m.  
Each model (set) includes a transmitter and remote control. 2 years guarantee.

- 180 programs
- Dimming
- Play-pause
- ON/OFF

 IP20.

**VK/12/MC/100M**  
Transmitter-remote control



**Product Models**

Code	Model	Box
90004-030126	VK/12/MC/100M 12V. 100m (max range)	1pc

**Details**

Use: multicolor led strip max 100 m. Each model (set) includes a transmitter and remote control. 2 years guarantee.

- 180 programs
- Dimming
- Play-pause
- ON/OFF

 IP20.

**VK/12/MC/AMP**  
Amplifier






**Product Models**

Code	Model	Box
78000-647126	VK/12/MC/AMP 12V. 1watt	1pc


**Details**

Use: signal amplifier of the control. 2 years guarantee.

 IP20.



*profiles*

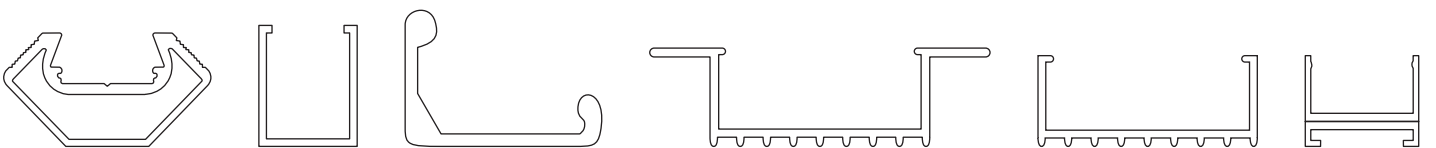


VK/08/11/AL

Product Models

Code	Model	Box
75165-262264	VK/08/11/AL Aluminium. 2.000x17.3x8.8mm	100pcs

Details

Charged per meter. Available 2m. Suits with LEDSTRIP Keiso VK/24/2835W/140/11  
Material Aluminium.

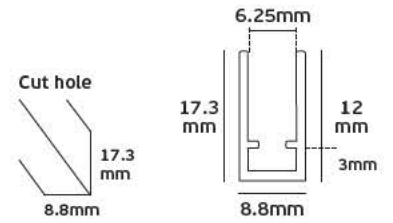


VK/08/19/AL

**Product Models**

Code	Model	Box
75165-261264	VK/08/19/AL Aluminium. 2.000x25x14.75mm	100pcs

**Details**

Charged per meter. Available 2m. Suits with LEDSTRIP Keiso VK/24/2835W/140/19 Material Aluminium.

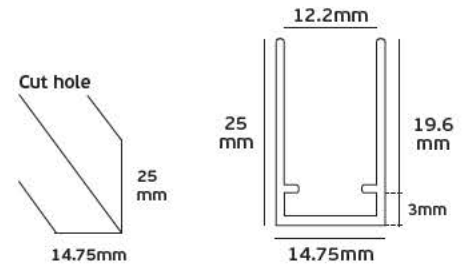

VK/00/AL




Product Models

Code	Model	Box
75165-137264	VK/00/AL Aluminium. 2.000x12x4mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



VK/01/SLIM/AL




Product Models

Code	Model	Box
75165-162264	VK/01/SLIM/AL Aluminium. 2.000x14x8mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



VK/01/DEEP/SLIM/AL




Product Models

Code	Model	Box
75165-215264	VK/01/DEEP/SLIM/AL Aluminium. 2.000x27.4x15mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



VK/K01/SLIM




## Product Models

Code	Model	Box
75165-167264	VK/K01/SLIM/CL Clear. 2.000x12x2.5mm	100pcs
75165-168264	VK/K01/SLIM/W Frost. 2.000x12x2.5mm	100pcs

## Details

Suitable for: VK/01/SLIM/AL, VK/01/DEEP/SLIM/AL.  
Material Polycarbonate. Charged per meter. Available 2m.





VK/O1/AL




Product Models

Code	Model	Box
75165-161264	VK/O1/AL Aluminium. 2.000x17.4x9mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



VK/D1/AL




Product Models


Code	Model	Box
75165-173264	VK/D1/AL Aluminium. 2.000x21x16mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



VK/O3/SLIM/AL

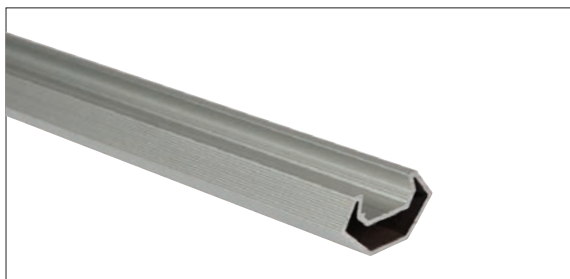


Product Models

Code	Model	Box
75165-166264	VK/O3/SLIM/AL Aluminium. 2.000x27.4x15mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.

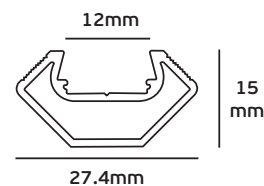

VK/D2/AL




Product Models

Code	Model	Box
75165-165264	VK/D2/AL Aluminium. 2.000x30x16mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.

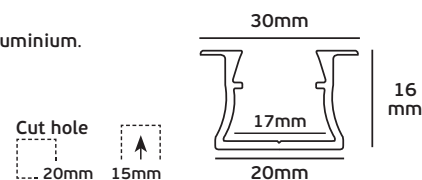

VK/O2/AL




Product Models

Code	Model	Box
75165-164264	VK/O2/AL Aluminium. 2.000x28x9mm	100pcs
75165-195264	VK/O2/W White. 2.000x28x9mm	100pcs

Details

Charged per meter. Available 2m. Material Aluminium.



**VK/K01**



**Product Models**

Code	Model	Box
75165-039264	VK/K01/CL Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W Frost. 2.000x16x4.5mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.

Material Polycarbonate. Charged per meter. Available 2m.



**VK/K01/NEON**




**Product Models**

Code	Model	Box
75165-241264	VK/K01/NEON Frost. 2.000x17x14mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.

Material Polycarbonate. Charged per meter. Available 2m.



**VK/K01U**  
with prismatic beam lens for beta light angle



**Product Models**

Code	Model	Box
75165-216264	VK/K01U/CL Clear. 2.000x14x10mm	100pcs
75165-217264	VK/K01U/W Frost. 2.000x14x10mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.

Material Polycarbonate. Charged per meter. Available 2m.



With Model

VK/01/AL



With Model

VK/02/AL



With Model

VK/D1/AL



With Model

VK/D2/AL



With Model

VK/03/SLIM/AL



VK/04R/AL




Product Models

Code	Model	Box
75165-225264	VK/04R/AL Aluminium. 2.000x45x13mm	100pcs
75165-236264	VK/04R/W White. 2.000x45x13mm	100pcs

Details

Charged per meter. Available 2m.  
Material Aluminium.



VK/04/AL




Product Models

Code	Model	Box
75165-224264	VK/04/AL Aluminium. 2.000x29x12mm	100pcs
75165-263264	VK/04/W White. 2.000x29x12mm	100pcs

Details

Charged per meter. Available 2m.  
Material Aluminium.



VK/06/AL




Product Models

Code	Model	Box
75165-233264	VK/06/AL Aluminium. 2.000x28x19.5mm	100pcs

Details

Charged per meter. Available 2m.  
Material Aluminium.

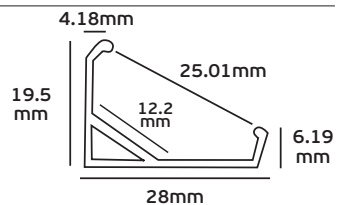


VK/K04

## Product Models

Code	Model	Box
75165-229264	VK/K04/CL Clear. 2.000x25x5mm	100pcs
75165-223264	VK/K04/W Frost. 2.000x25x5mm	100pcs

## Details

Suitable for: VK/04R/AL, VK/04/AL, VK/06/AL.  
Material Polycarbonate. Charged per meter.  
Available 2m.



VK/01R/DEEP/TRIMLESS/AL





Product Models

Code	Model	Box
75165-247264	VK/01R/DEEP/TRIMLESS/AL Aluminium. 2.000x41.4x27.2mm	100pcs


Details

Charged **per meter**. Available 2m.  
Material Aluminium.

1 σειρά LEDSTRIP

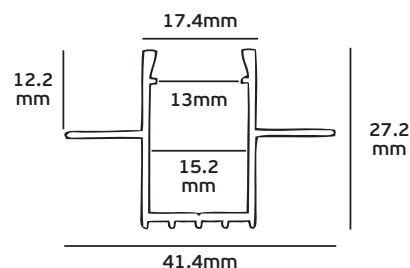

VK/07R/TRIMLESS/AL

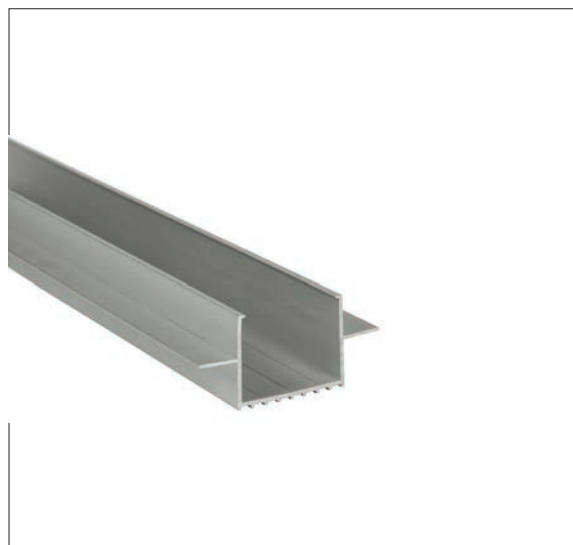

Product Models

Code	Model	Box
75165-246264	VK/07R/TRIMLESS/AL Aluminium. 2.000x57.8x27.2mm	100pcs



Details

Charged **per meter**. Available 2m.  
Material Aluminium.

1 πλακέτα LED



2 σειρές LEDSTRIP

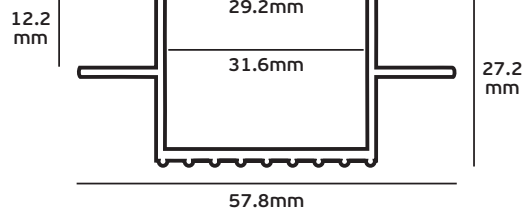

VK/K01




Product Models

Code	Model	Box
75165-039264	VK/K01/CL Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W Frost. 2.000x16x4.5mm	100pcs

Details

Suitable for: VK/01R/DEEP/TRIMLESS/AL.

Material Polycarbonate. Charged per meter. Available 2m.



VK/K07



Product Models

Code	Model	Box
75165-242264	VK/K07/W Frost. 2.000x36x3mm	100pcs

Details

Suitable for: VK/07R/TRIMLESS/AL.

Material Polycarbonate. Charged per meter. Available 2m.





LED Drivers on-off





**MW** MEAN WELL VK/LRS-50




**Product Models**

Code	Model	Box
78000-673255	VK/LRS-50-12 4.2A. 50w. 12V.	60pcs
78000-662255	VK/LRS-50-24 2.2A. 50w. 24V.	60pcs

**Details**

Voltage 100-240V. Watt 50w. Material Metallic. 3 years guarantee.

 IP20. 50w.

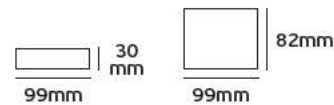

**MW** MEAN WELL VK/LRS-100




**Product Models**

Code	Model	Box
78000-674255	VK/LRS-100-12 8.5A. 100w. 12V.	40pcs
78000-637734	VK/LRS-100-24 4.5A. 100w. 24V.	40pcs

**Details**

Voltage 100-240V. Watt 100w. Material Metallic. 3 years guarantee.

 IP20. 100w.

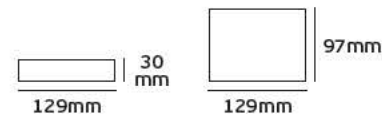

**MW** MEAN WELL VK/LRS-150




**Product Models**

Code	Model	Box
78000-675255	VK/LRS-150-12 12.5A. 150w. 12V.	30pcs
78000-653255	VK/LRS-150-24 6.5A. 150w. 24V.	30pcs

**Details**

Voltage 100-240V. Watt 150w. Material Metallic. 3 years guarantee.

 IP20. 150w.





## VK/LRS-200



## Product Models


Code	Model	Box
78000-678255	VK/LRS-200-12 17A. 200w. 12V.	15pcs
78000-634734	VK/LRS-200-24 8.8A. 200w. 24V.	15pcs

## Details

Voltage 100-240V. Watt 200w. Material Metallic. 3 years guarantee.



IP20. 200w.

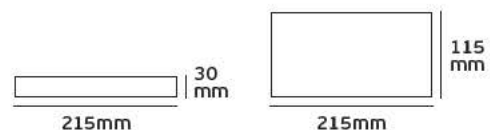

## VK/LRS-350



## Product Models


Code	Model	Box
78000-679255	VK/LRS-350-12 29A. 350w. 12V.	15pcs
78000-633734	VK/LRS-350-24 14.6A. 350w. 24V.	15pcs

## Details

Voltage 100-240V. Watt 350w. Material Metallic. 3 years guarantee.



IP20. 350w.

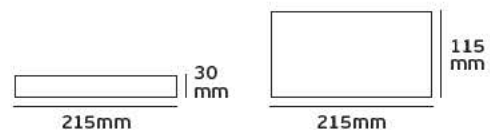

**MW** VK/HDR-60




**Product Models**

Code	Model	Box
78000-676255	VK/HDR-60-24 2.5A, 60w, 24V.	60pcs

**Details**

Voltage 100-240V. Watt 60w. Material Plastic housing. Use Rail. 3 years guarantee.

 IP20. 60w.

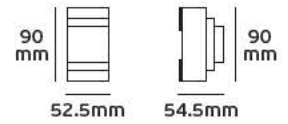

**MW** VK/HDR-100




**Product Models**

Code	Model	Box
78000-677255	VK/HDR-100-24 3.83A, 100w, 24V.	48pcs


**Details**

Voltage 100-240V. Watt 100w. Material Plastic housing. Use Rail. 3 years guarantee.

 IP20. 100w.

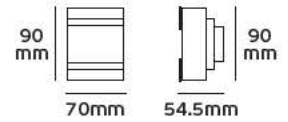

**MW** VK/HDR-60  
MEAN WELL IP20. 60w 



Voltage **100-240V**. Watt **60w**. Material **Plastic housing**.  
Use **Rail**. 3 years guarantee.

VK/15-25-36



Product Models


Code	Model	Box
78000-639117	VK/15-12 1.25A. 15w. 12V. L70xW38xH30mm	80pcs
78000-624719	VK/25-12 2A. 24w. 12V. L78xW48xH21mm	50pcs
78000-626719	VK/36-12 3A. 36w. 12V. L85xW58xH34mm	50pcs
78000-623719	VK/15-24 0.62A. 15w. 24V. L85xW58xH34mm	80pcs
78000-625719	VK/25-24 1A. 24w. 24V. L85xW58xH34mm	50pcs
78000-627719	VK/36-24 1.5A. 36w. 24V. L85xW58xH34mm	50pcs

Details

Voltage 110-240V. Watt 15w, 24w, 36w. Material Metallic. 2 years guarantee.



IP20. 15/24/36w.

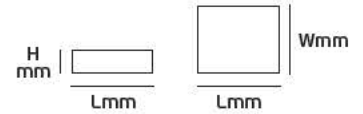

VK/60-75-100-120



Product Models


Code	Model	Box
78000-617719	VK/60-12 5A. 60w. 12V. L110xW78xH35mm	40pcs
78000-614719	VK/75-12 6A. 75w. 12V. L110xW78xH35mm	40pcs
78000-562719	VK/100-12 8.5A. 100w. 12V. L163xW99xH49mm	40pcs
78000-621719	VK/120-12 10A. 120w. 12V. L163xW99xH49mm	40pcs
78000-618719	VK/60-24 2.5A. 60w. 24V. L110xW78xH35mm	40pcs
78000-619719	VK/75-24 3A. 75w. 24V. L110xW78xH35mm	40pcs
78000-564719	VK/100-24 4A. 100w. 24V. L160xW97xH42mm	40pcs
78000-620719	VK/120-24 5A. 120w. 24V. L200xW98xH42mm	40pcs

Details

Voltage 110-240V. Watt 60w, 75w, 100w, 120w. Material Metallic. 2 years guarantee.



IP20. 60/75/100/120w.

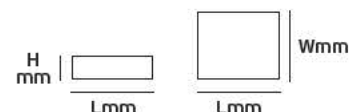

## VK/150-200



## Product Models


Code	Model	Box
78000-565719	VK/150-12 12.5A. 150w. 12V. L160xW99xH49mm	30pcs
78000-567719	VK/200-12 16.5A. 200w. 12V. L160xW99xH49mm	30pcs
78000-566719	VK/150-24 6A. 150w. 24V. L188xW46xH35mm	30pcs
78000-568719	VK/200-24 8A. 200w. 24V. L200xW99xH50mm	30pcs

## Details

Voltage 180-240V. Watt 150w, 240w. Material Metallic. 2 years guarantee.



IP20. 150/240w.

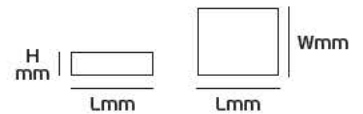

## VK/250-350



## Product Models


Code	Model	Box
78000-616719	VK/250-12 21A. 240w. 12V. L160xW99xH49mm	20pcs
78000-569719	VK/350-12 25A. 350w. 12V. L200xW99xH50mm	20pcs
78000-615719	VK/250-24 10A. 240w. 24V. L220xW68xH40mm	20pcs
78000-570719	VK/350-24 12.5A. 350w. 24V. L220xW68xH40mm	20pcs

## Details

Voltage 180-240V. Watt 240w, 350w. Material Metallic. 2 years guarantee.



IP20. 240/350w.

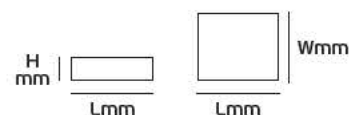

## VK/600



## Product Models


Code	Model	Box
78000-628719	VK/600-12 50A. 600w. 12V.	5pcs
78000-629719	VK/600-24 25A. 600w. 24V.	5pcs

## Details

Voltage 170-250V. Watt 600w. Material Metallic. 2 years guarantee.



IP20. 600w.

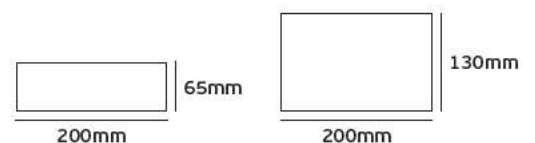

**VK/LV12**  
SMPS



**Product Models**

Code	Model	Box
78000-388016	VK/LV12-12 1A. 12w. 12V.	10pcs
78000-371016	VK/LV12-24 0.5A. 12w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 12w. Material Plastic. 2 years guarantee.



IP20. 12w.



**VK/LV26**  
SMPS



**Product Models**

Code	Model	Box
78000-389016	VK/LV26-12 2.1A. 26w. 12V.	10pcs
78000-366016	VK/LV26-24 1.1A. 26w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 26w. Material Plastic. 2 years guarantee.



IP20. 26w.



**VK/LV36**  
SMPS



**Product Models**

Code	Model	Box
78000-385016	VK/LV36-12 3A. 36w. 12V.	10pcs
78000-367016	VK/LV36-24 1.5A. 36w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 36w. Material Plastic. 2 years guarantee.



IP20. 36w.



**VK/LV50**  
SMPS



**Product Models**


Code	Model	Box
78000-386016	VK/LV50-12 4.2A. 50w. 12V.	10pcs
78000-364016	VK/LV50-24 2.1A. 50w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 50w. Material Plastic. 2 years guarantee.



IP20. 50w.



**VK/LV75**  
 SMPS

**VK/LV100**  
 SMPS

**VK/LV120**  
 SMPS


**VK/LV150**  
 SMPS

**Product Models**

Code	Model	Box
78000-383016	VK/LV75-12 6.2A. 75w. 12V.	10pcs
78000-365016	VK/LV75-24 3.1A. 75w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 75w. Material Plastic. 2 years guarantee.


**IP20. 75w.**



59mm

**Product Models**

Code	Model	Box
78000-384016	VK/LV100-12 8.3A. 100w. 12V.	10pcs
78000-372016	VK/LV100-24 4.2A. 100w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 100w. Material Plastic. 2 years guarantee.


**IP20. 100w.**


59mm

**Product Models**

Code	Model	Box
78000-531016	VK/LV120-12 10A. 120w. 12V.	10pcs
78000-378016	VK/LV120-24 5A. 120w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 120w. Material Plastic. 2 years guarantee.


**IP20. 120w.**



59mm

**Product Models**

Code	Model	Box
78000-516016	VK/LV150-12 12.5A. 150w. 12V.	10pcs
78000-529016	VK/LV150-24 6.2A. 150w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 150w. Material Plastic. 2 years guarantee.


**IP20. 150w.**


59mm



**MW** MEAN WELL VK/APV-16



**Product Models**


Code	Model	Box
78000-668255	VK/APV-16-12 1.25A. 16w. 12V.	120pcs
78000-669255	VK/APV-16-24 0.67A. 16w. 24V.	120pcs

**Details**

Voltage 100-240V. Watt 16w. Material Plastic housing. 2 years guarantee.



IP42. 16w.



**MW** MEAN WELL VK/APV-25



**Product Models**


Code	Model	Box
78000-670255	VK/APV-25-12 2.1A. 25w. 12V.	72pcs
78000-671255	VK/APV-25-24 1.05A. 25w. 24V.	72pcs

**Details**

Voltage 100-240V. Watt 25w. Material Plastic housing. 2 years guarantee.



IP42. 25w.



**MW** MEAN WELL VK/LPV-20



**Product Models**



Code	Model	Box
78000-683255	VK/LPV-20-12 1.67A. 20w. 12V.	60pcs
78000-684255	VK/LPV-20-24 0.84A. 20w. 24V.	60pcs

**Details**

Voltage 90-264V. Watt 20w. Material Plastic housing. 2 years guarantee.



IP67. 20w.



**MW** MEAN WELL VK/LPV-35



**Product Models**



Code	Model	Box
78000-685255	VK/LPV-35-12 3A. 35w. 12V.	40pcs
78000-686255	VK/LPV-35-24 1.5A. 35w. 24V.	40pcs

**Details**

Voltage 90-264V. Watt 35w. Material Plastic housing. 2 years guarantee.



IP67. 35w.





## VK/LPV-60



## Product Models


Code	Model	Box
78000-646255	VK/LPV-60-12 5A. 60w. 12V.	32pcs
78000-595663	VK/LPV-60-24 2.5A. 60w. 24V.	32pcs

## Details

Voltage 100-240V. Watt 60w. Material Plastic housing. 2 years guarantee.



IP67. 60w.



## VK/LPV-100



## Product Models



Code	Model	Box
78000-672255	VK/LPV-100-12 8.5A. 100w. 12V.	20pcs
78000-660255	VK/LPV-100-24 4.2A. 100w. 24V.	20pcs

## Details

Voltage 100-240V. Watt 100w. Material Plastic housing. 2 years guarantee.



IP67. 100w.



## VK/LPV-150



## Product Models


Code	Model	Box
78000-634255	VK/LPV-150-12 10A. 150w. 12V.	20pcs
78000-635255	VK/LPV-150-24 6.3A. 150w. 24V.	20pcs

## Details

Voltage 180-305V. Watt 150w. Material Plastic housing. 2 years guarantee.



IP67. 150w.



VK/10E



Product Models


Code	Model	Box
78000-589719	VK/A12-10E 0.83A. 10w. 12V.	10pcs
78000-605719	VK/A24-10E 0.41A. 10w. 24V.	10pcs

Details

Voltage 90-250V. Watt 10w. Material Metallic. 2 years guarantee.



IP67. 10w.



VK/30E



Product Models

Code	Model	Box
78000-590719	VK/A12-30E 2.5A. 30w. 12V.	10pcs
78000-606719	VK/A24-30E 1.25A. 30w. 24V.	10pcs

Details

Voltage 90-250V. Watt 10w. Material Metallic. 2 years guarantee.



IP67. 30w.



VK/45E



Product Models

Code	Model	Box
78000-591719	VK/A12-45E 3.75A. 45w. 12V.	10pcs
78000-607719	VK/A24-45E 1.85A. 45w. 24V.	10pcs

Details

Voltage 90-250V. Watt 10w. Material Metallic. 2 years guarantee.



IP67. 45w.



VK/60E



Product Models

Code	Model	Box
78000-592719	VK/A12-60E 5A. 60w. 12V.	10pcs
78000-608719	VK/A24-60E 2.5A. 60w. 24V.	10pcs

Details

Voltage 90-250V. Watt 10w. Material Metallic. 2 years guarantee.



IP67. 60w.



## VK/100E



## VK/150E



## VK/200E



## Product Models

Code	Model	Box
78000-593719	VK/A12-100E 8.33A. 100w. 12V.	10pcs



78000-609719	VK/A24-100E 4.16A. 100w. 24V.	10pcs
--------------	----------------------------------	-------

## Details

Voltage 180-240V. Watt 100w. Material Metallic. 2 years guarantee.



IP67. 100w.



## Product Models

Code	Model	Box
78000-594719	VK/A12-150E 12.5A. 150w. 12V.	10pcs

78000-610719	VK/A24-150E 6.5A. 150w. 24V.	10pcs
--------------	---------------------------------	-------

## Details

Voltage 180-240V. Watt 150w. Material Metallic. 2 years guarantee.



IP67. 150w.



## Product Models

Code	Model	Box
78000-595719	VK/A12-200E 16.5A. 200w. 12V.	10pcs

78000-611719	VK/A24-200E 8.3A. 200w. 24V.	10pcs
--------------	---------------------------------	-------

## Details

Voltage 180-240V. Watt 200w. Material Metallic. 2 years guarantee.



IP67. 200w.





Dimmable Drivers

## VK/10082



## Product Models

Code	Model	Box
78000-739719	VK/10082/12 5A. 60w. 12V.	1pc
78000-740719	VK/10082/24 2.5A. 60w. 24V.	1pc

## Details

Voltage 110-240V. Watt 60w. Material Metal. Dimmable Triac 0/1-10V. 2 years guarantee.



**IP20. 60w.**



## VK/10083



## Product Models

Code	Model	Box
78000-741719	VK/10083/12 8.3A. 100w. 12V.	1pc
78000-742719	VK/10083/24 4.15A. 100w. 24V.	1pc

## Details

Voltage 110-240V. Watt 100w. Material Metal. Dimmable Triac 0/1-10V. 2 years guarantee.



**IP20. 100w.**



## VK/10084



## Product Models

Code	Model	Box
78000-743719	VK/10084/12 12.5A. 150w. 12V.	1pc
78000-744719	VK/10084/24 6.25A. 150w. 24V.	1pc

## Details

Voltage 170-240V. Watt 150w. Material Metal. Dimmable Triac 0/1-10V. 2 years guarantee.



**IP20. 150w.**



## VK/10085



## Product Models

Code	Model	Box
78000-745719	VK/10085/12 16.6A. 200w. 12V.	1pc
78000-746719	VK/10085/24 8.3A. 200w. 24V.	1pc

## Details

Voltage 170-240V. Watt 200w. Material Metal. Dimmable Triac 0/1-10V. 2 years guarantee.



**IP20. 200w.**



**VK/LVD50**  
SMPS



**Product Models**


Code	Model	Box
78000-589016	VK/LVD50-12 4.2A. 50w. 12V.	10pcs
78000-368016	VK/LVD50-24 2.1A. 50w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 50w. Material Plastic. Dimmable. 2 years guarantee.



**IP20. 50w.**



**VK/LVD75**  
SMPS



**Product Models**


Code	Model	Box
78000-381016	VK/LVD75-12 6.2A. 75w. 12V.	10pcs
78000-369016	VK/LVD75-24 3.1A. 75w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 75w. Material Plastic. Dimmable. 2 years guarantee.



**IP20. 75w.**



**VK/LVD100**  
SMPS



**Product Models**


Code	Model	Box
78000-530016	VK/LVD100-12 8.3A. 100w. 12V.	10pcs
78000-370016	VK/LVD100-24 4.2A. 100w. 24V.	10pcs

**Details**

Voltage 190-265V. Watt 100w. Material Plastic. Dimmable. 2 years guarantee.



**IP20. 100w.**



**VK/LVD120**  
SMPS




**Product Models**

Code	Model	Box
78000-532016	VK/LVD120-12 10A. 120w. 12V.	10pcs
78000-382016	VK/LVD120-24 5A. 120w. 24V.	10pcs

**Details**  
Voltage 190-265V. Watt 120w. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 120w.**  
1-10v



**VK/LVD150**  
SMPS




**Product Models**

Code	Model	Box
78000-533016	VK/LVD150-12 14A. 150w. 12V.	10pcs
78000-515016	VK/LVD150-24 6.2A. 150w. 24V.	10pcs

**Details**  
Voltage 190-265V. Watt 150w. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 150w.**  
1-10v





VK/10076/PD



Product Models


Code	Model	Box
78000-744720	VK/10076/PD 1x10A. 120-240w. 12-24V.	1pc

Details

Voltage 12-24V. Watt 120-240w. Working temperature -20°C → 50°C. Material Plastic. Dimmable. 2 years guarantee.



IP20. 120-240w.



VK/CV/DIM/DALI



Product Models

Code	Model	Box
78000-763019	VK/CV/DIM/DALI Automatic reversible. <del>120w</del> 120w. 10.5-24V.	20pcs

Details

Voltage 10.5-24V. Watt 120w. Working temperature -20°C → 50°C. Material Plastic. Dimmable. 5 years guarantee.



IP20. 120w.



VK/10077/DIN



Product Models


Code	Model	Box
78000-745720	VK/10077/DIN 4ch, 5A/ch. 240-720w. 12-36V.	1pc

Details

Voltage 12-36V. Watt 240-720w. I-in 10A. V-out 4x(12-36) VDC. I-out 4x5A. Pout 4x 60-180w Working temperature -20°C → 50°C. Material Plastic. Dimmable. 2 years guarantee.



IP20. 240-720w.

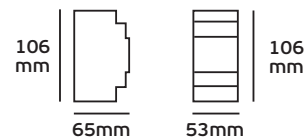



VK/ELG-100-24DA



Product Models

Code	Model	Box
78000-666255	VK/ELG-100-24DA 4A. 100w. 24V.	16pcs

Details

Voltage 100-305V. Watt 100w. Material **Metallic housing**. 5 years guarantee.



IP67. 100w.



VK/ELG-150-24DA



Product Models

Code	Model	Box
78000-667255	VK/ELG-150-24DA 6.25A. 150w. 24V.	16pcs

Details

Voltage 100-240V. Watt 150w. Material **Metallic housing**. 5 years guarantee.



IP67. 150w.



VK/10081/0-10V



Product Models

Code	Model	Box
78000-599663	VK/10081/0-10V 16.7A. 400w. 24V.	1pc



Details

Voltage 220-277V. Watt 400w. I-in 2.1A. V-out 24V. Material **Metal**. **Dimmable**. 2 years guarantee.



IP67. 400w.

Dimming Wiring

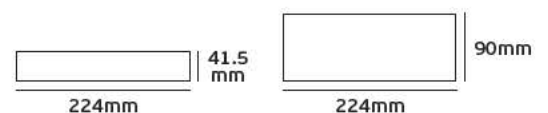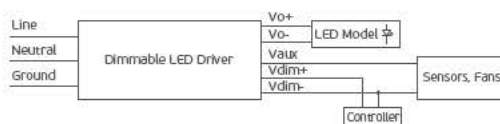

**LD-250W-RF**  
Dimmer button-remote controller MASTER




**Product Models**

Code	Model	Box
12083-919002	LD-250W-RF 1 ch 21A. 252/504w. 12/24V.	1pc

**Details**  
Voltage 12-24V. 252/504w. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 252/504w.**



**DM-400B-RF**  
Dimmer button-remote controller MASTER



**Product Models**

Code	Model	Box
12083-920002	DM-400B-RF 1 ch. 400w. 230V.	1pc

**Details**  
Voltage 230V. 400w. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 400w.**



**DM-DGL/B**  
Rail Triac-Digital Dimmer




**Product Models**

Code	Model	Box
12084-027338	DIM-DGL/B 1000w. 180-230V.	1pc

**Details**  
Voltage 180-230V. 700w. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 700w.**



**RF-CTRL**  
Remote controller MASTER



**Product Models**

Code	Model	Box
12083-921002	RF-CTRL 433.92MHz. 1 ch. 230V.	1pc

**Details**  
Voltage 230V. Material Plastic. Dimmable. 2 years guarantee.

**IP20. 230V.**



**VK/53008/D**  
Dimmer with switch ON/OFF




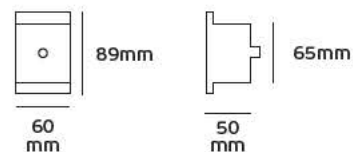
**Product Models**

Code	Model	Box
78000-646126	VK/53008/D 1 ch. x 8A. 12-24V.	10pcs

**Details**

Voltage 12-24V. Material Plastic. Dimmable. 2 years guarantee.

 IP20. 12-24V.



**GALAXY**  
Dimmer electronic





**Product Models**

Code	Model	Box
14184-116170	GALAXY Dimmer L. 230V. 1300w.	1pc

**Details**

Voltage 230V. Material Plastic. Dimmer L, ▲ C. Dimmable. 2 years guarantee.

 IP20. 230V.



**DIM MCU**  
Dimmer analog **OSRAM**





**Product Models**

Code	Model	Box
12084-020019	DIM MCU 6A. 230V.	1pc

**Details**


Voltage 230V. Load contact 6A. Material Plastic. 2 years guarantee.

 IP20. 230V.  
1-10V





Controllers/Dimming/DMX

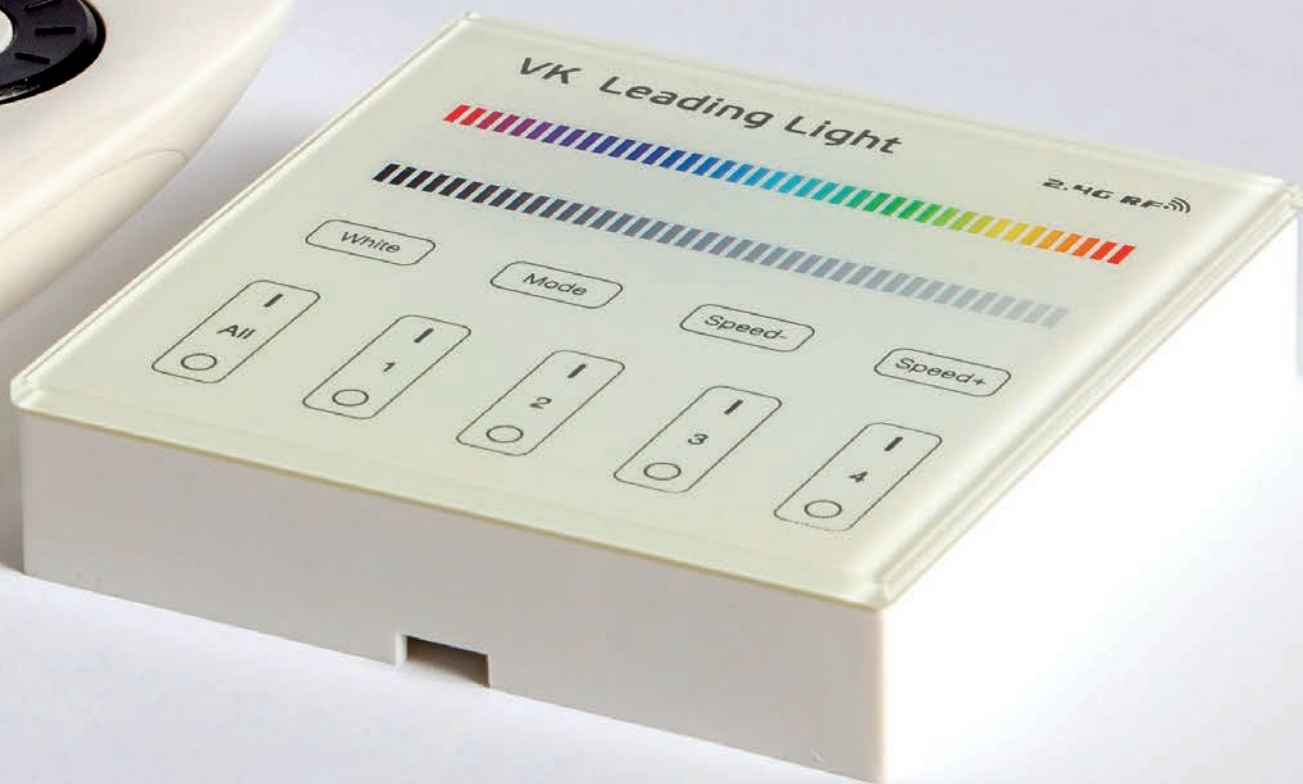

**VK/FUT095**

4 Zone Remote controller (RGBW), (RGB)





**Product Models**

Code	Model	Box
90004-032698	VK/FUT095 2.4GHz. 3V. 6dBm. 20uA.	1pc

**Details**

Voltage 3V. Frequency 2.4GHz. Transmitting power 6dBm. Standby Power 20uA. Distance 30m. Material Plastic. Dimmable RGB+W. Working temperature -20~60°C. 2 years guarantee.

 **IP20. 3V.**

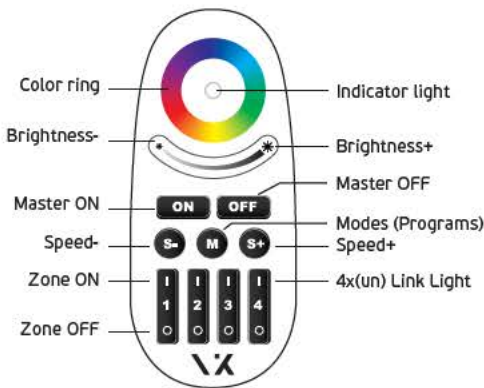

**VK/FUT092**

4 Zone Remote controller (RGB+CCT)





**Product Models**

Code	Model	Box
90004-037698	VK/FUT092 2.4GHz. 3V. 6dBm. 20uA.	1pc

**Details**

Voltage 3V. Frequency 2.4GHz. Transmitting power 6dBm. Standby Power 20uA. Distance 30m. Material Plastic. Dimmable RGB+CCT. Working temperature -20~60°C. 2 years guarantee.

 **IP20. 3V.**

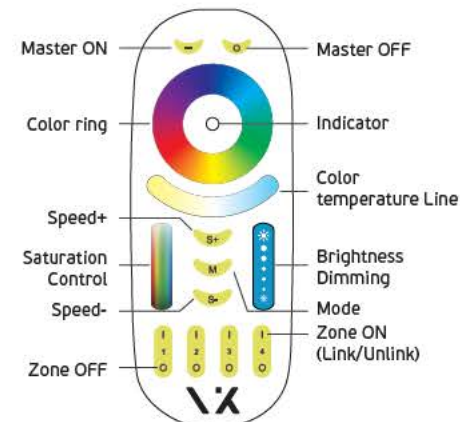

**VK/FUT006**  
 Remote controller, 1 color ledstrip

**Product Models**



Code	Model	Box
90004-033698	VK/FUT006 2.4GHz. 3V. 6dBm. 20uA.	1pc

**Details**

Voltage 3V. Frequency 2.4GHz. Transmitting power 6dBm. Standby Power 20uA. Distance 30m. Material Plastic. Dimmable W, 4 channels. Working temperature -20~60°C. 2 years guarantee.


**IP20. 3V.**

White

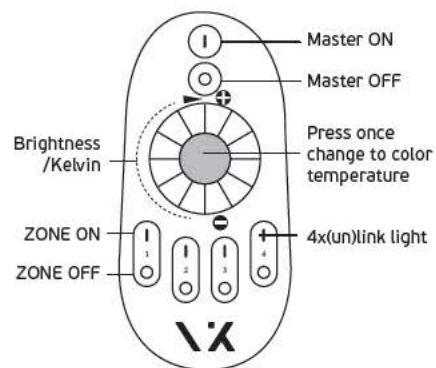



**VK/FUT/TR/RCS**

Controller wireless (RGBW, RGB, RGB+CCT)  
(recessed)




**Product Models**

Code	Model	Box
78000-722126	VK/FUT/TR/RCS 2.4GHz. 180-240V. 6dBm. L89xW60xH50mm	1pc

**Details**


Voltage 180-240V. Frequency 2.4GHz. Transmission power 6dBm. Working temperature -20°C → 60°C Distance 30m. Material Plastic. Dimmable RGB+W. 2 years guarantee.

 **IP20**  
RGB+W

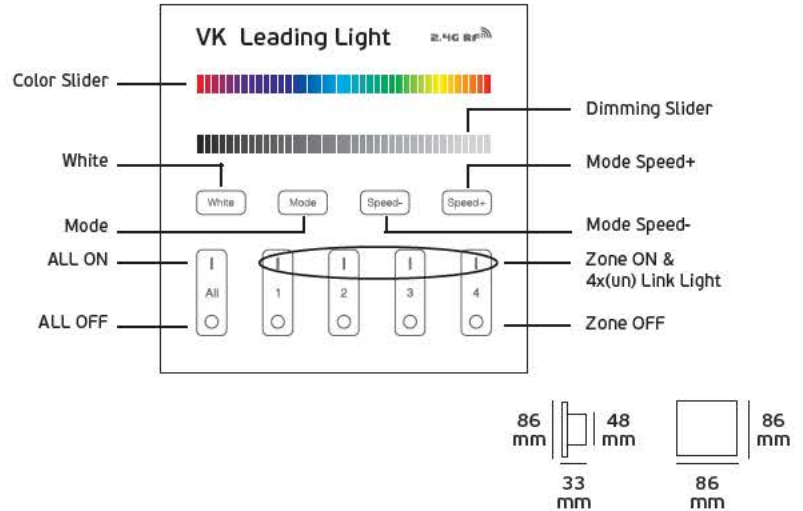

**VK/FUT/TR/BAT**

Controller wireless (RGBW, RGB, RGB+CCT)  
(with batteries)

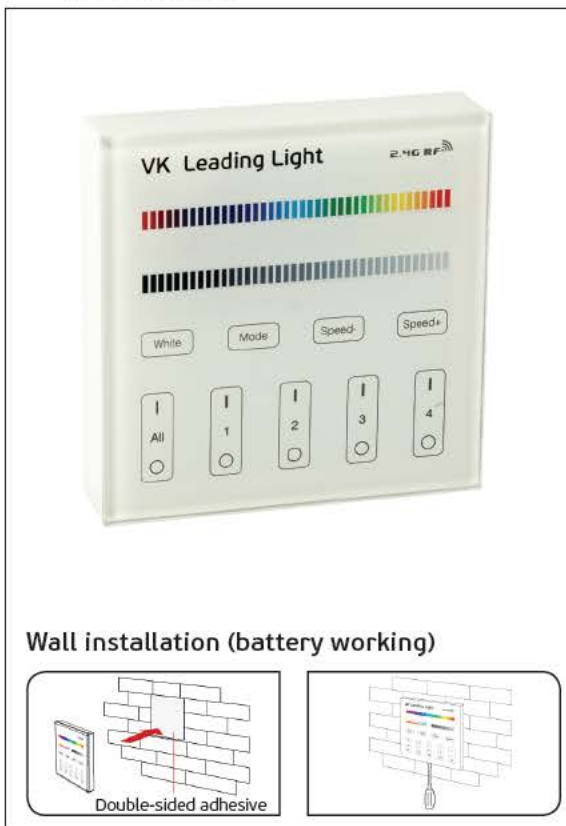


**Product Models**

Code	Model	Box
78000-723126	VK/FUT/TR/BAT 2.4GHz. 3V. 6dBm. L86xW86xH20mm	1pc

**Details**

Voltage 3V. Frequency 2.4GHz. Transmission power 6dBm. Working temperature -20°C → 60°C Distance 30m. Material Plastic. Dimmable RGB+W. 2 years guarantee.

 **IP20**  
RGB+W

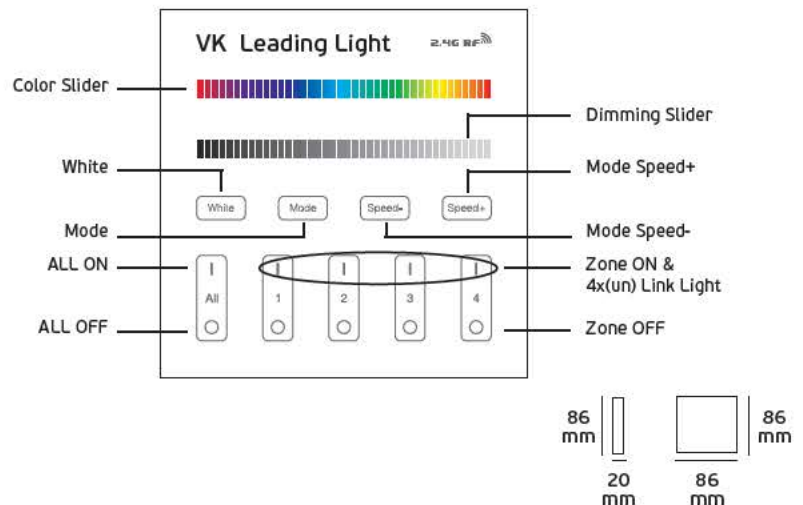

# VK Leading Light

2.4G RF



White

Mode

Speed-

Speed+

I  
All  
O

I  
1  
O

I  
2  
O

I  
3  
O

I  
4  
O



**VK/FUT036S**  
Controller Single Color




**Product Models**

Code	Model	Box
90004-034698	VK/FUT036S Max 12A. 12-24V.	1pc



**Details**

Voltage 12-24V. Output Max 12A. Total output Max 12A. Distance 30m. Material Plastic. Dimmable W, Single Color. Working temperature -10~40°C. 2 years guarantee.

 IP20. 12/24V.



Match FUT006

 17 mm  
74.5mm  36 mm  
74.5mm

**VK/FUT037S**  
Controller RGB




**Product Models**

Code	Model	Box
90004-029698	VK/FUT037S 6A/Channel. 12-24V. Max 12A.	1pc



**Details**

Voltage 12-24V. Output 6A/channel. Total output Max 12A. Distance 30m. Material Plastic. Dimmable RGB, 3 channels. Working temperature -10~40°C. 2 years guarantee.

 IP20. 12/24V.



Match FUT095

 17 mm  
74.5mm  36 mm  
74.5mm

**VK/FUT038S**  
Controller RGBW




**Product Models**

Code	Model	Box
90004-031698	VK/FUT038S 6A/Channel. 12-24V. Max 12A.	1pc



**Details**

Voltage 12-24V. Output 6A/channel. Total output Max 12A. Distance 30m. Material Plastic. Dimmable RGBW, 4 channels. Working temperature -10~40°C. 2 years guarantee.

 IP20. 12/24V.



Match FUT095

 17 mm  
74.5mm  36 mm  
74.5mm

**VK/FUT039S**  
Controller RGB+CCT



**Product Models**

Code	Model	Box
90004-039698	VK/FUT039S	1pc
	6A/Channel. 12-24V. Max 12A.	


**Details**

Voltage 12-24V. Output 6A/channel. Total output Max 12A. 2.4G RF RGB+CCT Distance 30m. Material Plastic. Dimmable RGB+CCT, 4 channels. Working temperature -10-40°C. 2 years guarantee.

 **IP20. 12/24V.**



Match FUT092



**VK/iBOX2**  
Controller WiFi



**Product Models**


Code	Model	Box
78000-649734	VK/iBOX2	1pc
	5V/500mA. 2.4GHz. WiFi 802.11 b/g/n. L90.5xW66xH15mm	

**Details**

Voltage 5V/500mA. Protocol 2.4GHz, WiFi 802.11 b/g/n. Working temperature -20°C → 60°C Material Plastic. Dimmable RGB+W. 2 years guarantee.

 **IP20. 5V/500mA.**

Match with all controllers & receivers of VK/FUT series






**VK/P/24506**  
DMX Decoder


**Product Models**

Code	Model	3 ch - 3A.	12/24V.	108/216w.	Box 10pcs
78000-470663	VK/P/24506				

*Details*

Voltage 12/24V. Output 3 channels-3A. Watt 108/216w. Material Aluminium. Dimmable DMX 512. 2 years guarantee.

 **IP20. 12/24V.**




**VK/P/24606**  
DMX Decoder


**Product Models**

Code	Model	1 ch - 3A.	12/24V.	36/72w.	Box 10pcs
78000-532663	VK/P/24606				

*Details*

Voltage 12/24V. Output 1 channel-3A. Watt 36/72w. Material Aluminium. Dimmable DMX 512. 2 years guarantee.

 **IP20. 12/24V.**






**VK/10074/DMX**  
DMX512 Decoder



**Product Models**

<b>Code</b> 78000-742720	<b>Model</b> VK/10074/DMX	4 ch	5A/ch.	12-36VDC.	240-720w.	L178xW46xH22mm	<b>Box</b> 1pc
-----------------------------	------------------------------	------	--------	-----------	-----------	----------------	-------------------

**Details**

Voltage 12-36VDC. Iout 4x5A. Iin 20.5A. Vout 4x(12-36) VDC. Pout 4x(60-180)w. Watt 240-720w. Material Plastic. Dimmable. 2 years guarantee.

 **IP20. 12-36VDC.**

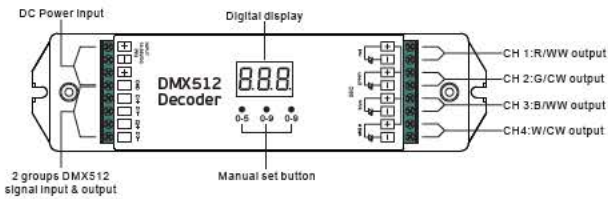


**VK/10075/DMX**  
AC TRIAC DMX Dimmer



**Product Models**

<b>Code</b> 78000-743720	<b>Model</b> VK/10075/DMX	2 ch	1.2A/ch.	100-240VAC.	240-576w.	L170xW59xH29mm	<b>Box</b> 1pc
-----------------------------	------------------------------	------	----------	-------------	-----------	----------------	-------------------

**Details**

Voltage 100-240VAC. Iout 2x1.2A. Iin 2.5A. Vout 2x(100-240) VAC. Pout 2x(120-288)w. Watt 240-576w. Material Plastic. Dimmable. 2 years guarantee.

 **IP20. 12-36VDC.**

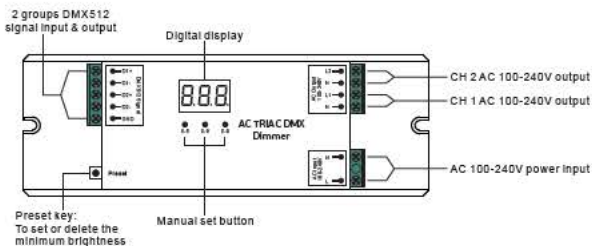

**VK/DIM500-PWM**  
LED dimmer triac



**Product Models**


Code	Model	Box
12084-023016	VK/DIM500-PWM 230V. 500w. 230V.	10pcs

**Details**

Voltage **230V**. Output **230V**. Material **Plastic**. **Dimmable**. 2 years guarantee.



**IP20. 230V.**



**VK/DM/24350**  
DMX Decoder



**Product Models**


Code	Model	Box
78000-501663	VK/DM/24350 1 ch-350mA. 1-12w. 12-48V.	10pcs

**Details**

Voltage **12-48V**. Output **1 channel-350mA**. Watt **1-12w**. Material **Aluminium**. **Dimmable**. 2 years guarantee.



**IP20. 350mA.**



**VK/DM/24700**  
DMX Decoder



**Product Models**


Code	Model	Box
78000-502663	VK/DM/24700 1 ch-700mA. 3-36w. 12-48V.	10pcs

**Details**

Voltage **12-48V**. Output **1 channel-700mA**. Watt **3-36w**. Material **Aluminium**. **Dimmable**. 2 years guarantee.



**IP20. 700mA.**



**VK/10080/RP**  
RGB Amplifier




**Product Models**

Code	Model	Box
78000-598663	VK/10080/RP 3 ch x 10A / 1 ch x 30A. 360w/720w. 12~24VDC.	1pc

**Details**

Voltage 3chx10A / 1chx30A. Output 12~24VDC. Watt 360w max (12V) / 720w max (24V). 2 years guarantee.

IP20. 12~24VDC.

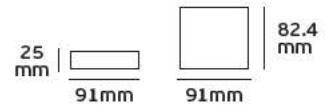

**VK/10078/RP**  
Power repeater (RGBW)



**Product Models**


Code	Model	Box
78000-746720	VK/10078/RP 4 ch x 5A. 240w/720w. 12~36VDC.	1pc

**Details**

Output current 4ch, 5A/ch. Input Voltage 12~36VDC. Watt 240/720w. Iin 20.5A. Vout 4x(12-36) VDC. Iout 4x5A. Pout 4x (60-180)w. 2 years guarantee.

IP20. 12~36VDC.

**Function introduction**

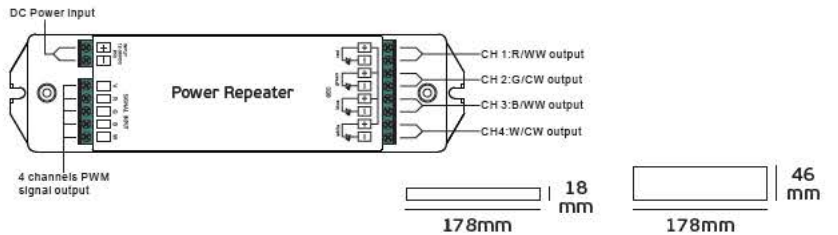

**VK/RP308**  
Data repeater PWM




**Product Models**

Code	Model	Box
78000-542016	VK/RP308 3x8A/1x24A. 288w/576w. 12~24V. L128xW59xH31mm	1pc

**Details**

Output current 3x8A/1x24A. Input Voltage 12/24V. Watt 288/576w. Material plastic. 2 years guarantee.

IP20. 12~24VDC.  
PWM








**Oti Dali 50w/ Oti Dali 80w**


**Product Models**

Code	Model	Input	Output	Channels	Box
78000-476019	VK/Oti Dali 50w	43A	50w	4 channels	20pcs
78000-473019	VK/Oti Dali 80w	48A	80w	4 channels	20pcs
78000-762019	VK/Oti Dali 80w/1	24V	80w	1 channel	20pcs

**Details**

Voltage 220-240V. AC198-264V. Watt 50w/80w. Dimmable. IP Rating IP20. Working temperature -20°C → 60°C. Lifetime 50.000hrs. Material Plastic housing. 5 years guarantee.

 IP20. 50w./80w.




**Oti Dali 160w**


**Product Models**

Code	Model	Input	Output	Channels	Box
78000-472019	VK/Oti Dali 160w	69A	160w	2 channels	20pcs

**Details**

Voltage 220-240V. AC198-264V. Watt 160w. Dimmable. IP Rating IP20. Working temperature -20°C → 60°C. Lifetime 50.000hrs. Material Plastic housing. 5 years guarantee.

 IP20. 160w.



**Oti Dali 210w**


**Product Models**

Code	Model	Input	Output	Channels	Box
78000-504019	VK/Oti Dali 210w	69A	210w	1-4 channels	6pcs

**Details**

Voltage 220-240V. AC198-264V. Watt 210w. Dimmable. IP Rating IP66/IP67. Working temperature -20°C → 60°C. Lifetime 50.000hrs. Material Aluminium. 5 years guarantee.

 IP66/IP67. 210w.

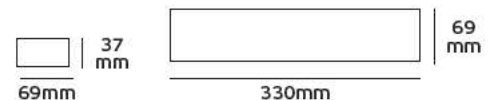

## VK/10079/DALI



## Product Models

Code	Model	Box
78000-597663	VK/10079/DALI 850-1.200mA. 40w. 220-240V.	1pc


## Details

Voltage 220-240V. Output 1 ch. 850-1.200mA. Vout 55Vmax. Pout 40w max PF >0.95. Material Plastic. Dimmable. 2 years guarantee.



IP20. 40w.

DALI Wiring

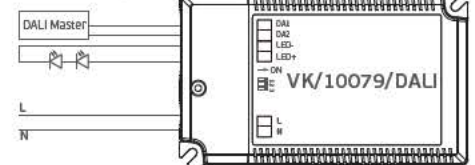VK/10073/DALI  
LED class 2 power supply

## Product Models


Code	Model	Box
78000-741720	VK/10073/DALI 4.16A. max50w. 200-240V.	20pcs

## Details


Voltage 200-240V. 12V DC/50Hz. Iout 4.16A. Iin 270mA & 230V AC. Material Plastic. Dimmable. 2 years guarantee.



IP20. 50w.

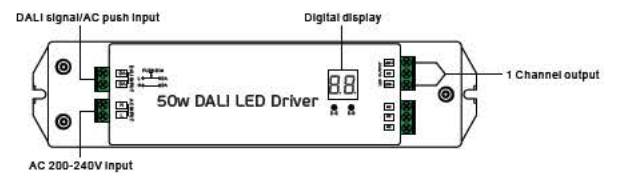

## VK/DALI/PCU

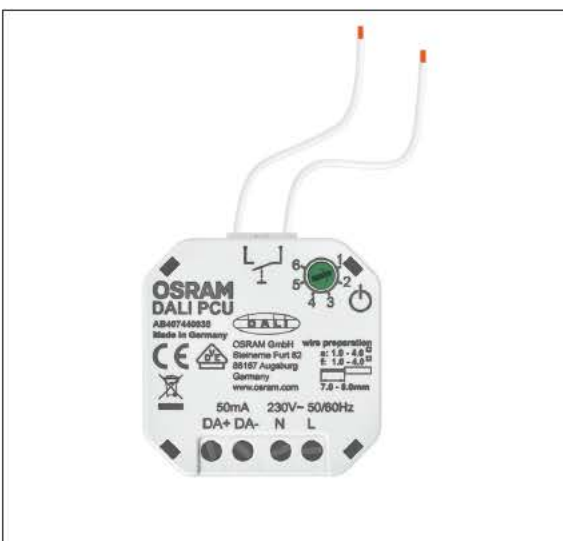

## Product Models

Code	Model	Box
78000-483019	VK/DALI/PCU DALI. 2w. 230V.	20pcs

## Details

Voltage 230V. Watt 2w. Working temperature 0°C → 40°C. Material Plastic. Dimmable. 5 years guarantee.



IP20. 2w.



**VK/LC350PWM**  
LED Converter



**Product Models**


Code	Model	Box
78000-420016	VK/LC350PWM/S 350mA. 12-48V. IP20.	10pcs
78000-528016	VK/LC350PWM/C 350mA. 12-48V. IP66.	10pcs

**Details**

Voltage 12-48V. Output 350mA. Material Plastic. Dimmable. 2 years guarantee.



**IP20/IP66. 350mA.**



**VK/LC700PWM**  
LED Converter



**Product Models**


Code	Model	Box
78000-421016	VK/LC700PWM/S 700mA. 12-48V. IP20.	10pcs
78000-425016	VK/LC700PWM/C 700mA. 12-48V. IP66.	10pcs

**Details**

Voltage 12-48V. Output 700mA. Material Plastic. Dimmable. 2 years guarantee.



**IP20/IP66. 700mA.**



**VK/L3-5-360**  
Dim Controller Analog



**Product Models**


Code	Model	Box
78000-557663	VK/L3-5-360 3 channels x 5A. 120-240W. 12-24V.	10pcs

**Details**

Voltage 12-24V. Output 3 channels x 5A. Material Aluminium. Dimmable. 2 years guarantee.



**IP20. 3ch. x 5A.**



**VK/CT309RF**  
Wireless Remote controller RGB



**Product Models**


Code	Model	Box
78000-410663	VK/CT309RF 3 ch x 5A. 12-24V. 180/360W.	10pcs

**Details**

Voltage 12-24V. Output 3 channels x 5A. Watt 180/360W. Material Plastic. Dimmable RGB. 2 years guarantee.



**IP20. 12-24V.**



**VK/LC350**  
LED**Product Models**

Code	Model	Box
78000-541016	VK/LC350-12 350mA. 1-3w. 3-12V. L67xW35xH25mm	10pcs
78000-590016	VK/LC350-24 350mA. 3-8.4w. 12-24V. L67xW35xH25mm	10pcs
78000-543016	VK/LC350-40 350mA. 5-14w. 24-40V. L81xW35xH27 mm	10pcs

**Details**


Voltage 195-265V. Watt 1-14w. Material Plastic. 2 years guarantee.

**IP20. 1-14w.****VK/LC500**  
LED**Product Models**

Code	Model	Box
78000-596016	VK/LC500-24 500mA. 6-12w. 12-24V.	10pcs
78000-591016	VK/LC500-45 500mA. 12-22w. 24-45V.	10pcs

**Details**


Voltage 195-265V. Watt 6-22.5w. Material Plastic. 2 years guarantee.

**IP20. 6-22.5w.****VK/LC630**  
LED**Product Models**

Code	Model	Box
78000-539016	VK/LC630-45 630mA. 16-28w. 24-45V.	10pcs

**Details**

Voltage 195-265V. Watt 16-22.5w. Material Plastic. 2 years guarantee.

**IP20. 16-22.5w.****VK/LC700**  
LED**Product Models**

Code	Model	Box
78000-588016	VK/LC700-12 700mA. 1-8.4w. 3-12V. L67xW35xH25mm	10pcs
78000-536016	VK/LC700-24 700mA. 6-16w. 12-24V. L67xW35xH25mm	10pcs
78000-595016	VK/LC700-40 700mA. 10-28w. 24-40V. L81xW35xH27 mm	10pcs

**Details**

Voltage 195-265V. Watt 1-28w. Material Plastic. 2 years guarantee.

**IP20. 1-28w.**





## 02 *recessed*



VK/04347/.../33-43

Product Models






Code	Model	Color	Temp	Light	Power	Brand	Beam	CRI	Size	Box
64174-137721	VK/04347/W/W/33	□ White	3000K	1.350lm	20w	bridgelux.	110°	CRI>90	Ø32.5cm	12pcs
64174-138721	VK/04347/W/C/33	□ White	4000K	1.420lm	20w	bridgelux.	110°	CRI>90	Ø32.5cm	12pcs
64174-139721	VK/04347/W/W/43	□ White	3000K	2.100lm	30w	bridgelux.	110°	CRI>90	Ø42.5cm	6pcs
64174-140721	VK/04347/W/C/43	□ White	4000K	2.200lm	30w	bridgelux.	110°	CRI>90	Ø42.5cm	6pcs

Details

AC Driver 220-240V (included). Watt 20w/30w. CRI>90. Type of Led *bridgelux.* 2835 with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. Recessed Trimless ceiling. 2 years guarantee.



IP20. 20w/30w.

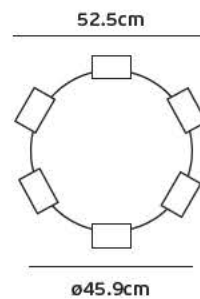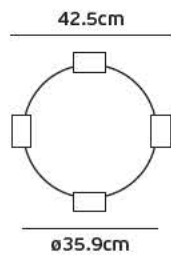



VK/04347/.../53

## Product Models

Code	Model	Color	Temp	Beam	Power	Brand	Beam	Quality	Size	Box
64174-141721	VK/04347/W/W/53	□ White	3000K	3.100lm	40w	bridgelux.	110°	CRI>90	ø52.5cm	1pc
64174-142721	VK/04347/W/C/53	□ White	4000K	3.250lm	40w	bridgelux.	110°	CRI>90	ø52.5cm	1pc

## Details

AC Driver 220-240V (included), Watt 40w, CRI>90. Type of Led **bridgelux.** 2835 with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. Recessed Trimless ceiling. 2 years guarantee.



IP20. 40w.







VK/04347/...

Product Models


Code	Model	Color	Temp	Lumen	Power	Brand	Beam	CRI	Size	Box
64174-143721	VK/04347/W/W/73	□ White	3000K	5.200lm	60w	bridgelux.	110°	CRI>90	ø72.5cm	1pc
64174-144721	VK/04347/W/C/73	□ White	4000K	5.460lm	60w	bridgelux.	110°	CRI>90	ø72.5cm	1pc
64174-145721	VK/04347/W/W/103	□ White	3000K	10.000lm	114w	bridgelux.	110°	CRI>90	ø102.5cm	1pc
64174-146721	VK/04347/W/C/103	□ White	4000K	10.500lm	114w	bridgelux.	110°	CRI>90	ø102.5cm	1pc

Details

AC Driver 220-240V (included). Watt 60w/114w. CRI>90. Type of Led *bridgelux.* 2835 with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. Recessed Trimless ceiling. 2 years guarantee.



IP20. 60w/114w.

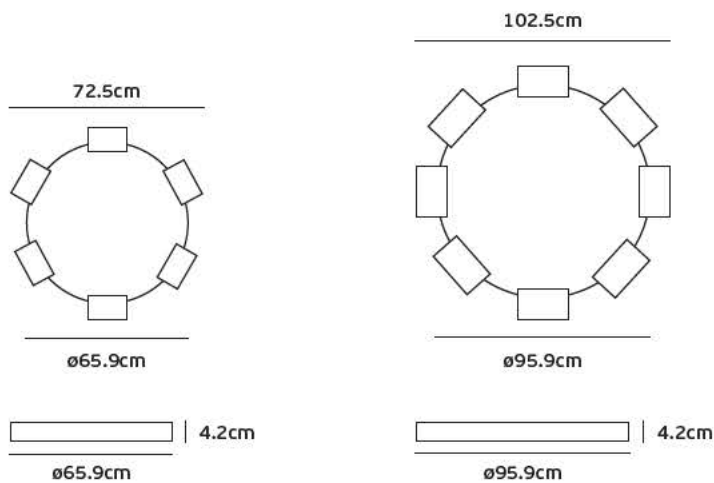





Dreams...





VK/04348/.../35-55

Product Models










Code	Model										Box
64174-147721	VK/04348/W/W/35	□ White	3000K	1.350lm	20w	bridgelux.	110°	CRI>90	ø28.6cm		4pcs
64174-148721	VK/04348/W/C/35	□ White	4000K	1.420lm	20w	bridgelux.	110°	CRI>90	ø28.6cm		4pcs
64174-149721	VK/04348/B/W/35	■ Black	3000K	1.350lm	20w	bridgelux.	110°	CRI>90	ø28.6cm		4pcs
64174-150721	VK/04348/B/C/35	■ Black	4000K	1.420lm	20w	bridgelux.	110°	CRI>90	ø28.6cm		4pcs
64174-151721	VK/04348/W/W/45	□ White	3000K	2.100lm	30w	bridgelux.	110°	CRI>90	ø38.6cm		1pc
64174-152721	VK/04348/W/C/45	□ White	4000K	2.200lm	30w	bridgelux.	110°	CRI>90	ø38.6cm		1pc
64174-153721	VK/04348/B/W/45	■ Black	3000K	2.100lm	30w	bridgelux.	110°	CRI>90	ø38.6cm		1pc
64174-154721	VK/04348/B/C/45	■ Black	4000K	2.200lm	30w	bridgelux.	110°	CRI>90	ø38.6cm		1pc
64174-155721	VK/04348/W/W/55	□ White	3000K	3.100lm	40w	bridgelux.	110°	CRI>90	ø48.6cm		1pc
64174-156721	VK/04348/W/C/55	□ White	4000K	3.250lm	40w	bridgelux.	110°	CRI>90	ø48.6cm		1pc
64174-157721	VK/04348/B/W/55	■ Black	3000K	3.100lm	40w	bridgelux.	110°	CRI>90	ø48.6cm		1pc
64174-158721	VK/04348/B/C/55	■ Black	4000K	3.250lm	40w	bridgelux.	110°	CRI>90	ø48.6cm		1pc

Details

AC Driver 220-240V (included). Watt 20w/30w/40w. CRI>90. Type of Led *bridgelux.* 2835 with driver. Rotation 20° & 350°. No Dimmable Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. Recessed Trimless adjustable ceiling. 2 years guarantee.



IP20. 20w/30w/40w.

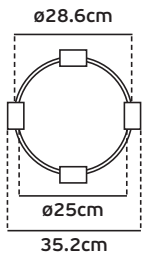





mini dark led



VK/04267/6



Product Models


Code	Model	Box
64174-061721	VK/04267/W/6/W □ White. 3000K. 6w. 610lm. 15°. CRI>90	10pcs
64174-062721	VK/04267/W/6/C □ White. 4000K. 6w. 610lm. 15°. CRI>90	10pcs
64174-059721	VK/04267/B/6/W ■ Black. 3000K. 6w. 610lm. 15°. CRI>90	10pcs
64174-060721	VK/04267/B/6/C ■ Black. 4000K. 6w. 610lm. 15°. CRI>90	10pcs

Details


AC Driver 220-240V (Included). Watt 6w. Beam Angle 15°. CRI>90. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 6w.



3.6 cm



5 cm

VK/04267/9



Product Models


Code	Model	Box
64174-065721	VK/04267/W/9/W □ White. 3000K. 9w. 946lm. 15°. CRI>90	10pcs
64174-066721	VK/04267/W/9/C □ White. 4000K. 9w. 946lm. 15°. CRI>90	10pcs
64174-063721	VK/04267/B/9/W ■ Black. 3000K. 9w. 946lm. 15°. CRI>90	10pcs
64174-064721	VK/04267/B/9/C ■ Black. 4000K. 9w. 946lm. 15°. CRI>90	10pcs

Details


AC Driver 220-240V. Watt 9w. Beam Angle 15°. CRI>90. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 9w.







3.6 cm




5 cm

VK/04267/12

Product Models





Code	Model	Box
64174-069721	VK/04267/W/12/W □ White. 3000K. 12w. 1.287lm. 15°.  CRI>90	10pcs
64174-070721	VK/04267/W/12/C □ White. 4000K. 12w. 1.287lm. 15°.  CRI>90	10pcs
64174-067721	VK/04267/B/12/W ■ Black. 3000K. 12w. 1.287lm. 15°.  CRI>90	10pcs
64174-068721	VK/04267/B/12/C ■ Black. 4000K. 12w. 1.287lm. 15°.  CRI>90	10pcs

Details

AC Driver 220-240V. Watt 12w. Beam Angle 15°. CRI>90. Type of Led .  
Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium.  
2 years guarantee.



IP20. 12w.

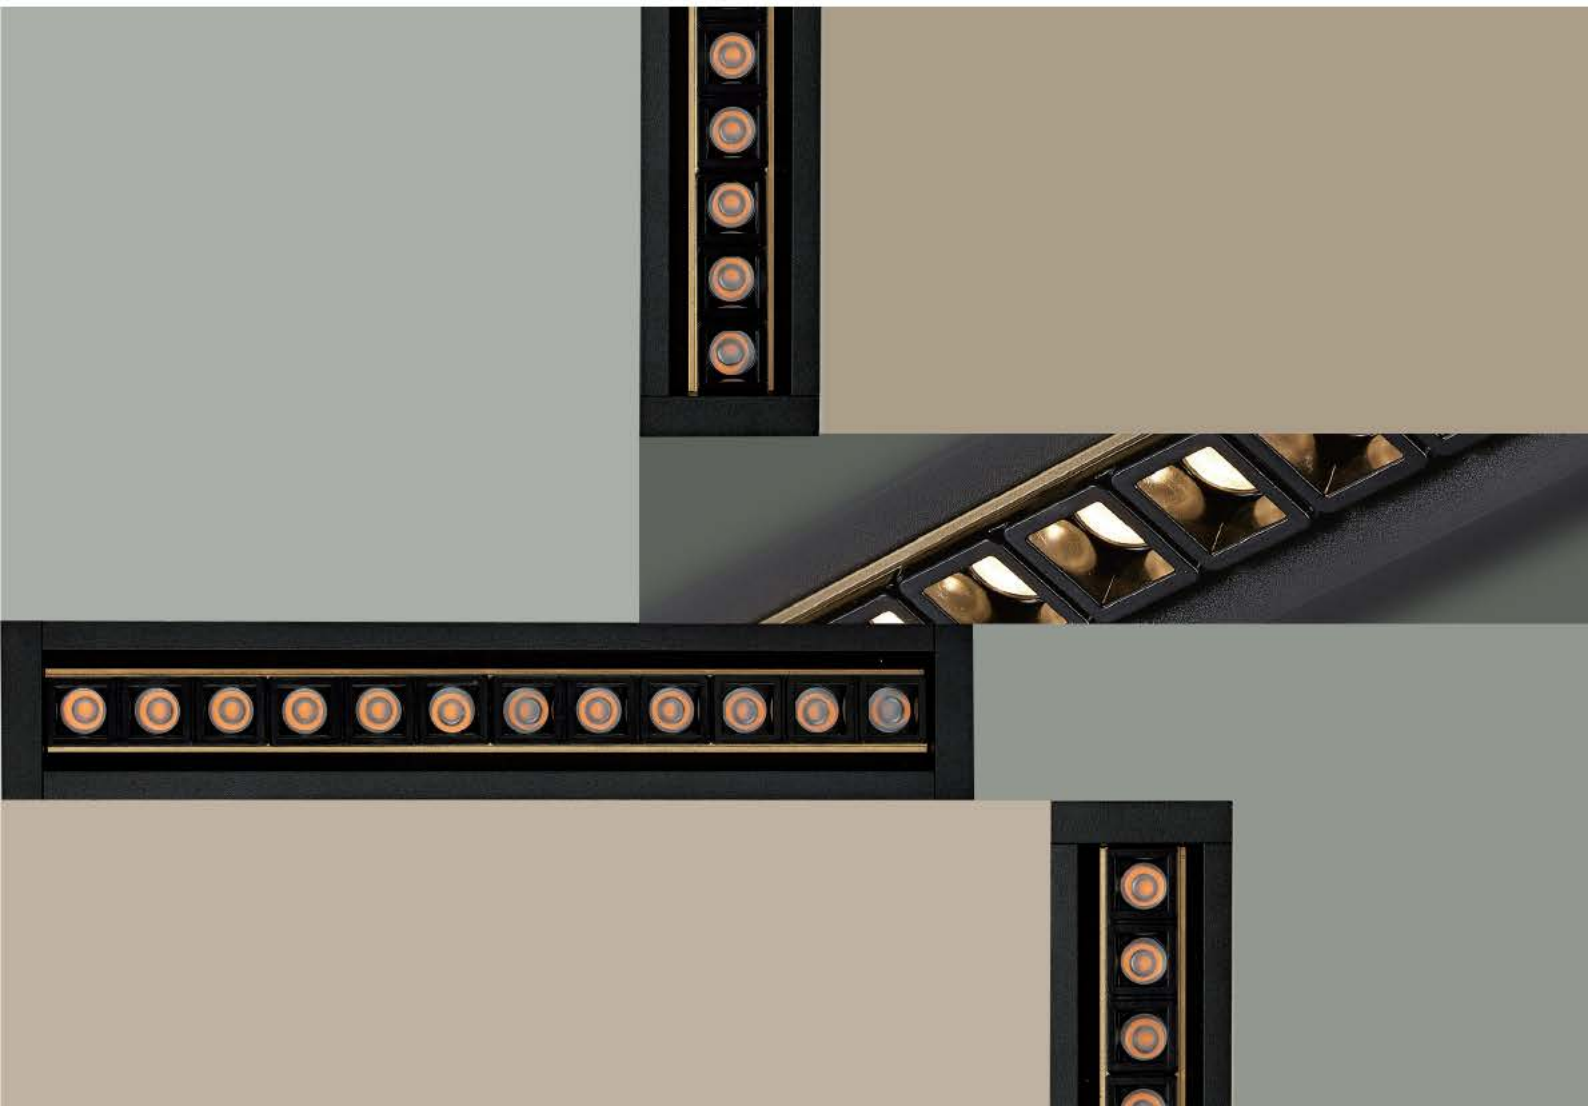

VK/04266TR/3




Product Models

Code	Model	Box
71164-054721	VK/04266TR/W/3/W □ White. 3000K. 6w. <i>bridgelux</i> . led. 429lm. 8°. CRI>90	10pcs
71164-055721	VK/04266TR/W/3/C □ White. 4000K. 6w. <i>bridgelux</i> . led. 429lm. 8°. CRI>90	10pcs
71164-052721	VK/04266TR/B/3/W ■ Black. 3000K. 6w. <i>bridgelux</i> . led. 429lm. 8°. CRI>90	10pcs
71164-053721	VK/04266TR/B/3/C ■ Black. 4000K. 6w. <i>bridgelux</i> . led. 429lm. 8°. CRI>90	10pcs

Details

AC Driver 220-240V. Watt 6w. Beam Angle 8°. CRI>90. Type of Led *bridgelux*.  
Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium.  
Magnet light. 2 years guarantee.

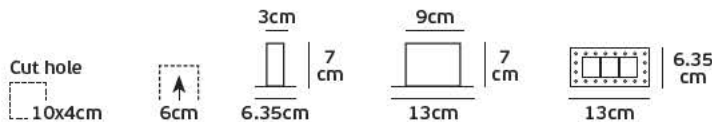

VK/04266TR/6




Product Models

Code	Model	Box
71164-058721	VK/04266TR/W/6/W □ White. 3000K. 12w. <i>bridgelux</i> . led. 694lm. 8°. CRI>90	10pcs
71164-059721	VK/04266TR/W/6/C □ White. 4000K. 12w. <i>bridgelux</i> . led. 694lm. 8°. CRI>90	10pcs
71164-056721	VK/04266TR/B/6/W ■ Black. 3000K. 12w. <i>bridgelux</i> . led. 694lm. 8°. CRI>90	10pcs
71164-057721	VK/04266TR/B/6/C ■ Black. 4000K. 12w. <i>bridgelux</i> . led. 694lm. 8°. CRI>90	10pcs

Details

AC Driver 220-240V. Watt 12w. Beam Angle 8°. CRI>90. Type of Led *bridgelux*.  
Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium.  
Magnet light. 2 years guarantee.

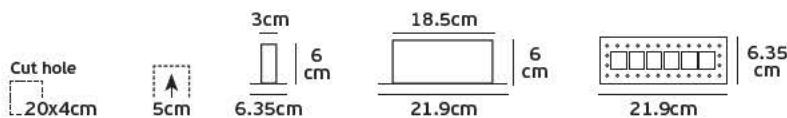



VK/04299



Product Models


Code	Model	Box
64174-087721	VK/04299/W/W □ White sand. 3000K. 418lm. 5w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-088721	VK/04299/W/C □ White sand. 4000K. 418lm. 5w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-089721	VK/04299/B/W ■ Black sand. 3000K. 418lm. 5w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-090721	VK/04299/B/C ■ Black sand. 4000K. 418lm. 5w. <i>bridgelux</i> . 35°. CRI>90	1pc

Details

AC Driver 220-240V (Included). Watt 5w. CRI>90. Beam Angle 35°. Type of Led *bridgelux*. 5050. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. 2 years guarantee.



IP20. 5w.

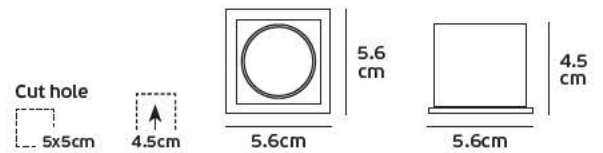

VK/04299/2



Product Models


Code	Model	Box
64174-091721	VK/04299/W/W/2 □ White sand. 3000K. 935lm. 10w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-092721	VK/04299/W/C/2 □ White sand. 4000K. 935lm. 10w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-093721	VK/04299/B/W/2 ■ Black sand. 3000K. 935lm. 10w. <i>bridgelux</i> . 35°. CRI>90	1pc
64174-094721	VK/04299/B/C/2 ■ Black sand. 4000K. 935lm. 10w. <i>bridgelux</i> . 35°. CRI>90	1pc


Details

AC Driver 220-240V (Included). Watt 10w (2x5w). CRI>90. Beam Angle 35°. Type of Led *bridgelux*. 5050. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. 2 years guarantee.



IP20. 10w.

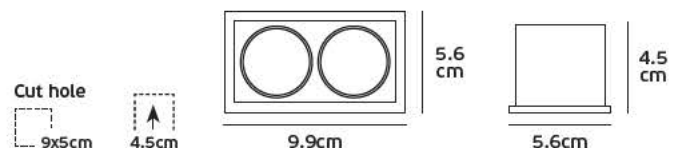

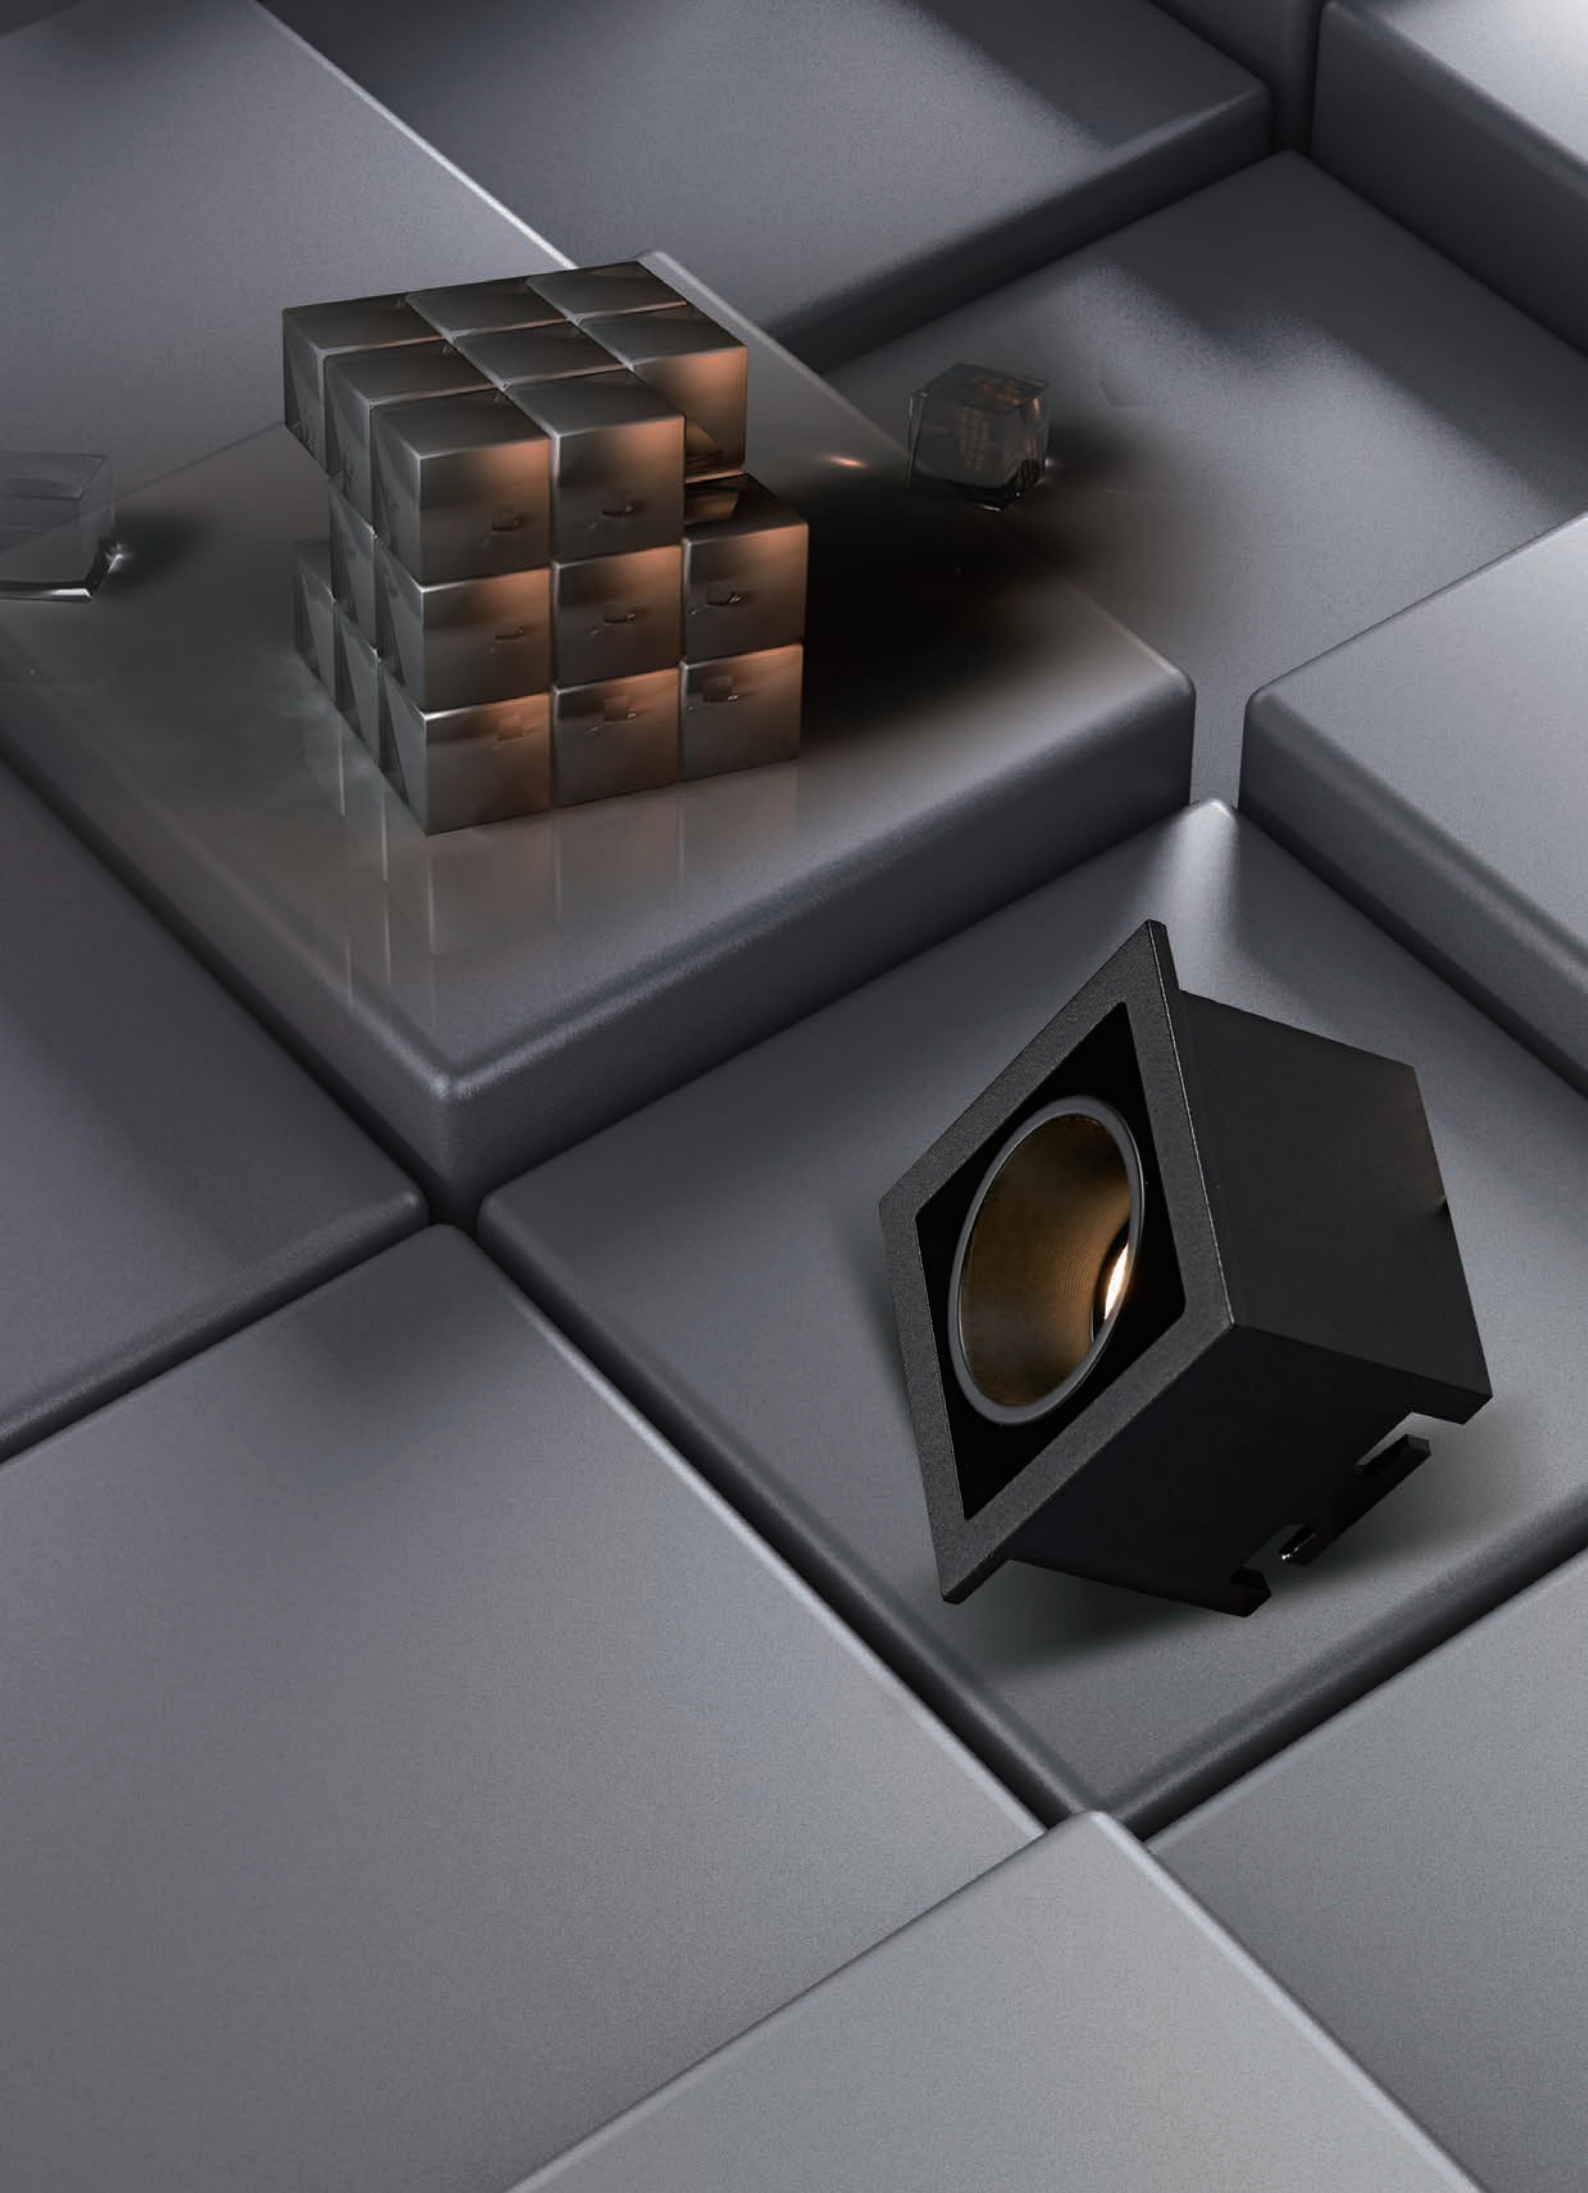



VN/04346/B/C  
LED, Black  
4000K, 12W, 240V,  
max. 2500, 1800h





Round dark downlights



VK/04345




Product Models

Code	Model	Box
64174-125721	VK/04345/WB/W ■ White-Black sand. 3000K. 370lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs
64174-126721	VK/04345/WB/C ■ White-Black sand. 4000K. 390lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs
64174-127721	VK/04345/B/W ■ Black sand. 3000K. 370lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs
64174-128721	VK/04345/B/C ■ Black sand. 4000K. 390lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs
64174-129721	VK/04345/BGD/W ■ Black-Gold sand. 3000K. 370lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs
64174-130721	VK/04345/BGD/W ■ Black-Gold sand. 4000K. 390lm. 7w. <i>bridgelux</i> . 35°. CRI>90	30pcs

Details

AC Driver 220-240V (included). Watt 7w. CRI>90. Type of Led *bridgelux*. 5050 with driver. IP Rating IP20. Rotation 30° & 350°. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

    IP20. 7w.



VK/04346




Product Models

Code	Model	Box
64174-131721	VK/04346/WB/W ■ White-Black sand. 3000K. 830lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs
64174-132721	VK/04346/WB/C ■ White-Black sand. 4000K. 870lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs
64174-133721	VK/04346/B/W ■ Black sand. 3000K. 830lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs
64174-134721	VK/04346/B/C ■ Black sand. 4000K. 870lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs
64174-135721	VK/04346/BGD/W ■ Black-Gold sand. 3000K. 830lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs
64174-136721	VK/04346/BGD/C ■ Black-Gold sand. 4000K. 870lm. 12w. <i>bridgelux</i> . 35°. CRI>90	20pcs

Details

AC Driver 220-240V (included). Watt 12w. CRI>90. Type of Led *bridgelux*. E8 with driver. IP Rating IP20. Rotation 30° & 350°. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

    IP20. 12w.

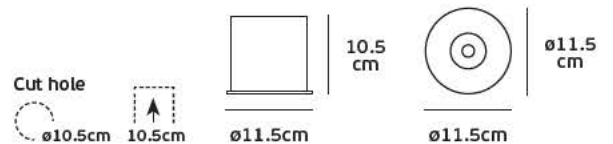



VK/04339



Product Models


Code	Model	Box
64174-117721	VK/04339/W/W □ White sand. 3000K. 120lm. 3w. 8°. CRI>90	30pcs
64174-118721	VK/04339/W/C □ White sand. 4000K. 130lm. 3w. 8°. CRI>90	30pcs
64174-119721	VK/04339/B/W ■ Black sand. 3000K. 120lm. 3w. 8°. CRI>90	30pcs
64174-120721	VK/04339/B/C ■ Black sand. 4000K. 130lm. 3w. 8°. CRI>90	30pcs

Details

AC Driver 100-240V (included). Watt 3w. CRI>90. IP Rating IP20. Type of Led . No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 3w.

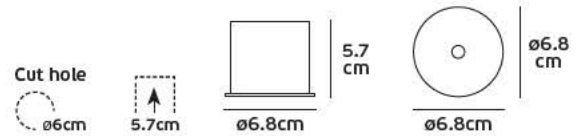

VK/04340



Product Models


Code	Model	Box
64174-121721	VK/04340/W/W □ White sand. 3000K. 128lm. 3w. 8°. CRI>90	30pcs
64174-122721	VK/04340/W/C □ White sand. 4000K. 135lm. 3w. 8°. CRI>90	30pcs
64174-123721	VK/04340/B/W ■ Black sand. 3000K. 128lm. 3w. 8°. CRI>90	30pcs
64174-124721	VK/04340/B/C ■ Black sand. 4000K. 135lm. 3w. 8°. CRI>90	30pcs

Details

AC Driver 100-240V (included). Watt 3w. CRI>90. IP Rating IP20. Type of Led . No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 3w.

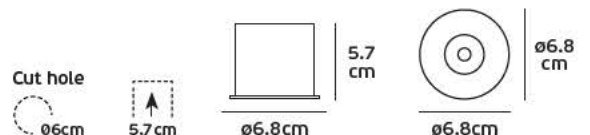



VK/04147




Product Models

Code	Model	Box
64174-016126	VK/04147/W/W □ White+Gold. 3000K. 560lm. 7w. 24°  220-240V. CRI>80	25pcs
64174-017126	VK/04147/B/W ■ Black+Gold. 3000K. 560lm. 7w. 24°  220-240V. CRI>80	25pcs
64174-020126	VK/04147ND/B/W (Driver NOT included) ■ Black. 3000K. 560lm. 7w. 24°  Depends on driver. CRI>80	25pcs

Details

AC 220-240V Driver (The models that included). Watt 7w. Beam Angle 24°. CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 20.000. Working temperature -40°C ~ 60°C. Material Aluminium. 2 years guarantee.

IP20. 7w.

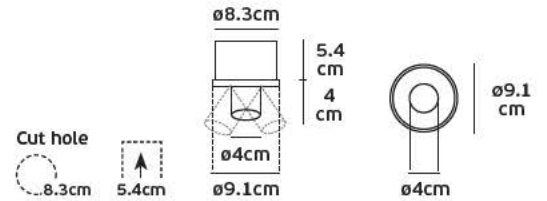

VK/04148




Product Models

Code	Model	Box
64174-018126	VK/04148/W/W □ White+Gold. 3000K. 1.040lm. 13w. 24°. CRI>80	25pcs
64174-019126	VK/04148/B/W ■ Black+Gold. 3000K. 1.040lm. 13w. 24°. CRI>80	25pcs

Details




AC 220-240V Driver (Included). Watt 13w. Beam Angle 24°. CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 20.000. Working temperature -40°C ~ 60°C. Material Aluminium. 2 years guarantee.

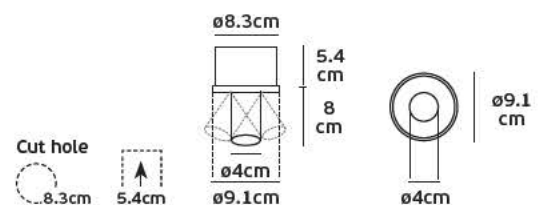IP20. 13w.




VK/04265

Product Models


Code	Model	Box
64174-057721	VK/04265/W/W □ White. 3000K. 73lm. 3w. 15°.  CRI>90	10pcs
64174-058721	VK/04265/W/C □ White. 4000K. 73lm. 3w. 15°.  CRI>90	10pcs
64174-055721	VK/04265/B/W ■ Black. 3000K. 73lm. 3w. 15°.  CRI>90	10pcs
64174-056721	VK/04265/B/C ■ Black. 4000K. 73lm. 3w. 15°.  CRI>90	10pcs



Details

AC Driver 100-240V. Watt 3w. Beam Angle 15°. CRI>90. Type of Led .  
Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium.  
2 years guarantee.

    IP20. 3w.



VK/04261



Product Models

Code	Model	Box
64174-041721	VK/04261/W/W □ White. 3000K. 99lm. 3w. 15°.  CRI>90	10pcs
64174-042721	VK/04261/W/C □ White. 4000K. 99lm. 3w. 15°.  CRI>90	10pcs
64174-039721	VK/04261/B/W ■ Black. 3000K. 99lm. 3w. 15°.  CRI>90	10pcs
64174-040721	VK/04261/B/C ■ Black. 4000K. 99lm. 3w. 15°.  CRI>90	10pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 15°. CRI>90. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04262  
With honeycomb




Product Models

Code	Model	Box
64174-045721	VK/04262/W/W □ White. 3000K. 90lm. 3w. 15°.  CRI>90	10pcs
64174-046721	VK/04262/W/C □ White. 4000K. 90lm. 3w. 15°.  CRI>90	10pcs
64174-043721	VK/04262/B/W ■ Black. 3000K. 90lm. 3w. 15°.  CRI>90	10pcs
64174-044721	VK/04262/B/C ■ Black. 4000K. 90lm. 3w. 15°.  CRI>90	10pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 15°. CRI>90. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium with honeycomb. 2 years guarantee.







VK/04263



Product Models

Code	Model	Box
64174-049721	VK/04263/W/W □ White. 3000K. 140lm. 3w. 8°.  CRI>90	10pcs
64174-050721	VK/04263/W/C □ White. 4000K. 140lm. 3w. 8°.  CRI>90	10pcs
64174-047721	VK/04263/B/W ■ Black. 3000K. 140lm. 3w. 8°.  CRI>90	10pcs
64174-048721	VK/04263/B/C ■ Black. 4000K. 140lm. 3w. 8°.  CRI>90	10pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 8°. CRI>90. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 3w.

Cut hole 4 cm  $\phi 4.1$  cm

VK/04264  
Zoomlight



Product Models

Code	Model	Box
64174-053721	VK/04264/W/W □ White. 3000K. 65-78lm. 3w. 15°-24°.  CRI>90	10pcs
64174-054721	VK/04264/W/C □ White. 4000K. 65-78lm. 3w. 15°-24°.  CRI>90	10pcs
64174-051721	VK/04264/B/W ■ Black. 3000K. 65-78lm. 3w. 15°-24°.  CRI>90	10pcs
64174-052721	VK/04264/B/C ■ Black. 4000K. 65-78lm. 3w. 15°-24°.  CRI>90	10pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 15°-24°. CRI>90. Zoomlight. Type of Led . Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 3w.

Cut hole 5 cm  $\phi 4.3$  cm



VK/04218



Product Models

Code	Model	Box
64174-034721	VK/04218/W/W □ White sanded. 3000K. 150lm. 3w. 8°. CRI>90	150pcs

Details

AC 100-240V Driver (Included). Watt 3w. Beam Angle 8°. CRI>90. Type of Led Bridgelux. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04219



Product Models

Code	Model	Box
64174-035721	VK/04219/W/W □ White sanded. 3000K. 150lm. 3w. 8°. CRI>80	150pcs

Details

AC 100-240V Driver (Included). Watt 3w. Beam Angle 8°. CRI>80. Type of Led CREE XP-E2. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04220



Product Models

Code	Model	Box
64174-036721	VK/04220/W/W □ White sanded. 3000K. 89lm. 3w. 8°. CRI>80	150pcs

Details

AC 100-240V Driver (Included). Watt 3w. Beam Angle 8°. CRI>80. Type of Led CREE XP-E2. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04221



Product Models

Code	Model	Box
64174-037721	VK/04221/W/W □ White sanded. 3000K. 89lm. 3w. 8°. CRI>80	150pcs

Details

AC 100-240V Driver (Included). Watt 3w. Beam Angle 8°. CRI>80. Type of Led CREE XP-E2. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04128



Product Models

Code	Model	Box
64174-015700	VK/04128/W/W □ White sanded. 3000K. 70lm. 3w. 20°. CRI>80	100pcs
64174-016700	VK/04128/W/C □ White sanded. 4000K. 100lm. 3w. 20°. CRI>80	100pcs
64174-017700	VK/04128/B/W ■ Black sanded. 3000K. 70lm. 3w. 20°. CRI>80	100pcs
64174-018700	VK/04128/B/C ■ Black sanded. 4000K. 100lm. 3w. 20°. CRI>80	100pcs

Details

AC 220-240V Driver (Included). Watt 3w. Beam Angle 20°. CRI>80. Type of Led CREE. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



VK/04146




Product Models

Code	Model	Box
64171-058738	VK/04146/W/W □ White. 3000K. 180-200lm. 3w. 15°. CRI>80	300pcs
64171-057738	VK/04146/B/W ■ Black. 3000K. 180-200lm. 3w. 15°. CRI>80	300pcs

Details

AC 220V Driver (Included). Watt 3w. Beam Angle 15°. CRI>80. Type of Led CREE XPE. Lifetime 17.500hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. Dimmable. 2 years guarantee.

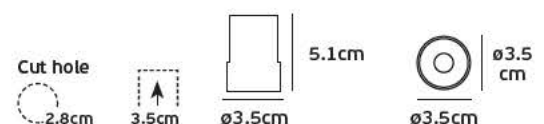

VK/04097



Product Models

Code	Model	Box
64171-043126	VK/04097/W/W □ White. 3000K. 1w. 120°. CRI>80	1pc
64171-044126	VK/04097/W/C □ White. 4000K. 1w. 120°. CRI>80	1pc
64171-074126	VK/04097/MC/W ■ Nickel mat. 3000K. 1w. 120°. CRI>80	1pc


Details

AC 220V. Driver 350mA (Included). Watt 1w. Beam Angle 120°. CRI>80. Type of Led CREE. Lifetime 17.500hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



IP20. 1w.

MINI SPOT LED with driver



VK/04127



Product Models


Code	Model	Box
64174-011700	VK/04127/W/W □ White sanded. 3000K. 100lm. 3w. 20°. CRI>80	100pcs
64174-012700	VK/04127/W/C □ White sanded. 4000K. 120lm. 3w. 20°. CRI>80	100pcs
64174-013700	VK/04127/B/W ■ Black sanded. 3000K. 100lm. 3w. 20°. CRI>80	100pcs
64174-014700	VK/04127/B/C ■ Black sanded. 4000K. 120lm. 3w. 20°. CRI>80	100pcs

Details

AC 220-240V Driver (Included). Watt 3w. Beam Angle 20°. CRI>80. Type of Led CREE. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



IP20. 3w.



VK/04222




Product Models

Code	Model	Box
64174-038721	VK/04222/W/W □ White matt. 3000K. 126lm. 3w. 25°. CRI>80	150pcs

Details

AC 100-240V Driver (Included). Watt 3w. Beam Angle 25°. CRI>80. Type of Led CREE XPE. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

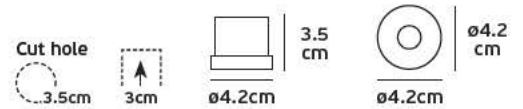

VK/04225




Product Models

Code	Model	Box
75169-043721	VK/04225/W/W □ White matt. 3000K. 20lm. 1w. CRI>80	300pcs

Details

AC 100-240V Driver (Included). Watt 1w. CRI>80. Type of Led Edison. Lifetime 50.000hrs. Clicks 20.000. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

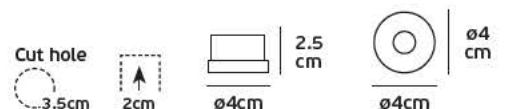

VK/04126



Product Models

Code	Model	Box
64174-007700	VK/04126/W/W □ White sanded. 3000K. 150lm. 3w. 30°. CRI>80	50pcs
64174-008700	VK/04126/W/C □ White sanded. 4000K. 150lm. 3w. 30°. CRI>80	50pcs
64174-009700	VK/04126/B/W ■ Black sanded. 3000K. 150lm. 3w. 30°. CRI>80	50pcs
64174-010700	VK/04126/B/C ■ Black sanded. 4000K. 150lm. 3w. 30°. CRI>80	50pcs

Details

AC 220-240V Driver (Included). Watt 3w. Beam Angle 30°. CRI>80. Type of Led CREE. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



VK/04123




Product Models

Code	Model	Box
64174-001700	VK/04123/W/W □ White sanded. 3000K. 710lm. 10w. 36°. CRI>80	20pcs
64174-002700	VK/04123/W/C □ White sanded. 4000K. 730lm. 10w. 36°. CRI>80	20pcs

Details

AC 220-240V Driver (Included). Watt 10w. Beam Angle 36°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.

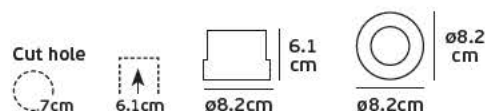



VK/04124




Product Models

Code	Model	Box
64174-003700	VK/04124/W/W □ White sanded. 3000K. 710lm. 10w. 36°. CRI>80	20pcs
64174-004700	VK/04124/W/C □ White sanded. 4000K. 730lm. 10w. 36°. CRI>80	20pcs

Details

AC 220-240V Driver (Included). Watt 10w. Beam Angle 36°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



VK/04125




Product Models

Code	Model	Box
64174-005700	VK/04125/W/W □ White sanded. 3000K. 710lm. 10w. 36°. CRI>80	20pcs
64174-006700	VK/04125/W/C □ White sanded. 4000K. 730lm. 10w. 36°. CRI>80	20pcs

Details

AC 220-240V Driver (Included). Watt 10w. Beam Angle 36°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Clicks 15.000. Working temperature -25°C ~ 40°C. Material Aluminium. 2 years guarantee.



VK/04108



Product Models

Code	Model	Box
64174-876147	VK/04108/W/W □ White. 3000K. 400lm. 5w. 38°. CRI>80	50pcs
64174-878147	VK/04108/W/C □ White. 4000K. 400lm. 5w. 38°. CRI>80	50pcs
64174-877147	VK/04108/B/W ■ Black. 3000K. 400lm. 5w. 38°. CRI>80	50pcs
64174-879147	VK/04108/B/C ■ Black. 4000K. 400lm. 5w. 38°. CRI>80	50pcs

Details

AC 220-240V Driver (Included). Watt 5w. Beam Angle 38°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. Clicks 15.000. Working temperature < 45°C. Material Plastic. 2 years guarantee.





VK/04290



Product Models

Code	Model	Box
64174-951724	VK/04290/W/W □ White matte. 3000K. 1.300lm. 13w. 36°.	48pcs
64174-954724	VK/04290/W/C □ White matte. 4000K. 1.300lm. 13w. 36°.	48pcs


Details

AC Driver 100-265V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C ~ 45°C. Material Aluminium. 2 years guarantee.





**IP20. 13w.**

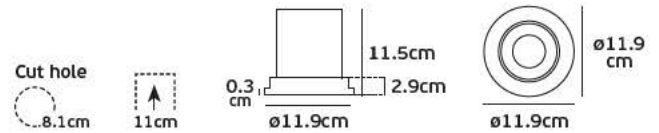

VK/04291



Product Models

Code	Model	Box
64174-952724	VK/04291/W/W □ White matte. 3000K. 2.400lm. 24w. 40°.	24pcs
64174-955724	VK/04291/W/C □ White matte. 4000K. 2.400lm. 24w. 40°.	24pcs


Details

AC Driver 220-240V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C ~ 45°C. Material Aluminium. 2 years guarantee.





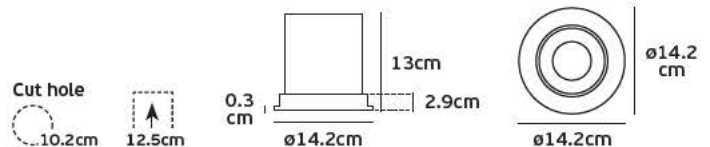

**IP20. 24w.**



VK/04292



Product Models

Code	Model	Box
64174-953724	VK/04292/W/D/W □ White matte. 3000K. 2.400lm. 24w. 40°. 	24pcs
64174-956724	VK/04292/W/D/C □ White matte. 4000K. 2.400lm. 24w. 40°. 	24pcs


Details

AC Driver 100-265V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C ~ 45°C. Material Aluminium. Dimmable. 2 years guarantee.





**IP20. 24w.**

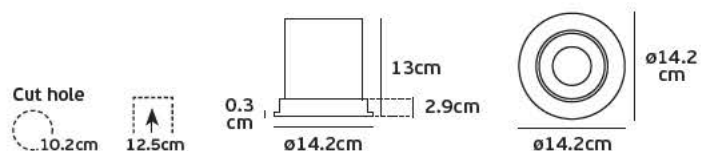

VK/04135



Product Models

Code	Model	Box
64174-001126	VK/04135/W/W □ White matte. 3000K. 800lm. 10w. 38°.	30pcs
64174-002126	VK/04135/W/C □ White matte. 4000K. 800lm. 10w. 38°.	30pcs


Details

AC Driver 200-240V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C ~ 60°C. Material Aluminium. 2 years guarantee.





**IP20. 10w.**

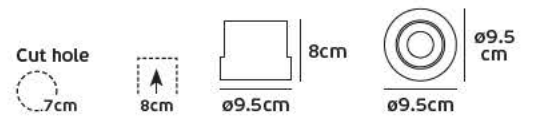

VK/04136



Product Models

Code	Model	Box
64174-003126	VK/04136/W/W □ White matte. 3000K. 1.600lm. 20w. 38°.	30pcs
64174-004126	VK/04136/W/C □ White matte. 4000K. 1.600lm. 20w. 38°.	30pcs


Details

AC Driver 200-240V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C ~ 60°C. Material Aluminium. 2 years guarantee.





**IP20. 20w.**

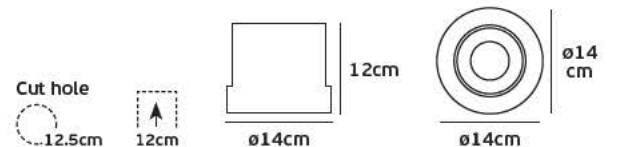

VK/04137



Product Models

Code	Model	Box
64174-005126	VK/04137/W/W □ White matte. 3000K. 2.400lm. 30w. 38°.	30pcs
64174-006126	VK/04137/W/C □ White matte. 4000K. 2.400lm. 30w. 38°.	30pcs


Details

AC Driver 200-240V (Included). CRI>80. Type of Led COB. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C ~ 60°C. Material Aluminium. 2 years guarantee.





**IP20. 30w.**

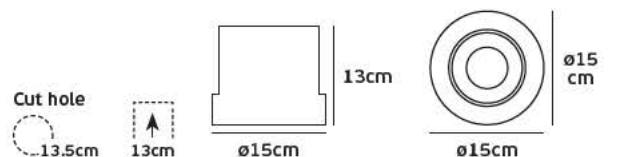

VK/04083/W



Product Models

Code	Model	Box
64174-226128	VK/04083/W/W/24 □ White. 3000K. 1.800lm. 20w. 24°. CRI>80	1pc
64174-227128	VK/04083/W/C/24 □ White. 4000K. 1.800lm. 20w. 24°. CRI>80	1pc


Details

AC Driver 200-240V (Included). Watt 20w. Beam Angle 24°. CRI>80. Type of Led COB CITIZEN. Lifetime 50.000hrs. Clicks 25.000. Working temperature -20°C ~ 45°C. Material Aluminium. Adjustable. 2 years guarantee.





**IP20. 20w.**

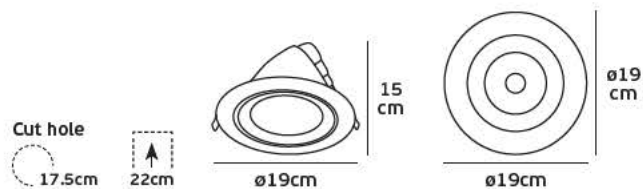

VK/04084/W



Product Models

Code	Model	Box
64174-228128	VK/04084/W/W/24 □ White. 3000K. 2.700lm. 30w. 24°. CRI>80	1pc
64174-229128	VK/04084/W/C/24 □ White. 4000K. 2.700lm. 30w. 24°. CRI>80	1pc


Details

AC Driver 200-240V (Included). Watt 30w. Beam Angle 24°. CRI>80. Type of Led COB CITIZEN. Lifetime 50.000hrs. Clicks 25.000. Working temperature -20°C ~ 45°C. Material Aluminium. Adjustable. 2 years guarantee.





**IP20. 30w.**

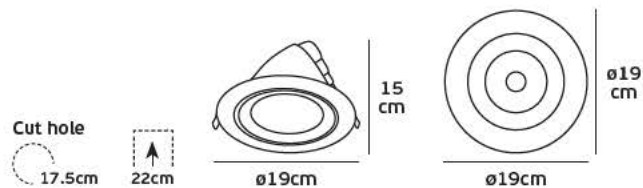

VK/04145

## Product Models

Code	Model	Box
64174-008126	VK/04145/W □ White matte. 3000K. 5.000lm. 50w. 45°. CRI>80	1pc
64174-009126	VK/04145/C □ White matte. 4000K. 5.000lm. 50w. 45°. CRI>80	1pc
64174-010126	VK/04145/D □ White matte. 5000K. 5.000lm. 50w. 45°. CRI>80	1pc

## Details

AC Driver 200-240V (Included). Watt 50w. Beam Angle 45°. CRI>80. Type of Led COB CREE. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C ~ 60°C. Material Aluminium. 5 years guarantee.



IP20. 50w.



Cut hole  
ø20cm

14cm

12 cm  
ø22cm

ø22 cm

VK/04149



Product Models

Code	Model	Box
64174-896703	VK/04149/W/W/24 □ White. 3000K. 1.350lm. 15w. 24°. CRI>90	16pcs
64174-897703	VK/04149/W/W/36 □ White. 3000K. 1.350lm. 15w. 36°-40°. CRI>90	16pcs
64174-900703	VK/04149/W/C/36 □ White. 4000K. 1.350lm. 15w. 36°. CRI>90	16pcs


Details

AC Driver 85-256V (Included). Watt 15w. Beam Angle 24°, 36°-40°, 36°. CRI>90.  
Type of Led TOYONIA. Lifetime 50.000hrs. Clicks 20.000. Working temperature -20°C ~ 45°C.  
Material Aluminium, plastic. Adjustable. 2 years guarantee.





**IP65. 15w.**

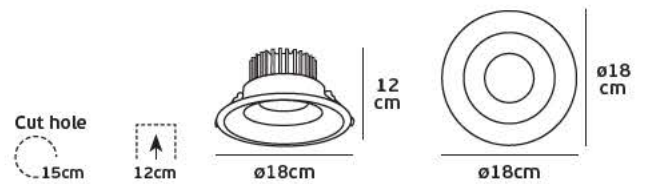

VK/04150



Product Models

Code	Model	Box
64174-898703	VK/04150/W/W/24 □ White. 3000K. 2.700lm. 30w. 24°. CRI>90	16pcs
64174-899703	VK/04150/W/W/36 □ White. 3000K. 2.700lm. 30w. 36°-40°. CRI>90	16pcs
64174-901703	VK/04150/W/C/36 □ White. 4000K. 2.700lm. 30w. 36°. CRI>90	16pcs


Details

AC Driver 85-256V (Included). Watt 30w. Beam Angle 24°, 36°-40°, 36°. CRI>90.  
Type of Led TOYONIA. Lifetime 50.000hrs. Clicks 20.000. Working temperature -20°C ~ 45°C.  
Material Aluminium, plastic. Adjustable. 2 years guarantee.





**IP65. 30w.**

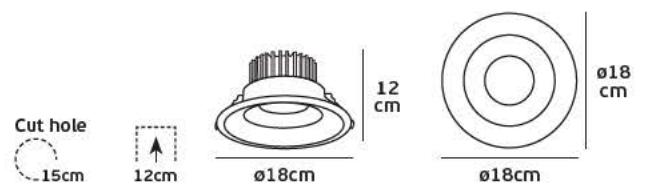









**Led panels**



**VK/04019/W**  
with **PHILIPS** driver

*Product Models*


Code	Model	Color	Temp	Beam	Power	Angle	CRI	Box
63158-212123	VK/04019/W/W	□ White	3000K	4.400lm	40w	110°	CRI>83	1pc
63158-213123	VK/04019/W/C	□ White	4000K	4.400lm	40w	110°	CRI>83	1pc
63158-214123	VK/04019/W/D	□ White	6000K	4.400lm	40w	110°	CRI>83	1pc

*Details*

AC Driver 220-240V **PHILIPS** (Included). Watt **40w**. Beam Angle 110°. CRI>83. LED SMD 4014. Lifetime 50.000hrs. Clicks 50.000. Working temperature < 45°C. Material Aluminium, PMMA. 2 years guarantee.



**IP40. 40w.**

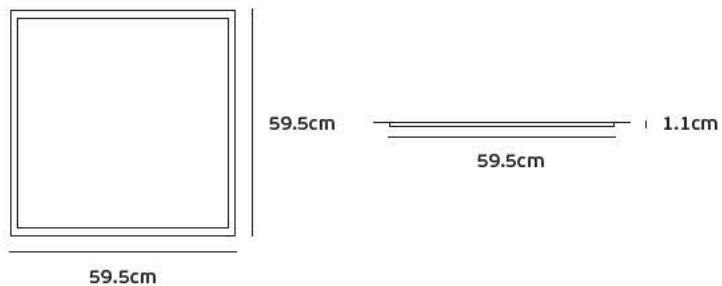



**VK/04041/W**  
with driver

**Product Models**

Code	Model								Box
63158-215123	VK/04041/W/W	□ White	3000K	4.400lm	40w	110°	CRI>83		1pc
63158-216123	VK/04041/W/C	□ White	4000K	4.400lm	40w	110°	CRI>83		1pc
63158-217123	VK/04041/W/D	□ White	6000K	4.400lm	40w	110°	CRI>83		1pc

**Details**

AC Driver 85-265V (Included). Watt 40w. Beam Angle 110°. CRI>83. LED SMD 4014. Lifetime 50.000hrs. Clicks 50.000. LED SMD 4014. Working temperature < 45°C. Material Aluminium, PMMA. 2 years guarantee.

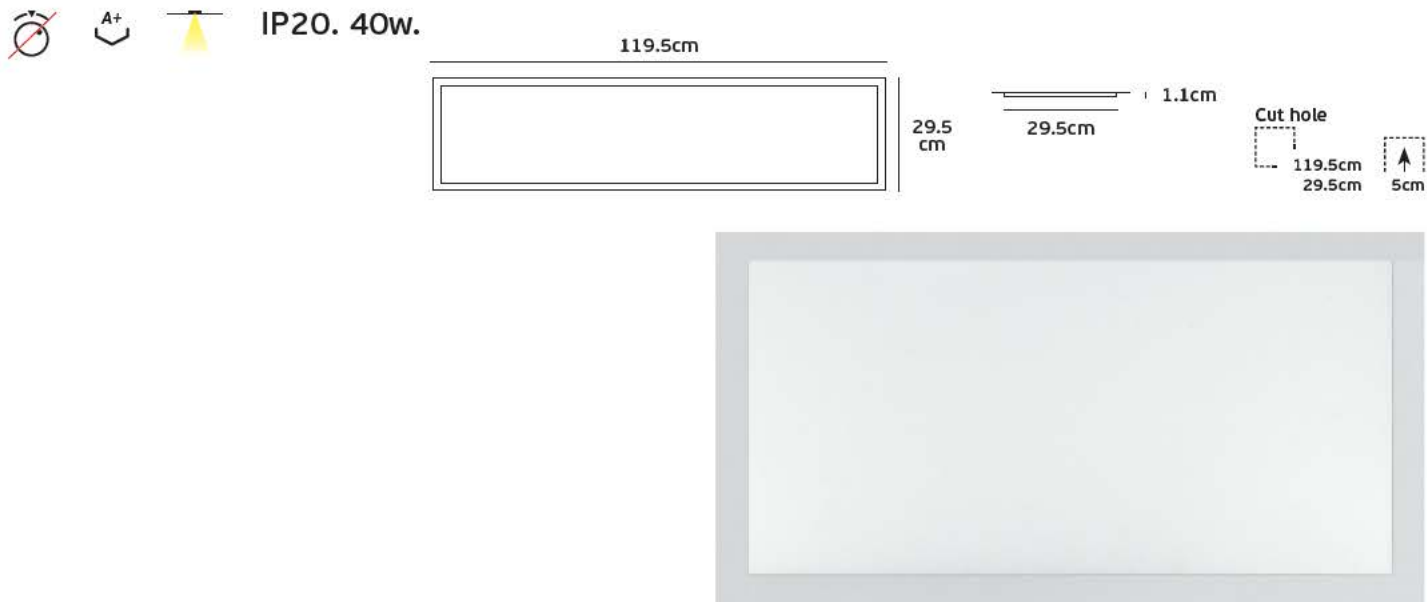

**VK/04051/W**  
with driver


**Product Models**

Code	Model								Box
63158-224123	VK/04051/W/W	□ White	3000K	3.170lm	36w	120°	CRI>83		1pc
63158-225123	VK/04051/W/C	□ White	4000K	3.300lm	36w	120°	CRI>83		1pc
63158-226123	VK/04051/W/D	□ White	6000K	3.400lm	36w	120°	CRI>83		1pc

**Details**

AC Driver 100-240V (Included). Watt 36w. Beam Angle 120°. CRI>83. LED SMD 4014. Lifetime 50.000hrs. Clicks 50.000. Working temperature < 45°C. Material Aluminium, Plastic. 2 years guarantee.

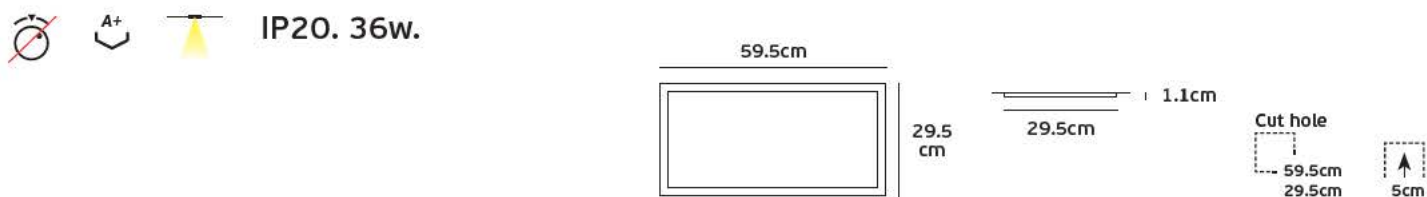

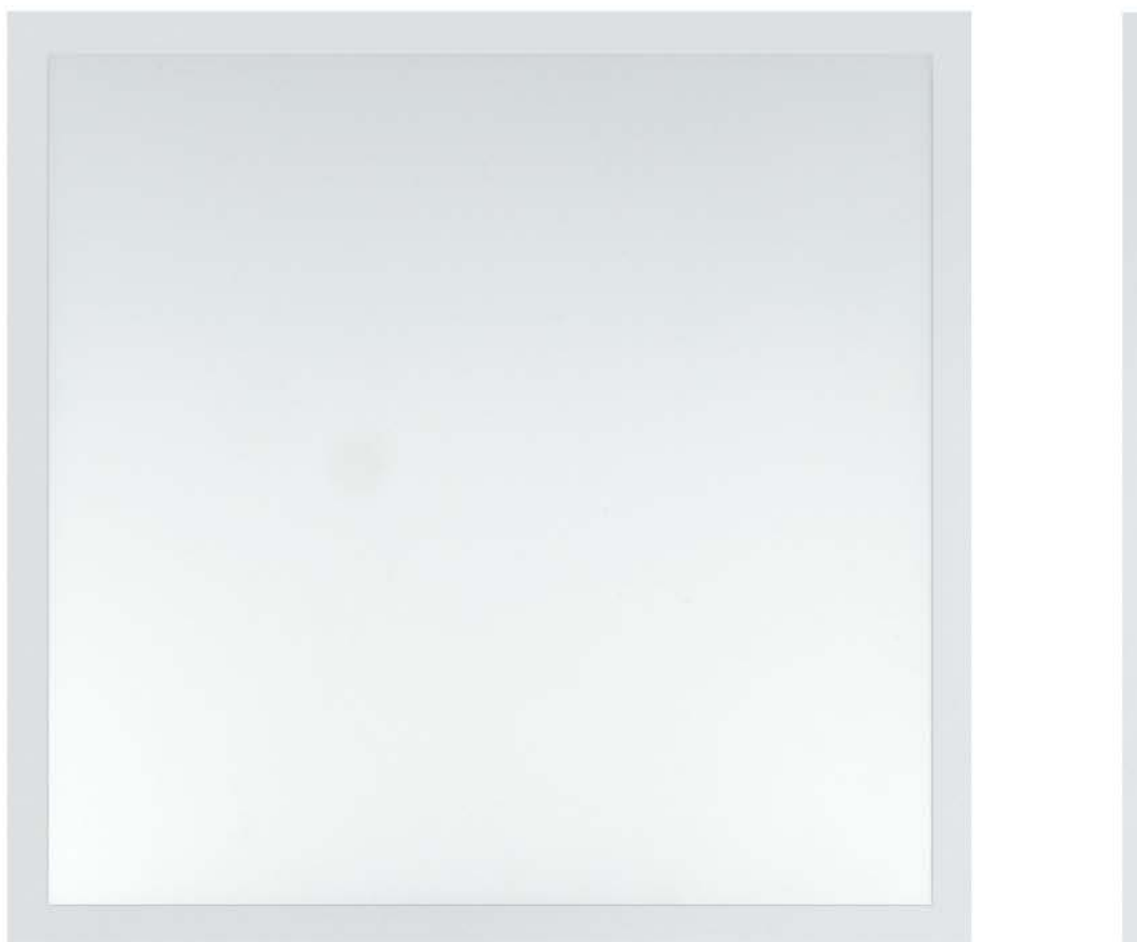

**VK/04019/W/C/19**  
with **PHILIPS** driver


*Product Models*


Code	Model	Color	Temp	Beam	Power	Angle	UGR	Driver	Box
63158-288123	VK/04019/W/C/19	□ White	4000K	3.240lm	36w	120°	UGR<19	LED driver <b>PHILIPS</b>	1pc

*Details*

AC Driver 220-240V **PHILIPS** (Included). Watt 36w. CRI>80. LED SMD4014. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C → 45°C. Material Aluminium, plastic. 2 years guarantee.

   **UGR<19 IP40. 36w.**

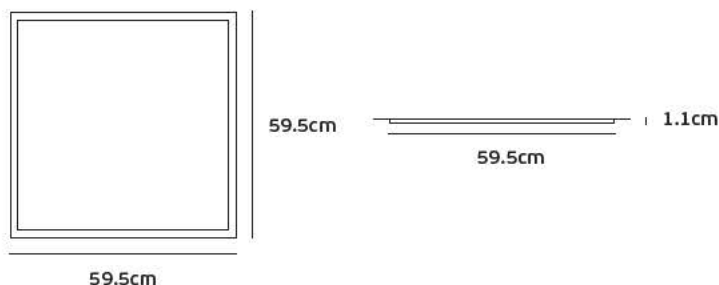

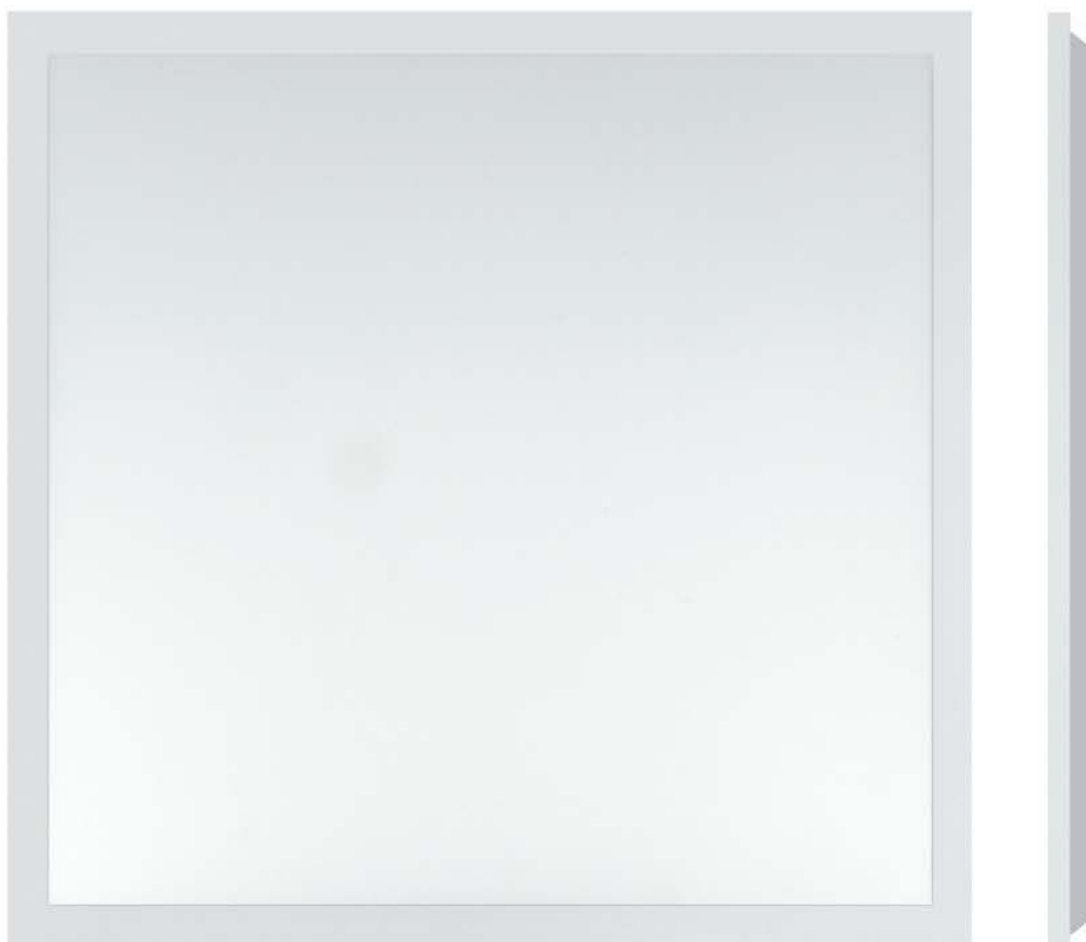

**VK/04424**  
with **PHILIPS** driver

**Product Models**

<b>Code</b> 63158-260727	<b>Model</b> VK/04424/W/W	□ White	3000K	4.620lm	42w	120°	LED driver <b>PHILIPS</b>	<b>Box</b> 10pcs
-----------------------------	------------------------------	---------	-------	---------	-----	------	---------------------------	---------------------

**Details**


Led Panel Light 220-240V. Watt 42w. CRI>80. LED  SMD 2835 with **PHILIPS** flicker free driver PF>0.95. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C → 45°C. Material Aluminium, plastic.

   **IP20. 42w.**

 **5 years guarantee**



LED SMD 2835 

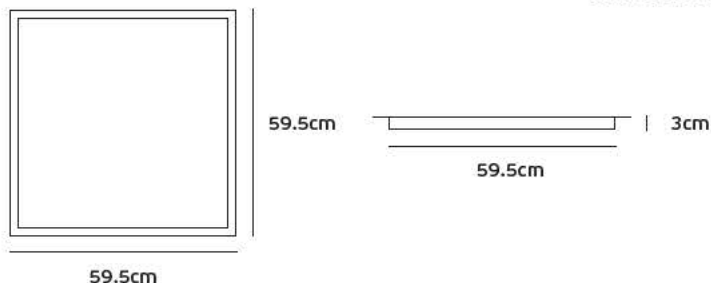




VK/04019/W/RGB  
with driver

Product Models


<b>Code</b> 63158-219123	<b>Model</b> VK/04019/W/RGB/D	□ White	6000K+RGB	3.200lm+N/A	40w	120°	CRI>83	<b>Box</b> 1pc
-----------------------------	----------------------------------	---------	-----------	-------------	-----	------	--------	-------------------

Details

AC Driver 240V (Included). Watt 40w. Beam Angle 120°. CRI>83. LED SMD 2835+5050. Lifetime 50.000hrs. Clicks 50.000. Working temperature < 45°C. Material Aluminium, Plastic. 2 years guarantee.

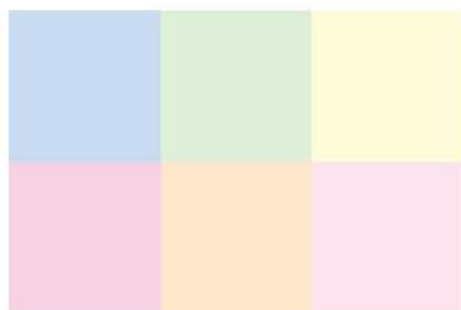

RGB

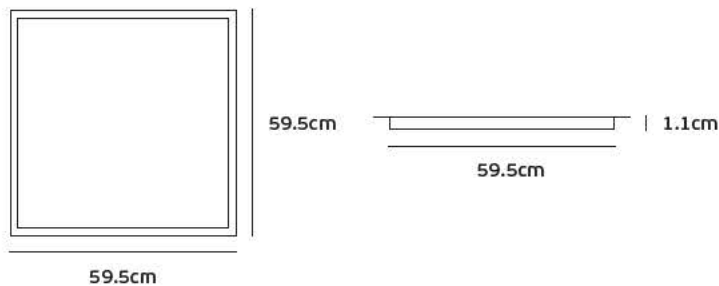

### VK/04019/W/RC

Controller for RGB panels



#### Product Models

Code	Model	Box
63158-220123	VK/04019/W/RGB/RC 12-24V.	1pc

#### Details

Voltage 12-24V. Material Plastic housing.



IP20. 12-24V.

### VK/LVD/PANEL

Driver dimmable for LED panels 40w



#### Product Models

Code	Model	Box
63158-218123	VK/LVD/PANEL 220-240V.	1pc

#### Details

Voltage 220-240V. Material Plastic housing.



IP20. 220-240V.

### OTi DALI 35/220-240/1A0 LT2

Controller **OSRAM** for RGB panels



#### Product Models

Code	Model	Box
78000-424019	OTi DALI 35/220-240/1A0 LT2 220-240V. 10.3x6.7x2.95cm	1pc

#### Details

Voltage 220-240V. Material Plastic housing. 3 years guarantee.




IP20. 220-240V.

10.3cm	2.95 cm	6.7 cm
10.3cm		



**VK/04019/SRK**  
Set of 2 ropes

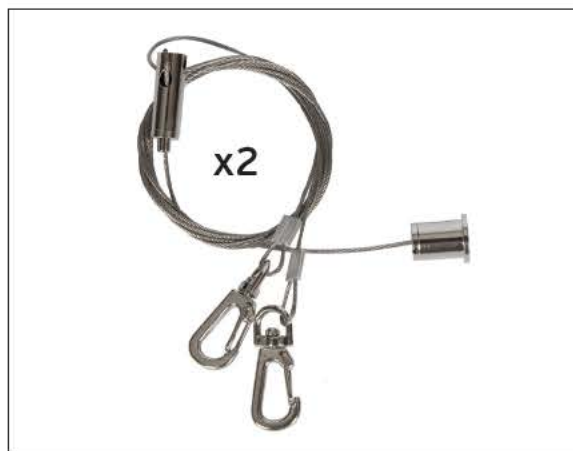


**Product Models**


Code	Model	Box
63158-221123	VK/04019/SRK Set of 2 ropes for LED panel VK/04019.	1pc

**Details**

Set of 2 ropes for LED panel VK/04019. Material Steel, Aluminium.



**VK/04041/SRK**  
Set of 3 ropes

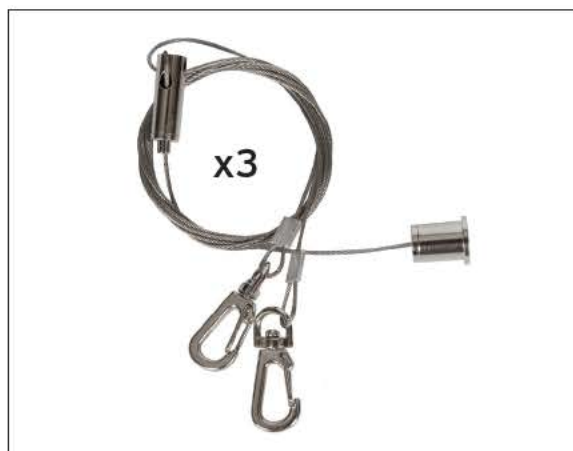


**Product Models**

Code	Model	Box
63158-222123	VK/04041/SRK Set of 3 ropes for LED panel VK/04041.	1pc

**Details**

Set of 3 ropes for LED panel VK/04041. Material Steel, Aluminium.






**VK/04019/MF**

**Product Models**

<b>Code</b> 63158-223123	<b>Model</b> VK/04019/MF	□ White.	<b>Box</b> 1pc
-----------------------------	-----------------------------	----------	-------------------

**Details**

Frame mounting kit for LED panel VK/04019.

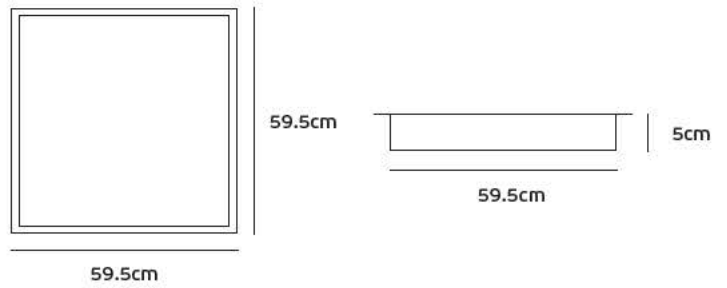


**VK/04019/RF**

**Product Models**

<b>Code</b> 77161-133164	<b>Model</b> VK/04019/RF	□ White.	<b>Box</b> 1pc
-----------------------------	-----------------------------	----------	-------------------

**Details**

Frame mounting kit for LED panel VK/04019 with metal clip set.

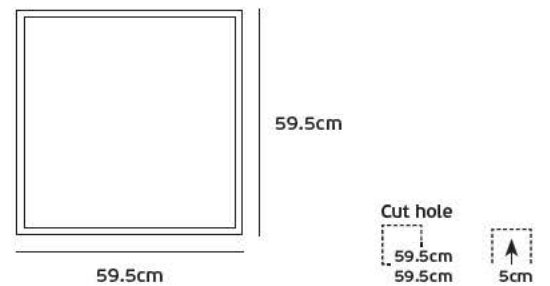




**VK/04051/MF**

**Product Models**

<b>Code</b> 77161-135164	<b>Model</b> VK/04051/MF	□ White.	<b>Box</b> 1pc
-----------------------------	-----------------------------	----------	-------------------

*Details*

Frame mounting kit for LED panel VK/04051.

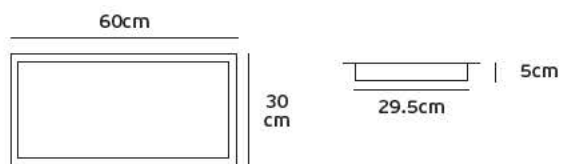


**VK/04041/MF**

**Product Models**

<b>Code</b> 77161-131164	<b>Model</b> VK/04041/MF	□ White.	<b>Box</b> 1pc
-----------------------------	-----------------------------	----------	-------------------

*Details*

Frame mounting kit for LED panel VK/04041.

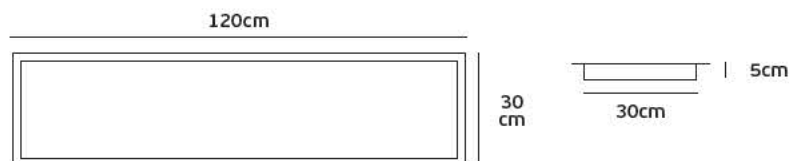



## VK/04051/RF

### Product Models

**Code**  
77161-147164

**Model**  
VK/04051/RF

□ White.

**Box**  
1pc

### Details

Frame mounting kit for LED panel VK/04051 with metal clip set.



## VK/04041/RF

### Product Models

**Code**  
77161-128164


**Model**  
VK/04041/RF


□ White.

**Box**  
1pc

### Details

Frame mounting kit for LED panel VK/04041 with metal clip set.

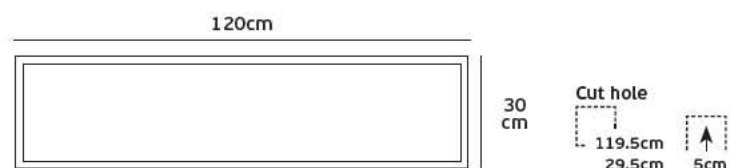

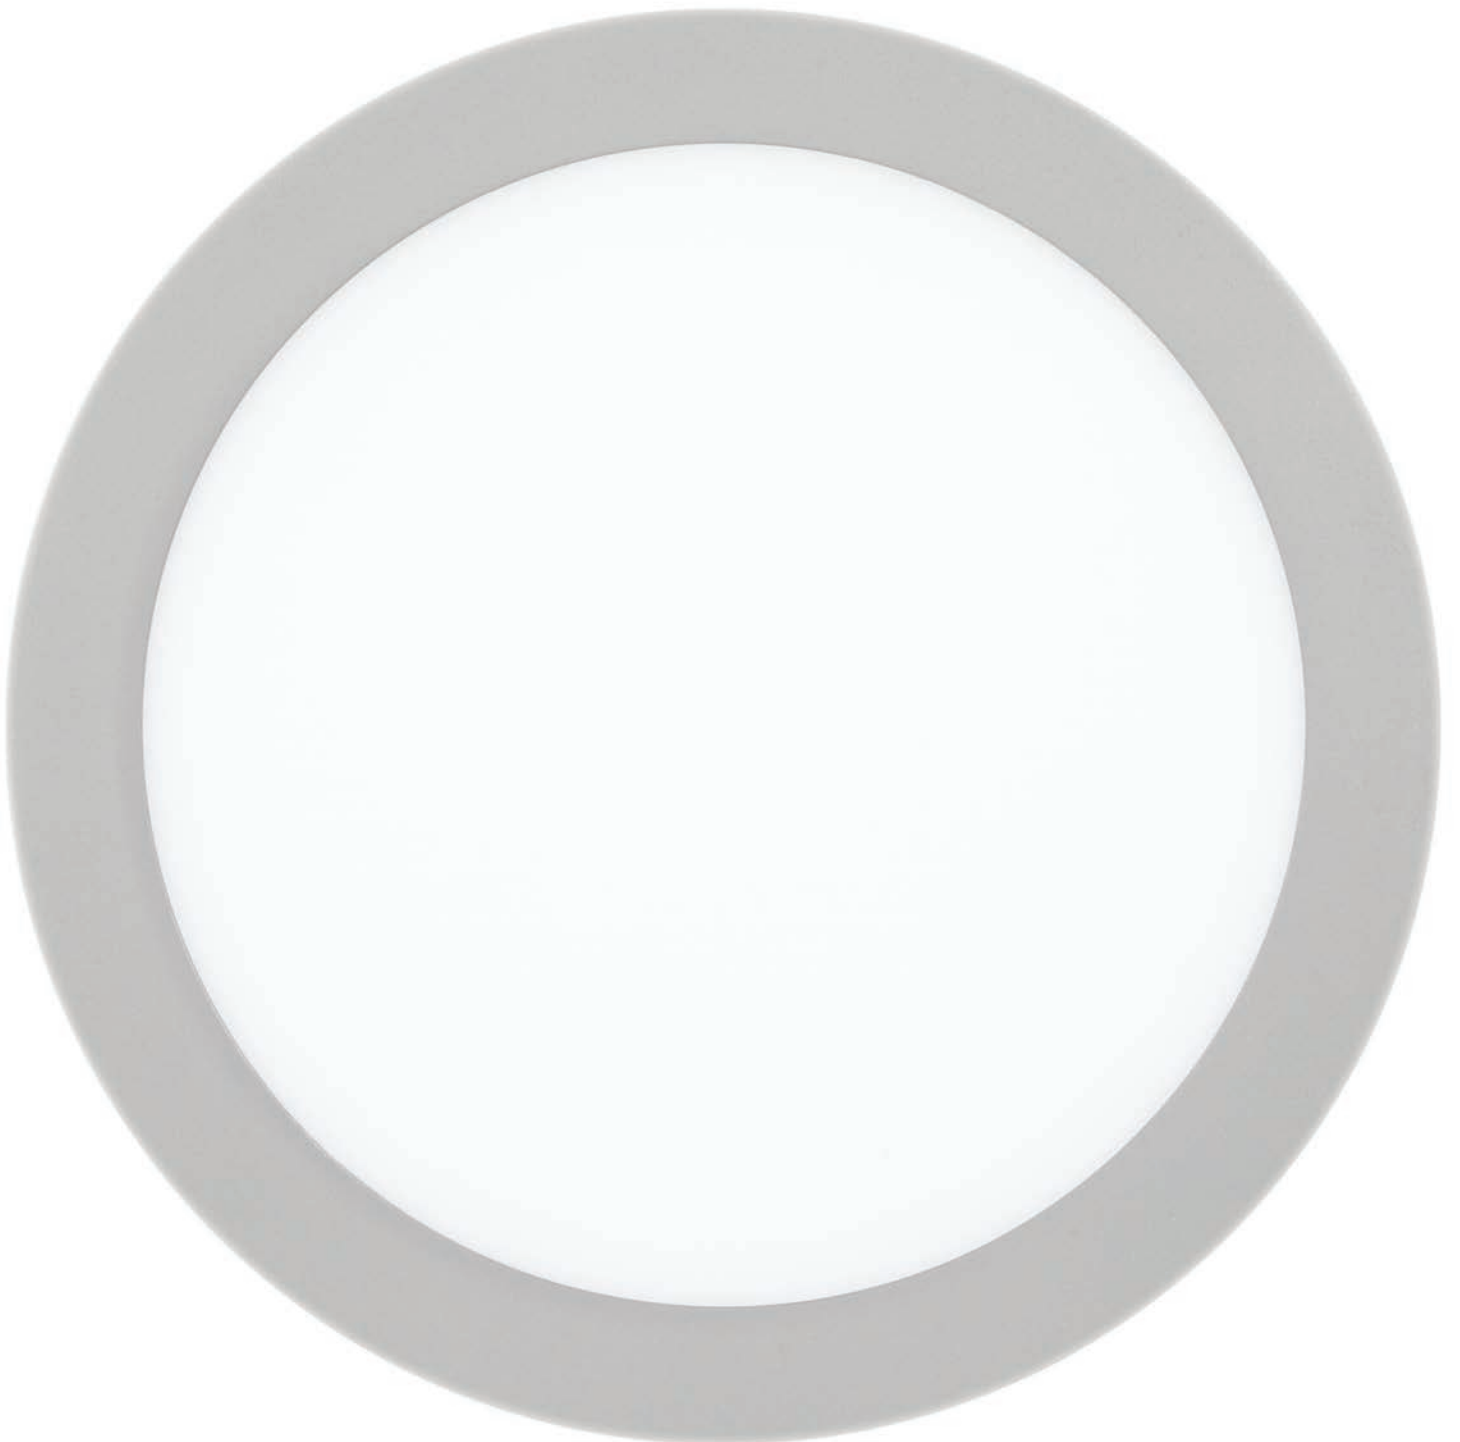



**Led panels round**

**VK/04072-VK/04074**  
**VK/04048-VK/04050, VK/04017**
**Product Models**

Code	Model							Box
64173-055123	VK/04072/W/W	□ White	3000K	250lm	3w	120°	CRI>80	10pcs
64173-056123	VK/04072/W/C	□ White	4000K	260lm	3w	120°	CRI>80	10pcs
64173-057123	VK/04073/W/W	□ White	3000K	510lm	6w	120°	CRI>80	10pcs
64173-058123	VK/04073/W/C	□ White	4000K	530lm	6w	120°	CRI>80	10pcs
64173-049123	VK/04048/W/W	□ White	3000K	760lm	9w	120°	CRI>80	10pcs
64173-050123	VK/04048/W/C	□ White	4000K	790lm	9w	120°	CRI>80	10pcs
64173-059123	VK/04074/W/W	□ White	3000K	1.010lm	12w	120°	CRI>80	10pcs
64173-060123	VK/04074/W/C	□ White	4000K	1.050lm	12w	120°	CRI>80	10pcs
64173-086123	VK/04074/W/D	□ White	6000K	1.050lm	12w	120°	CRI>80	10pcs
64173-054123	VK/04049/W/W	□ White	3000K	1.260lm	15w	120°	CRI>80	10pcs
64173-051123	VK/04049/W/C	□ White	4000K	1.310lm	15w	120°	CRI>80	10pcs
64173-087123	VK/04049/W/D	□ White	6000K	1.310lm	15w	120°	CRI>80	10pcs
64173-052123	VK/04050/W/W	□ White	3000K	1.510lm	18w	120°	CRI>80	10pcs
64173-053123	VK/04050/W/C	□ White	4000K	1.580lm	18w	120°	CRI>80	10pcs
64173-085123	VK/04050/W/D	□ White	6000K	1.510lm	18w	120°	CRI>80	10pcs
64173-061123	VK/04050/G/W	■ Grey	3000K	1.510lm	18w	120°	CRI>80	10pcs
64173-062123	VK/04050/G/C	■ Grey	4000K	1.580lm	18w	120°	CRI>80	10pcs
64173-043115	VK/04017/W/W	□ White	3000K	2.000lm	24w	120°	CRI>80	10pcs
64173-044115	VK/04017/W/C	□ White	4000K	2.050lm	24w	120°	CRI>80	10pcs
64173-045115	VK/04017/W/D	□ White	6000K	2.100lm	24w	120°	CRI>80	10pcs
64173-037115	VK/04017/G/W	■ Grey	3000K	2.000lm	24w	120°	CRI>80	10pcs
64173-038115	VK/04017/G/C	■ Grey	4000K	2.050lm	24w	120°	CRI>80	10pcs
64173-039115	VK/04017/G/D	■ Grey	6000K	2.100lm	24w	120°	CRI>80	10pcs

**Details**


AC Driver 100-240V (Included). Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. Working temperature < 45°C. Material Aluminium, plastic. 2 years guarantee.





IP20. 3w/6w/9w/12w/15w/18w/24w





ø9cm





ø12cm





ø15cm





ø17cm




ø20cm



ø22.5cm



ø24cm





VK/04075-VK/04080  
VK/04018

### Product Models














Code	Model							Box
64173-063123	VK/04075/W/W	□ White	3000K	250lm	3w	120°	CRI>80	10pcs
64173-064123	VK/04075/W/C	□ White	4000K	260lm	3w	120°	CRI>80	10pcs
64173-065123	VK/04076/W/W	□ White	3000K	510lm	6w	120°	CRI>80	10pcs
64173-066123	VK/04076/W/C	□ White	4000K	530lm	6w	120°	CRI>80	10pcs
64173-067123	VK/04077/W/W	□ White	3000K	760lm	9w	120°	CRI>80	10pcs
64173-068123	VK/04077/W/C	□ White	4000K	790lm	9w	120°	CRI>80	10pcs
64173-069123	VK/04078/W/W	□ White	3000K	1.010lm	12w	120°	CRI>80	10pcs
64173-070123	VK/04078/W/C	□ White	4000K	1.050lm	12w	120°	CRI>80	10pcs
64173-071123	VK/04079/W/W	□ White	3000K	1.260lm	15w	120°	CRI>80	10pcs
64173-072123	VK/04079/W/C	□ White	4000K	1.310lm	15w	120°	CRI>80	10pcs
64173-073123	VK/04080/W/W	□ White	3000K	1.510lm	18w	120°	CRI>80	10pcs
64173-074123	VK/04080/W/C	□ White	4000K	1.580lm	18w	120°	CRI>80	10pcs
64173-075123	VK/04080/G/W	■ Grey	3000K	1.510lm	18w	120°	CRI>80	10pcs
64173-076123	VK/04080/G/C	■ Grey	4000K	1.580lm	18w	120°	CRI>80	10pcs
64173-046115	VK/04018/W/W	□ White	3000K	2.000lm	24w	120°	CRI>80	10pcs
64173-047115	VK/04018/W/C	□ White	4000K	2.050lm	24w	120°	CRI>80	10pcs
64173-048115	VK/04018/W/D	□ White	6000K	2.100lm	24w	120°	CRI>80	10pcs
64173-040115	VK/04018/G/W	■ Grey	3000K	2.000lm	24w	120°	CRI>80	10pcs
64173-041115	VK/04018/G/C	■ Grey	4000K	2.050lm	24w	120°	CRI>80	10pcs
64173-042115	VK/04018/G/D	■ Grey	6000K	2.100lm	24w	120°	CRI>80	10pcs

### Details

AC Driver 100-240V (Included). Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. Working temperature < 45°C. Material Aluminium, plastic. 2 years guarantee.



IP20. 3w/6w/9w/12w/15w/18w/24w

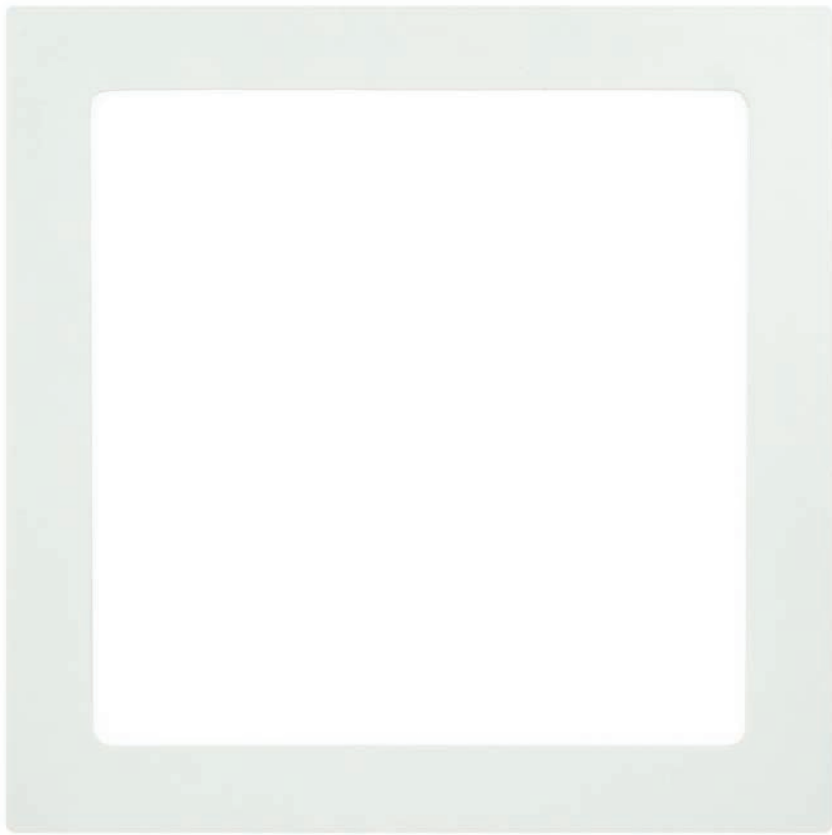

VK/04015

Product Models


Code	Model	Box
71164-003122	VK/04015/W/W □ White. 3000K. 1.780lm. 18w. 120°. CRI>75	20pcs
71164-004122	VK/04015/W/C □ White. 4000K. 1.780lm. 18w. 120°. CRI>75	20pcs
71164-006122	VK/04015/W/D □ White. 6000K. 1.780lm. 18w. 120°. CRI>75	20pcs

Details

AC Driver 90-265V (Included). Watt 18w. Beam Angle 120°. CRI>75. Type of Led SMD 2835. Lifetime 30.000hrs. Clicks 20.000. Working temperature -20°C ~ 45°C. Material Aluminium, plastic. 2 years guarantee.



IP20. 18w.



VK/04014

## Product Models


Code	Model	Box
71164-001122	VK/04014/W/W □ White. 3000K. 1.440lm. 18w. 120°. CRI>80	20pcs
71164-002122	VK/04014/W/C □ White. 4000K. 1.440lm. 18w. 120°. CRI>80	20pcs
71164-005122	VK/04014/W/D □ White. 6000K. 1.440lm. 18w. 120°. CRI>80	20pcs

## Details

AC Driver 220-240V (Included). Watt 18w. Beam Angle 120°. CRI>80. Type of Led SMD 2016. Lifetime 30.000hrs. Clicks 20.000. Working temperature -20°C ~ 45°C. Material Aluminium, plastic. 2 years guarantee.



IP20. 18w.




VK/04287

Product Models

Code	Model	Box
63158-293164	VK/04287/700/3/W/W 3 double parabolic □ White & silver. 36w. 3000K. 700mA. 3.500lm (origin 5.250lm.)	1pc
63158-294164	VK/04287/700/3/W/C 3 double parabolic □ White & silver. 36w. 4000K. 700mA. 3.500lm (origin 5.400lm.)	1pc
63158-299164	VK/04287/700/5/W/W 5 double parabolic □ White & silver. 38w. 3000K. 700mA. 3.100lm (origin 5.250lm.)	1pc
63158-300164	VK/04287/700/5/W/C 5 double parabolic □ White & silver. 38w. 4000K. 700mA. 3.100lm (origin 5.400lm.)	1pc








Details


700mA. Supply Voltage 230V AC. Driver  or PHILIPS (included). Watt 36w, 38w, UGR<19. Special Led board 1.4cm customed of VK Leading Light 2835 Edison. Working Temperature -25°C → 45°C. CRI>80. Material Metal body, electrostatically painted in white color, 99.85% clear mirror. PMMA Diffuser. Transmission 92%. Beam angle 130°. Lifetime 100.000hrs. Clicks 100.000. 5 years guarantee.




IP20. 36w. 38w.

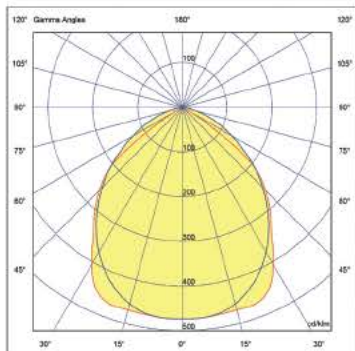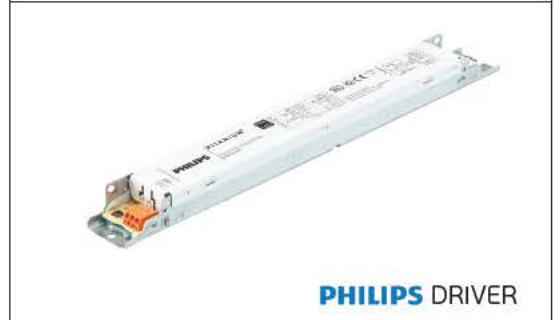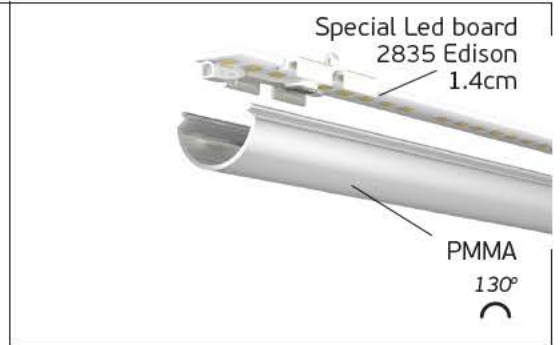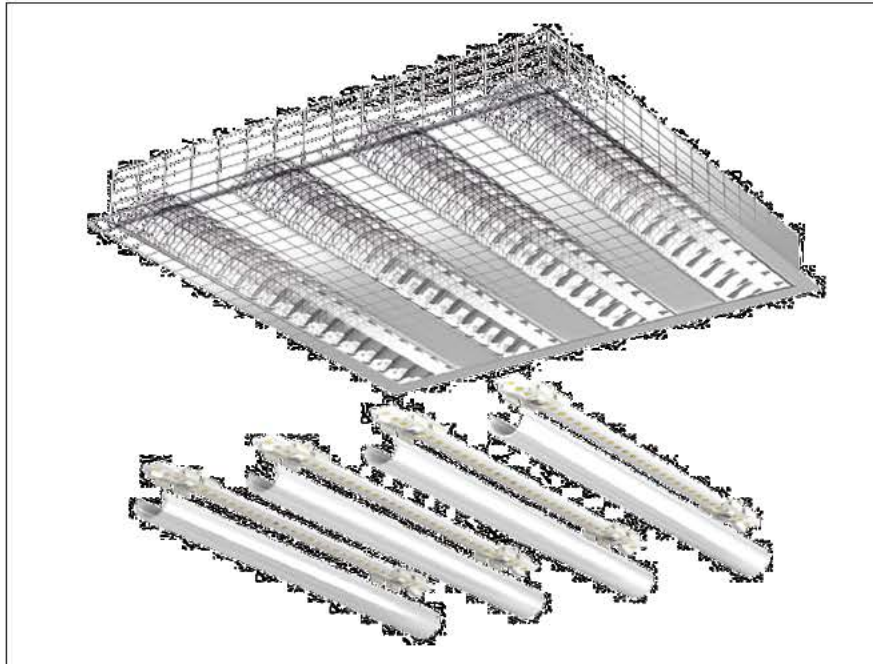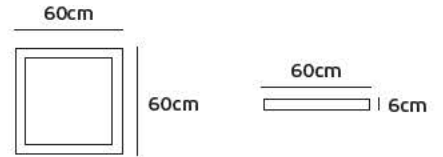


VK/04287/700/3/W/C



3 double parabolic

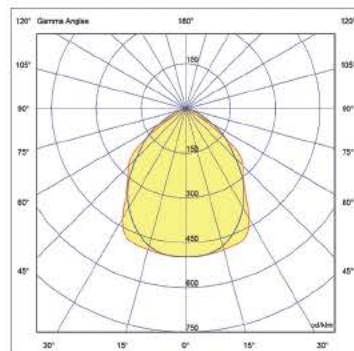


VK/04287/700/5/W/W



5 double parabolic

Parabolic detail




VK/04286

Product Models






Code	Model	Box
63158-291164	VK/04286/900/3/W/W 3 double parabolic □ White & silver. 44w. 3000K. 900mA. 4.000lm (origin 6.750lm.)	1pc
63158-292164	VK/04286/900/3/W/C 3 double parabolic □ White & silver. 44w. 4000K. 900mA. 4.000lm (origin 6.900lm.)	1pc
63158-301164	VK/04286/900/5/W/W 5 double parabolic □ White & silver. 46w. 3000K. 900mA. 3.700lm (origin 6.750lm.)	1pc
63158-302164	VK/04286/900/5/W/C 5 double parabolic □ White & silver. 46w. 4000K. 900mA. 3.700lm (origin 6.900lm.)	1pc

Details


900mA. Supply Voltage 230V AC. Driver  or PHILIPS (included). Watt 44w, 46w, UGR<19. Special Led board 1.4cm customed of VK Leading Light 2835 Edison. Working Temperature -25°C → 45°C. CRI>80. Material Metal body, electrostatically painted in white color, 99.85% clear mirror. PMMA Diffuser. Transmission 92%. Beam angle 130°. Lifetime 100.000hrs. Clicks 100.000. 5 years guarantee.




IP20. 44w. 46w.

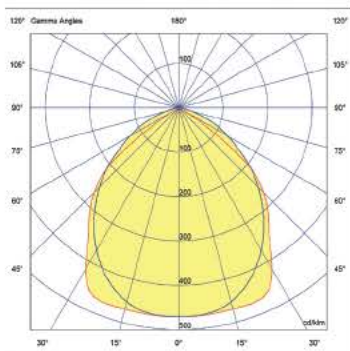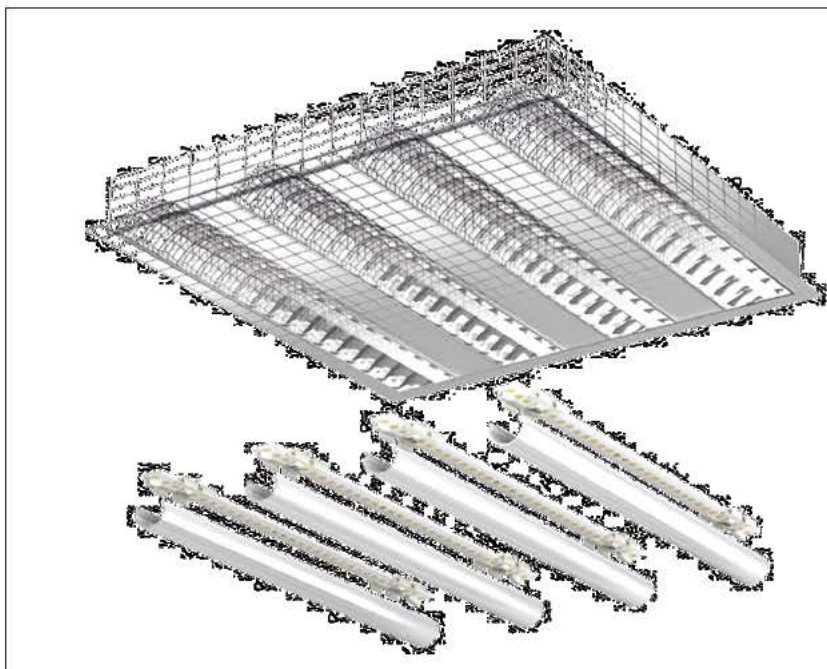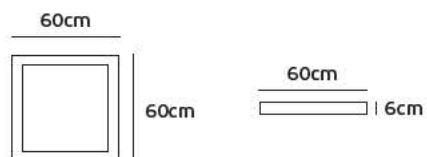


VK/04286/900/3/W/C



3 double parabolic

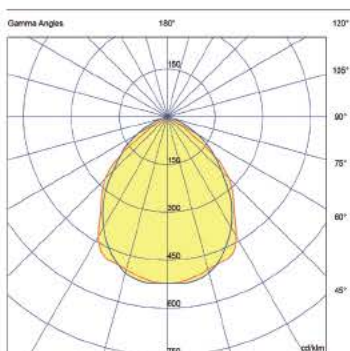


VK/04286/900/5/W/C




5 double parabolic

Parabolic detail



VK/04289, VK/04288

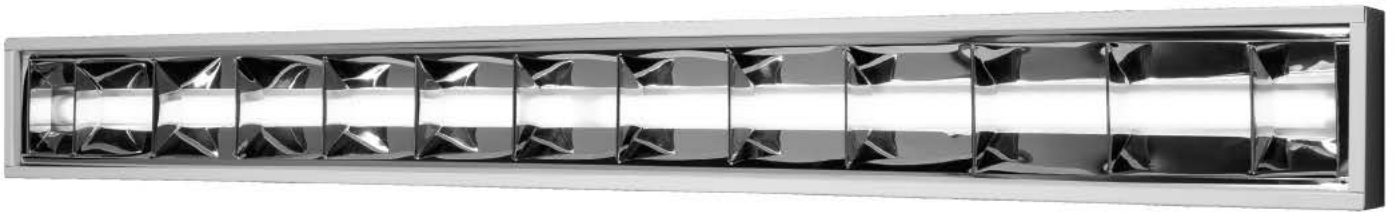



**Product Models**

Code	Model	Box
63158-297164	VK/04289/700/W/W double parabolic □ White & silver. 19w. 3000K. 700mA. 1.400lm. (origin 2.850lm.)	1pc
63158-298164	VK/04289/700/W/C double parabolic □ White & silver. 19w. 4000K. 700mA. 1.400lm. (origin 2.950lm.)	1pc
63158-295164	VK/04288/900/W/W double parabolic □ White & silver. 25w. 3000K. 900mA. 1.700lm. (origin 3.700lm.)	1pc
63158-296164	VK/04288/900/W/C double parabolic □ White & silver. 25w. 4000K. 900mA. 1.700lm. (origin 3.850lm.)	1pc


**Details**

700mA. 900mA. Supply Voltage 230V AC. Driver  or PHILIPS (included).  
Watt 19w, 25w, UGR<19. Special Led board 1.4cm customed of VK Leading Light 2835 Edison.  
Working Temperature -25°C → 45°C. CRI>80. Material Metal body, electrostatically painted in white color, 99.85% clear mirror. PMMA Diffuser. Transmission 92%. Beam angle 130°. Lifetime 100.000hrs. Clicks 100.000. 5 years guarantee.


   IP20. 19w. 25w.

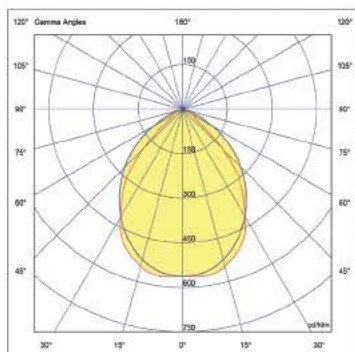

VK/04289/W/W

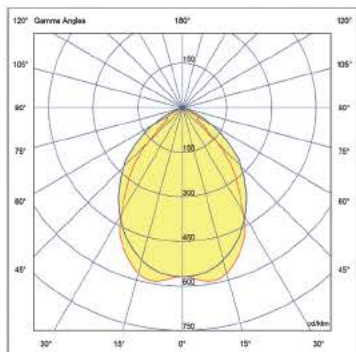

VK/04288/W/W

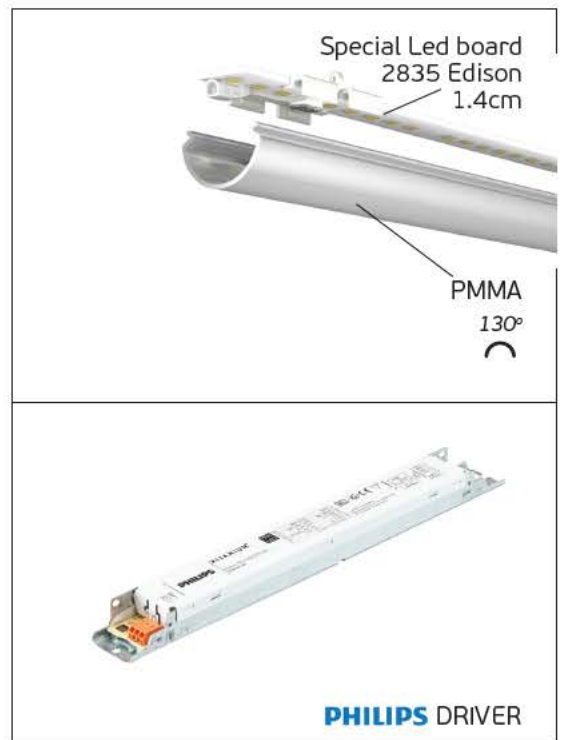

Parabolic detail



VK/04289/2, VK/04288/2






### Product Models

Code	Model	Box
63158-303164	VK/04289/700/2/W/W double parabolic □ White & silver. 36w. 3000K. 3.500lm. (origin 5.250lm.) 700mA.	1pc
63158-304164	VK/04289/700/2/W/C double parabolic □ White & silver. 36w. 4000K. 3.500lm. (origin 5.400lm.) 700mA.	1pc
63158-305164	VK/04288/900/2/W/W double parabolic □ White & silver. 44w. 3000K. 4.000lm. (origin 6.750lm.) 900mA.	1pc
63158-306164	VK/04288/900/2/W/C double parabolic □ White & silver. 44w. 4000K. 4.000lm. (origin 6.750lm.) 900mA.	1pc


### Details

700mA, 900mA. Supply Voltage 230V AC. Driver  or PHILIPS (included). Watt 36w, 44w, UGR<19. Special Led board 1.4cm customized of VK Leading Light 2835 Edison. Working Temperature -25°C → 45°C. CRI>80. Material Metal body, electrostatically painted in white color, 99.85% clear mirror. PMMA Diffuser. Transmission 92%. Beam angle 130°. Lifetime 100.000hrs. Clicks 100.000. 5 years guarantee.


   IP20. 36w. 44w.

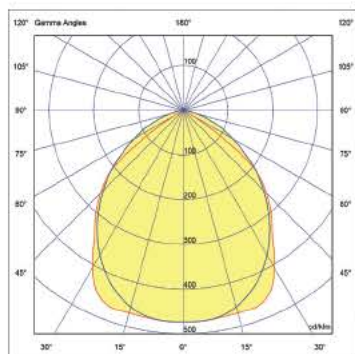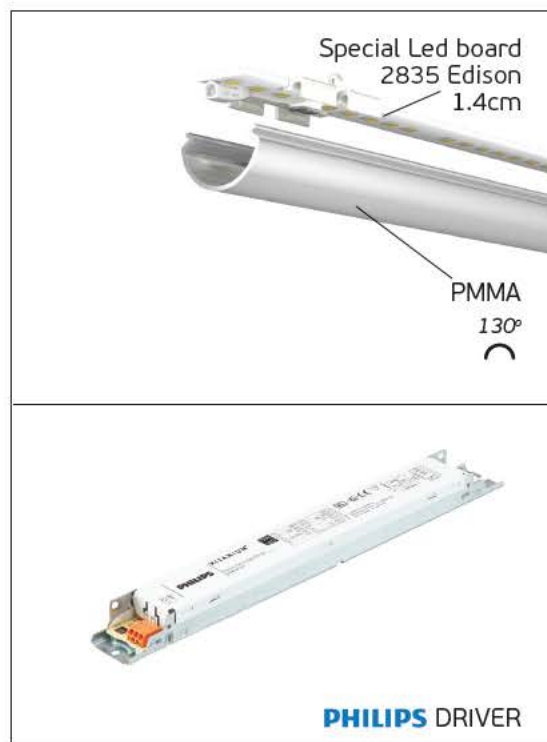

VK/04289/700/2/W/C




double parabolic

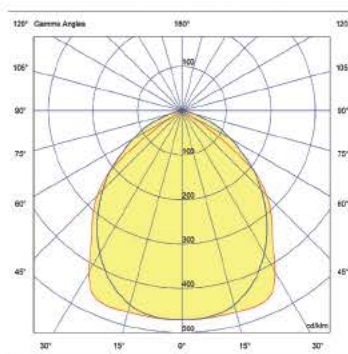

VK/04288/900/2/W/C



double parabolic



Parabolic detail







VK/03009G



Product Models

Code	Model	Box
64173-023121	VK/03009G/W □ White. GU10. Max 35w.	50pcs
64173-025121	VK/03009G/C ■ Chrome. GU10. Max 35w.	50pcs
64173-024121	VK/03009G/MC ■ Brushed Chrome. GU10. Max 35w.	50pcs
64173-049121	VK/03009G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.



VK/03010G




Product Models

Code	Model	Box
64173-050121	VK/03010G/W □ White. GU10. Max 35w.	50pcs
64173-051121	VK/03010G/MC ■ Brushed Chrome. GU10. Max 35w.	50pcs
64173-052121	VK/03010G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.

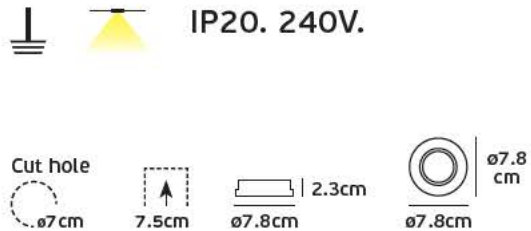

VK/03008G




Product Models

Code	Model	Box
64173-026121	VK/03008G/W □ White. GU10. Max 35w.	50pcs
64173-028121	VK/03008G/C ■ Chrome. GU10. Max 35w.	50pcs
64173-027121	VK/03008G/MC ■ Brushed Chrome. GU10. Max 35w.	50pcs
64173-047121	VK/03008G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.

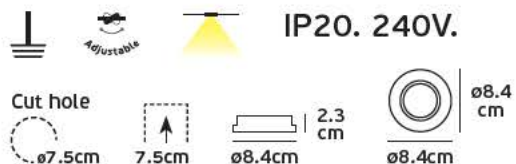

VK/03011G




Product Models







Code	Model	Box
64173-029121	VK/03011G/W □ White. GU10. Max 35w.	50pcs
64173-031121	VK/03011G/C ■ Chrome. GU10. Max 35w.	50pcs
64173-030121	VK/03011G/MC ■ Brushed Chrome. GU10. Max 35w.	50pcs
64173-048121	VK/03011G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.




**IP20. 240V.**





8.2 cm



VK/03012G

Product Models

Code	Model	Box
64173-022121	VK/03012G/W □ White. GU10. Max 35w.	50pcs
64173-035121	VK/03012G/B ■ Black. GU10. Max 35w.	50pcs

Details



Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



VK/03013G

## Product Models

Code	Model	Box
64173-053121	VK/03013G/W □ White. GU10. Max 35w.	50pcs
64173-054121	VK/03013G/B ■ Black. GU10. Max 35w.	50pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



ø8cm



13.5cm



8.8cm

6.5cm



8.8cm

8.8cm



VK/03113G



Product Models

Code	Model	Box
64173-076121	VK/03113G/W □ White. GU10. Max 35w.	50pcs
64173-077121	VK/03113G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.




IP20. 240V.



Cut hole



VK/03114G

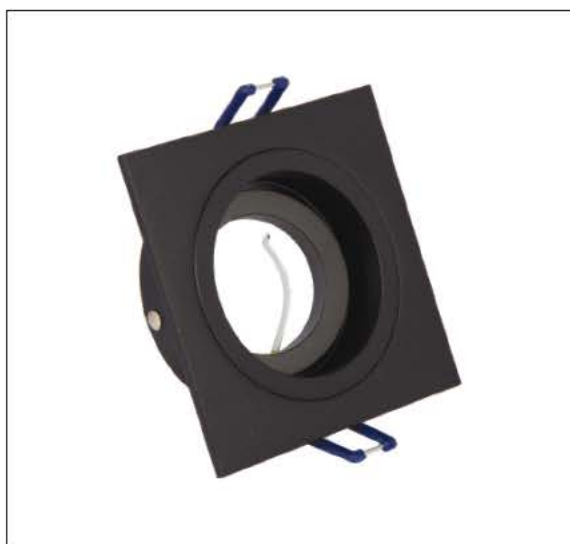

Product Models

Code	Model	Box
64173-078121	VK/03114G/W □ White. GU10. Max 35w.	50pcs
64173-079121	VK/03114G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



VK/03065G



Product Models

Code	Model	Box
64173-074121	VK/03065G/W □ White sanded. GU10. Max 35w.	80pcs
64173-075121	VK/03065G/B ■ Black sanded. GU10. Max 35w.	80pcs

Details


Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



## VK/03068



## Product Models

Code	Model	Box
64174-019700	VK/03068/W □ White sanded. GU10. Max 35w.	50pcs
64174-020700	VK/03068/B ■ Black sanded. GU10. Max 35w.	50pcs

## Details


Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



Cut hole



## VK/03069



## Product Models

Code	Model	Box
64174-021700	VK/03069/W □ White sanded. GU10. Max 35w.	50pcs
64174-022700	VK/03069/B ■ Black sanded. GU10. Max 35w.	50pcs

## Details


Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



Cut hole



## VK/03070



## Product Models

Code	Model	Box
64174-023700	VK/03070/W □ White sanded. GU10. Max 35w.	50pcs
64174-024700	VK/03070/B ■ Black sanded. GU10. Max 35w.	50pcs

## Details


Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



Cut hole





VK/03071



Product Models

Code	Model	Box
64174-025700	VK/03071/W □ White sanded. GU10. Max 35w.	50pcs
64174-026700	VK/03071/B ■ Black sanded. GU10. Max 35w.	50pcs

Details


Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



Cut hole



VK/03015G



Product Models

Code	Model	Box
64173-055121	VK/03015G/W □ White. GU10. Max 35w.	50pcs
64173-057121	VK/03015G/AL ■ Aluminium. GU10. Max 35w.	50pcs
64173-056121	VK/03015G/B ■ Black. GU10. Max 35w.	50pcs

Details


Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



VK/03014G



Product Models

Code	Model	Box
64173-058121	VK/03014G/W □ White. GU10. Max 35w.	50pcs
64173-060121	VK/03014G/AL ■ Aluminium. GU10. Max 35w.	50pcs
64173-059121	VK/03014G/B ■ Black. GU10. Max 35w.	50pcs

Details


Voltage 240V. Max watt 35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



## VK/03014G/2



## Product Models

Code	Model	Box
64173-061121	VK/03014G/2/W □ White. GU10x2. Max 2x35w.	50pcs
64173-063121	VK/03014G/2/AL ■ Aluminium. GU10x2. Max 2x35w.	50pcs
64173-062121	VK/03014G/2/B ■ Black. GU10x2. Max 2x35w.	50pcs

## Details


Voltage 240V. Max watt 2x35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole



## VK/03014G/3



## Product Models

Code	Model	Box
64173-064121	VK/03014G/3/W □ White. GU10x3. Max 3x35w.	50pcs
64173-066121	VK/03014G/3/AL ■ Aluminium. GU10x3. Max 3x35w.	50pcs
64173-065121	VK/03014G/3/B ■ Black. GU10x3. Max 3x35w.	50pcs

## Details


Voltage 240V. Max watt 3x35w. Par16. Material Pure aluminium.



IP20. 240V.



Cut hole

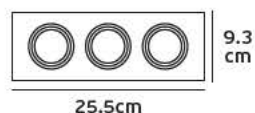

VK/03192G

Product Models

Code	Model	Box
64173-091121	VK/03192G/W □ White. GU10. Max 35w.	100pcs
64173-092121	VK/03192G/B ■ Black. GU10. Max 35w.	100pcs

Details



Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



Cut hole



VK/03191G

## Product Models

Code	Model	Box
64173-089121	VK/03191G/W □ White. GU10. Max 35w.	100pcs
64173-090121	VK/03191G/B ■ Black. GU10. Max 35w.	100pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium.



IP20. 240V.



VK/03193G

Product Models

Code	Model	Box
64173-093121	VK/03193G/W □ White. GU10. Max 35w.	50pcs
64173-094121	VK/03193G/B ■ Black. GU10. Max 35w.	50pcs

Details



Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.



IP20. 240V.



Cut hole



VK/05065G

VK/05148G

VK/05162G

VK/03194G

Product Models


Code	Model	Box
64173-095121	VK/03194G/W □ White. GU10. Max 35w.	50pcs
64173-096121	VK/03194G/B ■ Black. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. Par16. Material Die cast aluminium.



IP20. 240V.



VK/03184

Product Models

Code	Model	Box
64174-027700	VK/03184/W □ White. ES111/R111. Max 50w.	1pc
64174-028700	VK/03184/B ■ Black. ES111/R111. Max 50w.	1pc

Details



Max watt 50w. ES111/R111. Material Aluminium.  
INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.



Cut hole



VK/05112G



VK/05146G



Modules 111 OSRAM



VK/03185

## Product Models

Code	Model	Box
64174-029700	VK/03185/W □ White. ES111/R111. Max 50w.	1pc
64174-030700	VK/03185/B ■ Black. ES111/R111. Max 50w.	1pc

## Details

Max watt 50w. ES111/R111. Material Aluminium.  
INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.



Cut hole  
15.5cm  
15.5cm

12cm

4.5 cm  
15cm

15 cm  
15cm





VK/03116

Product Models

Code	Model	Box
64173-082121	VK/03116/W □ White. ES111/R111. Max 50w.	16pcs
64173-083121	VK/03116/B ■ Black. ES111/R111. Max 50w.	16pcs

Details


Max watt 50w. ES111/R111. Material Aluminium.  
INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.



4.5 cm



17.5 cm

17.5cm



VK/03116/2

Product Models

Code	Model	Color	Material	Max watt	Box
64173-084121	VK/03116/2/W	□ White	ES111/R111	Max 2x50w	8pcs
64173-085121	VK/03116/2/B	■ Black	ES111/R111	Max 2x50w	8pcs

Details

Max watt 50w. ES111/R111. Material Aluminium. INCLUDED LAMPHOLDER 2xG53.



IP20. GU10/G53.

Cut hole



30.5cm x 15.5cm




12cm



17.5cm

4.5 cm



32.5cm

17.5 cm




VK/03116/3

Product Models

Code	Model	Color	Chip	Power	Box
64173-086121	VK/03116/3/W	□ White	ES111/R111	Max 3x50w.	5pcs
64173-087121	VK/03116/3/B	■ Black	ES111/R111	Max 3x50w.	5pcs



Details

Max watt 50w. ES111/R111. Material Aluminium. INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.

Cut hole



17.5 cm



VK/11110D



Product Models

Code	Model	Box
64173-316622	VK/11110D/W □ White. ES111/R111. Max 50w.	36pcs
64173-657622	VK/11110D/B ■ Black. ES111/R111. Max 50w.	36pcs
64173-345622	VK/11110D/G ■ Grey. ES111/R111. Max 50w.	36pcs

Details



Max watt 50w. ES111/R111. Material Die cast aluminium.  
INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.



Cut hole



VK/03115



Product Models

Code	Model	Box
64173-080121	VK/03115/W □ White. ES111/R111. Max 50w.	16pcs
64173-081121	VK/03115/B ■ Black. ES111/R111. Max 50w.	16pcs

Details



Max watt 50w. ES111/R111. Material Die cast aluminium.  
INCLUDED LAMPHOLDER G53.



IP20. GU10/G53.



Cut hole



VK/03017

**Product Models**

Code	Model	Box
64174-006123	VK/03017/W □ White. PAR30-E27. Max 50w.	10pcs
64174-005123	VK/03017/B ■ Black. PAR30-E27. Max 50w.	10pcs

**Details**  
Voltage 240V. Max watt 50w. PAR30. Material Aluminium.




**IP20. 240V.**



VK/05112G



VK/05146G



Modules 111 OSRAM

VK/03059



Product Models

Code	Model	Box
64173-034121	VK/03059/W □ White. GU5.3. Max 35w.	50pcs
64173-069121	VK/03059/B ■ Black. GU5.3. Max 35w.	50pcs

Details

Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.



IP65. 12V.



Cut hole



4.4 cm



ø8.5 cm

ø7.5cm

10cm

ø8.5cm

ø8.5cm

VK/03058



Product Models

Code	Model	Box
64173-032121	VK/03058/W □ White. GU5.3. Max 35w.	50pcs
64173-033121	VK/03058/MC ■ Brushed Chrome. GU5.3. Max 35w.	50pcs
64173-068121	VK/03058/B ■ Black. GU5.3. Max 35w.	50pcs

Details

Voltage 12V. Max watt 35w. MR16. Material Pressing metal.



IP65. 12V.



Cut hole



3.7 cm



ø8.5 cm

ø5.5cm

7.5cm

ø8.5cm

ø8.5cm

VK/03034



Product Models

Code	Model	Box
64173-017121	VK/03034/W □ White. GU5.3. Max 35w.	50pcs
64173-018121	VK/03034/MC ■ Brushed Chrome. GU5.3. Max 35w.	50pcs
64173-067121	VK/03034/B ■ Black. GU5.3. Max 35w.	50pcs

Details

Voltage 12V. Max watt 35w. MR16. Material Aluminium.




IP65. 12V.



Cut hole



4.6 cm



ø8.4 cm

ø7.2cm

10cm

ø8.4cm

ø8.4cm

VK/03035

## Product Models

Code	Model	Box
64173-019121	VK/03035/W □ White. GU5.3. Max 35w.	50pcs
64173-020121	VK/03035/MC ■ Brushed Chrome. GU5.3. Max 35w.	50pcs

## Details



Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.



IP65. 12V.



Cut hole

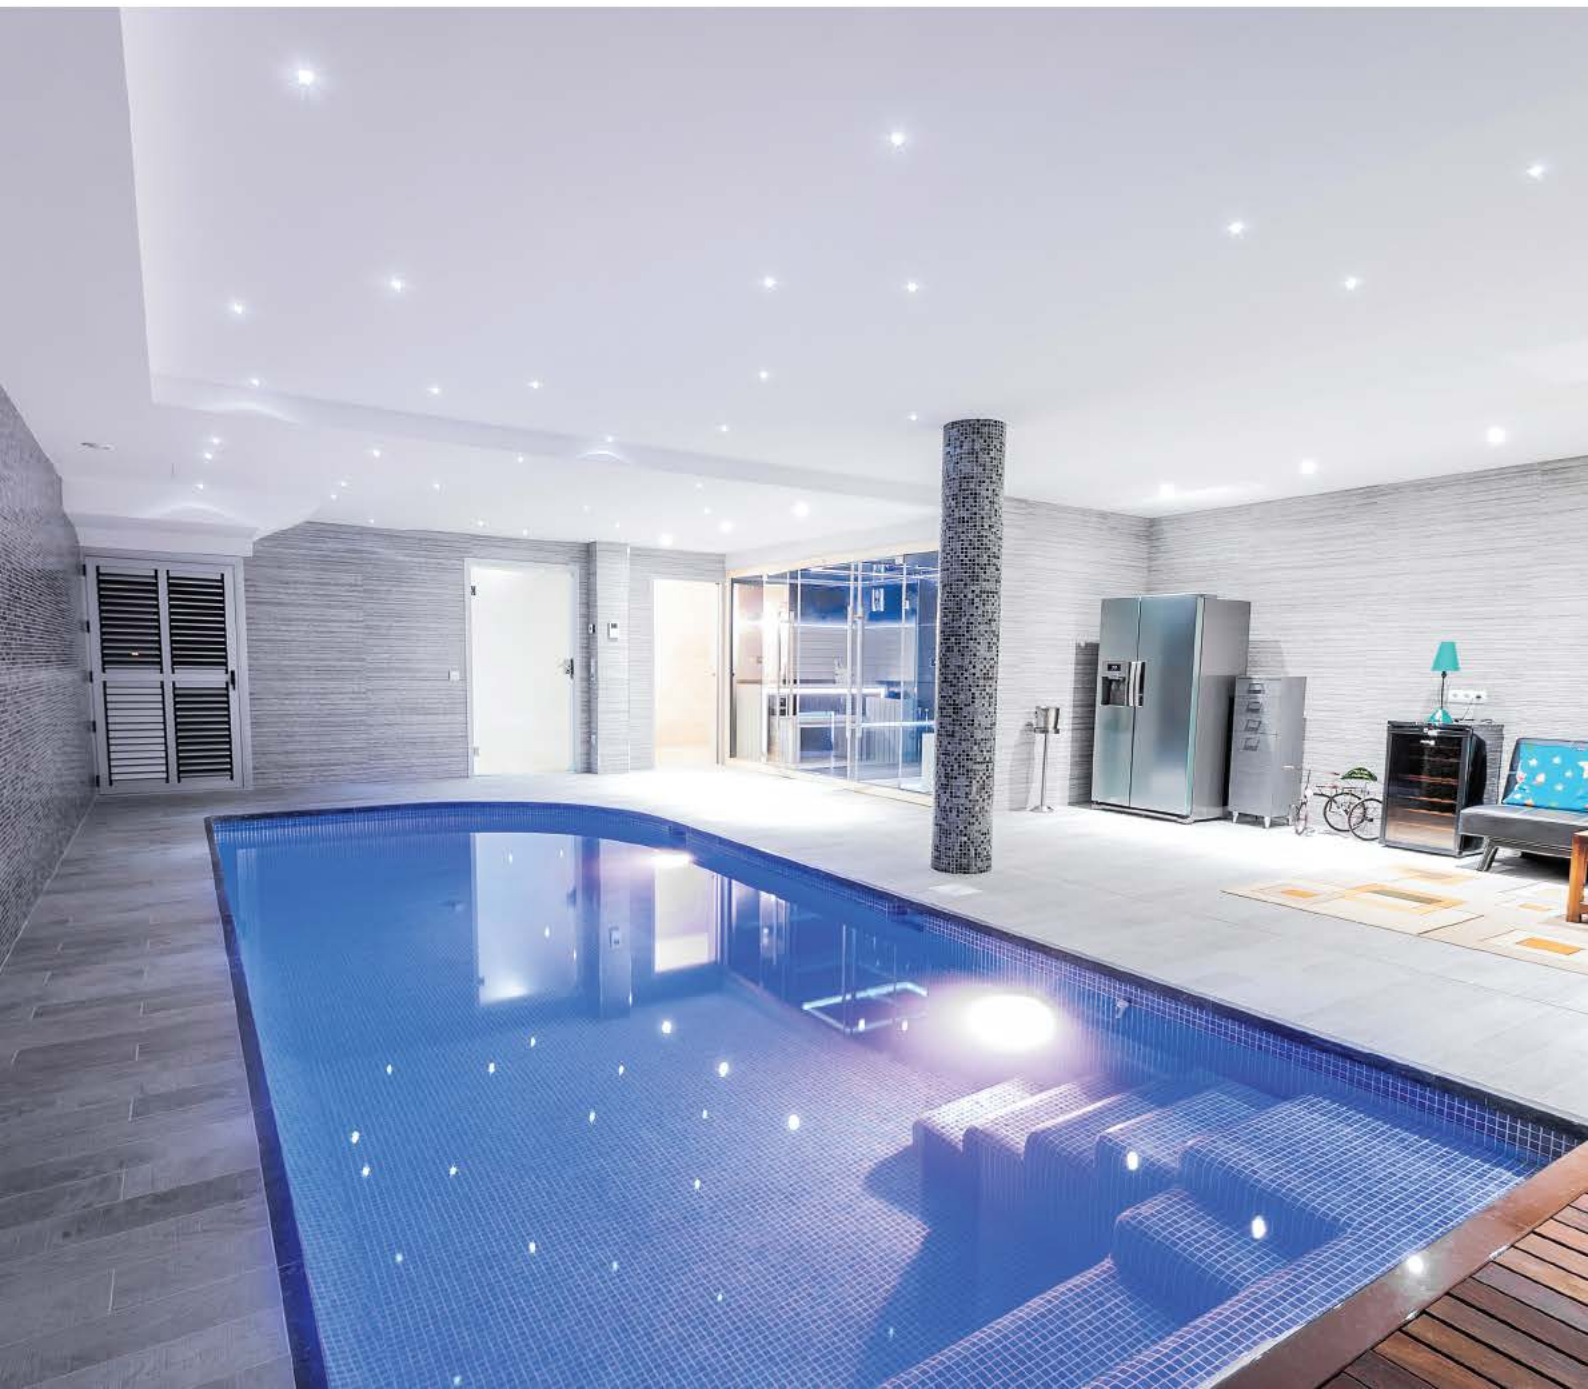4.6  
cm8.5  
cm4.3  
cm

VK/03195



Product Models

Code	Model	Box
64173-097121	VK/03195/W □ White. GU5.3. Max 35w.	100pcs
64173-098121	VK/03195/B ■ Black. GU5.3. Max 35w.	100pcs

Details


Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.



IP65. 12V.



Cut hole



VK/03196



Product Models

Code	Model	Box
64173-099121	VK/03196/W □ White. GU5.3. Max 35w.	100pcs
64173-100121	VK/03196/B ■ Black. GU5.3. Max 35w.	100pcs

Details



Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.



IP65. 12V.



Cut hole



VK/03197



Product Models

Code	Model	Box
64173-101121	VK/03197/W □ White. GU5.3. Max 35w.	100pcs
64173-103121	VK/03197/B ■ Black. GU5.3. Max 35w.	100pcs

Details



Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.



IP65. 12V.



Cut hole



VK/03208

## Product Models



Code	Model	Box
64173-104121	VK/03208/W □ White. GU5.3. Max 35w.	100pcs
64173-102121	VK/03208/B ■ Black. GU5.3. Max 35w.	100pcs

## Details

Voltage 12V. Max watt 35w. MR16. Material Die cast aluminium.






IP65. 12V.









## 03 *track lighting*

## VK/19B




## Product Models

Code	Model	Box
71164-001111	VK/19B/S ■ Silver. Track line. Available 1, 2, 3 meters. Aluminium.	10pcs
71164-002111	VK/19B/W □ White. Track line. Available 1, 2, 3 meters. Aluminium.	10pcs
71164-003111	VK/19B/B ■ Black. Track line. Available 1, 2, 3 meters. Aluminium.	10pcs

## Details

3-phase track line. Material Aluminium.



## VK/24B/L




Left

## Product Models

Code	Model	Box
71164-010111	VK/24B/S/L ■ Silver. Left connector. Aluminium, plastic.	10pcs
71164-011111	VK/24B/W/L □ White. Left connector. Aluminium, plastic.	10pcs
71164-012111	VK/24B/B/L ■ Black. Left connector. Aluminium, plastic.	10pcs

## Details

Left power connector to start track. Material Aluminium, plastic.



## VK/24B/R




Right

## Product Models

Code	Model	Box
71164-046111	VK/24B/S/R ■ Silver. Right connector. Aluminium, plastic.	10pcs
71164-047111	VK/24B/W/R □ White. Right connector. Aluminium, plastic.	10pcs
71164-048111	VK/24B/B/R ■ Black. Right connector. Aluminium, plastic.	10pcs

## Details

Right power connector to start track. Material Aluminium, plastic.



## VK/28B/L





Left

## Product Models

Code	Model	Box
71164-022111	VK/28B/S/L ■ Silver. Left L-shape. Aluminium, plastic.	10pcs
71164-023111	VK/28B/W/L □ White. Left L-shape. Aluminium, plastic.	10pcs
71164-024111	VK/28B/B/L ■ Black. Left L-shape. Aluminium, plastic.	10pcs

## Details

Left L-shape connector to connect two track sections at a 90° angle. Material Aluminium, plastic.



## VK/28B/R



## Product Models

Code	Model	Box
71164-049111	VK/28B/S/R ■ Silver. Right L-shape. Aluminium, plastic.	10pcs
71164-050111	VK/28B/W/R □ White. Right L-shape. Aluminium, plastic.	10pcs
71164-051111	VK/28B/B/R ■ Black. Right L-shape. Aluminium, plastic.	10pcs

## Details

Right L-shape connector to connect two track sections at a 90° angle.  
Material Aluminium, plastic.



## VK/29B




## Product Models

Code	Model	Box
71164-016111	VK/29B/S ■ Silver. "+" connector. Aluminium, plastic.	10pcs
71164-017111	VK/29B/W □ White. "+" connector. Aluminium, plastic.	10pcs
71164-018111	VK/29B/B ■ Black. "+" connector. Aluminium, plastic.	10pcs

## Details

"+" connector to connect four track sections into a cross configuration.  
Material Aluminium, plastic.



## VK/30B



## Product Models

Code	Model	Box
71164-028111	VK/30B/S ■ Silver. Flexible connector. Aluminium, plastic.	10pcs
71164-029111	VK/30B/W □ White. Flexible connector. Aluminium, plastic.	10pcs
71164-030111	VK/30B/B ■ Black. Flexible connector. Aluminium, plastic.	10pcs

## Details

Flexible connector to connect two track sections at any angle up to 180°.  
Material Aluminium, plastic.



## VK/32B/L1




## Product Models

Code	Model	Box
71164-052111	VK/32B/S/L1 ■ Silver. Left "T" connector. Aluminium, plastic.	10pcs
71164-053111	VK/32B/W/L1 □ White. Left "T" connector. Aluminium, plastic.	10pcs
71164-054111	VK/32B/B/L1 ■ Black. Left "T" connector. Aluminium, plastic.	10pcs

## Details

Left "T" connector to connect three track sections into a T configuration.  
Material Aluminium, plastic.



### VK/32B/R1




#### Product Models

Code	Model	Box
71164-019111	VK/32B/S/L1 ■ Silver. Right "T" connector. Aluminium, plastic.	10pcs
71164-020111	VK/32B/W/L1 □ White. Right "T" connector. Aluminium, plastic.	10pcs
71164-021111	VK/32B/B/L1 ■ Black. Right "T" connector. Aluminium, plastic.	10pcs

#### Details

Right "T" connector to connect three track sections into a T configuration. Material Aluminium, plastic.



### VK/25B



#### Product Models

Code	Model	Box
71164-025111	VK/25B/S ■ Silver. L-shape connector. Aluminium, plastic.	10pcs
71164-026111	VK/25B/W □ White. L-shape connector. Aluminium, plastic.	10pcs
71164-027111	VK/25B/B ■ Black. L-shape connector. Aluminium, plastic.	10pcs

#### Details

Adjustable L-shape connector to connect two track sections end-to-end. Material Aluminium, plastic.



### VK/26B




#### Product Models

Code	Model	Box
71164-013111	VK/26B/S ■ Silver. I-shape connector. Aluminium, plastic.	10pcs
71164-014111	VK/26B/W □ White. I-shape connector. Aluminium, plastic.	10pcs
71164-015111	VK/26B/B ■ Black. I-shape connector. Aluminium, plastic.	10pcs

#### Details

Straight I-shape connector to connect two track sections end-to-end. Material Aluminium, plastic.



### VK/34B




#### Product Models

Code	Model	Box
71164-004111	VK/34B/S ■ Silver. Straight interior connector. Aluminium, plastic.	10pcs
71164-005111	VK/34B/W □ White. Straight interior connector. Aluminium, plastic.	10pcs
71164-006111	VK/34B/B ■ Black. Straight interior connector. Aluminium, plastic.	10pcs

#### Details

Straight interior connector to connect two track sections end-to-end. Material Aluminium, plastic.



## VK/35B




## Product Models

Code	Model	Box
71164-007111	VK/35B/S ■ Silver. End plug. Aluminium, plastic.	10pcs
71164-008111	VK/35B/W □ White. End plug. Aluminium, plastic.	10pcs
71164-009111	VK/35B/B ■ Black. End plug. Aluminium, plastic.	10pcs

## Details

End plug connects to the track end section.  
Material Aluminium, plastic.



## VK/38B




## Product Models

Code	Model	Box
71164-031111	VK/38B/S ■ Silver. Suspension clamp. Aluminium.	10pcs
71164-032111	VK/38B/W □ White. Suspension clamp. Aluminium.	10pcs
71164-033111	VK/38B/B ■ Black. Suspension clamp. Aluminium.	10pcs

## Details

Suspension clamp for track connection.  
Material Aluminium.

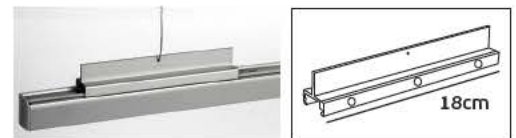

## VK/37D



## Product Models

Code	Model	Box
71164-055111	VK/37D ■ Silver. Suspension kit. Aluminium.	10pcs

## Details

Suspension kit with 2m wire.  
Material Aluminium.



## VK/85



## Product Models

Code	Model	Box
71164-045111	VK/85/S ■ Silver. Pendant adaptor. Aluminium, plastic.	10pcs
71164-043111	VK/85/W □ White. Pendant adaptor. Aluminium, plastic.	10pcs
71164-044111	VK/85/B ■ Black. Pendant adaptor. Aluminium, plastic.	10pcs

## Details

Pendant adaptor for connection to candelier or pendant fixture.  
Material Aluminium.




**VK/87**

**Product Models**

Code	Model	Box
71164-042111	VK/87/S ■ Silver. Base for track light VK/04109. Plastic.	40pcs
71164-041111	VK/87/W □ White. Base for track light VK/04109. Plastic.	40pcs
71164-040111	VK/87/B ■ Black. Base for track light VK/04109. Plastic.	40pcs

*Details*

Base for track light VK/04109.  
Material Plastic.

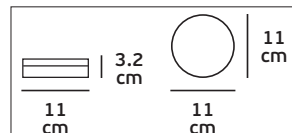


**VK/FLAPS**

**Product Models**

Code	Model	Box
64174-273128	VK/FLAPS/D90/W □ White. Flaps. Aluminium.	50pcs
64174-274128	VK/FLAPS/D90/B ■ Black. Flaps. Aluminium.	50pcs

*Details*

Flaps.  
Material Aluminium.




**VK/19R****Product Models**

Code	Model	Box
71164-002126	VK/19R/W □ White. Recessed Track line. Available 1, 2, 3 meters. Aluminium.	8pcs
71164-003126	VK/19R/B ■ Black. Recessed Track line. Available 1, 2, 3 meters. Aluminium.	8pcs

**Details**


3-phase track line recessed. Available in 1 meter, 2m, 3m.  
Material Aluminium.

**VK/24R****Product Models**

Code	Model	Box
71164-011126	VK/24R/W □ White. Power connector. Aluminium, plastic.	100pcs
71164-012126	VK/24R/B ■ Black. Power connector. Aluminium, plastic.	100pcs

**Details**


Power connector to start track. Material Aluminium, plastic.

**VK/25R****Product Models**

Code	Model	Box
71164-026126	VK/25R/W □ White. Adjustable L-shape. Aluminium, plastic.	50pcs
71164-027126	VK/25R/B ■ Black. Adjustable L-shape. Aluminium, plastic.	50pcs

**Details**


Adjustable L-shape connector to connect  
two track sections end-to-end.  
Material Aluminium, plastic.

**VK/28R****Product Models**

Code	Model	Box
71164-023126	VK/28R/W □ White. L-shape connector. Aluminium, plastic.	50pcs
71164-024126	VK/28R/B ■ Black. L-shape connector. Aluminium, plastic.	50pcs

**Details**

L-shape connector to connect  
two track sections at a 90° angle.  
Material Aluminium, plastic.





**VK/29R**




**Product Models**

Code	Model	Box
71164-017126	VK/29R/W □ White. "+" connector. Aluminium, plastic.	40pcs
71164-018126	VK/29R/B ■ Black. "+" connector. Aluminium, plastic.	40pcs

**Details**

"+" connector to connect four track sections into a cross configuration.  
Material Aluminium, plastic.



**VK/30R**




**Product Models**

Code	Model	Box
71164-029126	VK/30R/W □ White. Flexible connector. Aluminium, plastic.	50pcs
71164-030126	VK/30R/B ■ Black. Flexible connector. Aluminium, plastic.	50pcs

**Details**

Flexible connector to connect two track sections at any angle up to 180°.  
Material Aluminium, plastic.



**VK/32R**




**Product Models**

Code	Model	Box
71164-020126	VK/32R/W □ White. "T" connector. Aluminium, plastic.	50pcs
71164-021126	VK/32R/B ■ Black. "T" connector. Aluminium, plastic.	50pcs

**Details**

"T" connector to connect three track sections into a T configuration.  
Material Aluminium, plastic.



**VK/35R**




**Product Models**

Code	Model	Box
71164-008126	VK/35R/W □ White. End plug. Aluminium, plastic.	500pcs
71164-009126	VK/35R/B ■ Black. End plug. Aluminium, plastic.	500pcs

**Details**

End plug connects to the track end section.  
Material Aluminium, plastic.





## VK/04020



## Product Models

Code	Model	Box
64174-199128	VK/04020/W/W/24 □ White. 3000K. 1.200lm. 15w. 24°. CRI>80	1pc
64174-200128	VK/04020/W/C/24 □ White. 4000K. 1.350lm. 15w. 24°. CRI>80	1pc
64174-201128	VK/04020/B/W/24 ■ Black. 3000K. 1.200lm. 15w. 24°. CRI>80	1pc
64174-202128	VK/04020/B/C/24 ■ Black. 4000K. 1.350lm. 15w. 24°. CRI>80	1pc
64174-203128	VK/04020/G/W/24 ■ Grey. 3000K. 1.200lm. 15w. 24°. CRI>80	1pc
64174-204128	VK/04020/G/C/24 ■ Grey. 4000K. 1.350lm. 15w. 24°. CRI>80	1pc

## Details


Voltage 220-240V. Watt 15w. Type of LED COB Citizen. Beam angle 24°. Clicks 25.000. Working temperature -25°C → 45°C. Lifetime 50.000hrs. 3-phase adapter. Material Aluminium.





IP20. 15w.

**5** years guarantee

VK/04020/W/24



VK/04020/C/24



## VK/04021



## Product Models

Code	Model	Box
64174-205128	VK/04021/W/W/36 □ White. 3000K. 2.400lm. 30w. 36°. CRI>80	1pc
64174-206128	VK/04021/W/C/36 □ White. 4000K. 2.700lm. 30w. 36°. CRI>80	1pc
64174-207128	VK/04021/B/W/36 ■ Black. 3000K. 2.400lm. 30w. 36°. CRI>80	1pc
64174-208128	VK/04021/B/C/36 ■ Black. 4000K. 2.700lm. 30w. 36°. CRI>80	1pc
64174-209128	VK/04021/G/W/36 ■ Grey. 3000K. 2.400lm. 30w. 36°. CRI>80	1pc
64174-210128	VK/04021/G/C/36 ■ Grey. 4000K. 2.700lm. 30w. 36°. CRI>80	1pc

## Details


Voltage 220-240V. Watt 30w. Type of LED COB Citizen. Beam angle 36°. Clicks 25.000. Working temperature -25°C → 45°C. Lifetime 50.000hrs. 3-phase adapter. Material Aluminium.





IP20. 30w.

**5** years guarantee

VK/04021/W/36



VK/04021/C/36

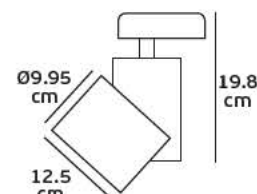

VK/04022

## Product Models

Code	Model	Box
64174-211128	VK/04022/W/W/36 □ White. 3000K. 3.600lm. 45w. 36°. CRI>80	1pc
64174-212128	VK/04022/W/C/36 □ White. 4000K. 4.050lm. 45w. 36°. CRI>80	1pc
64174-213128	VK/04022/B/W/36 ■ Black. 3000K. 3.600lm. 45w. 36°. CRI>80	1pc
64174-214128	VK/04022/B/C/36 ■ Black. 4000K. 3.760lm. 40w. 36°. CRI>80	1pc
64174-215128	VK/04022/G/W/36 ■ Grey. 3000K. 3.600lm. 45w. 36°. CRI>80	1pc
64174-216128	VK/04022/G/C/36 ■ Grey. 4000K. 4.050lm. 45w. 36°. CRI>80	1pc

## Details


Voltage 220-240V. Watt 45w. Type of LED COB Citizen. Beam angle 36°. Clicks 25.000.  
Working temperature -25°C → 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 45w.

**5** years guarantee

VK/04022/W/36



VK/04022/C/36



**VK/04119**  
12°



**Product Models**

Code	Model	Box
64174-244128	VK/04119/W/WW/12 □ White. 2700K. 800lm. 10w. 12°. CRI>80	24pcs
64174-245128	VK/04119/W/C/12 □ White. 4000K. 800lm. 10w. 12°. CRI>80	24pcs
64174-246128	VK/04119/B/WW/12 ■ Black. 2700K. 800lm. 10w. 12°. CRI>80	24pcs
64174-247128	VK/04119/B/C/12 ■ Black. 4000K. 800lm. 10w. 12°. CRI>80	24pcs

**Details**


Voltage 220-240V. Watt 10w. Type of LED COB Citizen. Beam angle 12°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 10w.

**5** years guarantee

VK/04119/WW/12



VK/04119/C/12



**VK/04119**  
24°



**Product Models**

Code	Model	Box
64174-248128	VK/04119/W/WW/24 □ White. 2700K. 800lm. 10w. 24°. CRI>80	24pcs
64174-249128	VK/04119/W/C/24 □ White. 4000K. 800lm. 10w. 24°. CRI>80	24pcs
64174-250128	VK/04119/B/WW/24 ■ Black. 2700K. 800lm. 10w. 24°. CRI>80	24pcs
64174-251128	VK/04119/B/C/24 ■ Black. 4000K. 800lm. 10w. 24°. CRI>80	24pcs

**Details**


Voltage 220-240V. Watt 10w. Type of LED COB Citizen. Beam angle 24°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 10w.

**5** years guarantee

VK/04119/WW/24



VK/04119/C/24



**VK/04120**  
**12°**

**Product Models**


Code	Model	Box
64174-252128	VK/04120/W/W/12 □ White. 3000K. 1.800lm. 20w. 12°. CRI>80	24pcs
64174-253128	VK/04120/W/C/12 □ White. 4000K. 1.800lm. 20w. 12°. CRI>80	24pcs
64174-254128	VK/04120/B/W/12 ■ Black. 3000K. 1.800lm. 20w. 12°. CRI>80	24pcs
64174-255128	VK/04120/B/C/12 ■ Black. 4000K. 1.800lm. 20w. 12°. CRI>80	24pcs

**Details**



Voltage 220-240V. Watt 20w. Type of LED COB Citizen. Beam angle 12°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.


**IP20. 20w.**
**5 years guarantee**

VK/04120/W/W/12



VK/04120/C/12

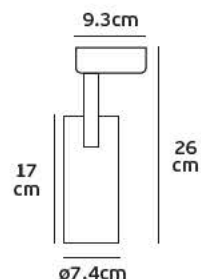
**VK/04120**  
**24°**

**Product Models**


Code	Model	Box
64174-256128	VK/04120/W/W/24 □ White. 3000K. 1.800lm. 20w. 24°. CRI>80	24pcs
64174-257128	VK/04120/W/C/24 □ White. 4000K. 1.800lm. 20w. 24°. CRI>80	24pcs
64174-258128	VK/04120/B/W/24 ■ Black. 3000K. 1.800lm. 20w. 24°. CRI>80	24pcs
64174-259128	VK/04120/B/C/24 ■ Black. 4000K. 1.800lm. 20w. 24°. CRI>80	24pcs

**Details**



Voltage 220-240V. Watt 20w. Type of LED COB Citizen. Beam angle 24°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.


**IP20. 20w.**
**5 years guarantee**

VK/04120/W/24



VK/04120/C/24

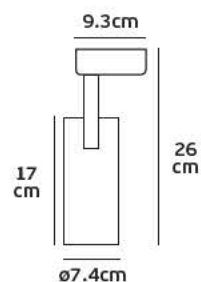

**VK/04121**  
12°



**Product Models**

Code	Model	Box
64174-260128	VK/04121/W/W/12 □ White. 3000K. 2.700lm. 30w. 12°. CRI>80	15pcs
64174-261128	VK/04121/W/C/12 □ White. 4000K. 2.700lm. 30w. 12°. CRI>80	15pcs
64174-262128	VK/04121/B/W/12 ■ Black. 3000K. 2.700lm. 30w. 12°. CRI>80	15pcs
64174-263128	VK/04121/B/C/12 ■ Black. 4000K. 2.700lm. 30w. 12°. CRI>80	15pcs

**Details**


Voltage 220-240V. Watt 20w. Type of LED COB Citizen. Beam angle 12°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 30w.

**5 years guarantee**

VK/04121/W/12



VK/04121/C/12



**VK/04121**  
24°



**Product Models**

Code	Model	Box
64174-264128	VK/04121/W/W/24 □ White. 3000K. 2.700lm. 30w. 24°. CRI>80	15pcs
64174-265128	VK/04121/W/C/24 □ White. 4000K. 2.700lm. 30w. 24°. CRI>80	15pcs
64174-266128	VK/04121/B/W/24 ■ Black. 3000K. 2.700lm. 30w. 24°. CRI>80	15pcs
64174-267128	VK/04121/B/C/24 ■ Black. 4000K. 2.700lm. 30w. 24°. CRI>80	15pcs

**Details**


Voltage 220-240V. Watt 20w. Type of LED COB Citizen. Beam angle 24°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 30w.

**5 years guarantee**

VK/04121/W/24



VK/04121/C/24

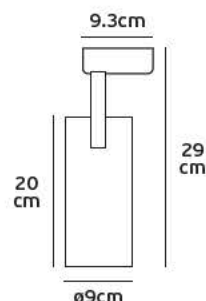

## VK/04228



## Product Models

Code	Model	Box
64174-281128	VK/04228/W/W/36 □ White. 3000K. 3.600lm. 40w. 36°. CRI>80	24pcs
64174-282128	VK/04228/W/C/36 □ White. 4000K. 3.600lm. 40w. 36°. CRI>80	24pcs
64174-283128	VK/04228/B/W/36 ■ Black. 3000K. 3.600lm. 40w. 36°. CRI>80	24pcs
64174-284128	VK/04228/B/C/36 ■ Black. 4000K. 3.600lm. 40w. 36°. CRI>80	24pcs

## Details


Voltage 220-240V. Watt 40w. Type of LED COB Citizen. Beam angle 36°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium.





IP20. 40w.

**5** years guarantee

VK/04228/W



VK/04228/C

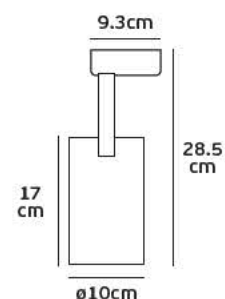

## VK/LENSE



## Product Models

Code	Model	Box
64174-268128	VK/LENSE/12 Clear. Glass. 12°.	100pcs
64174-269128	VK/LENSE/24 Clear. Glass. 24°.	100pcs

## Details

Can be used to VK/04121. Material Glass.



## VK/ANTIGLARE-NET



## Product Models

Code	Model	Box
64174-272128	VK/ANTIGLARE-NET Black. Metal. Filter.	1pc

## Details

Can be used to VK/04117. Material Metal.





VK/04122



Product Models




Code	Model	Box
64174-270128	VK/04122/W/W/24 □ White. 3000K. 1.800lm. 20w. 24°. CRI>80	10pcs
64174-271128	VK/04122/W/C/24 □ White. 4000K. 1.800lm. 20w. 24°. CRI>80	10pcs

Details

Voltage 220-240V. Watt 20w. Type of LED COB Epistar. Beam angle 24°. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium. 2 years guarantee.



IP20. 20w.



VK/04116



Product Models




Code	Model	Box
64174-232128	VK/04116/W/W/24 □ White. 3000K. 1.200lm. 15w. 24°. CRI>80	20pcs
64174-233128	VK/04116/W/C/24 □ White. 4000K. 1.200lm. 15w. 24°. CRI>80	20pcs
64174-234128	VK/04116/B/W/24 ■ Black. 3000K. 1.200lm. 15w. 24°. CRI>80	20pcs
64174-235128	VK/04116/B/C/24 ■ Black. 4000K. 1.200lm. 15w. 24°. CRI>80	20pcs

Details

Voltage 220-240V. Watt 20w. Type of LED COB Epistar. Beam angle 24°. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium. 2 years guarantee.



IP20. 15w.



## VK/04117



## Product Models

Code	Model	Box
64174-236128	VK/04117/W/W/36 □ White. 3000K. 2.400lm. 30w. 36°. CRI>80	10pcs
64174-237128	VK/04117/W/C/36 □ White. 4000K. 2.400lm. 30w. 36°. CRI>80	10pcs
64174-238128	VK/04117/B/W/36 ■ Black. 3000K. 2.400lm. 30w. 36°. CRI>80	10pcs
64174-239128	VK/04117/B/C/36 ■ Black. 4000K. 2.400lm. 30w. 36°. CRI>80	10pcs


## Details

Voltage 220-240V. Watt 30w. Type of LED COB Epistar. Beam angle 36°. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium. 2 years guarantee.





IP20. 30w.

VK/04117/W/36



VK/04117/C/36

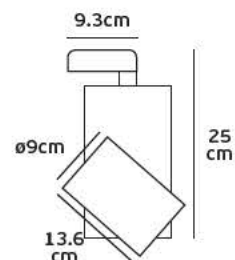

## VK/04118



## Product Models

Code	Model	Box
64174-240128	VK/04118/W/W/36 □ White. 3000K. 4.000lm. 50w. 36°. CRI>80	10pcs
64174-241128	VK/04118/W/C/36 □ White. 4000K. 4.000lm. 50w. 36°. CRI>80	10pcs
64174-242128	VK/04118/B/W/36 ■ Black. 3000K. 4.000lm. 50w. 36°. CRI>80	10pcs
64174-243128	VK/04118/B/C/36 ■ Black. 4000K. 4.000lm. 50w. 36°. CRI>80	10pcs


## Details

Voltage 220-240V. Watt 50w. Type of LED COB Epistar. Beam angle 36°. Working temperature -25°C→ 45°C. Lifetime 35.000hrs. 3-phase adapter. Material Aluminium. 2 years guarantee.





IP20. 50w.

VK/04118/W/36



VK/04118/C/36

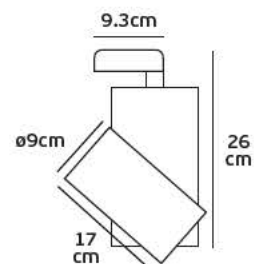

VK/04107



Product Models

Code	Model	Box
64174-285128	VK/04107/W/W □ White. 3000K. 3.775lm. 55w. 90°. CRI>80	1pc
64174-231128	VK/04107/W/C □ White. 4000K. 3.775lm. 55w. 90°. CRI>80	1pc
64174-286128	VK/04107/B/W ■ Black. 3000K. 3.775lm. 55w. 90°. CRI>80	1pc
64174-276128	VK/04107/B/C ■ Black. 4000K. 3.775lm. 55w. 90°. CRI>80	1pc


Details

Voltage 220-240V. Watt 45w. Type of LED SMD 2835. Beam angle 90°. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. 3-phase adapter. Material Aluminium. 2 years guarantee.





IP20. 45w.

VK/04107/W



VK/04107/C

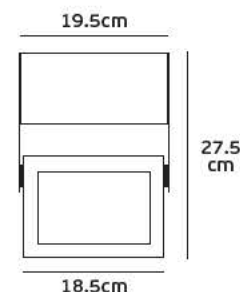

VK/04081



Product Models

Code	Model	Box
64174-220128	VK/04081/W/W/24 □ White. 3000K. 2.100lm. 30w. 24°. CRI>80	1pc
64174-221128	VK/04081/W/C/24 □ White. 4000K. 2.100lm. 30w. 24°. CRI>80	1pc
64174-222128	VK/04081/B/W/24 ■ Black. 3000K. 2.100lm. 30w. 24°. CRI>80	1pc
64174-223128	VK/04081/B/C/24 ■ Black. 4000K. 2.100lm. 30w. 24°. CRI>80	1pc


Details

Voltage 220-240V. Watt 30w. Type of LED COB Epistar. Beam angle 24°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. 3-phase adapter. Material Aluminium. 3 years guarantee.





IP20. 30w.

VK/04081/W



VK/04081/C



## VK/04082



## Product Models

Code	Model	Box
64174-224128	VK/04082/B/W ■ Black. 2700K. 2.100lm. 30w. 15°-65°. CRI>80	1pc
64174-225128	VK/04082/B/C ■ Black. 4000K. 2.100lm. 30w. 15°-65°. CRI>80	1pc


## Details

Voltage 220-240V. Watt 30w. Type of LED COB Telescopic Sharp. Beam angle 15°-65°. Clicks 25.000. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. 3-phase adapter. Material Aluminium. 3 years guarantee.





IP20. 30w.

VK/04082/W



VK/04082/C



## VK/04109



## Product Models

Code	Model	Box
64174-880111	VK/04109/W/W □ White. 3000K. 1.500lm. 20w. 110°. CRI>80	1pc
64174-883111	VK/04109/W/C □ White. 4000K. 1.600lm. 20w. 110°. CRI>80	1pc
64174-881111	VK/04109/B/W ■ Black. 3000K. 1.500lm. 20w. 110°. CRI>80	1pc
64174-884111	VK/04109/B/C ■ Black. 4000K. 1.600lm. 20w. 110°. CRI>80	1pc
64174-882111	VK/04109/S/W ■ Grey. 3000K. 1.500lm. 20w. 110°. CRI>80	1pc
64174-885111	VK/04109/S/C ■ Grey. 4000K. 1.600lm. 20w. 110°. CRI>80	1pc


## Details

Voltage 100-240V. Watt 20w. Type of LED SMD 5630. Beam angle 110°. Clicks 15.000. Working temperature -25°C→ 60°C. Lifetime 50.000hrs. 3-phase adapter. Material Plastic. 2 years guarantee.



IP20. 20w.

VK/04109



VK/03190TR

Product Models



Code	Model	Box
64174-327131	VK/03190TR/W/40 □ White. GU10. Max 13w. L55cm.	30pcs
64174-326131	VK/03190TR/B/40 ■ Black. GU10. Max 13w. L55cm.	30pcs
64174-325131	VK/03190TR/W/70 □ White. GU10. Max 13w. L85cm.	30pcs
64174-324131	VK/03190TR/B/70 ■ Black. GU10. Max 13w. L85cm.	30pcs

Details

Voltage 220-240V. Max watt 13w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.

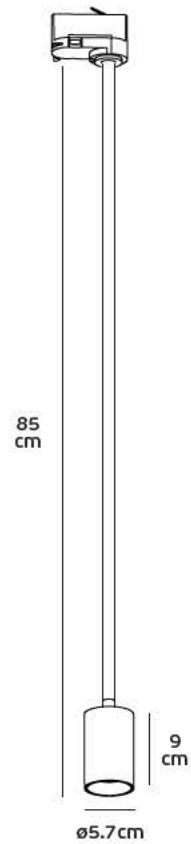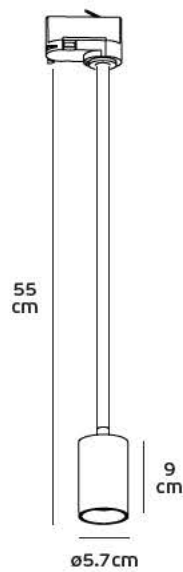



## VK/04197TR/S



## Product Models


Code	Model	Box
64174-945128	VK/04197TR/W/S □ White. GU10. Max 35w.	60pcs
64174-946128	VK/04197TR/B/S ■ Black. GU10. Max 35w.	60pcs
64174-947128	VK/04197TR/G/S ■ Grey. GU10. Max 35w.	60pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/03093TR



## Product Models


Code	Model	Box
64174-009108	VK/03093TR/W □ White. GU10. Max 35w.	40pcs
64174-010108	VK/03093TR/B ■ Black. GU10. Max 35w.	40pcs

## Details


Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/03198TR

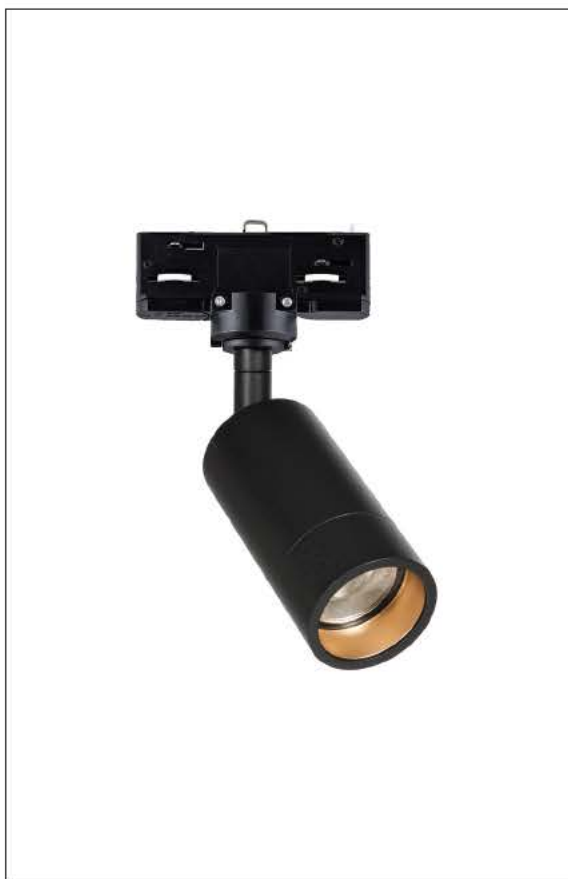

## Product Models


Code	Model	Box
64174-946121	VK/03198TR/W □ White. GU10. Max 35w.	30pcs
64174-947121	VK/03198TR/B ■ Black. GU10. Max 35w.	30pcs
64174-950121	VK/03198TR/CH-GD ■ Champaign Gold. GU10. Max 35w.	30pcs

## Details

Voltage 230V. Max watt 35w. Par16. Material Pure aluminium. 3-phase adapter.



IP20. 230V.



## VK/04196TR



## Product Models


Code	Model	Box
64174-942121	VK/04196TR/W □ White. GU10. Max 35w.	30pcs
64174-943121	VK/04196TR/B ■ Black. GU10. Max 35w.	30pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Pure aluminium. 3-phase adapter.




IP20. 240V.





## VK/03094TR

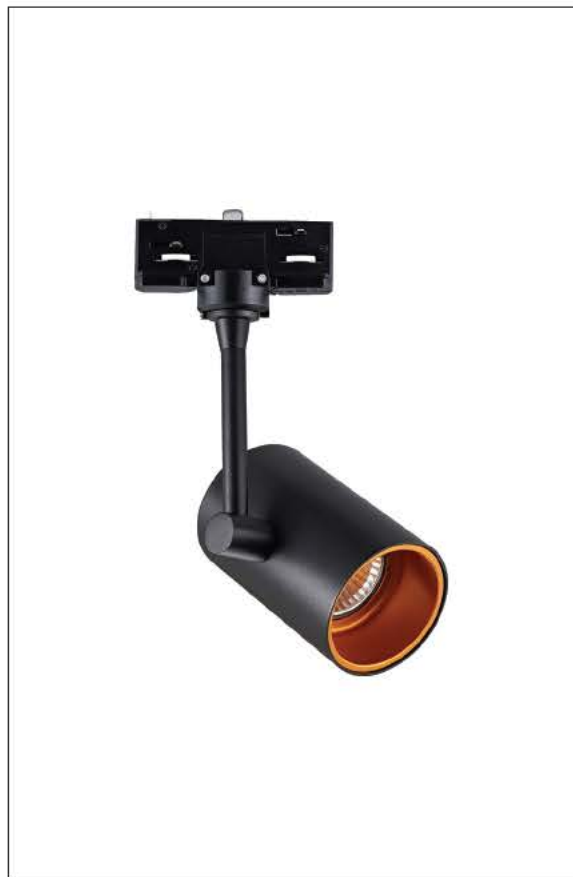

## Product Models


Code	Model	Box
64174-012108	VK/03094TR/BGD ■ Black+Gold. GU10. Max 35w.	20pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04197TR/L



## Product Models


Code	Model	Box
64174-948128	VK/04197TR/W/L □ White. GU10. Max 35w.	30pcs
64174-949128	VK/04197TR/B/L ■ Black. GU10. Max 35w.	30pcs
64174-950128	VK/04197TR/G/L ■ Grey. GU10. Max 35w.	30pcs

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04351G/TR



## Product Models

Code	Model	Box
64174-699269	VK/04351G/TR/W □ White. GU10. Max 35w.	1pc
64174-700269	VK/04351G/TR/B ■ Black. GU10. Max 35w.	1pc
64174-701269	VK/04351G/TR/G ■ Grey. GU10. Max 35w.	1pc

## Details

Voltage 230V. Max watt 35w. Par16 or module . Material Aluminium. 3-phase adapter.



IP20. 230V.



## VK/04043TR



## Product Models


Code	Model	Box
64174-300269	VK/04043TR/W □ White. GU10. Max 35w.	1pc
64174-298269	VK/04043TR/B ■ Black. GU10. Max 35w.	1pc
64174-299269	VK/04043TR/MC ■ Brushed Chrome. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04052TR/S



## Product Models


Code	Model	Box
64174-323269	VK/04052TR/W/S □ White. GU10. Max 35w.	1pc
64174-322269	VK/04052TR/B/S ■ Black. GU10. Max 35w.	1pc
64174-324269	VK/04052TR/G/S ■ Grey. GU10. Max 35w.	1pc
64174-325269	VK/04052TR/AN/S ■ Anthracite. GU10. Max 35w.	1pc
64174-326269	VK/04052TR/MC/S ■ Brushed Chrome. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04052TR/L



## Product Models


Code	Model	Box
64174-318269	VK/04052TR/W/L □ White. GU10. Max 35w.	1pc
64174-316269	VK/04052TR/B/L ■ Black. GU10. Max 35w.	1pc
64174-319269	VK/04052TR/G/L ■ Grey. GU10. Max 35w.	1pc
64174-320269	VK/04052TR/AN/L ■ Anthracite. GU10. Max 35w.	1pc
64174-321269	VK/04052TR/MC/L ■ Brushed Chrome. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04052TR/2/S



## Product Models


Code	Model	Box
64174-328269	VK/04052TR/2/W/S □ White. GU10x2. Max 2x35w.	1pc
64174-327269	VK/04052TR/2/B/S ■ Black. GU10x2. Max 2x35w.	1pc
64174-330269	VK/04052TR/2/AN/S ■ Anthracite. GU10x2. Max 2x35w.	1pc
64174-331269	VK/04052TR/2/MC/S ■ Brushed Chrome. GU10x2. Max 2x35w.	1pc

## Details

Voltage 240V. Max watt 2x35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04071G



## Product Models


Code	Model	Box
64174-394269	VK/04071G/PAR16/W □ White. GU10. Max 35w.	1pc
64174-386269	VK/04071G/PAR16/B ■ Black. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. Par16. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04071G/R111



## Product Models


Code	Model	Box
64174-393269	VK/04071G/R111/W □ White. GU10. Max 35w.	1pc
64174-385269	VK/04071G/R111/B ■ Black. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 50w. R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04071E



## Product Models


Code	Model	Box
64174-392269	VK/04071E/PAR30/W □ White. E27. Max 50w.	1pc
64174-384269	VK/04071E/PAR30/B ■ Black. E27. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. PAR30. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04198TR



## Product Models


Code	Model	Box
64174-951128	VK/04198TR/W □ White. GU10. Max 50w.	8pcs
64174-952128	VK/04198TR/B ■ Black. GU10. Max 50w.	8pcs
64174-953128	VK/04198TR/G ■ Grey. GU10. Max 50w.	8pcs

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04199TR



## Product Models


Code	Model	Box
64174-954128	VK/04199TR/W □ White. GU10. Max 50w.	8pcs
64174-955128	VK/04199TR/B ■ Black. GU10. Max 50w.	8pcs

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/03109TR



## Product Models


Code	Model	Box
64174-026108	VK/03109TR/W □ White sanded. GU10. Max 50w.	10pcs
64174-027108	VK/03109TR/B ■ Black sanded. GU10. Max 50w.	10pcs

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/03045



## Product Models


Code	Model	Box
64174-382269	VK/03045/W □ White. GU10. Max 50w.	1pc
64174-383269	VK/03045/B ■ Black. GU10. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/03045/S



## Product Models


Code	Model	Box
64174-390269	VK/03045/S/W □ White. GU10. Max 50w.	1pc
64174-391269	VK/03045/S/B ■ Black. GU10. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04053TR/S



## Product Models


Code	Model	Box
64174-348269	VK/04053TR/W/S □ White. GU10. Max 50w.	1pc
64174-317269	VK/04053TR/B/S ■ Black. GU10. Max 50w.	1pc
64174-349269	VK/04053TR/G/S ■ Grey. GU10. Max 50w.	1pc
64174-350269	VK/04053TR/AN/S ■ Anthracite. GU10. Max 50w.	1pc
64174-351269	VK/04053TR/MC/S ■ Brushed Chrome. GU10. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.





## VK/04053TR/L



## Product Models


Code	Model	Box
64174-353269	VK/04053TR/W/L □ White. GU10. Max 50w.	1pc
64174-352269	VK/04053TR/B/L ■ Black. GU10. Max 50w.	1pc
64174-354269	VK/04053TR/G/L ■ Grey. GU10. Max 50w.	1pc
64174-355269	VK/04053TR/AN/L ■ Anthracite. GU10. Max 50w.	1pc
64174-356269	VK/04053TR/MC/L ■ Brushed Chrome. GU10. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.



## VK/04053TR/2/S



## Product Models


Code	Model	Box
64174-374269	VK/04053TR/2/W/S □ White. GU10x2. Max 50w.	1pc
64174-373269	VK/04053TR/2/B/S ■ Black. GU10x2. Max 50w.	1pc
64174-375269	VK/04053TR/2/G/S ■ Grey. GU10x2. Max 50w.	1pc
64174-376269	VK/04053TR/2/AN/S ■ Anthracite. GU10x2. Max 50w.	1pc
64174-377269	VK/04053TR/2/MC/S ■ Brushed Chrome. GU10x2. Max 50w.	1pc

## Details

Voltage 240V. Max watt 2x50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.

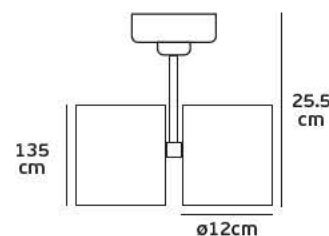

## VK/03025



## Product Models


Code	Model	Box
64174-217128	VK/03025/W □ White. G53. Max 50w.	1pc
64174-218128	VK/03025/B ■ Black. G53. Max 50w.	1pc
64174-219128	VK/03025/G ■ Grey. G53. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. ES111/R111. Material Aluminium. 3-phase adapter.



IP20. 240V.

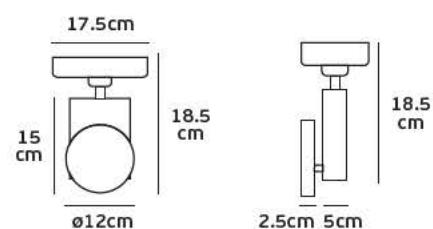

## VK/03183TR



## Product Models


Code	Model	Box
64174-944121	VK/03183TR/W □ White. E27. Max 50w.	1pc
64174-945121	VK/03183TR/B ■ Black. E27. Max 50w.	1pc

## Details

Voltage 240V. Max watt 50w. Par30. Material Aluminium, Steel. 3-phase adapter.



IP20. 240V.





Dimmable LED Magnetic Track lights 48v



*magnetic 04  
track lighting*

*μαγνητικά φωτιστικά ράγας 48V & 24V*

VK/04360TR/R/.../B

**Product Models**

Code	Model	Box
71164-075721	VK/04360TR/R/1/B ■ Black. 48V. 1m. (L100.4cm)	1pc
71164-076721	VK/04360TR/R/1.5/B ■ Black. 48V. 1.5m. (L150.4cm)	1pc
71164-077721	VK/04360TR/R/2/B ■ Black. 48V. 2m. (L200.4cm)	1pc


**Details**

Magnetic recessed track line 48V. Length 1-2m. IP Rating IP20. Working temperature < 45°C. Material Aluminium. Must be install VK/04361 to work.


IP20.




4b. Measure the size of cut-out, drill the hole in the installation position






4c. Connect input end of power supply to the cable of magnetic track

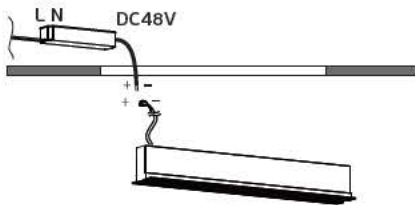

4d. Put the magnetic track into the installation hole, then fix the magnetic track by screws, and put decoration cover into the magnetic track to avoid touch dust

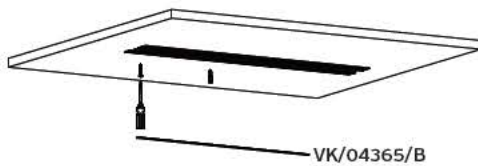

4e. After the installation of magnetic track, clean the surface

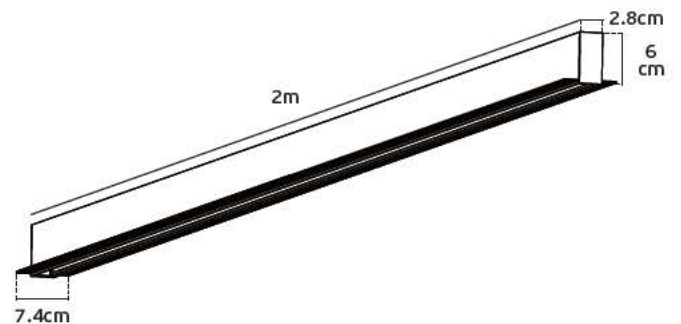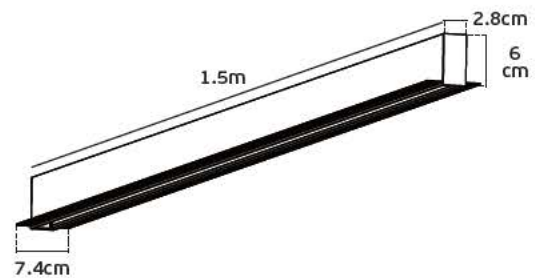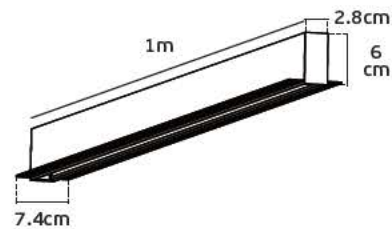

VK/04360TR/S/.../B

## Product Models

Code	Model	Box
71164-078721	VK/04360TR/S/1/B ■ Black. 48V. 1m. (L100.4cm)	1pc
71164-079721	VK/04360TR/S/1.5/B ■ Black. 48V. 1.5m. (L150.4cm)	1pc
71164-080721	VK/04360TR/S/2/B ■ Black. 48V. 2m. (L200.4cm)	1pc


## surface/pendant




## Details

Magnetic surface mounted track line 48V. Length 1-2m. IP Rating IP20.  
Working temperature < 45°C. Material Aluminium. Must be install VK/04361 to work.


IP20.

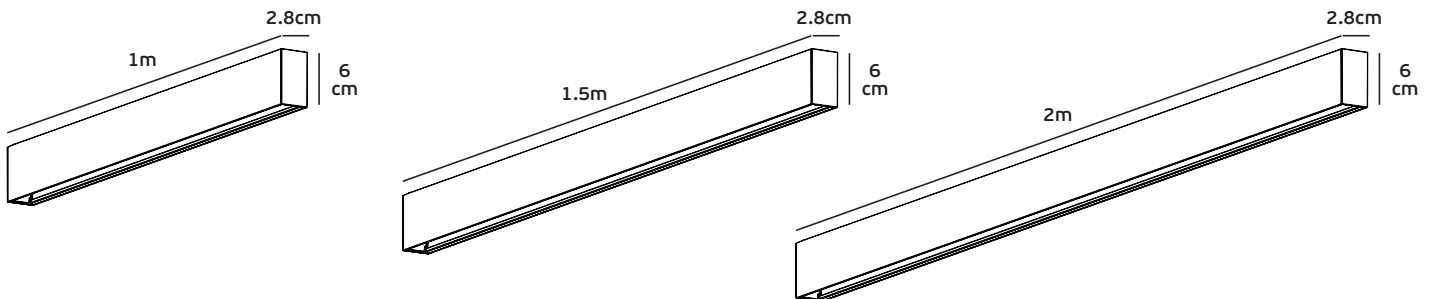

## surface

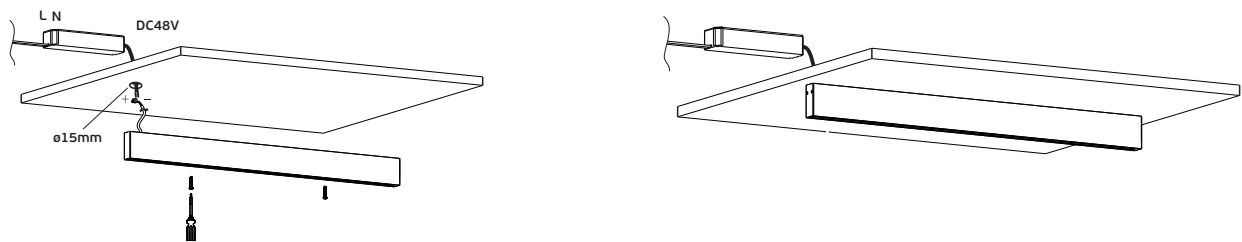

## pendant

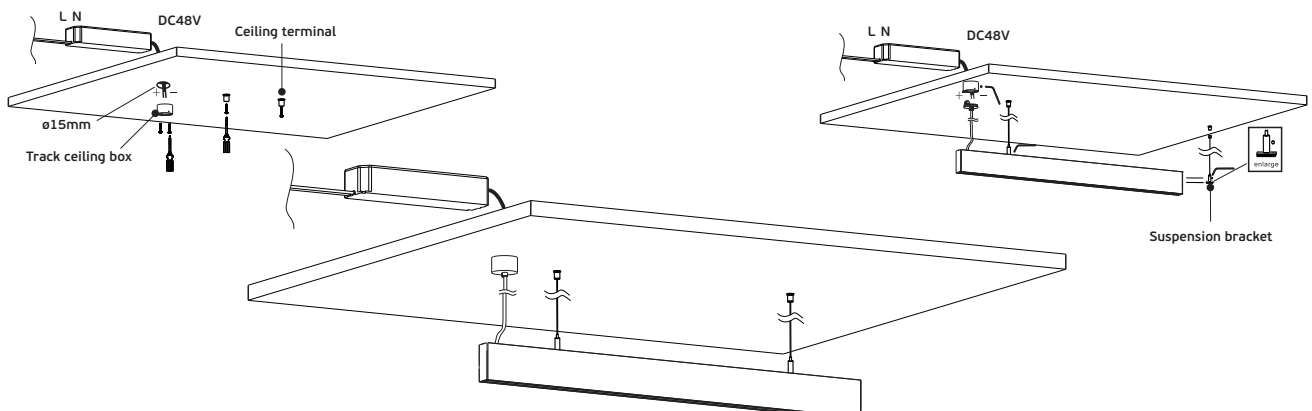

**VK/04363/RC/B/LR**




**Product Models**

Code	Model	Box
71164-086721	VK/04363/RC/B/LR ■ Black. 48V. Left & Right recessed corner	1pc

**Details**

Left/Right corner recessed.  
Track lines 48V. 2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work (connector for corners).

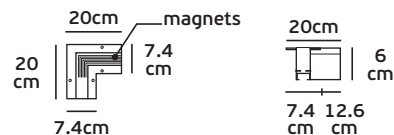

**IP20.**

**VK/04363/RC/B/IC**




**Product Models**

Code	Model	Box
71164-087721	VK/04363/RC/B/IC ■ Black. 48V. Inner corner for recessed track	1pc

**Details**

Inner corner for recessed.  
Track lines 48V. 2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work (connector for corners).

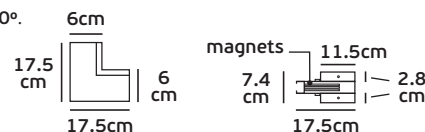

**IP20.**

**VK/04363/RC/B/OC**




**Product Models**

Code	Model	Box
71164-088721	VK/04363/RC/B/OC ■ Black. 48V. Outer corner for recessed track	1pc

**Details**

Outer corner for recessed.  
Track lines 48V. 2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work (connector for corners).

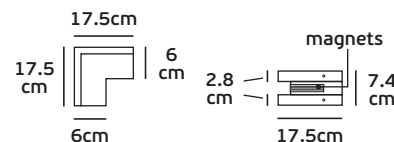

**IP20.**

**VK/04363/S/B/LR**




**Product Models**

Code	Model	Box
71164-089721	VK/04363/S/B/LR ■ Black. 48V. Left & Right corner for surface magnetic track	1pc

**Details**

Left/Right corner for surface. Track lines 48V.  
2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work (connector for corners).

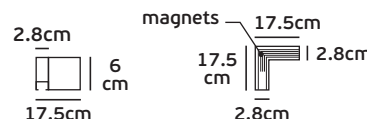

**IP20.**

**VK/04363/S/B/IC**




**Product Models**

Code	Model	Box
71164-090721	VK/04363/S/B/IC ■ Black. 48V. Inner corner for surface magnetic track	1pc

**Details**

Inner corner for surface. Track lines 48V.  
2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work (connector for corners).

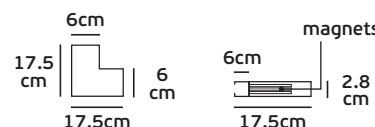

**IP20.**

## VK/04363/S/B/OC




## Product Models

Code	Model	Box
71164-091721	VK/04363/S/B/OC ■ Black. 48V. Outer corner for surface magnetic track	1pc

## Details

Outer corner for surface. Track lines 48V.  
2 rails link at an angle of 90°.  
Material Aluminium.  
Must be install VK/04364/PC to work  
(connector for corners).

IP20.

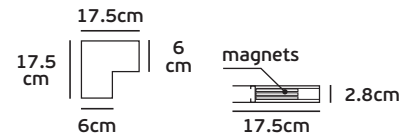

## VK/04361/B




## Product Models

Code	Model	Box
71164-082721	VK/04361/B ■ Black. 48V.	1pc

## Details

Power connector for recessed & surface  
magnetic track lines (VK/04360TR/R/...  
& VK/04360TR/S/...) with cable.  
Working temperature < 45°C. Material Plastic.

IP20.



## VK/04364/B/PC/2



## Product Models

Code	Model	Box
71164-093721	VK/04364/B/PC/2 ■ Black. 48V.	1pc

## Details

Power connector for 2 recessed or  
2 surface magnetic track 48V  
(VK/04360TR/R/... & VK/04360TR/S/...)  
with cable. Working temperature < 45°C.  
IP Rating IP20. Material Plastic.

IP20.



## VK/04364/B/PC




## Product Models

Code	Model	Box
71164-092721	VK/04364/B/PC ■ Black. 48V.	1pc

## Details

Corner Power connector for recessed  
& surface magnetic track 48V  
(VK/04360TR/R/... & VK/04360TR/S/...)  
with cable. Working temperature < 45°C.  
IP Rating IP20. Material Plastic.

IP20.



## VK/04360/SRK




## Product Models

Code	Model	Box
71164-081721	VK/04360/SRK ■ Black. 48V.	1pc

## Details

Hanging kit for magnetic surface  
track lines (VK/04360TR/S/...) 48V  
to become hanging track. IP Rating IP20.  
Material Aluminium.

IP20.





VK/04365/B


### Product Models

Code	Model	Box
71164-094721	VK/04365/B ■ Black. 48V. 2m.	1pc

### Details

Cover for magnetic track lights 48V, decoration bar for recessed or surface tracks.  
IP Rating IP20. Working temperature < 45°C. Material PC.

IP20.



## VK/LV100W48CG



## Product Models


Code	Model	Box
71164-083721	VK/LV100W48CG 0-2100mA. 100w.	1pc

## Details

Voltage 220-240V.  $I_{in} \leq 0.6A$ .  $U_{rated} = 48V$ .  $I_{range} = 0-2100mA$ .  $P_{range} = 0-100w$ . IP Rating IP20. Working temperature  $-25^{\circ}C \rightarrow 45^{\circ}C$ . Material Plastic housing. 3 years guarantee.



IP20. 100w.



## VK/LV150W48CG



## Product Models


Code	Model	Box
71164-084721	VK/LV150W48CG 0-3125mA. 150w.	1pc

## Details

Voltage 220-240V.  $I_{in} \leq 0.9A$ .  $U_{rated} = 48V$ .  $I_{range} = 0-3125mA$ .  $P_{range} = 0-150w$ . IP Rating IP20. Working temperature  $-25^{\circ}C \rightarrow 45^{\circ}C$ . Material Plastic housing. 3 years guarantee.



IP20. 150w.



## VK/LV250W48CG



## Product Models


Code	Model	Box
71164-085721	VK/LV250W48CG 0-5210mA. 250w.	1pc

## Details

Voltage 220-240V.  $I_{in} \leq 1.5A$ .  $U_{rated} = 48V$ .  $I_{range} = 0-5210mA$ .  $P_{range} = 0-250w$ . IP Rating IP20. Working temperature  $-25^{\circ}C \rightarrow 45^{\circ}C$ . Material Plastic housing. 3 years guarantee.



IP20. 250w.



VK/04366/B/6





Product Models

Code	Model	Box
71164-095721	VK/04366/B/6 ■ Black sand. 3000K. 640lm. 9w  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 9w. CRI>90. IP Rating IP20  
Type of Led CREE with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 9w.



VK/04366/B/12




Product Models

Code	Model	Box
71164-096721	VK/04366/B/12 ■ Black sand. 3000K. 1.170lm. 18w  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 18w. CRI>90. IP Rating IP20  
Type of Led CREE with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 18w.



VK/04366/B/18




Product Models

Code	Model	Box
71164-097721	VK/04366/B/18 ■ Black sand. 3000K. 1.880lm. 27w  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 27w. CRI>90. IP Rating IP20  
Type of Led CREE with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 27w.





VK/04367/B/6





Product Models

Code	Model	Box
71164-098721	VK/04367/B/6 ■ Black sand. 3000K. 640lm. 9w.  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 9w. CRI>90. IP Rating IP20  
Type of Led with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

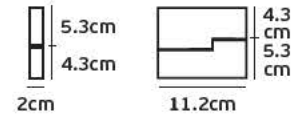

VK/04367/B/12




Product Models

Code	Model	Box
71164-099721	VK/04367/B/12 ■ Black sand. 3000K. 1.160lm. 18w.  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 18w. CRI>90. IP Rating IP20  
Type of Led with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.



VK/04372/B





Product Models

Code	Model	Box
71164-108721	VK/04372/B ■ Black sand. 3000K. 1.420lm. 18w.  led. 50°+<60°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 18w. CRI>90. IP Rating IP20  
Type of Led 5050 with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

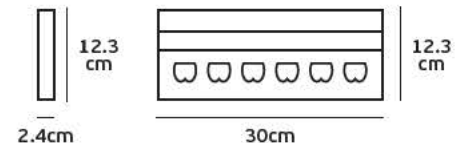



VK/04368/B/9




Product Models



Code	Model	Box
71164-100721	VK/04368/B/9 ■ Black sand. 3000K. 490lm. 9w. <i>bridgelux</i> . led. 110°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 9w. CRI>90. IP Rating IP20  
Type of Led *bridgelux*. 2835 with driver. Dimmable 1-10V. Lifetime 50,000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

   IP20. 9w.



 5.3 cm  5.3 cm  
2cm 30cm

VK/04368/B/15




Product Models



Code	Model	Box
71164-101721	VK/04368/B/15 ■ Black sand. 3000K. 720lm. 15w. <i>bridgelux</i> . led. 110°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 15w. CRI>90. IP Rating IP20  
Type of Led *bridgelux*. 2835 with driver. Dimmable 1-10V. Lifetime 50,000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

   IP20. 15w.



 5.3 cm  5.3 cm  
2cm 60cm

VK/04368/B/25




Product Models



Code	Model	Box
71164-102721	VK/04368/B/25 ■ Black sand. 3000K. 1.020lm. 25w. <i>bridgelux</i> . led. 110°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 25w. CRI>90. IP Rating IP20  
Type of Led *bridgelux*. 2835 with driver. Dimmable 1-10V. Lifetime 50,000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

   IP20. 25w.



 5.3 cm  5.3 cm  
2cm 90cm

VK/04369/B

## Product Models




Code	Model	Box
71164-103721	VK/04369/B ■ Black sand. 3000K. 535lm. 9w. <a href="#">bridgelux</a> . led. 110°. CRI>90	1pc

## Details

Led magnetic track light DC driver 48V (included). Watt 9w. CRI>90. IP Rating IP20  
 Type of Led [bridgelux](#). 2835 with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
 Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 9w.





# LED Magnetic Track lights 48V



VK/04370/B/13

## Product Models



Code	Model	Color	Temp	Beam	Power	Brand	Beam Angle	CR	Box
71164-104721	VK/04370/B/13	Black sand	3000K	1.250lm	13w.	bridgelux.	110°	CRI>90	1pc

### Details

Led magnetic track light DC driver 48V (included). Watt 13w. CRI>90. IP Rating IP20. Type of Led [bridgelux. 2835 with driver](#). Dimmable 1-10V. Lifetime 50.000 hrs Working temperature < 45°C. Material Aluminium. 2 years guarantee.




**IP20. 13w.**

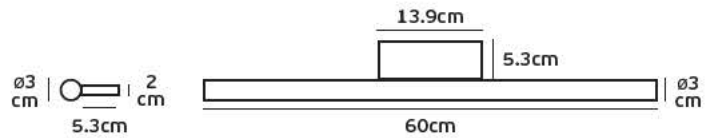

VK/04370/B/20

## Product Models



Code	Model	Color	Temp	Beam	Power	Brand	Beam Angle	CR	Box
71164-105721	VK/04370/B/20	Black sand.	3000K.	1.840lm.	20w.	bridgelux.	110°.	CRI>90	1pc

### Details

Led magnetic track light DC driver 48V (included). Watt 20w. CRI>90. IP Rating IP20 Type of Led [bridgelux. 2835 with driver](#). Dimmable 1-10V. Lifetime 50.000 hrs Working temperature < 45°C. Material Aluminium. 2 years guarantee.




**IP20. 20w.**

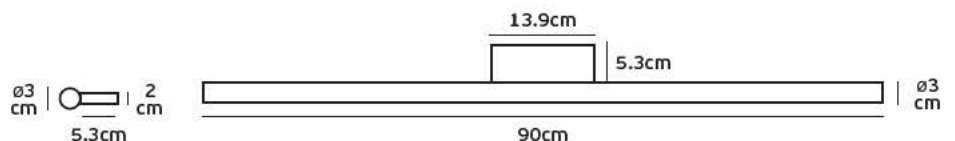



# LED Magnetic Track lights 48V





**VK/04371/B/20**

## Product Models

<b>Code</b> 71164-106721	<b>Model</b> VK/04371/B/20	■ Black sand. 3000K.	1.840lm.	20w.	bridgelux.	110°.	CRI>90	<b>Box</b> 1pc
-----------------------------	-------------------------------	----------------------	----------	------	------------	-------	--------	-------------------

### Details

Led magnetic track light DC driver 48V (included). Watt 20w. CRI>90. IP Rating IP20 Type of Led [bridgelux](#). 2835 with driver. Dimmable 1-10V. Lifetime 50.000 hrs Working temperature < 45°C. Material Aluminium. 2 years guarantee.

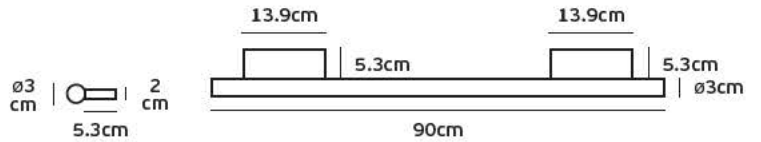



**VK/04371/B/28**

## Product Models

<b>Code</b> 71164-107721	<b>Model</b> VK/04371/B/28	■ Black sand. 3000K.	2.430lm.	28w.	bridgelux.	110°.	CRI>90	<b>Box</b> 1pc
-----------------------------	-------------------------------	----------------------	----------	------	------------	-------	--------	-------------------

### Details

Led magnetic track light DC driver 48V (included). Watt 28w. CRI>90. IP Rating IP20 Type of Led [bridgelux](#). 2835 with driver. Dimmable 1-10V. Lifetime 50.000 hrs Working temperature < 45°C. Material Aluminium. 2 years guarantee.

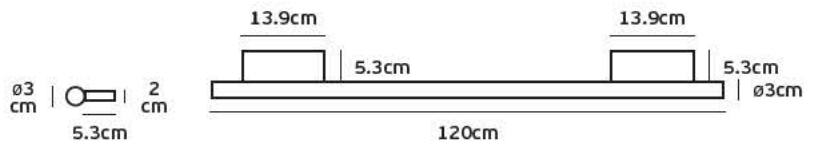



VK/04373/B





Product Models

Code	Model	Box
71164-109721	VK/04373/B ■ Black sand. 3000K. 220lm. 3w.  led. 8°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 3w. CRI>90. IP Rating IP20  
Type of Led with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 3w.

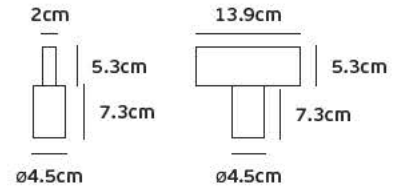

VK/04374/B





Product Models

Code	Model	Box
71164-110721	VK/04374/B ■ Black sand. 3000K. 590lm. 9w. 8°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 9w. CRI>90. IP Rating IP20  
Type of Led CREE XHP-35 with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 9w.

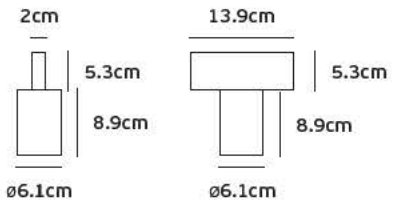

VK/04375/B





Product Models

Code	Model	Box
71164-111721	VK/04375/B ■ Black sand. 3000K. 530lm. 7w.  led. 24°. CRI>90	1pc

Details

Led magnetic track light DC driver 48V (included). Watt 7w. CRI>90. IP Rating IP20  
Type of Led E6 with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 7w.

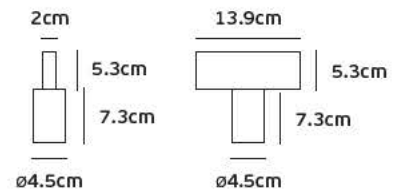

VK/04376/B/12

## Product Models



Code	Model	Box
71164-112721	VK/04376/B/12 ■ Black sand. 3000K. 880lm. 12w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

## Details

Led magnetic track light DC driver 48V (included). Watt 12w. CRI>90. IP Rating IP20  
 Type of Led *bridgelux*. E8 with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
 Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.

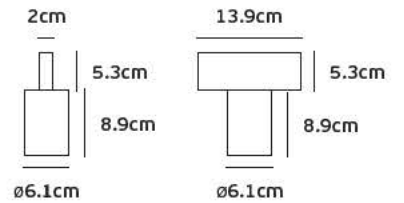

**VK/04376/B/HC/15**  
With honeycomb cover





**Product Models**

Code	Model	Box
71164-113721	VK/04376/B/HC/15 ■ Black sand. 3000K. 650lm. 15w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

**Details**

Led magnetic track light with honeycomb cover DC driver 48V (included). Watt 15w. CRI>90. IP Rating IP20. Type of Led *bridgelux*. with driver. Dimmable 1-10V. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 15w.

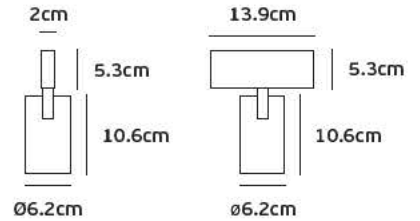

**VK/04377/B/HC/18**  
With honeycomb cover





**Product Models**

Code	Model	Box
71164-114721	VK/04377/B/HC/18 ■ Black sand. 3000K. 1.340lm. 18w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

**Details**

Led magnetic track light with honeycomb cover DC driver 48V (included). Watt 18w. CRI>90. IP Rating IP20. Type of Led *bridgelux*. with driver. Dimmable 1-10V. Lifetime 50.000 hrs Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 18w.

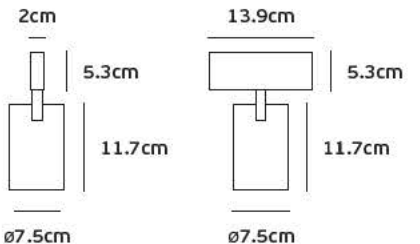

**VK/04377/B/HC/25**  
With honeycomb cover





**Product Models**

Code	Model	Box
71164-115721	VK/04377/B/HC/25 ■ Black sand. 3000K. 1.660lm. 25w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

**Details**

Led magnetic track light with honeycomb cover DC driver 48V (included). Watt 25w. CRI>90. IP Rating IP20. Type of Led *bridgelux*. with driver. Dimmable 1-10V. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

IP20. 25w.

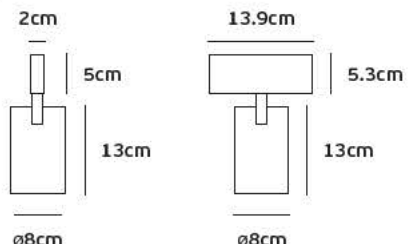





**VK/04378/B/ZM**  
Zoom light 15°-45°





**Product Models**

Code	Model	Box
71164-116721	VK/04378/B/ZM ■ Black sand. 3000K. 440lm. 7w. <i>bridgelux</i> . led. Zoom 15°-45°. CRI>90	1pc

**Details**

Led magnetic track Zoom Light DC driver 48V (included). Watt 7w. CRI>90  
IP Rating IP20. Type of Led *bridgelux* with driver. Dimmable 1-10V. Lifetime 50.000 hrs  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

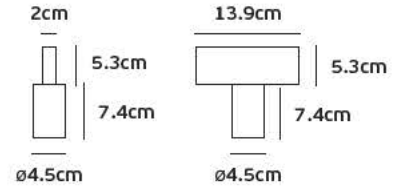

**VK/04379/B/ZM**  
Zoom light 15°-60°





**Product Models**

Code	Model	Box
71164-117721	VK/04379/B/ZM ■ Black sand. 3000K. 780lm. 12w. <i>bridgelux</i> . led. Zoom 15°-60°. CRI>90	1pc

**Details**

Led magnetic track Zoom Light DC driver 48V (included). Watt 12w. CRI>90.  
IP Rating IP20. Type of Led *bridgelux* V6 HD with driver. Dimmable 1-10V. Lifetime 50.000hrs.  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

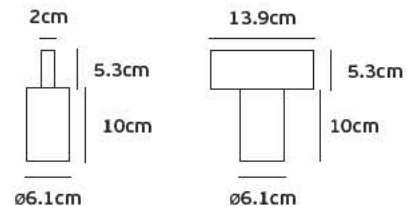

**VK/04380/B/ZM**  
Zoom light 15°-60°





**Product Models**

Code	Model	Box
71164-118721	VK/04380/B/ZM ■ Black sand. 3000K. 1.540lm. 18w. <i>bridgelux</i> . led. Zoom 15°-60°. CRI>90	1pc

**Details**

Led magnetic track Zoom Light DC driver 48V (included). Watt 18w. CRI>90.  
IP Rating IP20. Type of Led *bridgelux* V10C with driver. Dimmable 1-10V. Lifetime 50.000hrs.  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.

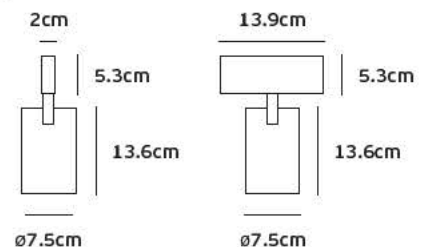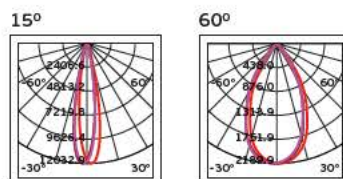

VK/04381/B/ZM  
Zoom light 15°-60°



### Product Models



Code	Model	Box
71164-119721	VK/04381/B/ZM ■ Black sand. 3000K. 1.870lm. 25w. <i>bridgelux</i> . led. Zoom 15°-60°. CRI>90	1pc

### Details


Led magnetic track Zoom Light DC driver 48V (included). Watt 25w. CRI>90.  
IP Rating IP20. Type of Led *bridgelux*. V9 HD with driver. Dimmable 1-10V. Lifetime 50.000hrs.  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 25w.




2cm



ø8cm

5.3cm

13.9cm



5.3cm

14.7cm

ø8cm



VK/04382/CE/B

### Product Models


Code	Model	Box
71164-120721	VK/04382/CE/B ■ Black sand. 3000K. 350lm. 6w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

### Details

Led magnetic track Pendant Light DC driver 48V (included). Watt 6w. CRI>90.  
IP Rating IP20. Type of Led *bridgelux*. E6 CA with driver. Dimmable 1-10V. Lifetime 50.000hrs.  
Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 6w.

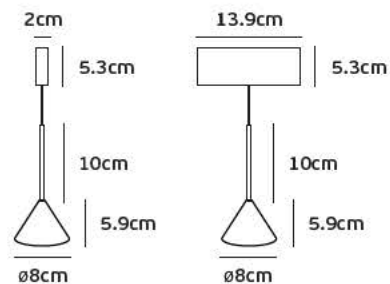




**Συνδεσμολογία Μαγνητικής Ράγας 48V**

**1. Magnet Track System Electrical Diagram 48V**

Note: Cut off electric supply before installation!

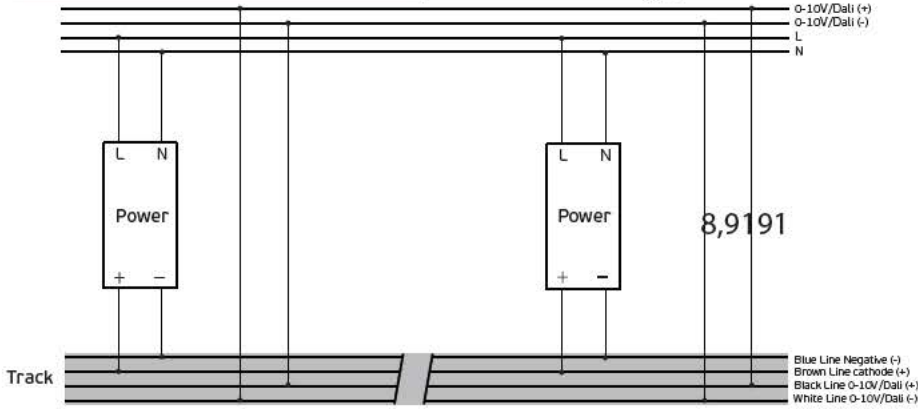


Note: When all lights power is bigger than load power, need to add one new driver into track.

**Διάγραμμα κοπής για το τροφοδοτικό**

**2. The cut out diagram of the driver**

Put the driver into ceiling before installation. Calculate the power of lamp, it must less than load power of driver. If the lamp wattage exceed load power of driver. Need to add one more driver. Note: New added driver need to cut out  $\phi 10\text{mm}$  for wires.

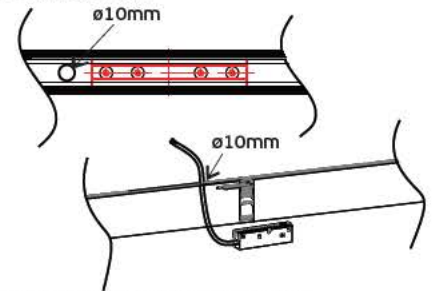


Connect the driver to electric supply; (The driver needs to close to the installation position for the easy installation).


**Cut off electric supply before installation!**

**Διάγραμμα σύνδεσης track φωτιστικών 48V 3. Track connection diagram 48V**


**3a. Power head connection diagram/Διάγραμμα σύνδεσης παροχής ενέργειας**

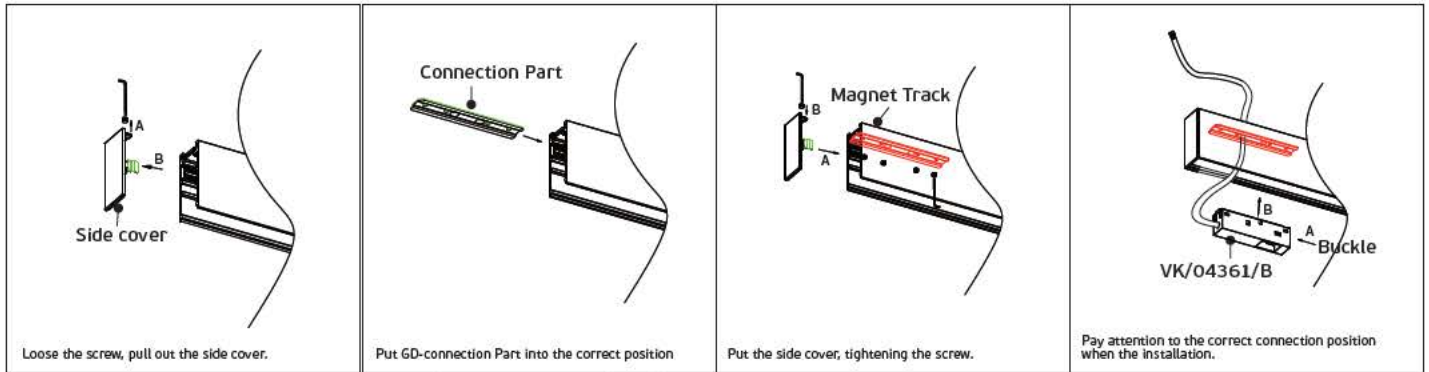

**3b. The corner connection diagram/Διάγραμμα γωνιακής σύνδεσης**

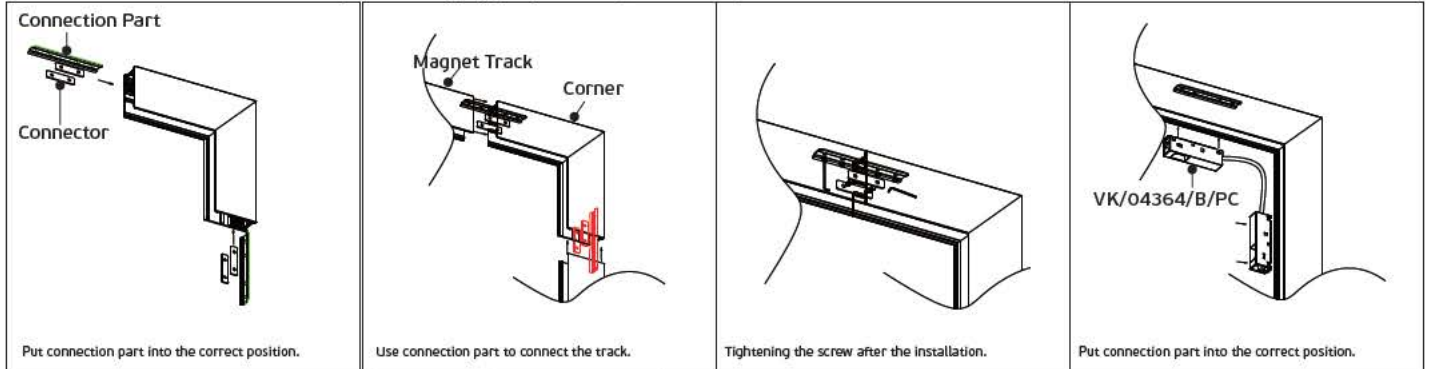


**3c. Track connection diagram/Διάγραμμα σύνδεσης σε σειρά**

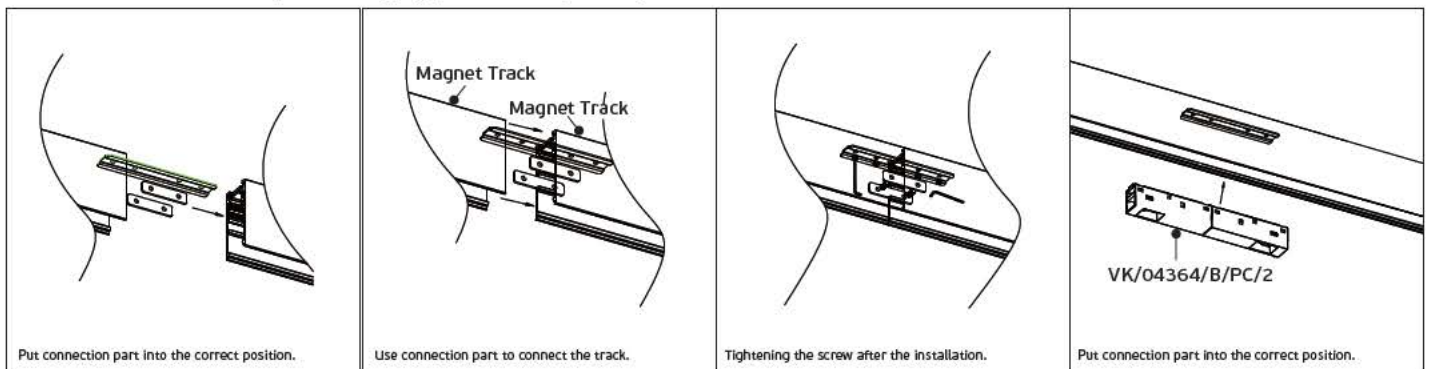


**Οδηγίες εγκατάστασης χωνευτής μαγνητικής ράγας 48V**


**4. Recessed magnetic track installation diagram 48V**

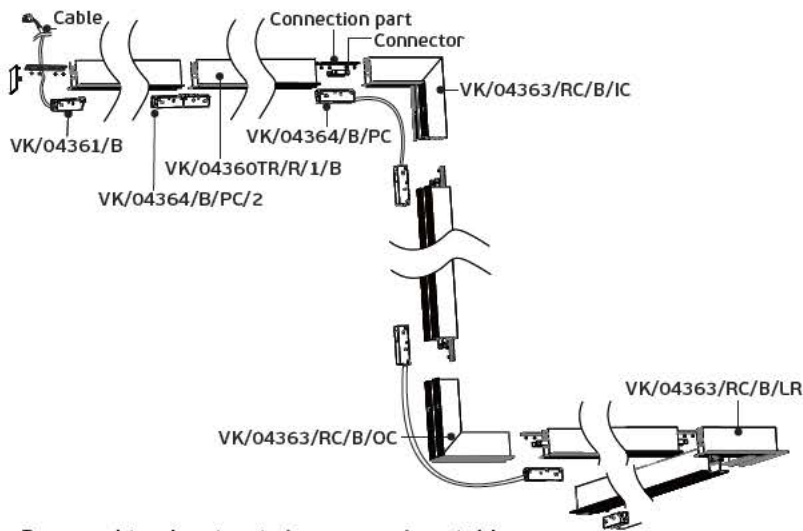


4b. Measure the size of cut-out, drill the hole in the installation position



4c. Connect input end of power supply to the cable of magnetic track

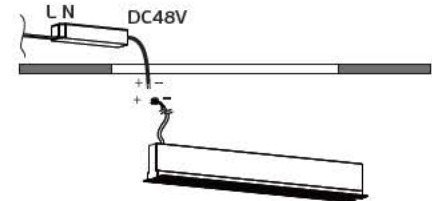


4d. Put the magnetic track into the installation hole, then fix the magnetic track by screws, and put decoration cover into the magnetic track to avoid touch dust

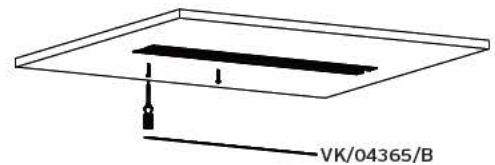

4a. Recessed track cut-out size comparison table  
Συγκριτικός Πίνακας διαστάσεων κοπής


Product drawing	Models	Cut-out	Cut-out size
	VK/04360TR/R/1/B VK/04360TR/R/1.5/B VK/04360TR/R/2/B	L100xW30mm L150xW30mm L200xW30mm	
	VK/04363/RC/B/IC	L120xW30mm	
	VK/04363/RC/B/OC	L170xW30mm	
	VK/04363/RC/B/LR	L180xW30mm	

4e. After the installation of magnetic track, clean the surface





**Οδηγίες εγκατάστασης επιτοίχιας μαγνητικής ράγας 48V**

**5. Surface-mounted magnetic track installation diagram 48V**

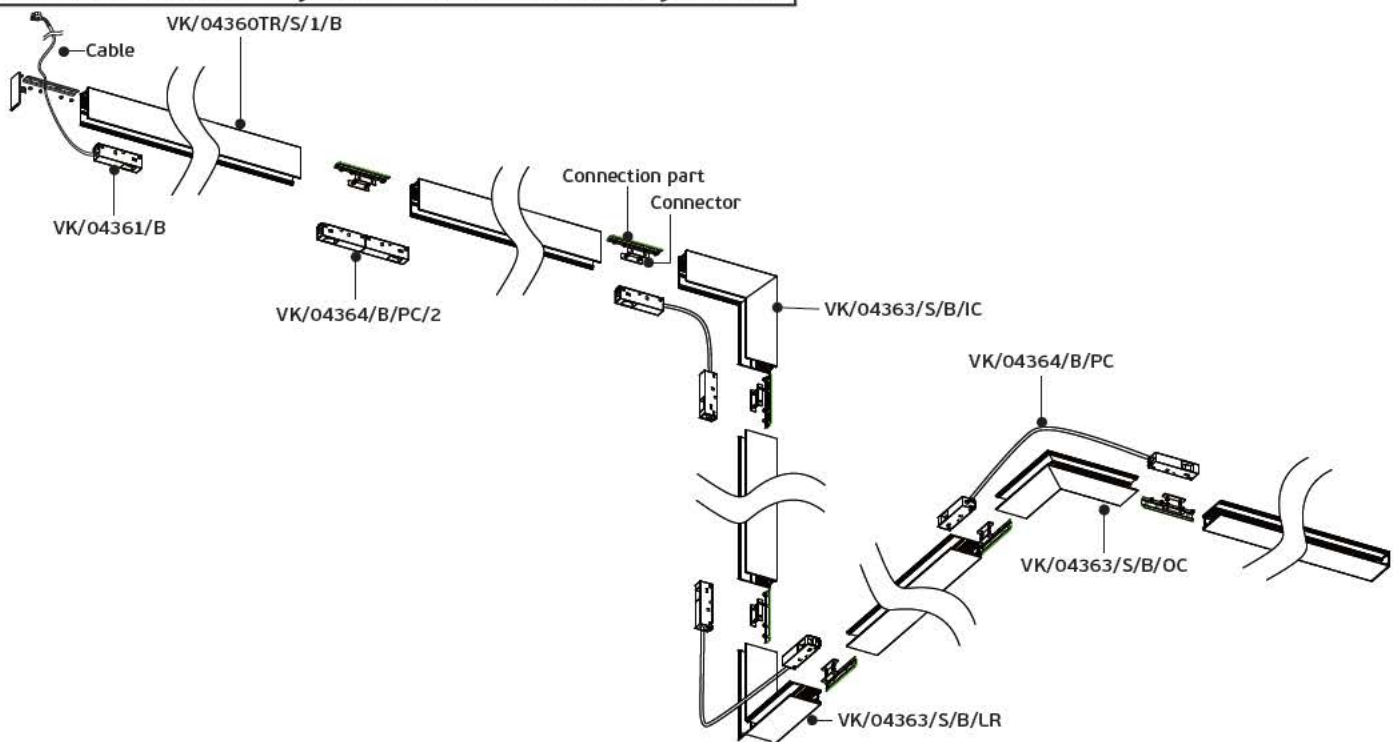


5a. Connect input end of power supply to the cable of magnetic track, then fix surface-mounted magnetic track by screws

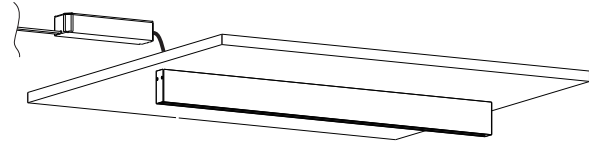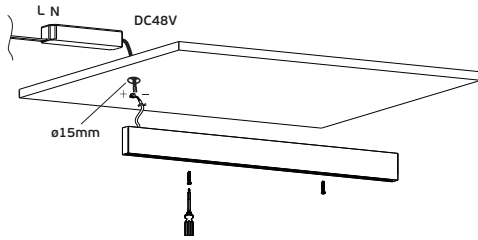


**Οδηγίες εγκατάστασης κρεμοστής μαγνητικής ράγας 48V**


**6. Hanging magnetic track installation diagram 48V**

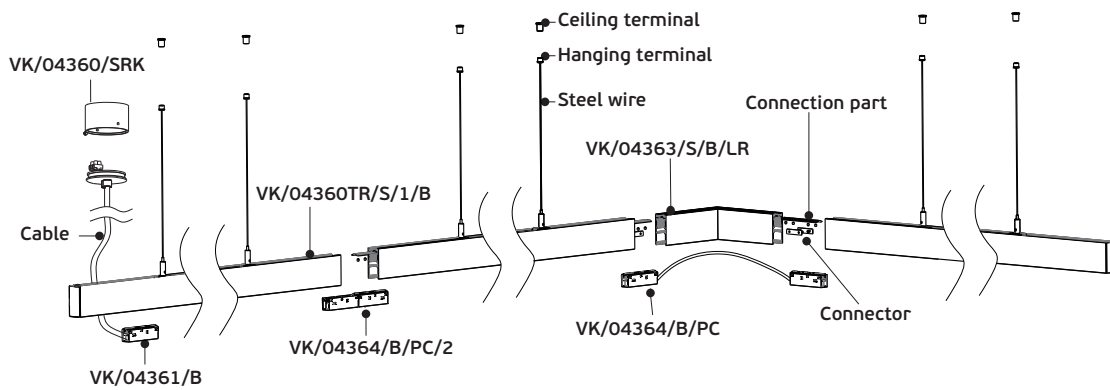

6a. Fix the ceiling box and ceiling terminal by screws first

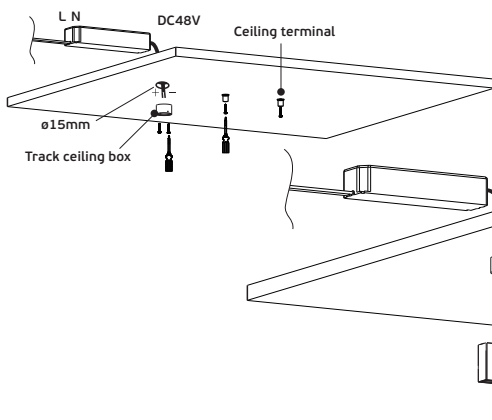

6b. Connect output end of power supply to the cable of magnetic track (Install hanging fixture first, then tightening the screws)

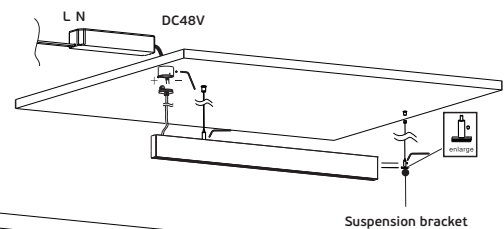


**Σύνδεση 0-10V Dim Dali μαγνητικής ράγας 48V**


**7. 0-10V Dimming/Dali Dimming connection diagram 48V**

**Εγκατάσταση φωτιστικών στη μαγνητική ράγα 48V**

**8. Magnet track system-lights installation 48V**

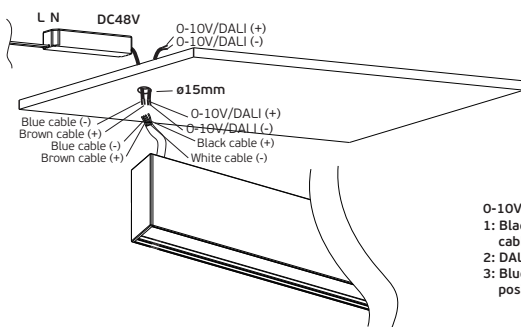



- 0-10V Dimming/DALI Dimming:
- 1: Black cable connect dimming positive pole/white cable connect dimming negative pole.
  - 2: DALI module connect black cable.
  - 3: Blue/Brown cable connect power supply, output positive pole and negative.

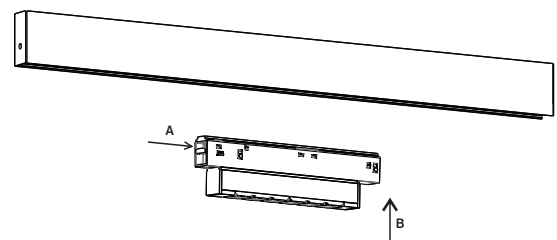





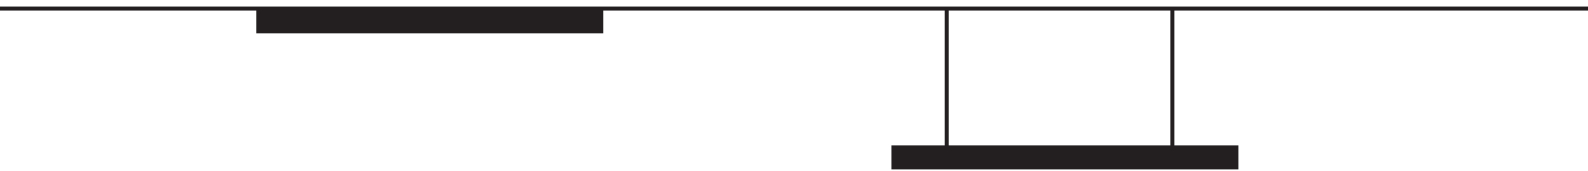

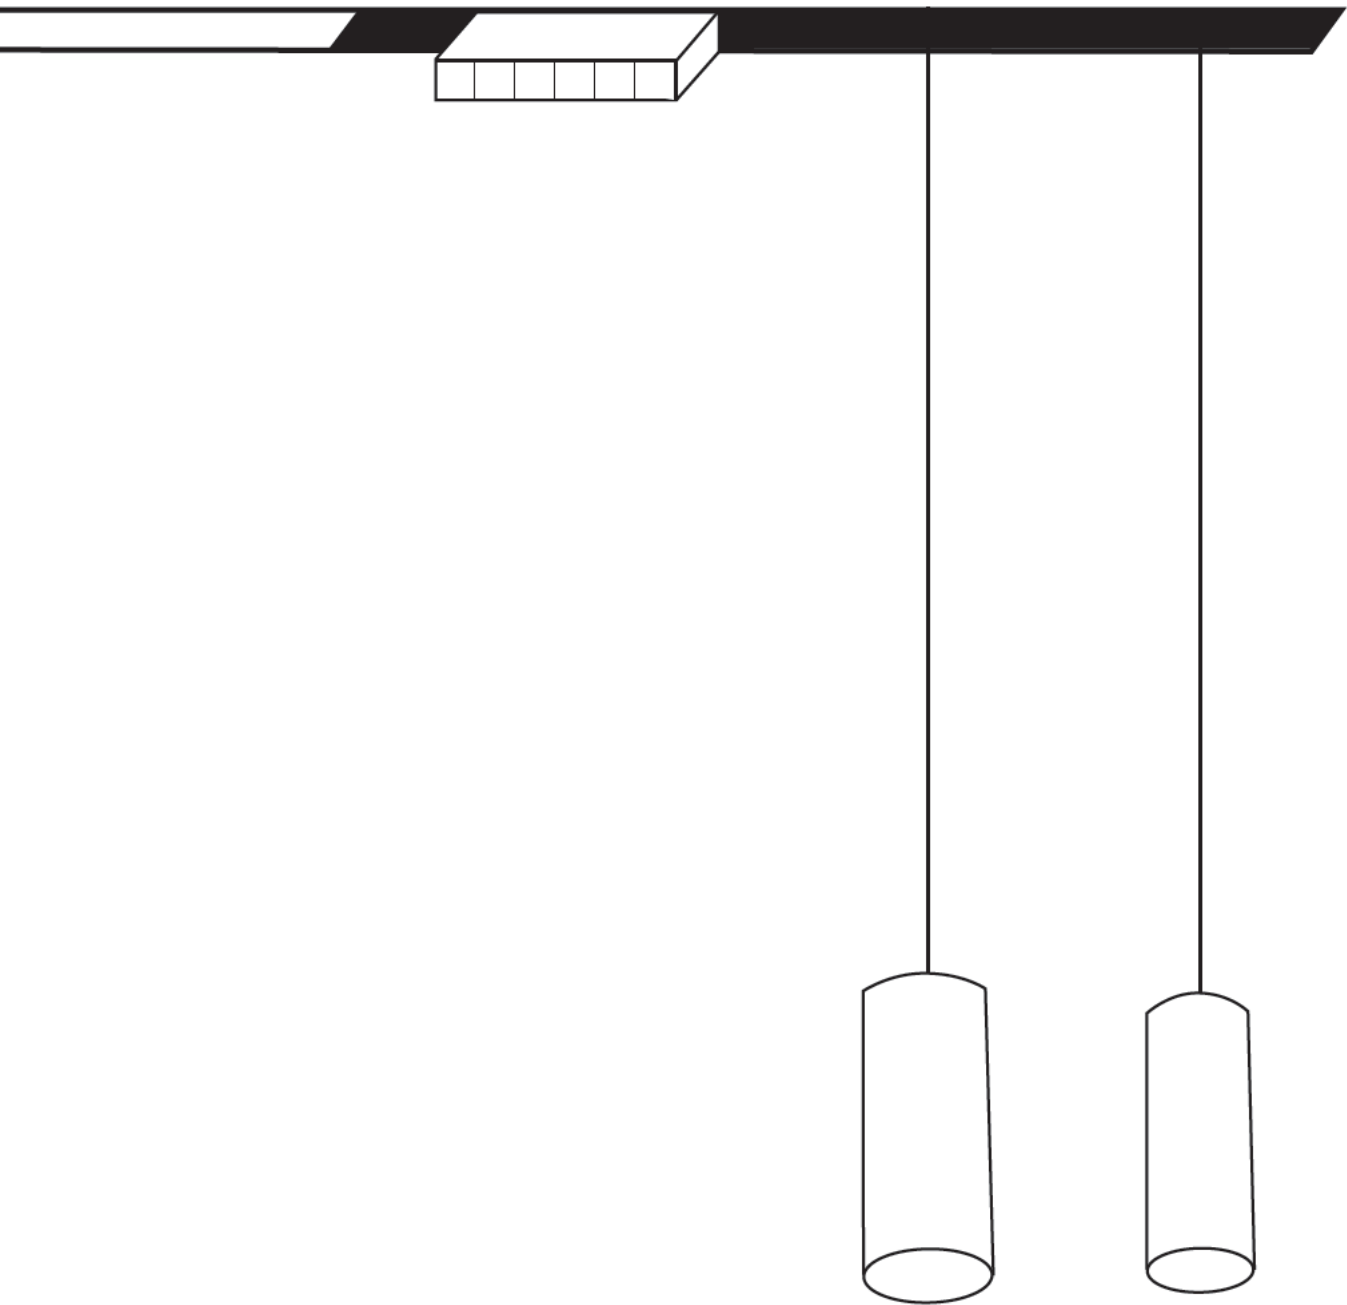

LED Magnetic Track lights 24v

VK/04203TR/R

Product Models

Code	Model	Box
71164-001721	VK/04203TR/R/1/B ■ Black sand. 24V. 1m (L100.5cm).	1pc
71164-002721	VK/04203TR/R/1.5/B ■ Black sand. 24V. 1.5m (L150.5cm).	1pc
71164-003721	VK/04203TR/R/2/B ■ Black sand. 24V. 2m (L200.5cm).	1pc


Details

Magnetic recessed track line 24V. Length 1-2m. IP Rating IP20.  
Working temperature < 45°C. Material Aluminium.


IP20.




4a. Check cut out size, then cut the hole in position.






4b. Connect driver output side with track line.

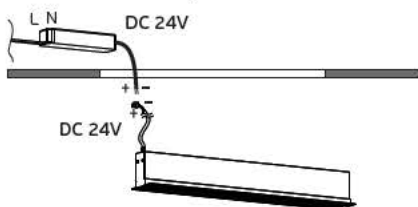

4c. Put the track into the hole, use screw to fix and instal this decorative film into track.

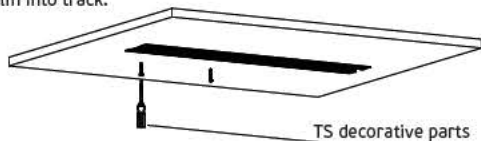

4d. Apply plaster on the track

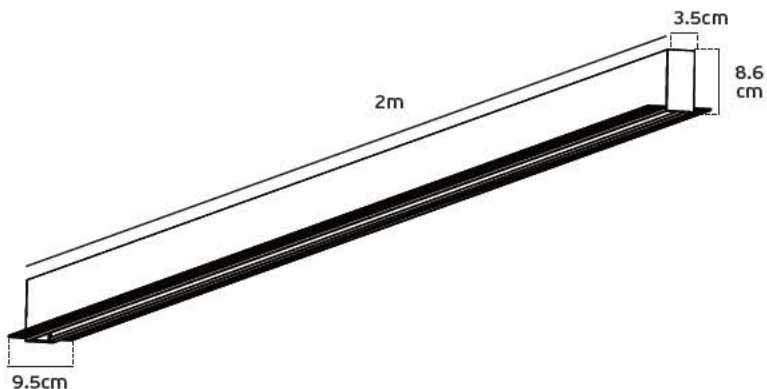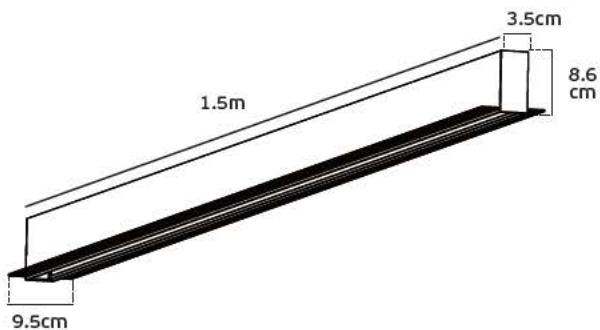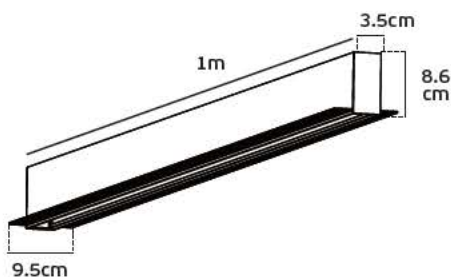

VK/04203TR/S

## Product Models

Code	Model	Box
71164-004721	VK/04203TR/S/1/B ■ Black sand. 24V. 1m. (L100.5cm)	1pc
71164-005721	VK/04203TR/S/1.5/B ■ Black sand. 24V. 1.5m (L150.5cm)	1pc
71164-006721	VK/04203TR/S/2/B ■ Black sand. 24V. 2m. (L200.5cm)	1pc


## surface/pendant



## Details


Magnetic surface mounted track line 24V. Length 1-2m. IP Rating IP20.  
Working temperature < 45°C. Material Aluminium.

IP20.

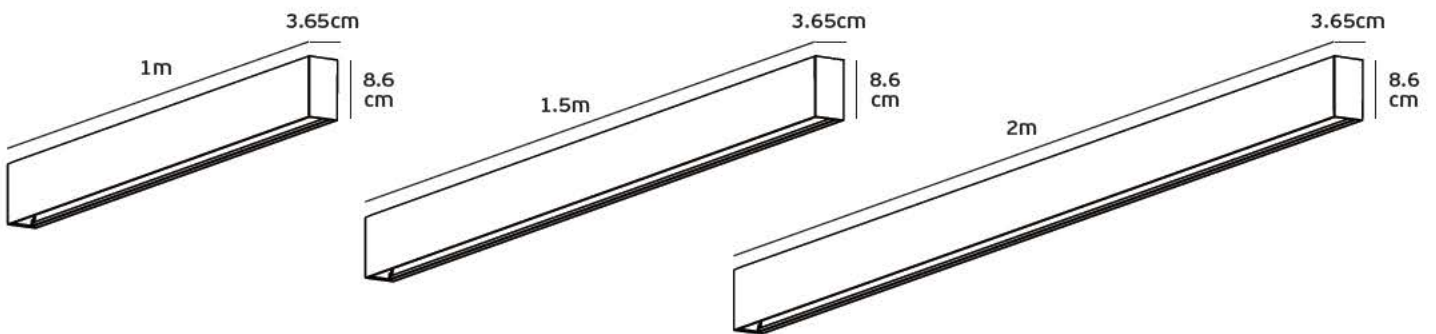


## surface

A. Use screw fix TS-S installation support on the ceiling.

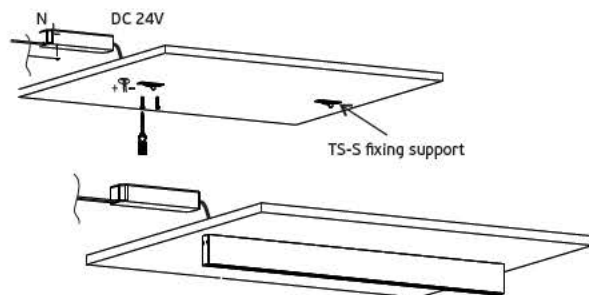


B. Connect driver output side with track power line, then fix TS-TS track with TS-TS support.


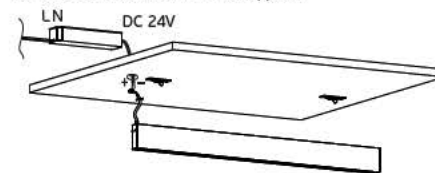


## pendant

A. Fixed TS-TP track ceiling box on ceiling with screw.

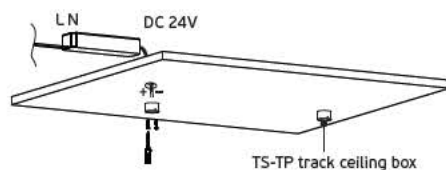

B. Connect driver output side with track line, and fixed TS-TP ceiling cover and TS-TP box cover with M4 screw.

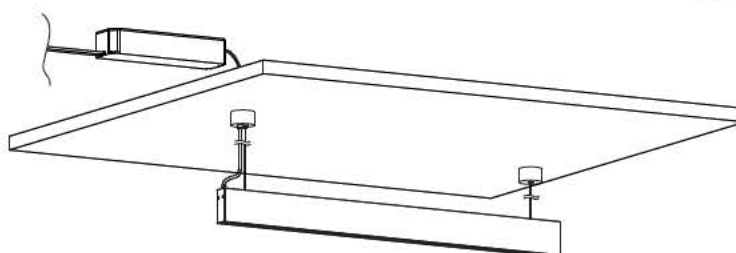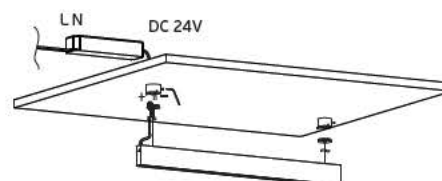

VK/04212TR/R/INN/B




Product Models

Code	Model	Box
71164-022721	VK/04212TR/R/INN/B ■ Sand Black. Inner Corner recessed.	1pc

Details

Inner corner recessed. Connect 2 rails link at an angle of 90°. Material Aluminium.



VK/04212TR/R/OUT/B




Product Models

Code	Model	Box
71164-023721	VK/04212TR/R/OUT/B ■ Sand Black. Outer Corner recessed.	1pc

Details

Outer corner recessed. Connect 2 rails link at an angle of 90°. Material Aluminium.



VK/04213TR/R/L-R/B




Product Models

Code	Model	Box
71164-024721	VK/04213TR/R/L-R/B ■ Sand Black. Left/Right Corner recessed.	1pc

Details

Left/Right corner recessed. Connect 2 rails link at an angle of 90°. Material Aluminium.



VK/04214TR/S/INN/B




Product Models

Code	Model	Box
71164-026721	VK/04214TR/S/INN/B ■ Sand Black. Inner Corner.	1pc

Details

Inner corner. Connect 2 rails link at an angle of 90°. Material Aluminium.

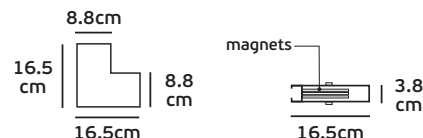

VK/04214TR/S/OUT/B




Product Models

Code	Model	Box
71164-027721	VK/04214TR/S/OUT/B ■ Sand Black. Outer Corner.	1pc

Details

Outer corner. Connect 2 rails link at an angle of 90°. Material Aluminium.

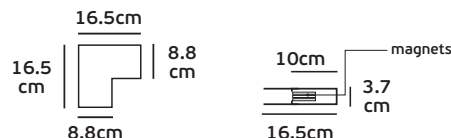

## VK/04215TR/S/L-R/B




## Product Models

Code	Model	Box
71164-028721	VK/04215TR/S/L-R/B ■ Sand Black. Left/Right corner.	1pc

## Details

Left/Right Corner. Connect 2 rails link at an angle of 90°. Material Aluminium.

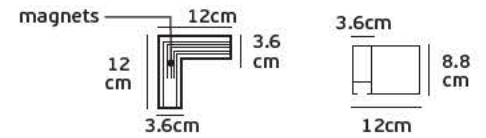

## VK/04216TR/R/CON/B



## Product Models

Code	Model	Box
71164-030721	VK/04216TR/R/CON/B ■ Sand Black. Connection accessory.	1pc

## Details

Connection accessory for magnetic recessed track. Material Aluminium.

## VK/04216TR/P/CON/B



## Product Models

Code	Model	Box
71164-031721	VK/04216TR/P/CON/B ■ Sand Black. Connection accessory.	1pc

## Details

Connection accessory for magnetic recessed track. Material Aluminium.

## VK/04217TR/PC/B



## Product Models

Code	Model	Box
71164-032721	VK/04217TR/PC/B ■ Sand Black. Power Connection accessory.	1pc

## Details

Power Connection accessory for magnetic recessed track. Material Aluminium.

## VK/04203TR/SRK




## Product Models

Code	Model	Box
71164-007721	VK/04203TR/SRK ■ Sand Black. 1m hanging kit.	1pc

## Details

Material Aluminium. 1m hanging kit.



VK/04218TR/COV/B

### Product Models

**Code**  
71164-033721



**Model**  
VK/04218TR/COV/B  
■ Black sand. Cover 1 meter.

**Box**  
1pc

### Details

Cover for magnetic track lights 24V, decoration bar for recessed or surface tracks.  
IP Rating IP20. Working temperature < 45°C. Material Acrylic.

IP20.

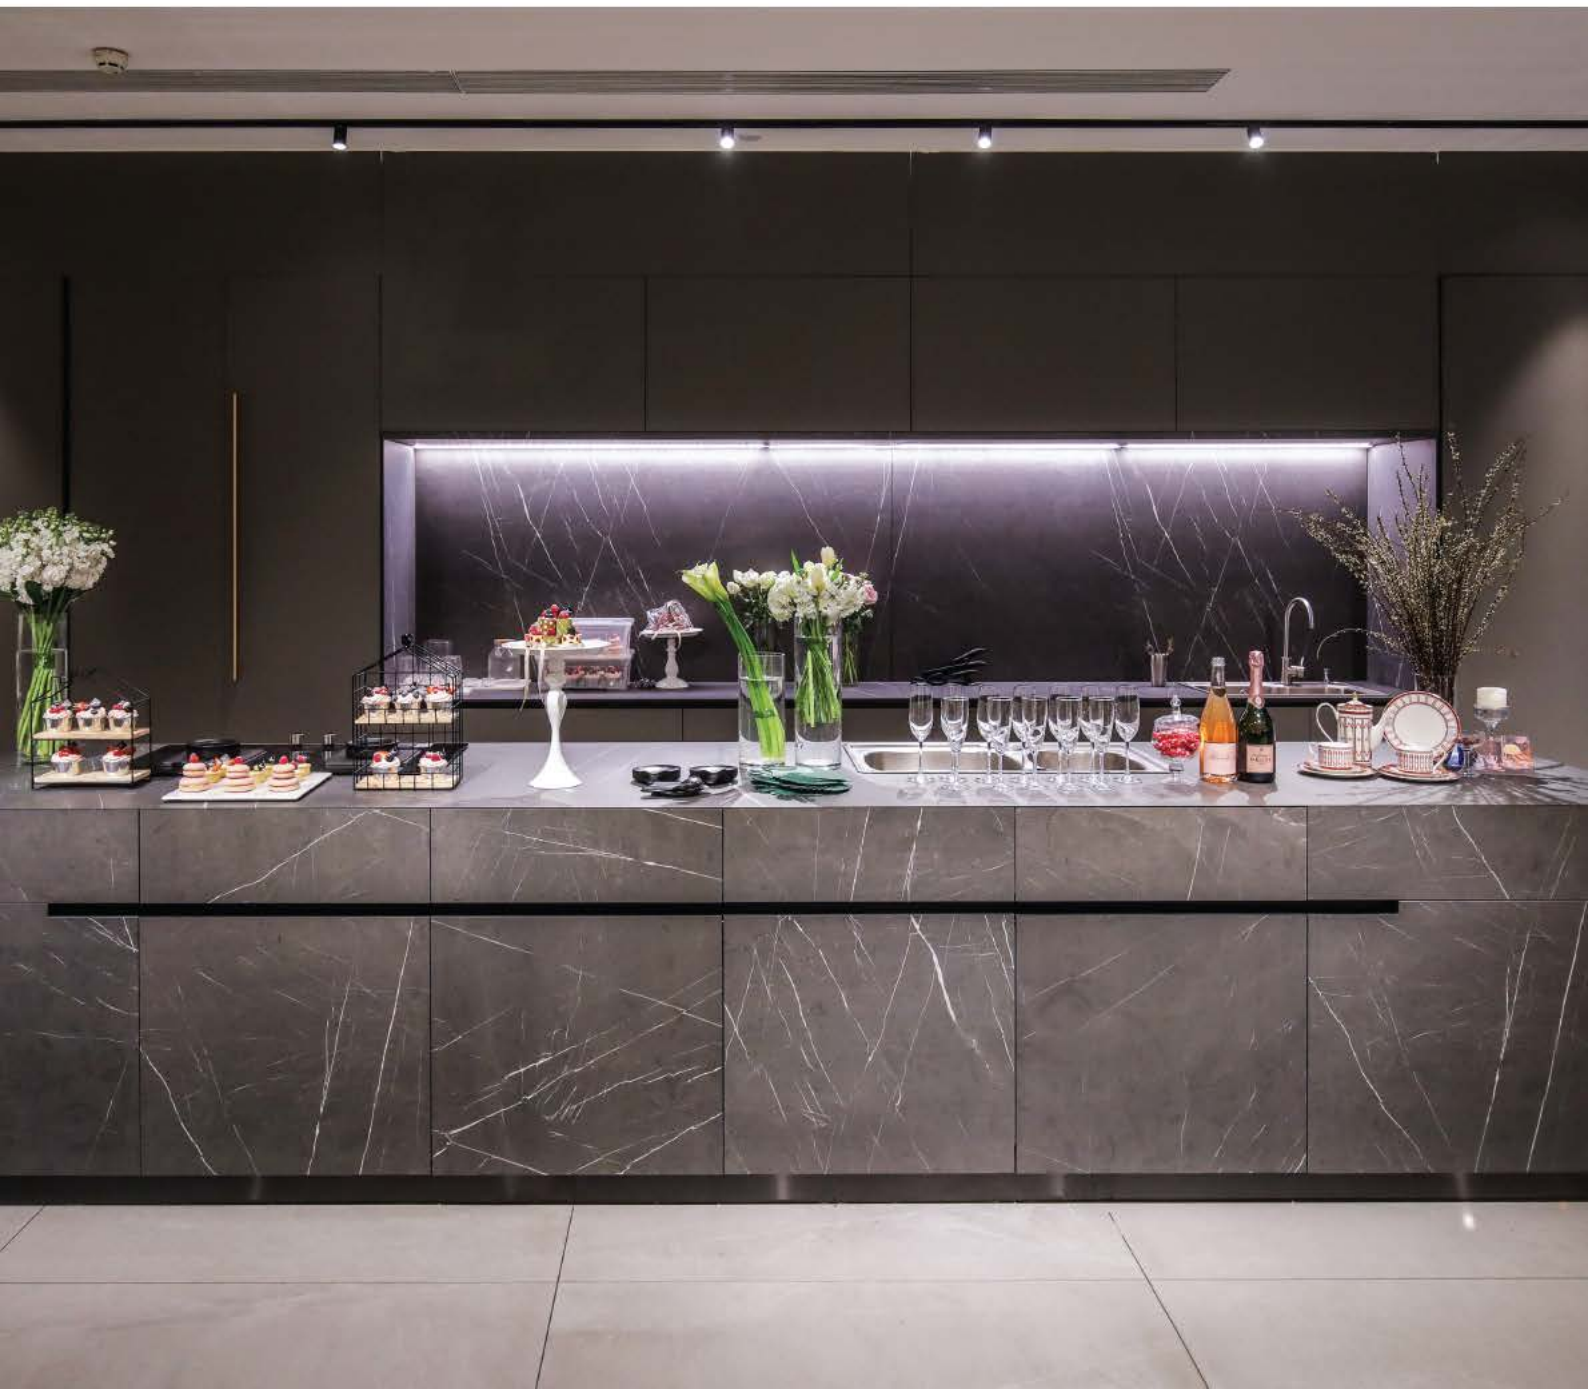



VK/LPV-60



## Product Models

Code	Model	Box
78000-595663	VK/LPV-60-24 2.5A. 60w. 24V.	32pcs

## Details

Voltage 100-240V. Watt 60w. Material Plastic housing. 2 years guarantee.



IP67. 60w.



VK/LPV-100



## Product Models

Code	Model	Box
78000-660255	VK/LPV-100-24 4.2A. 100w. 24V.	20pcs

## Details

Voltage 100-240V. Watt 100w. Material Plastic housing. 2 years guarantee.



IP67. 100w.



VK/LPV-150



## Product Models

Code	Model	Box
78000-635255	VK/LPV-150-24 6.3A. 150w. 24V.	20pcs

## Details

Voltage 180-305V. Watt 150w. Material Plastic housing. 2 years guarantee.



IP67. 150w.





VK/04207TR/LIN37



Product Models



Code	Model	Box
71164-013721	VK/04207TR/W/LIN37/B ■ Black sand. 3000K. 440lm. 12w. <i>bridgelux</i> . led. 110°. CRI>90	10pcs
71164-040721	VK/04207TR/C/LIN37/B ■ Black sand. 4000K. 440lm. 12w. <i>bridgelux</i> . led. 110°. CRI>90	10pcs

Details

Led magnetic track light DC Driver 24V. Watt 12w. Beam Angle 110°. Type of Led *bridgelux*. 2835. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.



VK/04207TR/LIN56



Product Models


Code	Model	Box
71164-014721	VK/04207TR/W/LIN56/B ■ Black sand. 3000K. 680lm. 18w. <i>bridgelux</i> . led. 110°. CRI>90	30pcs
71164-041721	VK/04207TR/C/LIN56/B ■ Black sand. 4000K. 680lm. 18w. <i>bridgelux</i> . led. 110°. CRI>90	30pcs

Details

Led magnetic track light DC Driver 24V. Watt 18w. Beam Angle 110°. Type of Led *bridgelux*. 2835. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 18w.



VK/04207TR/LIN74



Product Models


Code	Model	Box
71164-015721	VK/04207TR/W/LIN74/B ■ Black sand. 3000K. 1.050lm. 24w. <i>bridgelux</i> . led. 110°. CRI>90	12pcs
71164-042721	VK/04207TR/C/LIN74/B ■ Black sand. 4000K. 1.050lm. 24w. <i>bridgelux</i> . led. 110°. CRI>90	12pcs

Details

Led magnetic track light DC Driver 24V. Watt 24w. Beam Angle 110°. Type of Led *bridgelux*. 2835. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 24w.





VK/04204TR/3



Product Models



Code	Model	Box
71164-008721	VK/04204TR/W/3/B ■ Black sand. 3000K. 383lm. 6w. <i>bridgelux</i> . led. 8°. CRI>90	20pcs
71164-043721	VK/04204TR/C/3/B ■ Black sand. 4000K. 383lm. 6w. <i>bridgelux</i> . led. 8°. CRI>90	20pcs

Details

Led magnetic track light DC Driver 24V. Watt 6w. Beam Angle 8°. Type of Led *bridgelux*. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 6w.



VK/04204TR/6



Product Models


Code	Model	Box
71164-009721	VK/04204TR/W/6/B ■ Black sand. 3000K. 756lm. 12w. <i>bridgelux</i> . led. 8°. CRI>90	50pcs
71164-044721	VK/04204TR/C/6/B ■ Black sand. 4000K. 756lm. 12w. <i>bridgelux</i> . led. 8°. CRI>90	50pcs

Details

Led magnetic track light DC Driver 24V. Watt 12w. Beam Angle 8°. Type of Led *bridgelux*. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.



VK/04204TR/12



Product Models


Code	Model	Box
71164-010721	VK/04204TR/W/12/B ■ Black sand. 3000K. 1.408lm. 24w. <i>bridgelux</i> . led. 8°. CRI>90	10pcs
71164-046721	VK/04204TR/C/12/B ■ Black sand. 4000K. 1.408lm. 24w. <i>bridgelux</i> . led. 8°. CRI>90	10pcs

Details

Led magnetic track light DC Driver 24V. Watt 24w. Beam Angle 8°. Type of Led *bridgelux*. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 24w.



VK/04205TR/6



Product Models



Code	Model	Box
71164-011721	VK/04205TR/W/6/B ■ Black sand. 3000K. 756lm. 12w. <i>bridgelux</i> . led. 8°. CRI>90	20pcs
71164-045721	VK/04205TR/C/6/B ■ Black sand. 4000K. 756lm. 12w. <i>bridgelux</i> . led. 8°. CRI>90	20pcs

Details

Led magnetic track light DC Driver 24V. Watt 12w. Beam Angle 8°. Type of Led *bridgelux*. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.

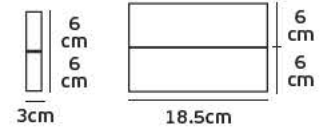

VK/04206TR




Code	Model	Box
71164-012721	VK/04206TR/W/LIN/B ■ Black sand. 3000K. 348lm. 10w. <i>bridgelux</i> . led. 18°. CRI>90	30pcs
71164-039721	VK/04206TR/C/LIN/B ■ Sand Black. 4000K. 348lm. 10w. <i>bridgelux</i> . led. 18°. CRI>90	30pcs

Details

Led magnetic track light DC Driver 24V. Watt 10w. CRI>90. Beam Angle 18°. Type of Led *bridgelux*. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 10w.



VK/04208TR/SP



Product Models



Code	Model	Box
71164-016721	VK/04208TR/W/SP/B ■ Black sand. 3000K. 480lm. 7w. 24°. CRI>90	30pcs
71164-047721	VK/04208TR/C/SP/B ■ Black sand. 4000K. 480lm. 7w. 24°. CRI>90	30pcs

Details

Led magnetic track light DC Driver 24V. Watt 7w. Beam Angle 24°. Type of Led CREE CXA 1304. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 7w.



VK/04209TR/SP



Product Models



Code	Model	Box
71164-017721	VK/04209TR/W/SP/B ■ Black sand. 3000K. 850lm. 12w. 24°. CRI>90	20pcs
71164-038721	VK/04209TR/C/SP/B ■ Black sand. 4000K. 850lm. 12w. 24°. CRI>90	20pcs

Details

Led magnetic track light DC Driver 24V. Watt 12w. Beam Angle 24°. Type of Led CREE CXA 1507. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.



VK/04210TR/SP



Product Models



Code	Model	Box
71164-018721	VK/04210TR/W/SP/B ■ Black sand. 3000K. 2.220lm. 28w. 24°. CRI>90	12pcs
71164-048721	VK/04210TR/C/SP/B ■ Black sand. 4000K. 2.220lm. 28w. 24°. CRI>90	12pcs

Details

Led magnetic track light DC Driver 24V. Watt 28w. Beam Angle 24°. Type of Led CREE CXA 1816. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 28w.

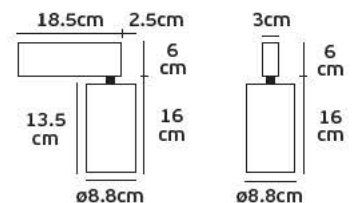



VK/04208TR/SP/3

## Product Models



Code	Model							Box
71164-019721	VK/04208TR/W/SP/3/B ■ Black sand.	3000K.	1.100lm.	21w.	24°.	CRI>90		12pcs
71164-049721	VK/04208TR/C/SP/3/B ■ Black sand.	4000K.	1.100lm.	21w.	24°.	CRI>90		12pcs

## Details

Led magnetic track light DC Driver 24V. Watt 21w. Beam Angle 24°. Type of Led CREE CXA 1304. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 21w.

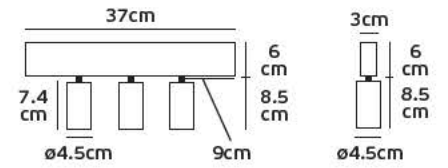

VK/04210TR/PE



Product Models



Code	Model	Box
71164-020721	VK/04210TR/W/PE/B ■ Black sand. 3000K. 92lm. 3w. 15°. CRI>90	12pcs
71164-050721	VK/04210TR/C/PE/B ■ Black sand. 4000K. 92lm. 3w. 15°. CRI>90	12pcs

Details

Led magnetic track light DC Driver 24V. Watt 3w. Beam Angle 15°. Type of Led CREE XP-E2. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 3w.

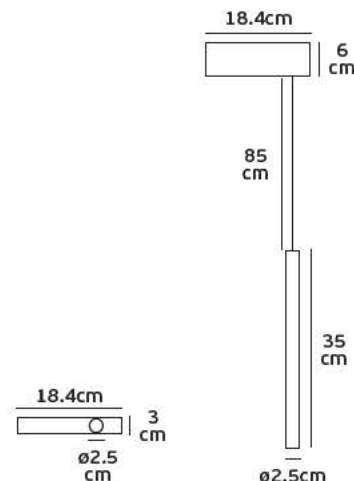

VK/04211TR/PE



Product Models



Code	Model	Box
71164-021721	VK/04211TR/W/PE/B ■ Black sand. 3000K. 558lm. 7w. 24°. CRI>90	10pcs
71164-051721	VK/04211TR/C/PE/B ■ Black sand. 4000K. 558lm. 7w. 24°. CRI>90	10pcs

Details

Led magnetic track light DC Driver 24V. Watt 7w. Beam Angle 24°. Type of Led CREE CXA 1304. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.




IP20. 7w.

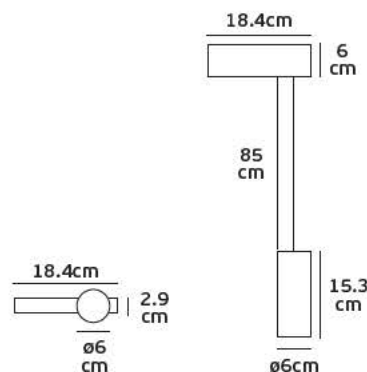






**Συνδεσμολογία Μαγνητικής Ράγας**  
**Magnet Track System Electrical Diagram**

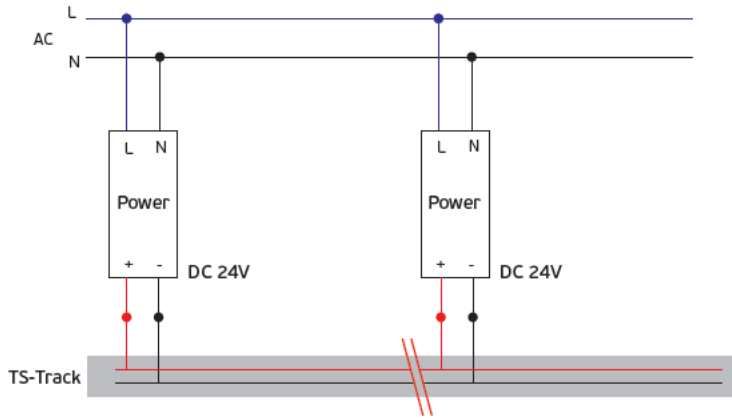

Note: When all lights power is bigger than load power, need to add one new driver into track.

(driver is near track installation position easily to install)  
 Before install track, put the driver into ceiling, calculate driver power and lights power. Lights power must be smaller than driver's power. If is bigger, need to add one more driver.

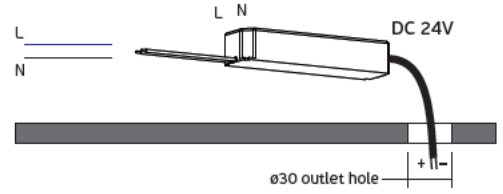


**Driver**  
 LPV-60-24//AC:100-240V DC:60W 24V  
 LPV-100-24//AC:100-240V DC:100W 24V  
 LPV-150-24//AC:100-240V DC:150W 24V

**Cut off electric supply before installation!**


**Πίνακας Διαστάσεων Κοπής**  
**Built-in Magnet Track System Cut out size List**

Product diagram	Model	Cut out size	Cut out figure
	TS-TR Track/1m TS-TR Track/1.5m TS-TR Track/2m	L1010xw 50mm L1510xw 50mm L2010xw 50mm	
	TR-R Inner Corner	L100xw 50mm	
	TR-R Out Corner	L100xw 50mm	
	TR-R90 Left Corner	L125xw 50mm	
	TR-R90 Right Corner	L125xw 50mm	


4a. Check cut out size, then cut the hole in position.



4b. Connect driver output side with track line.

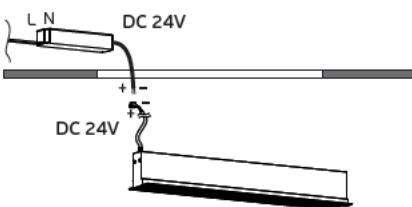

4c. Put the track into the hole, use screw to fix and instal this decorative film into track.




4d. Apply plaster on the track




## Οδηγίες Εγκατάστασης Χωνευτής Μαγνητικής Ράγας Recessed Magnet Track Installation Diagram

Product detail

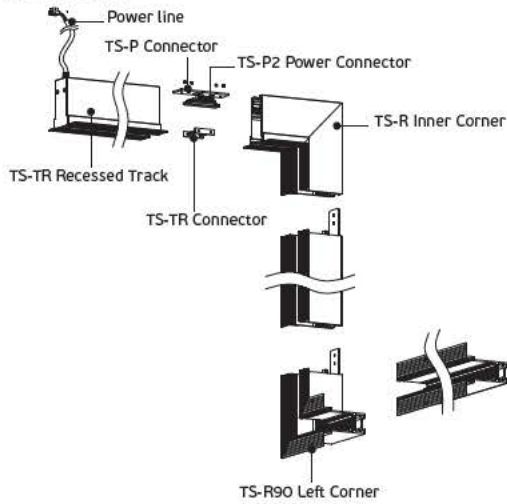

New connect driver: output line diagram



Recessed magnet track system connect

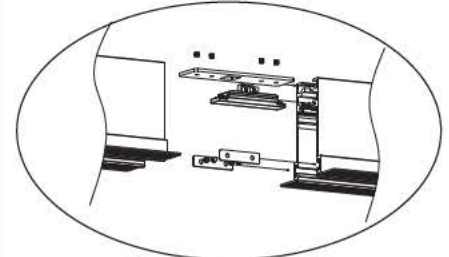


Figure 1


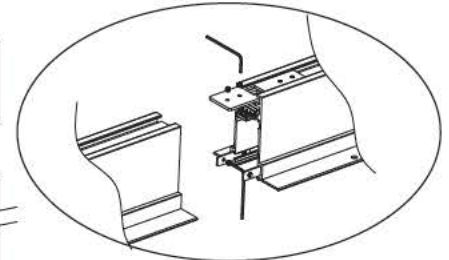



Figure 2

## Οδηγίες Εγκατάστασης Επιτοίχιας Μαγνητικής Ράγας Surface Mounted Magnet Track System Installation diagram

Product detail

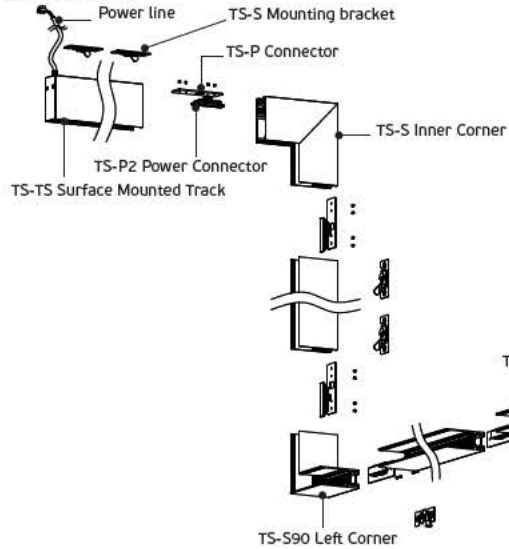

New connect driver: output line diagram



Surface mounted magnet track system connection diagram

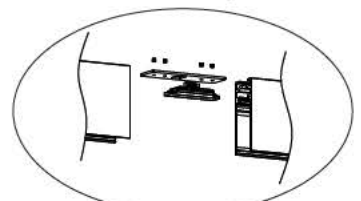


Figure 1



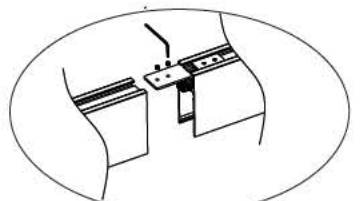


Figure 2


A. Use screw fix TS-S installation support on the ceiling.

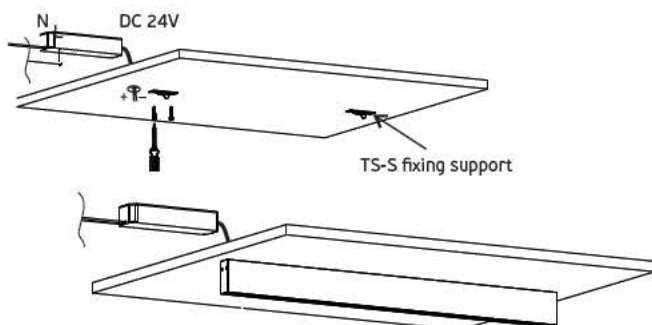


B. Connect driver output side with track power line, then fix TS-TS track with TS-TS support.

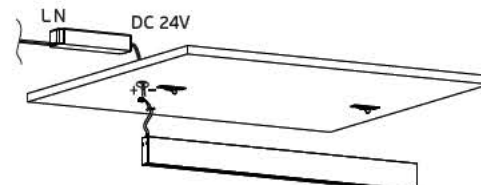



**Οδηγίες Εγκατάστασης Κρεμαστής Μαγνητικής Ράγας**  
**Hanging Magnet Track System Installation Diagram**

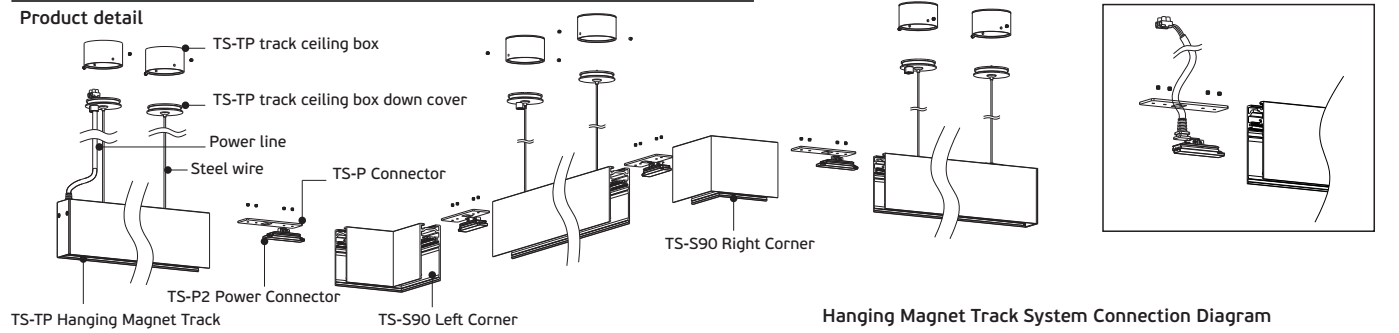

A. Fixed TS-TP track ceiling box on ceiling with screw.

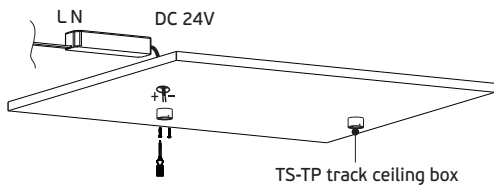


B. Connect driver output side with track line, and fixed TS-TP ceiling cover and TS-TP box cover with M4 screw.

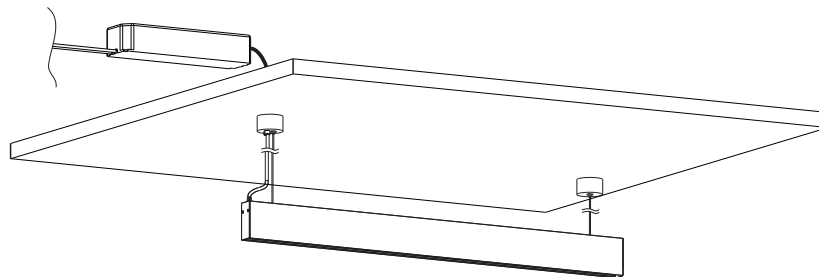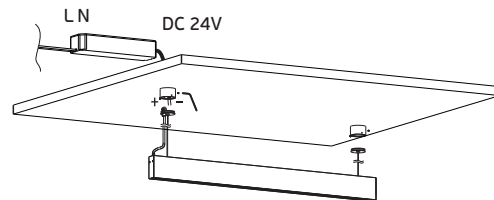

**Τρόπος Τοποθέτησης Φωτιστικών**  
**Magnet Track System-lights Installation**

Magnet track system, lights installation has Magnet and buckle style

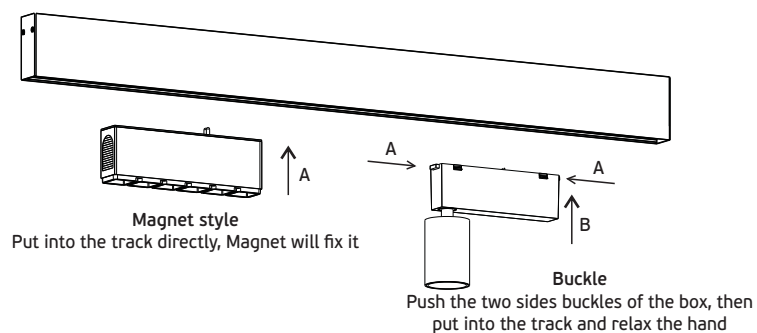






▲ Η VK έχει αναπτύξει ειδική μονάδα παραγωγής και κατασκευής γραμμικών φωτιστικών με γρήγορους χρόνους παράδοσης. Υπάρχει δυνατότητα κατασκευής, εξωτερικών, κρεμαστών ή χωνευτών, σε μήκη έτσι ώστε να προσαρμόζονται στις απαιτήσεις των έργων, ειδικές βαφές (RAL), CRI, πιο πολλά lumen και Kelvin σύμφωνα με τις ανάγκες των μελετών.

▲ VK has developed a special unit for the production and manufacture of linear lights with fast delivery times. It is possible to construct external, hanging or recessed in lengths to fit the requirements of projects, special colors (RAL), CRI, more lumen and Kelvin according to the needs of the studies.

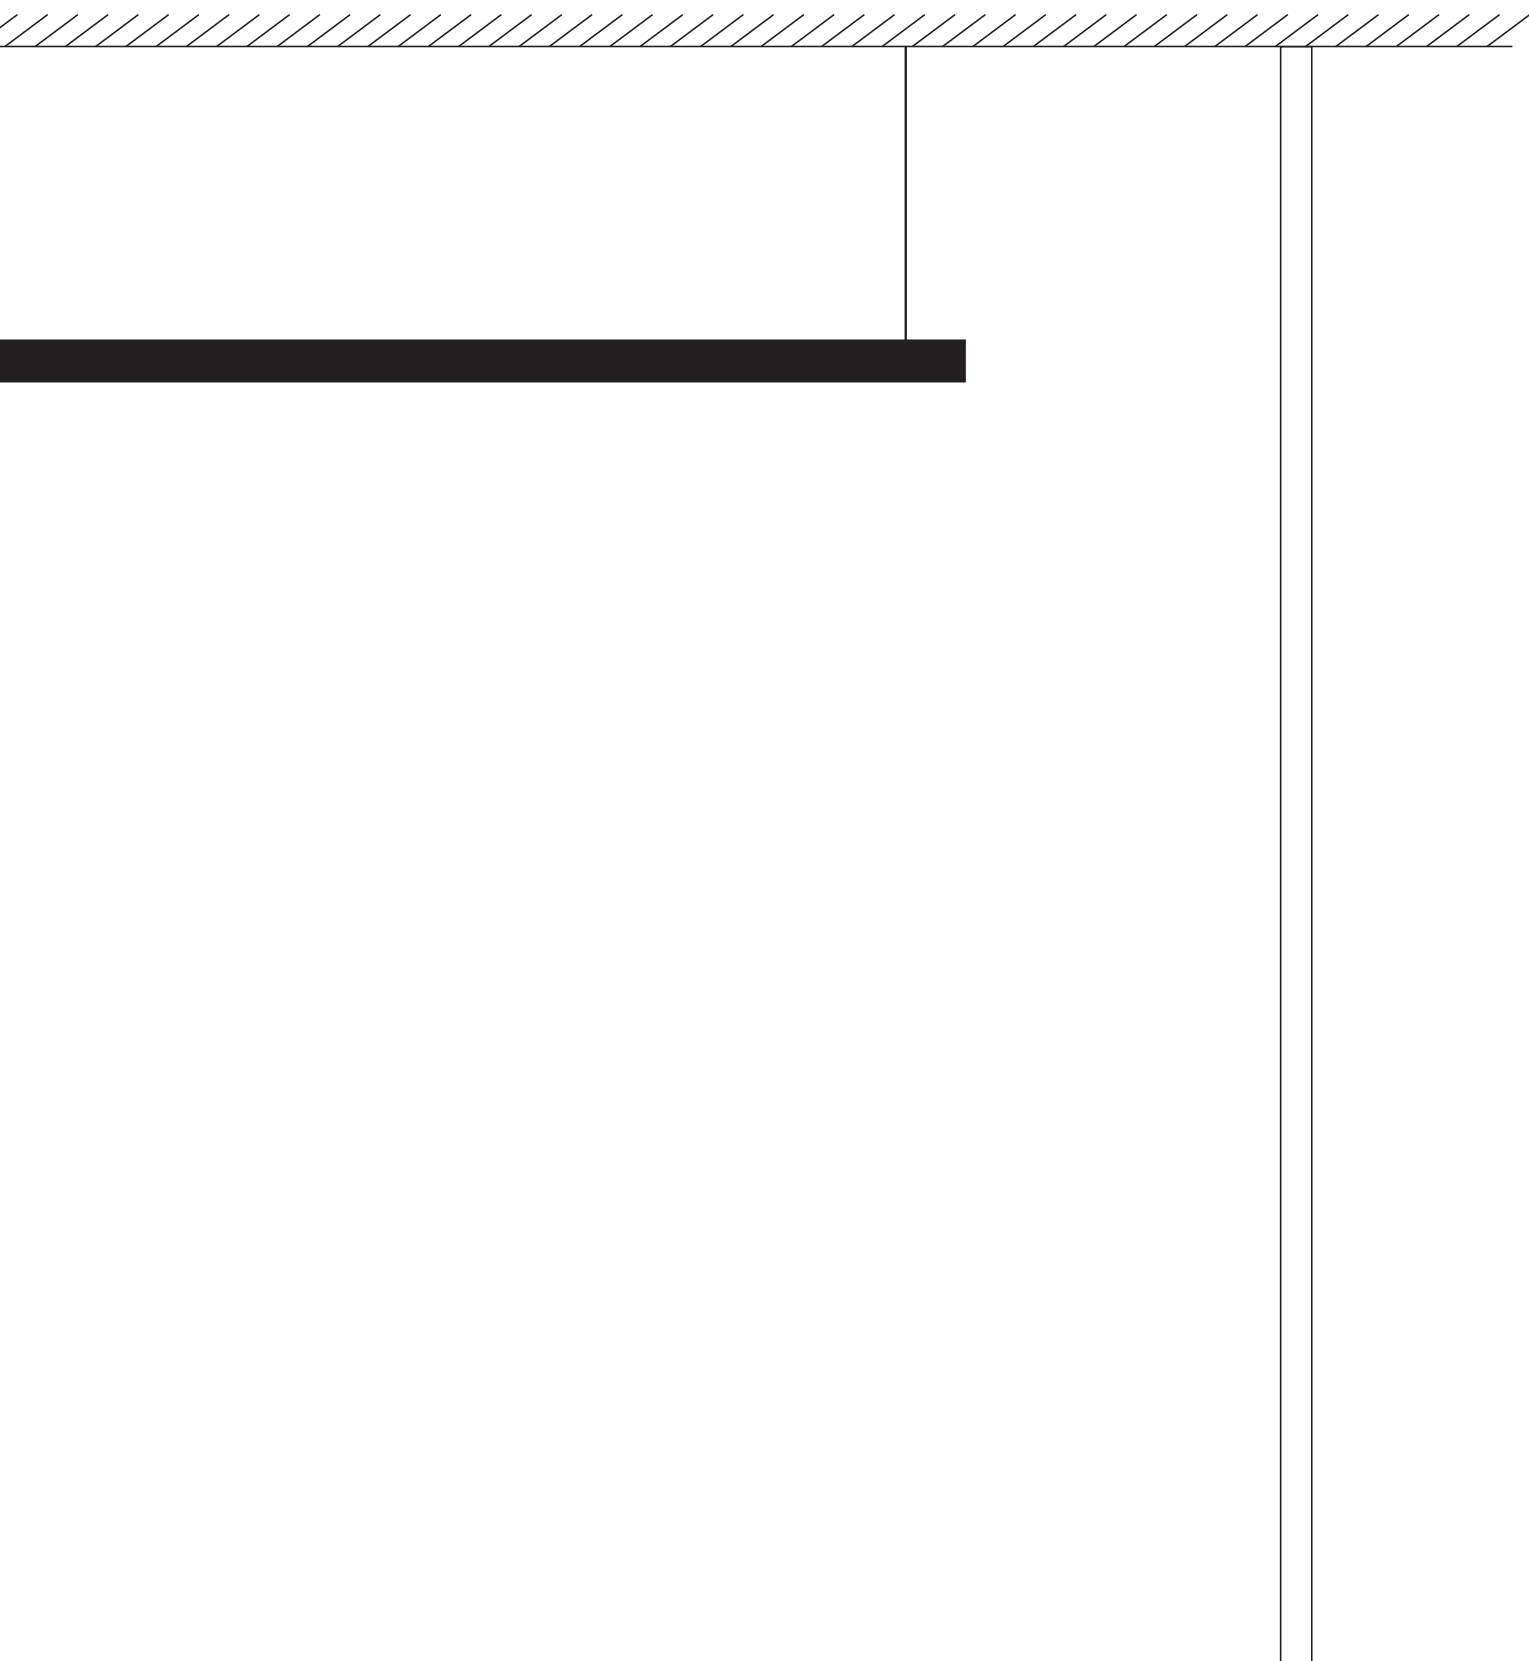

## *led linear lighting 05*

γραμμικός φωτισμός







VK/04462


Product Models

Code	Model						Box
75167-037210	VK/04462/60/W/W	□ White	3000K	29w	4.750lm	ø60cm	1pc
75167-038210	VK/04462/60/B/W	■ Black	3000K	29w	4.750lm	ø60cm	1pc
75167-039210	VK/04462/60/W/C	□ White	4000K	29w	4.750lm	ø60cm	1pc
75167-040210	VK/04462/60/B/C	■ Black	4000K	29w	4.750lm	ø60cm	1pc
75167-041210	VK/04462/90/W/W	□ White	3000K	44w	7.340lm	ø90cm	1pc
75167-042210	VK/04462/90/B/W	■ Black	3000K	44w	7.340lm	ø90cm	1pc
75167-043210	VK/04462/90/W/C	□ White	4000K	44w	7.340lm	ø90cm	1pc
75167-044210	VK/04462/90/B/C	■ Black	4000K	44w	7.340lm	ø90cm	1pc
75167-045210	VK/04462/120/W/W	□ White	3000K	57w	9.490lm	ø120cm	1pc
75167-046210	VK/04462/120/B/W	■ Black	3000K	57w	9.490lm	ø120cm	1pc
75167-047210	VK/04462/120/W/C	□ White	4000K	57w	9.490lm	ø120cm	1pc
75167-048210	VK/04462/120/B/C	■ Black	4000K	57w	9.490lm	ø120cm	1pc
75167-049210	VK/04462/140/W/W	□ White	3000K	78w	13.000lm	ø140cm	1pc
75167-050210	VK/04462/140/B/W	■ Black	3000K	78w	13.000lm	ø140cm	1pc
75167-051210	VK/04462/140/W/C	□ White	4000K	78w	13.000lm	ø140cm	1pc
75167-052210	VK/04462/140/B/C	■ Black	4000K	78w	13.000lm	ø140cm	1pc
75167-053210	VK/04462/180/W/W	□ White	3000K	99w	16.380lm	ø180cm	1pc
75167-054210	VK/04462/180/B/W	■ Black	3000K	99w	16.380lm	ø180cm	1pc
75167-055210	VK/04462/180/W/C	□ White	4000K	99w	16.380lm	ø180cm	1pc
75167-056210	VK/04462/180/B/C	■ Black	4000K	99w	16.380lm	ø180cm	1pc

Details


Voltage 220-240V. CRI>80. Type of LED **TRIDONIC**. Beam angle 120°. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

 5 years guarantee







IP20.

VK/04462/60/W/C



- » **TRIDONIC** LLE-G2
- » **TRIDONIC** LED driver

320

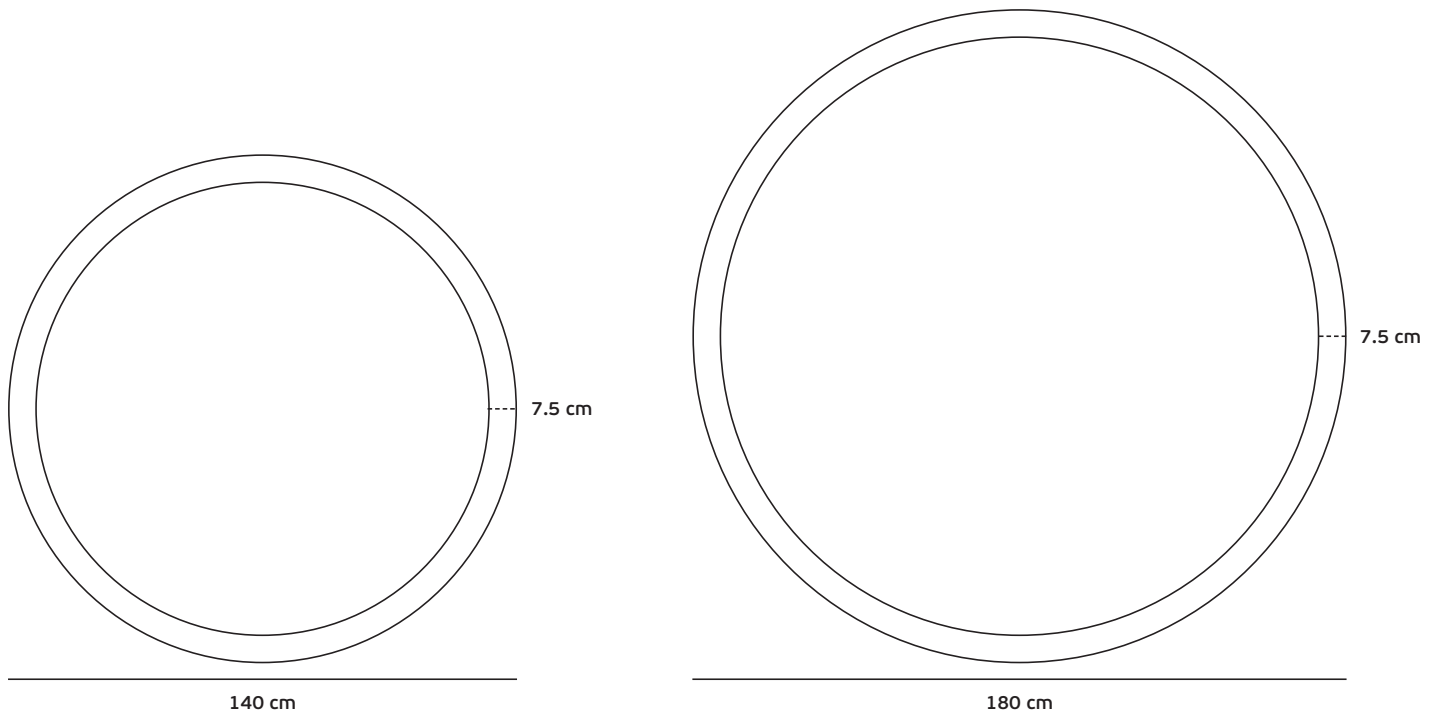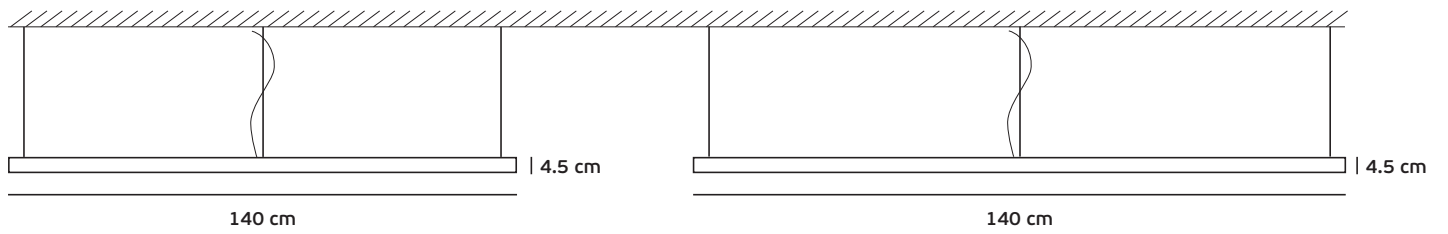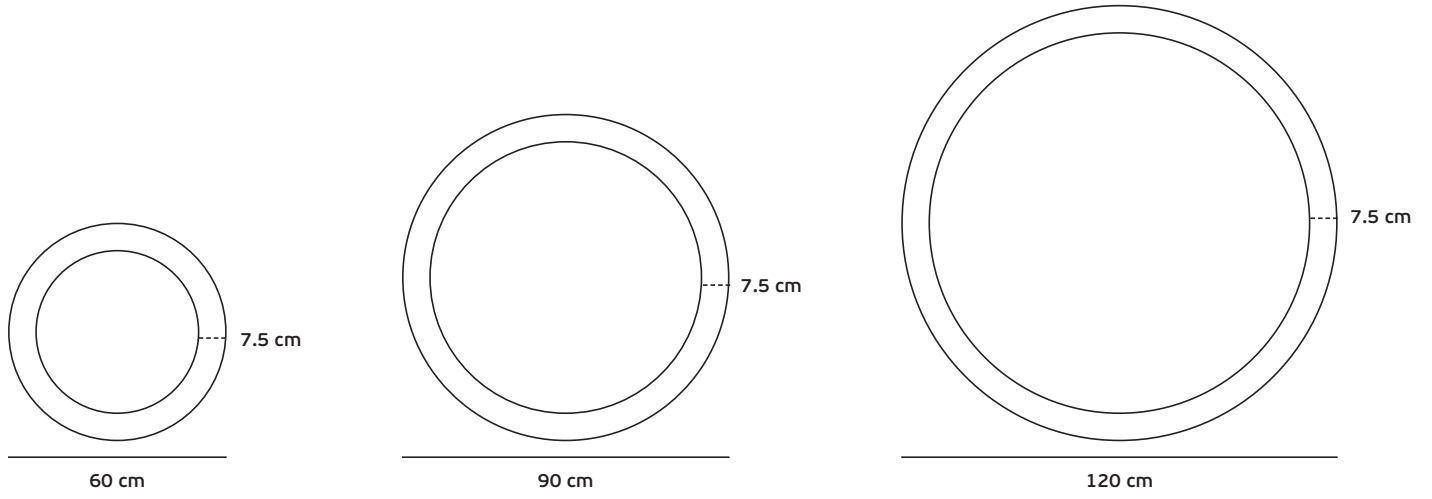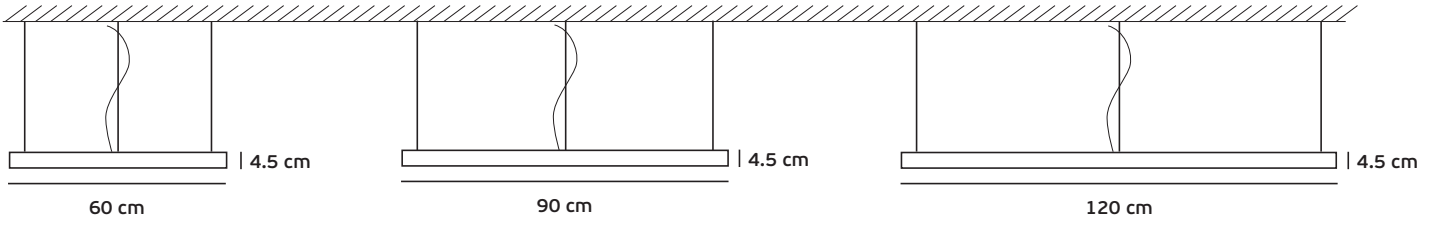





VK/04463


Product Models

Code	Model			Down	Up	Down	Up	Length	Box
75167-057210	VK/04463/58/W/W	□ White	3000K	11w	6w	1.730lm	830lm	58cm	1pc
75167-058210	VK/04463/58/B/W	■ Black	3000K	11w	6w	1.730lm	830lm	58cm	1pc
75167-059210	VK/04463/58/W/C	□ White	4000K	11w	6w	1.730lm	830lm	58cm	1pc
75167-060210	VK/04463/58/B/C	■ Black	4000K	11w	6w	1.730lm	830lm	58cm	1pc
75167-061210	VK/04463/86/W/W	□ White	3000K	16w	11w	2.530lm	1.730lm	86cm	1pc
75167-062210	VK/04463/86/B/W	■ Black	3000K	16w	11w	2.530lm	1.730lm	86cm	1pc
75167-063210	VK/04463/86/W/C	□ White	4000K	16w	11w	2.530lm	1.730lm	86cm	1pc
75167-064210	VK/04463/86/B/C	■ Black	4000K	16w	11w	2.530lm	1.730lm	86cm	1pc
75167-065210	VK/04463/114/W/W	□ White	3000K	21w	16w	3.430lm	2.530lm	114cm	1pc
75167-066210	VK/04463/114/B/W	■ Black	3000K	21w	16w	3.430lm	2.530lm	114cm	1pc
75167-067210	VK/04463/114/W/C	□ White	4000K	21w	16w	3.430lm	2.530lm	114cm	1pc
75167-068210	VK/04463/114/B/C	■ Black	4000K	21w	16w	3.430lm	2.530lm	114cm	1pc
75167-069210	VK/04463/142/W/W	□ White	3000K	26w	21w	4.350lm	3.430lm	142cm	1pc
75167-070210	VK/04463/142/B/W	■ Black	3000K	26w	21w	4.350lm	3.430lm	142cm	1pc
75167-071210	VK/04463/142/W/C	□ White	4000K	26w	21w	4.350lm	3.430lm	142cm	1pc
75167-072210	VK/04463/142/B/C	■ Black	4000K	26w	21w	4.350lm	3.430lm	142cm	1pc
75167-073210	VK/04463/198/W/W	□ White	3000K	37w	31w	5.960lm	5.140lm	198cm	1pc
75167-074210	VK/04463/198/B/W	■ Black	3000K	37w	31w	5.960lm	5.140lm	198cm	1pc
75167-075210	VK/04463/198/W/C	□ White	4000K	37w	31w	5.960lm	5.140lm	198cm	1pc
75167-076210	VK/04463/198/B/C	■ Black	4000K	37w	31w	5.960lm	5.140lm	198cm	1pc
75167-077210	VK/04463/226/W/W	□ White	3000K	42w	37w	6.850lm	5.960lm	226cm	1pc
75167-078210	VK/04463/226/B/W	■ Black	3000K	42w	37w	6.850lm	5.960lm	226cm	1pc
75167-079210	VK/04463/226/W/C	□ White	4000K	42w	37w	6.850lm	5.960lm	226cm	1pc
75167-080210	VK/04463/226/B/C	■ Black	4000K	42w	37w	6.850lm	5.960lm	226cm	1pc

Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department. (included suspension kit 2m height)

 5 years guarantee

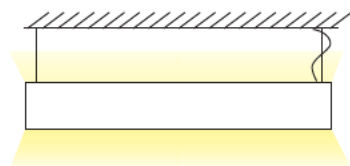

IP20.








VK/04463/114/W/C



- » **TRIDONIC** LLE-G2
- » **TRIDONIC** LED driver



## Up-Down lighting

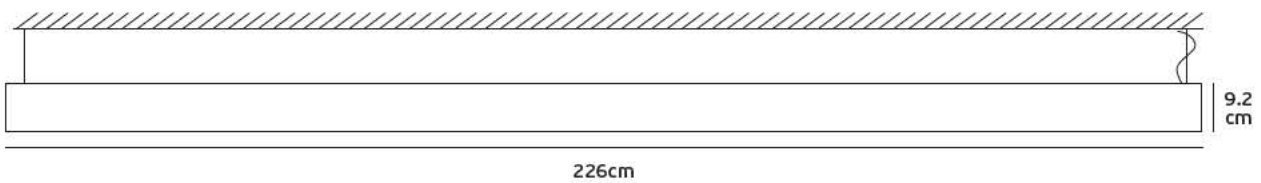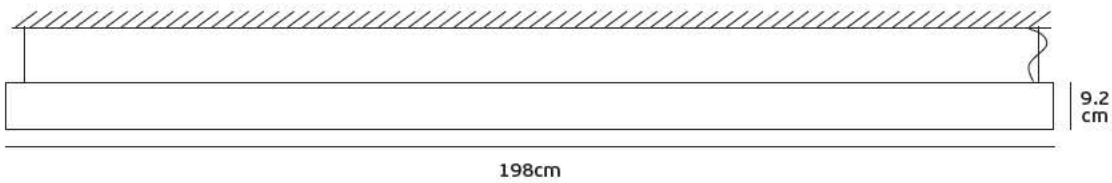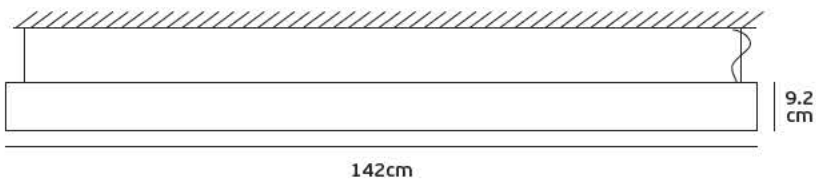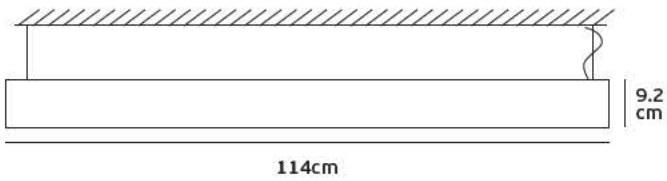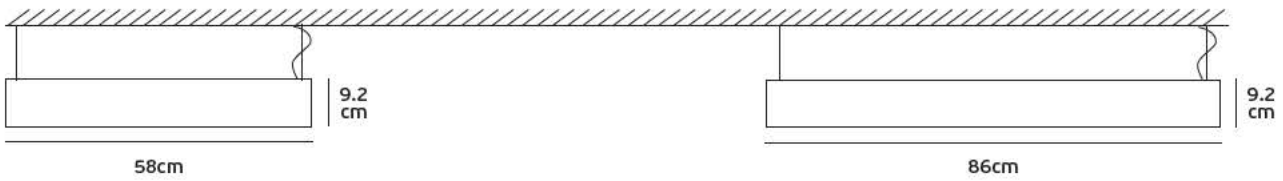















VK/04156

Product Models


Code	Model						Box
75165-383210	VK/04156/56/AL/W	■ Aluminium	3000K	13w	1.600lm	56cm	1pc
75165-384210	VK/04156/56/W/W	□ White	3000K	13w	1.600lm	56cm	1pc
75165-385210	VK/04156/56/B/W	■ Black	3000K	13w	1.600lm	56cm	1pc
75165-401210	VK/04156/56/AL/C	■ Aluminium	4000K	13w	1.600lm	56cm	1pc
75165-402210	VK/04156/56/W/C	□ White	4000K	13w	1.600lm	56cm	1pc
75165-403210	VK/04156/56/B/C	■ Black	4000K	13w	1.600lm	56cm	1pc
75165-386210	VK/04156/84/AL/W	■ Aluminium	3000K	19w	2.400lm	84cm	1pc
75165-387210	VK/04156/84/W/W	□ White	3000K	19w	2.400lm	84cm	1pc
75165-388210	VK/04156/84/B/W	■ Black	3000K	19w	2.400lm	84cm	1pc
75165-404210	VK/04156/84/AL/C	■ Aluminium	4000K	19w	2.400lm	84cm	1pc
75165-405210	VK/04156/84/W/C	□ White	4000K	19w	2.400lm	84cm	1pc
75165-406210	VK/04156/84/B/C	■ Black	4000K	19w	2.400lm	84cm	1pc
75165-389210	VK/04156/112/AL/W	■ Aluminium	3000K	25w	3.200lm	112cm	1pc
75165-390210	VK/04156/112/W/W	□ White	3000K	25w	3.200lm	112cm	1pc
75165-391210	VK/04156/112/B/W	■ Black	3000K	25w	3.200lm	112cm	1pc
75165-407210	VK/04156/112/AL/C	■ Aluminium	4000K	25w	3.200lm	112cm	1pc
75165-408210	VK/04156/112/W/C	□ White	4000K	25w	3.200lm	112cm	1pc
75165-409210	VK/04156/112/B/C	■ Black	4000K	25w	3.200lm	112cm	1pc
75165-392210	VK/04156/140/AL/W	■ Aluminium	3000K	31w	4.000lm	140cm	1pc
75165-393210	VK/04156/140/W/W	□ White	3000K	31w	4.000lm	140cm	1pc
75165-394210	VK/04156/140/B/W	■ Black	3000K	31w	4.000lm	140cm	1pc
75165-410210	VK/04156/140/AL/C	■ Aluminium	4000K	31w	4.000lm	140cm	1pc
75165-411210	VK/04156/140/W/C	□ White	4000K	31w	4.000lm	140cm	1pc
75165-412210	VK/04156/140/B/C	■ Black	4000K	31w	4.000lm	140cm	1pc

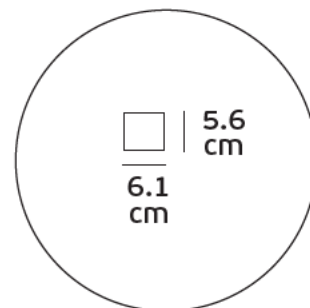

Code	Model						Box
75165-395210	VK/04156/168/AL/W	■ Aluminium	3000K	38w	4.800lm	168cm	1pc
75165-396210	VK/04156/168/W/W	□ White	3000K	38w	4.800lm	168cm	1pc
75165-397210	VK/04156/168/B/W	■ Black	3000K	38w	4.800lm	168cm	1pc
75165-413210	VK/04156/168/AL/C	■ Aluminium	4000K	38w	4.800lm	168cm	1pc
75165-414210	VK/04156/168/W/C	□ White	4000K	38w	4.800lm	168cm	1pc
75165-415210	VK/04156/168/B/C	■ Black	4000K	38w	4.800lm	168cm	1pc
75165-398210	VK/04156/196/AL/W	■ Aluminium	3000K	44w	5.600lm	196cm	1pc
75165-399210	VK/04156/196/W/W	□ White	3000K	44w	5.600lm	196cm	1pc
75165-400210	VK/04156/196/B/W	■ Black	3000K	44w	5.600lm	196cm	1pc
75165-416210	VK/04156/196/AL/C	■ Aluminium	4000K	44w	5.600lm	196cm	1pc
75165-417210	VK/04156/196/W/C	□ White	4000K	44w	5.600lm	196cm	1pc
75165-418210	VK/04156/196/B/C	■ Black	4000K	44w	5.600lm	196cm	1pc


Details

Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. CRI>80. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.



IP20.

VK/04156/140/W/C



- » TRIDONIC LLE-G2
- » TRIDONIC LED driver




**VK/04156/CE (Ceiling)**

**Product Models**

Code	Model		Box
75165-311210	VK/04156/CE	■ Aluminium suspension of roof	1pc

*Details*

Material **Aluminium**.

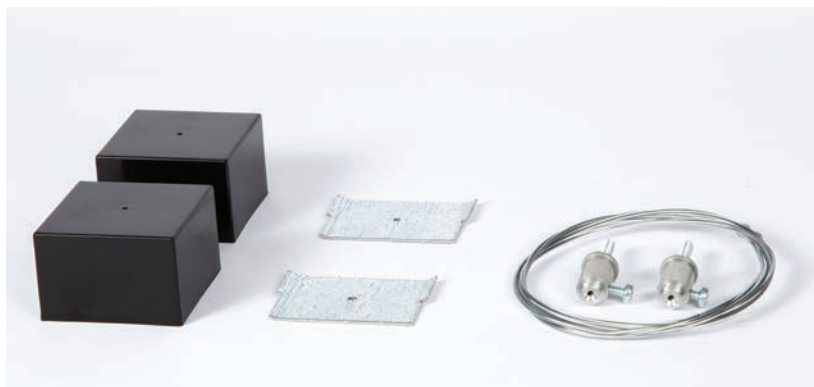

**VK/04156/SRK (Pendant)**

**Product Models**

Code	Model		Box
75165-144210	VK/04156/AL/SRK/1	■ Aluminium	1m.
75165-199210	VK/04156/W/SRK/1	□ White	1m.
75165-130210	VK/04156/B/SRK/1	■ Black	1m.
75165-137210	VK/04156/AL/SRK/2	■ Aluminium	2m.
75165-263210	VK/04156/W/SRK/2	□ White	2m.
75165-189210	VK/04156/B/SRK/2	■ Black	2m.
75165-421210	VK/04156/AL/SRK/3	■ Aluminium	3m.
75165-132210	VK/04156/W/SRK/3	□ White	3m.
75165-420210	VK/04156/B/SRK/3	■ Black	3m.

*Details*

Material **Aluminium**.













## VK/04157

## Product Models

Code	Model						Box
75165-423210	VK/04157/57/AL/W	■ Aluminium	3000K	13w	1.600lm	57cm	1pc
75165-424210	VK/04157/57/W/W	□ White	3000K	13w	1.600lm	57cm	1pc
75165-425210	VK/04157/57/B/W	■ Black	3000K	13w	1.600lm	57cm	1pc
75165-441210	VK/04157/57/AL/C	■ Aluminium	4000K	13w	1.600lm	57cm	1pc
75165-442210	VK/04157/57/W/C	□ White	4000K	13w	1.600lm	57cm	1pc
75165-443210	VK/04157/57/B/C	■ Black	4000K	13w	1.600lm	57cm	1pc
75165-426210	VK/04157/85/AL/W	■ Aluminium	3000K	19w	2.400lm	85cm	1pc
75165-427210	VK/04157/85/W/W	□ White	3000K	19w	2.400lm	85cm	1pc
75165-428210	VK/04157/85/B/W	■ Black	3000K	19w	2.400lm	85cm	1pc
75165-444210	VK/04157/85/AL/C	■ Aluminium	4000K	19w	2.400lm	85cm	1pc
75165-445210	VK/04157/85/W/C	□ White	4000K	19w	2.400lm	85cm	1pc
75165-446210	VK/04157/85/B/C	■ Black	4000K	19w	2.400lm	85cm	1pc
75165-429210	VK/04157/113/AL/W	■ Aluminium	3000K	25w	3.200lm	113cm	1pc
75165-430210	VK/04157/113/W/W	□ White	3000K	25w	3.200lm	113cm	1pc
75165-431210	VK/04157/113/B/W	■ Black	3000K	25w	3.200lm	113cm	1pc
75165-447210	VK/04157/113/AL/C	■ Aluminium	4000K	25w	3.200lm	113cm	1pc
75165-448210	VK/04157/113/W/C	□ White	4000K	25w	3.200lm	113cm	1pc
75165-449210	VK/04157/113/B/C	■ Black	4000K	25w	3.200lm	113cm	1pc
75165-432210	VK/04157/141/AL/W	■ Aluminium	3000K	31w	4.000lm	141cm	1pc
75165-433210	VK/04157/141/W/W	□ White	3000K	31w	4.000lm	141cm	1pc
75165-434210	VK/04157/141/B/W	■ Black	3000K	31w	4.000lm	141cm	1pc
75165-450210	VK/04157/141/AL/C	■ Aluminium	4000K	31w	4.000lm	141cm	1pc
75165-451210	VK/04157/141/W/C	□ White	4000K	31w	4.000lm	141cm	1pc
75165-452210	VK/04157/141/B/C	■ Black	4000K	31w	4.000lm	141cm	1pc

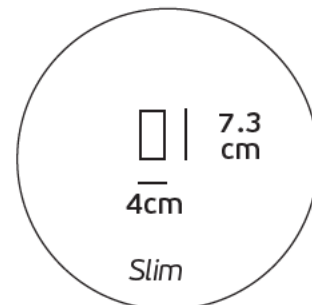


Code	Model						Box
75165-435210	VK/04157/169/AL/W	■ Aluminium	3000K	38w	4.800lm	169cm	1pc
75165-436210	VK/04157/169/W/W	□ White	3000K	38w	4.800lm	169cm	1pc
75165-437210	VK/04157/169/B/W	■ Black	3000K	38w	4.800lm	169cm	1pc
75165-453210	VK/04157/169/AL/C	■ Aluminium	4000K	38w	4.800lm	169cm	1pc
75165-454210	VK/04157/169/W/C	□ White	4000K	38w	4.800lm	169cm	1pc
75165-455210	VK/04157/169/B/C	■ Black	4000K	38w	4.800lm	169cm	1pc
75165-438210	VK/04157/197/AL/W	■ Aluminium	3000K	44w	5.600lm	197cm	1pc
75165-439210	VK/04157/197/W/W	□ White	3000K	44w	5.600lm	197cm	1pc
75165-440210	VK/04157/197/B/W	■ Black	3000K	44w	5.600lm	197cm	1pc
75165-456210	VK/04157/197/AL/C	■ Aluminium	4000K	44w	5.600lm	197cm	1pc
75165-457210	VK/04157/197/W/C	□ White	4000K	44w	5.600lm	197cm	1pc
75165-458210	VK/04157/197/B/C	■ Black	4000K	44w	5.600lm	197cm	1pc

Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. CRI>80. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee



IP20.

VK/04157/169/W/C



- » **TRIDONIC** LLE-G2
- » **TRIDONIC** LED driver






**VK/04157/CE (Ceiling)**

**Product Models**

Code	Model		Box
75165-198210	VK/04157/CE	■ Aluminium suspension of roof	1pc

*Details*

Material Aluminium.

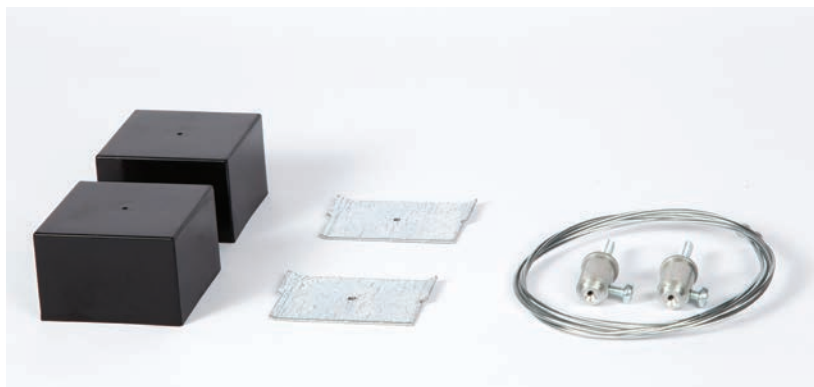

**VK/04157/SRK (Pendant)**

**Product Models**

Code	Model		Box
75165-176210	VK/04157/AL/SRK/1	■ Aluminium	1m
75165-177210	VK/04157/W/SRK/1	□ White	1m
75165-322210	VK/04157/B/SRK/1	■ Black	1m
75165-544210	VK/04157/AL/SRK/2	■ Aluminium	2m
75165-335210	VK/04157/W/SRK/2	□ White	2m
75165-543210	VK/04157/B/SRK/2	■ Black	2m
75165-547210	VK/04157/AL/SRK/3	■ Aluminium	3m
75165-545210	VK/04157/W/SRK/3	□ White	3m
75165-546210	VK/04157/B/SRK/3	■ Black	3m

*Details*

Material Aluminium.

















## VK/04158

## Product Models

Code	Model						Box
75165-459210	VK/04158/57/AL/W	■ Aluminium	3000K	13w	1.600lm	57cm	1pc
75165-460210	VK/04158/57/W/W	□ White	3000K	13w	1.600lm	57cm	1pc
75165-461210	VK/04158/57/B/W	■ Black	3000K	13w	1.600lm	57cm	1pc
75165-477210	VK/04158/57/AL/C	■ Aluminium	4000K	13w	1.600lm	57cm	1pc
75165-478210	VK/04158/57/W/C	□ White	4000K	13w	1.600lm	57cm	1pc
75165-479210	VK/04158/57/B/C	■ Black	4000K	13w	1.600lm	57cm	1pc
75165-462210	VK/04158/85/AL/W	■ Aluminium	3000K	19w	2.400lm	85cm	1pc
75165-463210	VK/04158/85/W/W	□ White	3000K	19w	2.400lm	85cm	1pc
75165-464210	VK/04158/85/B/W	■ Black	3000K	19w	2.400lm	85cm	1pc
75165-480210	VK/04158/85/AL/C	■ Aluminium	4000K	19w	2.400lm	85cm	1pc
75165-481210	VK/04158/85/W/C	□ White	4000K	19w	2.400lm	85cm	1pc
75165-482210	VK/04158/85/B/C	■ Black	4000K	19w	2.400lm	85cm	1pc
75165-465210	VK/04158/113/AL/W	■ Aluminium	3000K	25w	3.200lm	113cm	1pc
75165-466210	VK/04158/113/W/W	□ White	3000K	25w	3.200lm	113cm	1pc
75165-467210	VK/04158/113/B/W	■ Black	3000K	25w	3.200lm	113cm	1pc
75165-483210	VK/04158/113/AL/C	■ Aluminium	4000K	25w	3.200lm	113cm	1pc
75165-484210	VK/04158/113/W/C	□ White	4000K	25w	3.200lm	113cm	1pc
75165-485210	VK/04158/113/B/C	■ Black	4000K	25w	3.200lm	113cm	1pc
75165-468210	VK/04158/141/AL/W	■ Aluminium	3000K	31w	4.000lm	141cm	1pc
75165-469210	VK/04158/141/W/W	□ White	3000K	31w	4.000lm	141cm	1pc
75165-470210	VK/04158/141/B/W	■ Black	3000K	31w	4.000lm	141cm	1pc
75165-486210	VK/04158/141/AL/C	■ Aluminium	4000K	31w	4.000lm	141cm	1pc
75165-487210	VK/04158/141/W/C	□ White	4000K	31w	4.000lm	141cm	1pc
75165-488210	VK/04158/141/B/C	■ Black	4000K	31w	4.000lm	141cm	1pc

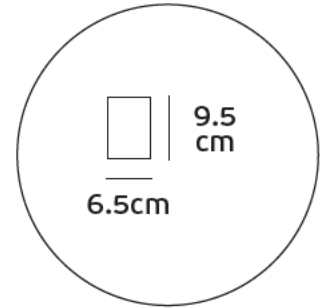


Code	Model						Box
75165-471210	VK/04158/169/AL/W	■ Aluminium	3000K	38w	4.800lm	169cm	1pc
75165-472210	VK/04158/169/W/W	□ White	3000K	38w	4.800lm	169cm	1pc
75165-473210	VK/04158/169/B/W	■ Black	3000K	38w	4.800lm	169cm	1pc
75165-489210	VK/04158/169/AL/C	■ Aluminium	4000K	38w	4.800lm	169cm	1pc
75165-490210	VK/04158/169/W/C	□ White	4000K	38w	4.800lm	169cm	1pc
75165-491210	VK/04158/169/B/C	■ Black	4000K	38w	4.800lm	169cm	1pc
75165-474210	VK/04158/197/AL/W	■ Aluminium	3000K	44w	5.600lm	197cm	1pc
75165-475210	VK/04158/197/W/W	□ White	3000K	44w	5.600lm	197cm	1pc
75165-476210	VK/04158/197/B/W	■ Black	3000K	44w	5.600lm	197cm	1pc
75165-492210	VK/04158/197/AL/C	■ Aluminium	4000K	44w	5.600lm	197cm	1pc
75165-493210	VK/04158/197/W/C	□ White	4000K	44w	5.600lm	197cm	1pc
75165-494210	VK/04158/197/B/C	■ Black	4000K	44w	5.600lm	197cm	1pc

Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. CRI>80. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee

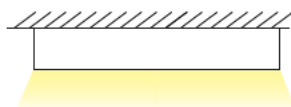

IP20.

VK/04158/113/AL/C



- » **TRIDONIC** LLE-G2
- » **TRIDONIC** LED driver




**VK/04158/CE (Ceiling)**

**Product Models**

Code	Model		Box
75165-365210	VK/04158/CE	■ Aluminium suspension of roof	1pc

*Details*

Material Aluminium.

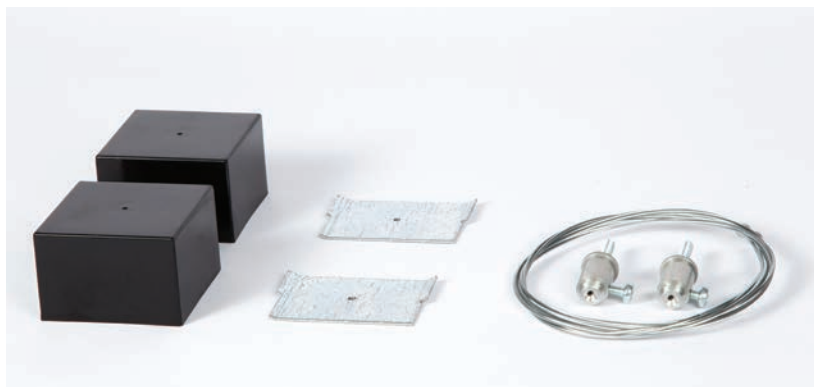

**VK/04158/SRK (Pendant)**

**Product Models**

Code	Model		Box
75165-364210	VK/04158/AL/SRK/1	■ Aluminium	1m
75165-362210	VK/04158/W/SRK/1	□ White	1m
75165-363210	VK/04158/B/SRK/1	■ Black	1m
75165-550210	VK/04158/AL/SRK/2	■ Aluminium	2m
75165-548210	VK/04158/W/SRK/2	□ White	2m
75165-549210	VK/04158/B/SRK/2	■ Black	2m
75165-553210	VK/04158/AL/SRK/3	■ Aluminium	3m
75165-551210	VK/04158/W/SRK/3	□ White	3m
75165-552210	VK/04158/B/SRK/3	■ Black	3m

*Details*

Material Aluminium.












## VK/04159

## Product Models

Code	Model						Box
75165-495210	VK/04159/60/AL/W	■ Aluminium	3000K	13w	1.600lm	59.5cm	1pc
75165-496210	VK/04159/60/W/W	□ White	3000K	13w	1.600lm	59.5cm	1pc
75165-497210	VK/04159/60/B/W	■ Black	3000K	13w	1.600lm	59.5cm	1pc
75165-513210	VK/04159/60/AL/C	■ Aluminium	4000K	13w	1.600lm	59.5cm	1pc
75165-514210	VK/04159/60/W/C	□ White	4000K	13w	1.600lm	59.5cm	1pc
75165-515210	VK/04159/60/B/C	■ Black	4000K	13w	1.600lm	59.5cm	1pc
75165-498210	VK/04159/88/AL/W	■ Aluminium	3000K	19w	2.400lm	87.5cm	1pc
75165-499210	VK/04159/88/W/W	□ White	3000K	19w	2.400lm	87.5cm	1pc
75165-500210	VK/04159/88/B/W	■ Black	3000K	19w	2.400lm	87.5cm	1pc
75165-516210	VK/04159/88/AL/C	■ Aluminium	4000K	19w	2.400lm	87.5cm	1pc
75165-517210	VK/04159/88/W/C	□ White	4000K	19w	2.400lm	87.5cm	1pc
75165-518210	VK/04159/88/B/C	■ Black	4000K	19w	2.400lm	87.5cm	1pc
75165-501210	VK/04159/116/AL/W	■ Aluminium	3000K	25w	3.200lm	115.5cm	1pc
75165-502210	VK/04159/116/W/W	□ White	3000K	25w	3.200lm	115.5cm	1pc
75165-503210	VK/04159/116/B/W	■ Black	3000K	25w	3.200lm	115.5cm	1pc
75165-519210	VK/04159/116/AL/C	■ Aluminium	4000K	25w	3.200lm	115.5cm	1pc
75165-520210	VK/04159/116/W/C	□ White	4000K	25w	3.200lm	115.5cm	1pc
75165-521210	VK/04159/116/B/C	■ Black	4000K	25w	3.200lm	115.5cm	1pc
75165-504210	VK/04159/144/AL/W	■ Aluminium	3000K	31w	4.000lm	143.5cm	1pc
75165-505210	VK/04159/144/W/W	□ White	3000K	31w	4.000lm	143.5cm	1pc
75165-506210	VK/04159/144/B/W	■ Black	3000K	31w	4.000lm	143.5cm	1pc
75165-522210	VK/04159/144/AL/C	■ Aluminium	4000K	31w	4.000lm	143.5cm	1pc
75165-523210	VK/04159/144/W/C	□ White	4000K	31w	4.000lm	143.5cm	1pc
75165-524210	VK/04159/144/B/C	■ Black	4000K	31w	4.000lm	143.5cm	1pc

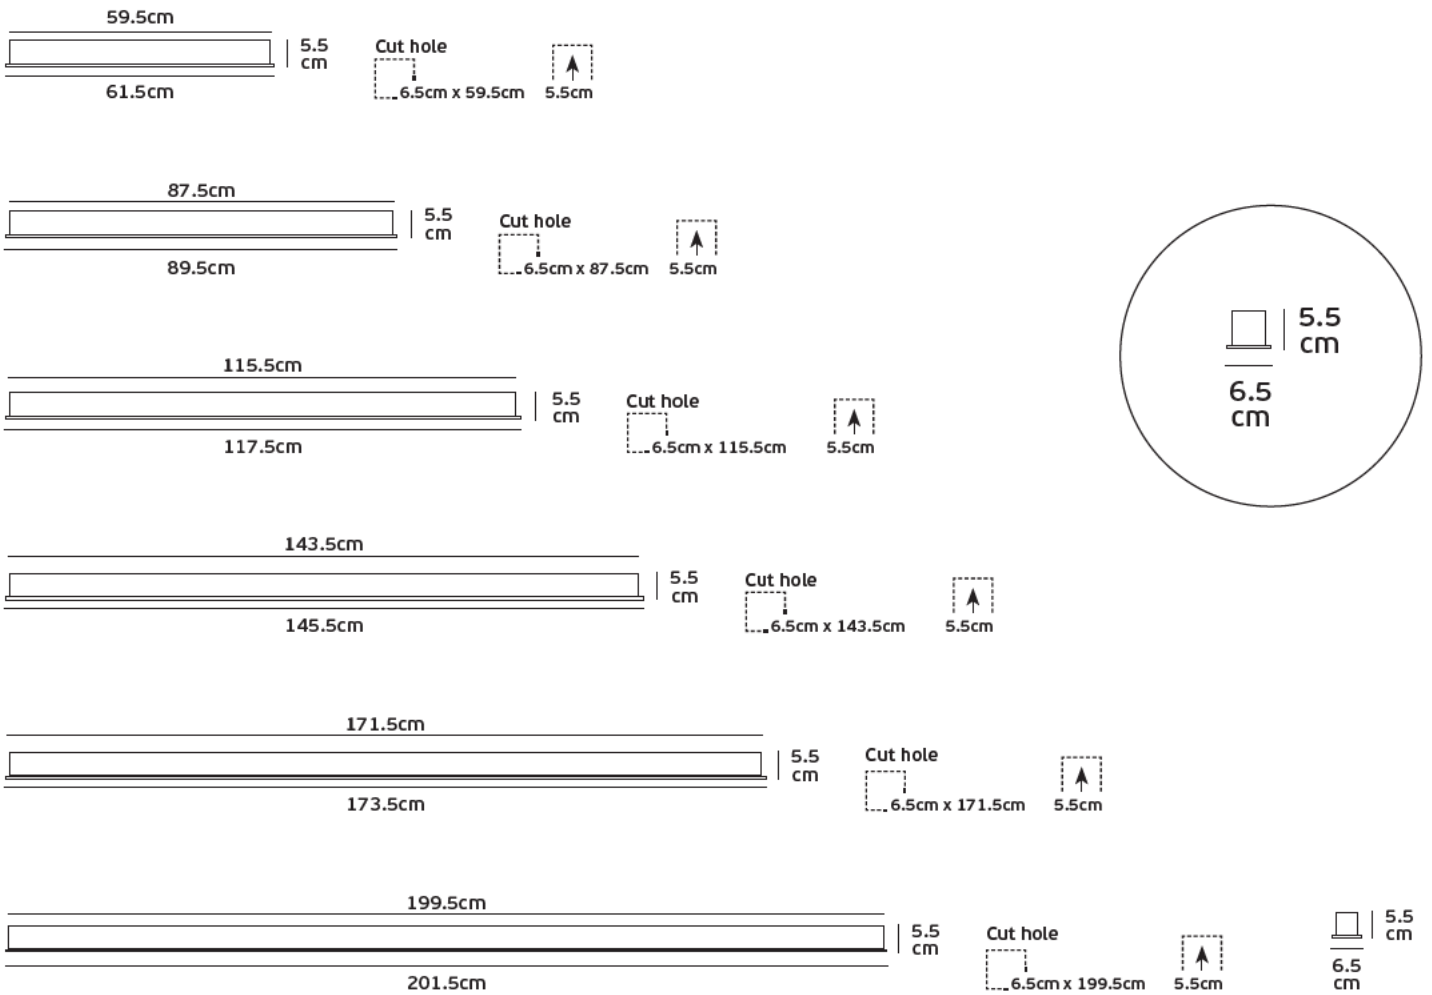


Code	Model	Material	Color	Power	Light Output	Length	Box
75165-507210	VK/04159/172/AL/W	Aluminium	3000K	38w	4.800lm	171.5cm	1pc
75165-508210	VK/04159/172/W/W	White	3000K	38w	4.800lm	171.5cm	1pc
75165-509210	VK/04159/172/B/W	Black	3000K	38w	4.800lm	171.5cm	1pc
75165-525210	VK/04159/172/AL/C	Aluminium	4000K	38w	4.800lm	171.5cm	1pc
75165-526210	VK/04159/172/W/C	White	4000K	38w	4.800lm	171.5cm	1pc
75165-527210	VK/04159/172/B/C	Black	4000K	38w	4.800lm	171.5cm	1pc
75165-510210	VK/04159/200/AL/W	Aluminium	3000K	44w	5.600lm	199.5cm	1pc
75165-511210	VK/04159/200/W/W	White	3000K	44w	5.600lm	199.5cm	1pc
75165-512210	VK/04159/200/B/W	Black	3000K	44w	5.600lm	199.5cm	1pc
75165-528210	VK/04159/200/AL/C	Aluminium	4000K	44w	5.600lm	199.5cm	1pc
75165-529210	VK/04159/200/W/C	White	4000K	44w	5.600lm	199.5cm	1pc
75165-530210	VK/04159/200/B/C	Black	4000K	44w	5.600lm	199.5cm	1pc

Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. CRI>80. Clicks 50,000. Working temperature -25°C→ 45°C. Lifetime 50,000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee



IP20.

VK/04159/144/W/C



- » TRIDONIC LLE-G2
- » TRIDONIC LED driver





← Fire exit

## LED Linear Slim Lights Recessed. Trimless



VK/04461


### Product Models

Code	Model					Box
75167-023210	VK/04461/58/W	3000K	10w	1.700lm	58cm	1pc
75167-024210	VK/04461/58/C	4000K	10w	1.700lm	58cm	1pc
75167-025210	VK/04461/86/W	3000K	15w	2.550lm	86cm	1pc
75167-026210	VK/04461/86/C	4000K	15w	2.550lm	86cm	1pc
75167-027210	VK/04461/114/W	3000K	20w	3.445lm	114cm	1pc
75167-028210	VK/04461/114/C	4000K	20w	3.445lm	114cm	1pc
75167-029210	VK/04461/142/W	3000K	25w	5.160lm	142cm	1pc
75167-030210	VK/04461/142/C	4000K	25w	5.160lm	142cm	1pc
75167-031210	VK/04461/198/W	3000K	35w	6.840lm	198cm	1pc
75167-032210	VK/04461/198/C	4000K	35w	6.840lm	198cm	1pc
75167-033210	VK/04461/254/W	3000K	45w	8.530lm	254cm	1pc
75167-034210	VK/04461/254/C	4000K	45w	8.530lm	254cm	1pc
75167-035210	VK/04461/310/W	3000K	55w	10.120lm	310cm	1pc
75167-036210	VK/04461/310/C	4000K	55w	10.120lm	310cm	1pc

### Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee



IP20.









VK/04461/142/W/C



» **TRIDONIC** LLE-G2

» **TRIDONIC** LED driver

**350**







VK/04160


Product Models

Code	Model					Box
75165-531210	VK/04160/57/W	3000K	13w	1.600lm	57 cm	1pc
75165-537210	VK/04160/57/C	4000K	13w	1.600lm	57 cm	1pc
75165-532210	VK/04160/85/W	3000K	19w	2.400lm	85cm	1pc
75165-538210	VK/04160/85/C	4000K	19w	2.400lm	85cm	1pc
75165-533210	VK/04160/113/W	3000K	25w	3.200lm	113cm	1pc
75165-539210	VK/04160/113/C	4000K	25w	3.200lm	113cm	1pc
75165-534210	VK/04160/141/W	3000K	31w	4.000lm	141cm	1pc
75165-540210	VK/04160/141/C	4000K	31w	4.000lm	141cm	1pc
75165-535210	VK/04160/169/W	3000K	38w	4.800lm	169cm	1pc
75165-541210	VK/04160/169/C	4000K	38w	4.800lm	169cm	1pc
75165-536210	VK/04160/197/W	3000K	44w	5.600lm	197cm	1pc
75165-542210	VK/04160/197/C	4000K	44w	5.600lm	197cm	1pc

Details


Voltage 220-240V. Type of LED **TRIDONIC**. Beam angle 120°. Clicks 50.000. Working temperature -25°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee










IP20.

VK/04160/197/C



» **TRIDONIC** LLE-G2

» **TRIDONIC** LED driver





VK/04420


Product Models

Code	Model					Box
75169-427271	VK/04420/60/12/830	3000K	12w	2.000lm	60cm	1pc
75169-428271	VK/04420/60/12/840	4000K	12w	2.000lm	60cm	1pc
75169-429271	VK/04420/60/12/850	5000K	12w	2.000lm	60cm	1pc
75169-430271	VK/04420/60/24/830	3000K	24w	4.210lm	60cm	1pc
75169-431271	VK/04420/60/24/840	4000K	24w	4.210lm	60cm	1pc
75169-432271	VK/04420/60/24/850	5000K	24w	4.210lm	60cm	1pc
75169-433271	VK/04420/115/23/830	3000K	23w	4.200lm	115cm	1pc
75169-434271	VK/04420/115/23/840	4000K	23w	4.200lm	115cm	1pc
75169-435271	VK/04420/115/23/850	5000K	23w	4.200lm	115cm	1pc
75169-436271	VK/04420/115/48/830	3000K	48w	8.400lm	115cm	1pc
75169-437271	VK/04420/115/48/840	4000K	48w	8.400lm	115cm	1pc
75169-438271	VK/04420/115/48/850	5000K	48w	8.400lm	115cm	1pc
75169-439271	VK/04420/200/40/830	3000K	40w	7.000lm	200cm	1pc
75169-440271	VK/04420/200/40/840	4000K	40w	7.000lm	200cm	1pc
75169-441271	VK/04420/200/40/850	5000K	40w	7.000lm	200cm	1pc
75169-442271	VK/04420/200/84/830	3000K	84w	14.800lm	200cm	1pc
75169-443271	VK/04420/200/84/840	4000K	84w	14.800lm	200cm	1pc
75169-444271	VK/04420/200/84/850	5000K	84w	14.800lm	200cm	1pc

Details


Voltage 220-240V. Type of LED TRIDONIC . Power factor 0.95. Beam angle 40°-120°. Body IK09. CRI>80. Clicks 50.000. Working temperature -30°C→ 50°C. Lifetime 50.000hrs. Material Anodized aluminium. No dimmable but can be dimmable after contact with our headquarter sales department.

**5** years guarantee




IP67.


VK/04420/40°




VK/04420/60°



VK/04420/90°



VK/04420/120°



- » TRIDONIC LLE-G2
- » TRIDONIC LED driver



### VK/04420/WA (Wall)

### Product Models

<b>Code</b> 75169-446271	<b>Model</b> VK/04420/WA	■ Aluminium accessories for wall	<b>Box</b> 1pc
-----------------------------	-----------------------------	----------------------------------	-------------------

#### Details

Material Aluminium. Set of 2 pieces.





### VK/04420/SRK (Pendant)

### Product Models

<b>Code</b> 75169-445271	<b>Model</b> VK/04420/SRK	■ Aluminium	<b>Box</b> 1.5m
-----------------------------	------------------------------	-------------	--------------------

#### Details

Material Aluminium.





# 06 *tubes & squares*

VK/04301

Product Models




Code	Model	Box
64174-099721	VK/04301/W/W □ White sand. 3000K. 365lm. 6w. 8°. CRI>80	1pc
64174-100721	VK/04301/W/C □ White sand. 4000K. 365lm. 6w. 8°. CRI>80	1pc
64174-101721	VK/04301/B/W ■ Black sand. 3000K. 365lm. 6w. 8°. CRI>80	1pc
64174-102721	VK/04301/B/C ■ Black sand. 4000K. 365lm. 6w. 8°. CRI>80	1pc

Details

AC Driver 220-240V (Included). Watt 6w (3x2w). CRI>80. Beam Angle 8°.  
Type of Led CREE XP-E2. Working temperature < 45°C. Lifetime 50.000hrs.  
Clicks 50.000. Material Aluminium. Magnet light. 2 years guarantee.



IP20. 6w.

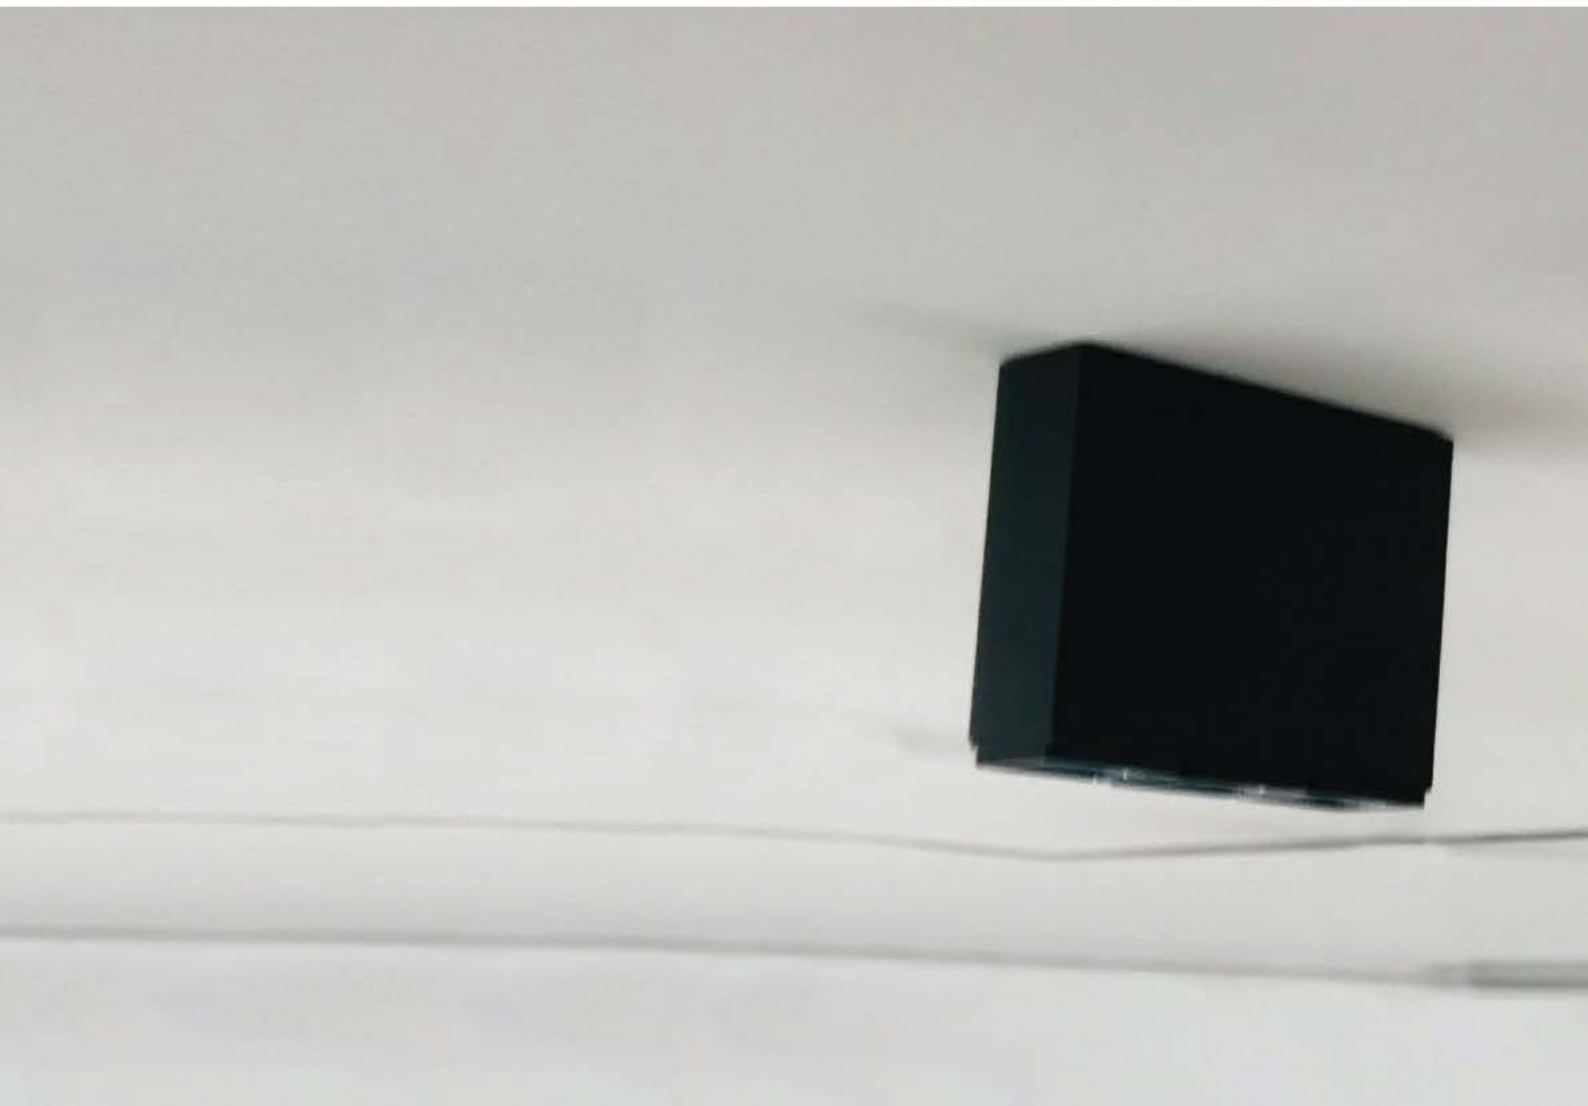

VK/04303

## Product Models



Code	Model	Box
64174-107721	VK/04303/W/W □ White sand. 3000K. 365lm. 6w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-108721	VK/04303/W/C □ White sand. 4000K. 365lm. 6w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-109721	VK/04303/B/W ■ Black sand. 3000K. 365lm. 6w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-110721	VK/04303/B/C ■ Black sand. 4000K. 365lm. 6w. <i>bridgelux</i> . 8°. CRI>90	1pc

## Details

AC Driver 220-240V (Included). Watt 6w (3x2w). CRI>90. Beam Angle 8°.  
Type° of Led *bridgelux*. Working temperature < 45°C. Lifetime 50.000hrs.  
Clicks 50.000. Material Aluminium. 2 years guarantee.



IP20. 6w.

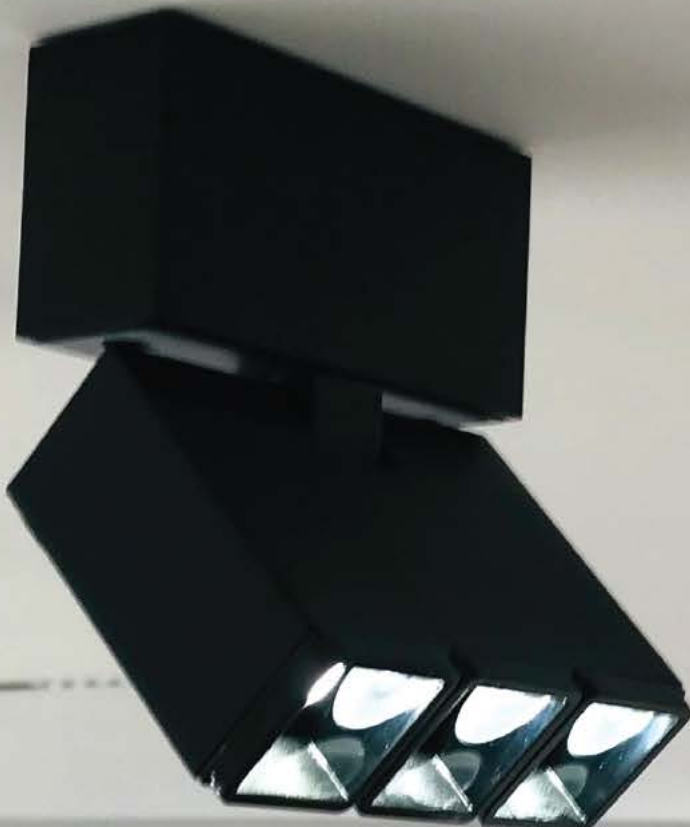



VK/04302

Product Models


Code	Model	Box
64174-103721	VK/04302/W/W □ White sand. 3000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-104721	VK/04302/W/C □ White sand. 4000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-105721	VK/04302/B/W ■ Black sand. 3000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-106721	VK/04302/B/C ■ Black sand. 4000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc

Details

AC Driver 220-240V (Included). Watt 8w (4x2w). CRI>90. Beam Angle 8°. Type of Led *bridgelux*. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. Magnet light. 2 years guarantee.



IP20. 8w.



VK/04304

## Product Models



Code	Model	Box
64174-111721	VK/04304/W/W □ White sand. 3000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-112721	VK/04304/W/C □ White sand. 4000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-113721	VK/04304/B/W ■ Black sand. 3000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc
64174-114721	VK/04304/B/C ■ Black sand. 4000K. 460lm. 8w. <i>bridgelux</i> . 8°. CRI>90	1pc

## Details

AC Driver 220-240V (Included). Watt 8w (4x2w). CRI&gt;90. Beam Angle 8°.

Type of Led *bridgelux*. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. 2 years guarantee.

IP20. 8w.




VK/04341/CE




Product Models

Code	Model	Box
71164-062721	VK/04341/CE/WB/W □ ■ White-Black sand. 3000K. 500lm. 6w.  led. 24°. CRI>90	30pcs
71164-061721	VK/04341/CE/BGD/W ■ ■ Black-Gold sand. 3000K. 500lm. 6w.  led. 24°. CRI>90	30pcs

Details

AC Driver 220-240V (included). Watt 6w. CRI>90. IP Rating IP20. Type of Led  with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



   IP20. 6w.




VK/04343/CE



Product Models


Code	Model	Box
71164-066721	VK/04343/CE/WB/W □ ■ White-Black sand. 3000K. 1.020lm. 15w.  led. 24°. CRI>90	20pcs
71164-065721	VK/04343/CE/BGD/W ■ ■ Black-Gold sand. 3000K. 1.020lm. 15w.  led. 24°. CRI>90	20pcs

Details

AC Driver 220-240V (included). Watt 15w. CRI>90. Type of Led  5050 with driver. IP Rating IP20. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.

   IP20. 15w.



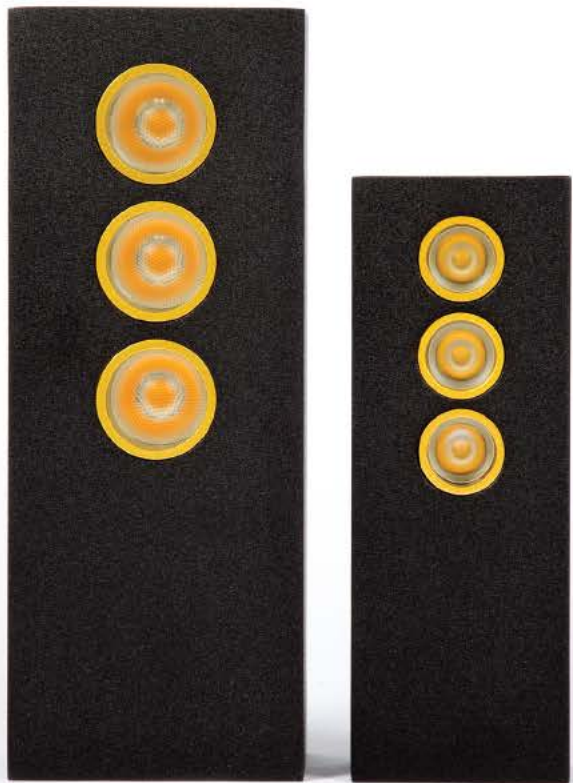




## VK/04342/CE



## Product Models


Code	Model	Box
71164-064721	VK/04342/CE/WB/W ■ White-Black sand. 3000K. 550lm. 6w.  led. 24°. CRI>90	30pcs
71164-063721	VK/04342/CE/B/W ■ Black sand. 3000K. 550lm. 6w.  led. 24°. CRI>90	30pcs

## Details

AC Driver 220-240V (included). Watt 6w. CRI>90. IP Rating IP20. Type of Led  with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.




IP20. 6w.




## VK/04344/CE



## Product Models



Code	Model	Box
71164-068721	VK/04344/CE/WB/W ■ White-Black sand. 3000K. 1.090lm. 15w.  led. 24°. CRI>90	20pcs
71164-067721	VK/04344/CE/B/W ■ Black sand. 3000K. 1.090lm. 15w.  led. 24°. CRI>90	20pcs

## Details

AC Driver 220-240V (included). Watt 15w. CRI>90. Type of Led  5050 with driver. IP Rating IP20. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 15w.



VK/04268CE



Product Models


Code	Model	Box
64174-073721	VK/04268CE/W/W □ White. 3000K. 113lm. 3w. 8°. led. CRI>90	1pc
64174-074721	VK/04268CE/W/C □ White. 4000K. 113lm. 3w. 8°. led. CRI>90	1pc
64174-071721	VK/04268CE/B/W ■ Black. 3000K. 113lm. 3w. 8°. led. CRI>90	1pc
64174-072721	VK/04268CE/B/C ■ Black. 4000K. 113lm. 3w. 8°. led. CRI>90	1pc

Details


AC Driver 100-240V (Included) . Watt 3w.  
CRI>90. Beam Angle 8°. Type of Led .  
Working temperature < 45°C. Lifetime 50.000 hrs.  
Material Aluminium. 2 years guarantee.



IP20. 3w.



ø15cm



15cm

4.1  
cm



VK/04269CE



Product Models


Code	Model	Box
64174-077721	VK/04269CE/W/W □ White. 3000K. 467lm. 9w. 8°. led. CRI>90	1pc
64174-078721	VK/04269CE/W/C □ White. 4000K. 467lm. 9w. 8°. led. CRI>90	1pc
64174-075721	VK/04269CE/B/W ■ Black. 3000K. 467lm. 9w. 8°. led. CRI>90	1pc
64174-076721	VK/04269CE/B/C ■ Black. 4000K. 467lm. 9w. 8°. led. CRI>90	1pc

Details

AC Driver 200-240V (Included). Watt 3x3w. CRI>90. Beam Angle 8°. Type of Led .  
Working temperature < 45°C. Lifetime 50.000 hrs. Material Aluminium. 2 years guarantee.



IP20. 9w.



ø15cm



15cm

4.1  
cm





VK/04167CE



Product Models


Code	Model	Box
64174-902739	VK/04167CE/W/W □ White shanded. 3000K. 580lm. 8w. 25°. CRI>80	1pc
64174-903739	VK/04167CE/W/C □ White shanded. 4000K. 580lm. 8w. 25°. CRI>80	1pc

Details

AC 110-240V Driver (Included). Watt 8w. CRI>80. Beam Angle 25°.  
Type of Led COB Citizen. Working temperature -20°C ~ 40°C. Lifetime 30.000 hrs.  
Material Aluminium die-cast. 3 years guarantee.



IP20. 8w.



VK/04168CE



Product Models


Code	Model	Box
64174-904739	VK/04168CE/W/W □ White shanded. 3000K. 1.160lm. 16w. 25°. CRI>80	1pc
64174-905739	VK/04168CE/W/C □ White shanded. 4000K. 1.160lm. 16w. 25°. CRI>80	1pc

Details

AC 110-240V Driver (Included). Watt 16w. CRI>80. Beam Angle 25°.  
Type of Led COB Citizen. Working temperature -20°C ~ 40°C. Lifetime 30.000 hrs.  
Material Aluminium die-cast. 3 years guarantee.



IP20. 16w.

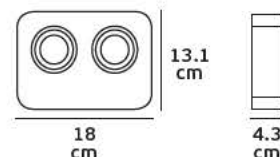

## VK/04169CE



## Product Models


Code	Model	Box
64174-906739	VK/04169CE/W/W □ White shadded. 3000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-907739	VK/04169CE/W/C □ White shadded. 4000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-908739	VK/04169CE/B/W ■ Black. 3000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-909739	VK/04169CE/B/C ■ Black. 4000K. 1.080lm. 12w. 38°. CRI>90	1pc

## Details

AC 110-240V Driver (Included). Watt 12w. CRI>90. Beam Angle 38°.  
Type of Led COB Citizen. Working temperature -20°C ~ 40°C. Lifetime 30.000 hrs.  
Material Aluminium die-cast. 3 years guarantee.



IP20. 12w.



ø14.15  
cm



ø14.15  
cm

3.9  
cm

## VK/04170CE



## Product Models


Code	Model	Box
64174-910739	VK/04170CE/W/W □ White shadded. 3000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-911739	VK/04170CE/W/C □ White shadded. 4000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-912739	VK/04170CE/B/W ■ Black. 3000K. 1.080lm. 12w. 38°. CRI>90	1pc
64174-913739	VK/04170CE/B/C ■ Black. 4000K. 1.080lm. 12w. 38°. CRI>90	1pc

## Details

AC 110-240V Driver (Included). Watt 12w. CRI>90. Beam Angle 38°.  
Type of Led COB Citizen. Working temperature -20°C ~ 40°C. Lifetime 30.000 hrs.  
Material Aluminium die-cast. 3 years guarantee.




IP20. 12w.



ø14.15  
cm

14.15  
cm



ø14.15  
cm

3.9  
cm

VK/04300

Product Models



Code	Model	Box
64174-095721	VK/04300/W/W □ White sand. 3000K. 935lm. 7w. <i>bridgelux</i> . led. 24°. CRI>90	1pc
64174-096721	VK/04300/W/C □ White sand. 4000K. 935lm. 7w. <i>bridgelux</i> . led. 24°. CRI>90	1pc
64174-097721	VK/04300/B/W ■ Black sand. 3000K. 935lm. 7w. <i>bridgelux</i> . led. 24°. CRI>90	1pc
64174-098721	VK/04300/B/C ■ Black sand. 4000K. 935lm. 7w. <i>bridgelux</i> . led. 24°. CRI>90	1pc

Details

AC Driver 100-250V (Included). Watt 7w. CRI>90. Beam Angle 24°. Adjustable 25°, 175°. Type of Led *bridgelux*. E6-CA. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. 2 years guarantee.



IP20. 7w.

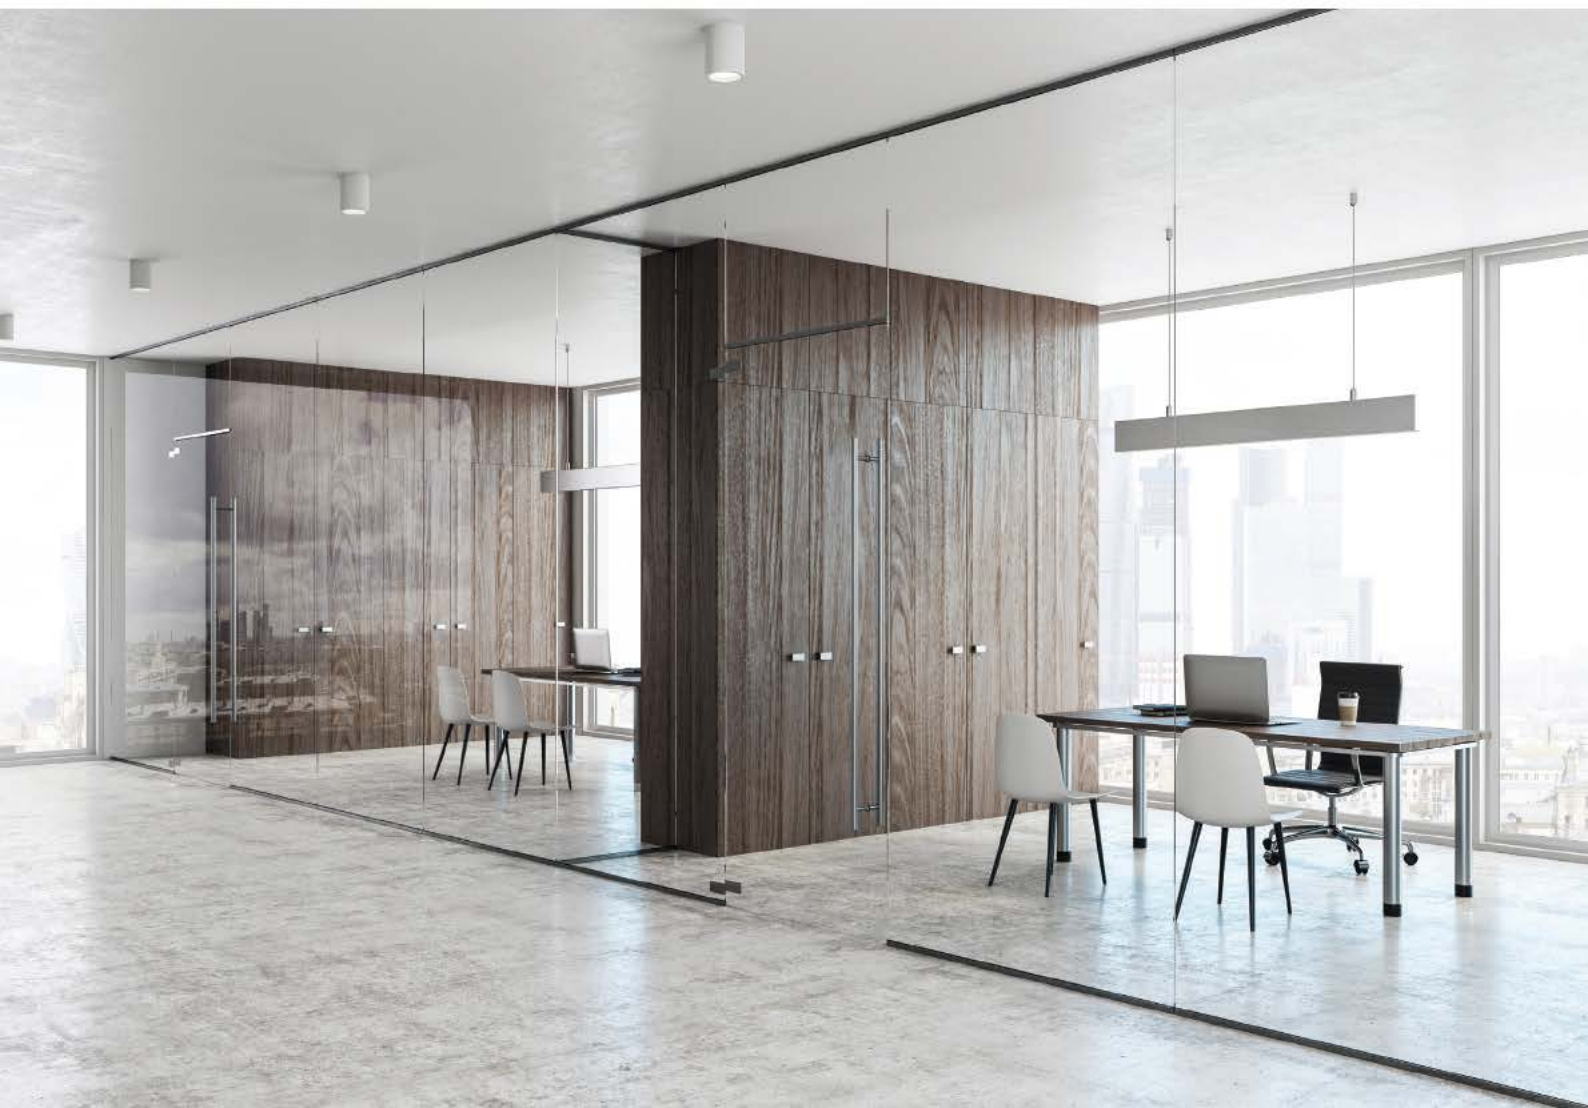



VK/03139CE

Product Models


Code	Model	Box
75169-381121	VK/03139CE/W □ White. GU10. Max 35w.	1pc
75169-382121	VK/03139CE/B ■ Black. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.




VK/03139/R

Product Models

Code	Model	Box
75169-383121	VK/03139/R/G Gold ring.	1pc

Details

Can be used to VK/03139CE. Material Aluminium.



**VK/03140CE**



**Product Models**


Code	Model	Box
75169-384121	VK/03140CE/W □ White. GU10. Max 35w.	1pc
75169-385121	VK/03140CE/B ■ Black. GU10. Max 35w.	1pc

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**



**VK/03140/R**




**Product Models**


Code	Model	Box
75169-386121	VK/03140/R/G Gold ring.	1pc

**Details**

Can be used to **VK/03139CE**. Material **Aluminium**.



**VK/03087CE/13**

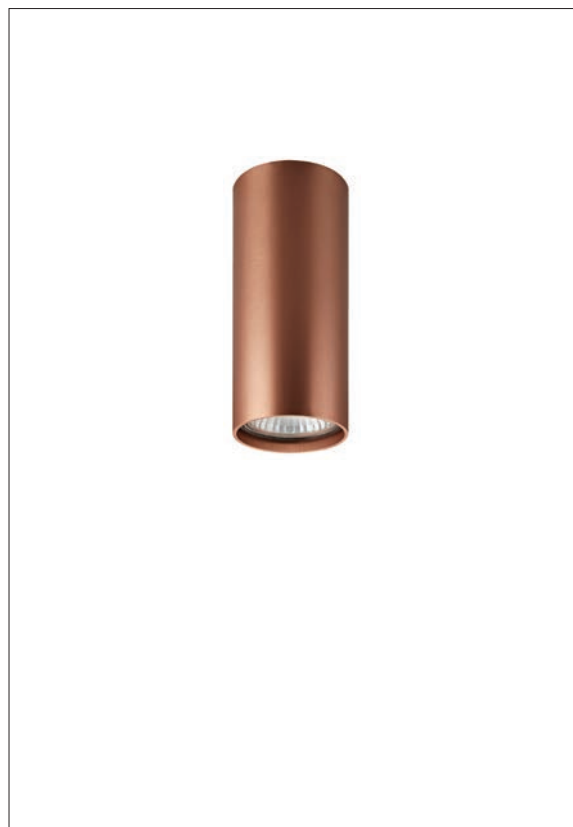

**Product Models**

Code	Model	Box
75169-233108	VK/03087CE/13/W □ White sanded. <b>GU10</b> . Max 35w.	50pcs
75169-234108	VK/03087CE/13/B ■ Black sanded. <b>GU10</b> . Max 35w.	50pcs
75169-235108	VK/03087CE/13/COP ■ Copper. <b>GU10</b> . Max 35w.	50pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**

□ White

■ Black

■ Copper



13.5  
cm

ø5.6  
cm

ø5.6  
cm

**VK/03087CE/20**



**Product Models**

Code	Model	Box
75169-236108	VK/03087CE/20/W □ White sanded. <b>GU10</b> . Max 35w.	40pcs
75169-237108	VK/03087CE/20/B ■ Black sanded. <b>GU10</b> . Max 35w.	40pcs
75169-238108	VK/03087CE/20/COP ■ Copper. <b>GU10</b> . Max 35w.	40pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**

□ White

■ Black

■ Copper



20  
cm

ø5.6  
cm

ø5.6  
cm

VK/03087CE/30

**Product Models**

Code	Model	Box
75169-239108	VK/03087CE/30/W □ White sanded. <b>GU10</b> . Max 35w.	30pcs
75169-240108	VK/03087CE/30/B ■ Black sanded. <b>GU10</b> . Max 35w.	30pcs
75169-241108	VK/03087CE/30/COP ■ Copper. <b>GU10</b> . Max 35w.	30pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**

□ White

■ Black


■ Copper



30  
cm

5.6  
cm

5.6  
cm

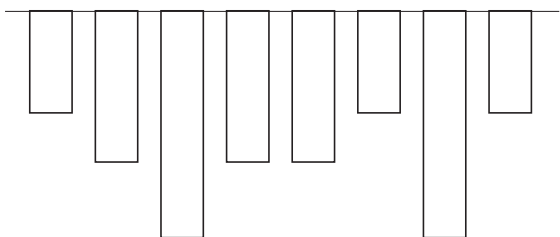



**VK/03091CE/25**

**Product Models**


Code	Model	Box
75169-245108	VK/03091CE/25/WGD □ White+Gold sanded. <b>GU10</b> . Max 35w.	18pcs
75169-246108	VK/04062CE/25/BGD ■ Black+Gold sanded. <b>GU10</b> . Max 35w.	18pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**



**VK/03091CE/50**

**Product Models**


Code	Model	Box
75169-247108	VK/03091CE/50/WGD □ White+Gold sanded. <b>GU10</b> . Max 35w.	12pcs
75169-248108	VK/04062CE/50/BGD ■ Black+Gold sanded. <b>GU10</b> . Max 35w.	12pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**

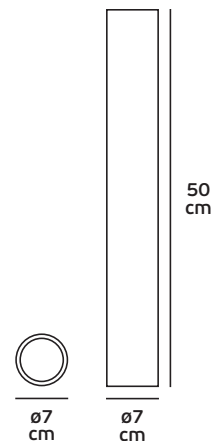



VK/03084CE



Product Models


Code	Model	Box
75169-230108	VK/03084CE/COP ■ Copper. GU10. Max 35w.	20pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



VK/03006



Product Models


Code	Model	Box
75169-192108	VK/03006/W □ White. GU10. Max 35w.	1pc
75169-208108	VK/03006/B ■ Black. GU10. Max 35w.	1pc
75169-207108	VK/03006/AL ■ Aluminium. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



VK/03082CE



### Product Models


Code	Model	Box
75169-228108	VK/03082CE/COP ■ Copper. GU10. Max 35w.	20pcs

### Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



VK/03054



### Product Models


Code	Model	Box
75169-211108	VK/03054/W □ White. GU10. Max 35w.	1pc
75169-212108	VK/03054/B ■ Black. GU10. Max 35w.	1pc
64174-951121	VK/03054/CH-GD ■ Champaign Gold. GU10. Max 35w.	1pc

### Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium. Adjustable.



IP20. GU10.

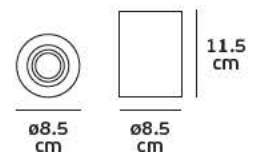

VK/04052CE/S



Product Models


Code	Model	Box
64174-343269	VK/04052CE/W/S □ White. GU10. Max 35w.	1pc
64174-342269	VK/04052CE/B/S ■ Black. GU10. Max 35w.	1pc
64174-344269	VK/04052CE/G/S ■ Grey. GU10. Max 35w.	1pc
64174-345269	VK/04052CE/AN/S ■ Anthracite. GU10. Max 35w.	1pc
64174-346269	VK/04052CE/MC/S ■ Brushed chrome. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.



VK/04052CE/L



Product Models


Code	Model	Box
64174-338269	VK/04052CE/W/L □ White. GU10. Max 35w.	1pc
64174-337269	VK/04052CE/B/L ■ Black. GU10. Max 35w.	1pc
64174-339269	VK/04052CE/G/L ■ Grey. GU10. Max 35w.	1pc
64174-340269	VK/04052CE/AN/L ■ Anthracite. GU10. Max 35w.	1pc
64174-341269	VK/04052CE/MC/L ■ Brushed chrome. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.



## VK/03056



## Product Models


Code	Model	Box
75169-215108	VK/03056/W □ White. GU10. Max 35w.	1pc
75169-216108	VK/03056/B ■ Black. GU10. Max 35w.	1pc

## Details

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Pure aluminium**.



**IP20. GU10.**



## VK/04062CE



## Product Models


Code	Model	Box
64174-379269	VK/04062CE/W □ White. GU10. Max 35w.	1pc
64174-378269	VK/04062CE/B ■ Black. GU10. Max 35w.	1pc
64174-380269	VK/04062CE/G ■ Grey. GU10. Max 35w.	1pc
64174-381269	VK/04062CE/AN ■ Anthracite. GU10. Max 35w.	1pc

## Details

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.



**IP20. GU10.**



VK/03002

**Product Models**

Code	Model	Box
75169-200108	VK/03002/W □ White. <b>GU10.</b> Max 35w.	10pcs
75169-202108	VK/03002/B ■ Black. <b>GU10.</b> Max 35w.	10pcs
75169-185108	VK/03002/C ■ Chrome. <b>GU10.</b> Max 35w.	10pcs
75169-199108	VK/03002/AL ■ Aluminium. <b>GU10.</b> Max 35w.	10pcs
75169-184108	VK/03002/R ■ Red. <b>GU10.</b> Max 35w.	10pcs
75169-188108	VK/03002/GR ■ Green. <b>GU10.</b> Max 35w.	10pcs
75169-201108	VK/03002/Y ■ Yellow. <b>GU10.</b> Max 35w.	10pcs
75169-187108	VK/03002/OR ■ Orange. <b>GU10.</b> Max 35w.	10pcs
75169-203108	VK/03002/DB ■ Deep Blue. <b>GU10.</b> Max 35w.	10pcs
75169-186108	VK/03002/LB ■ Light Blue. <b>GU10.</b> Max 35w.	10pcs

**Details**

Voltage **240V.** Max watt **35w.** GU10/Par16. Working temperature **-20°C ~ 40°C.**  
Material **Aluminium.**



**IP20. GU10.**



9.5  
cm

ø8  
cm

ø8  
cm



- White.
- Black.
- Chrome.
- Aluminium.
- Red.
- Green.
- Yellow.
- Orange.
- Deep Blue.
- Light Blue.

VK/03001

## Product Models



Code	Model	Box
75169-181108	VK/03001/W □ White. GU10. Max 35w.	10pcs
75169-176108	VK/03001/B ■ Black. GU10. Max 35w.	10pcs
75169-182108	VK/03001/C ■ Chrome. GU10. Max 35w.	10pcs
75169-197108	VK/03001/AL ■ Aluminium. GU10. Max 35w.	10pcs
75169-175108	VK/03001/R ■ Red. GU10. Max 35w.	10pcs
75169-177108	VK/03001/GR ■ Green. GU10. Max 35w.	10pcs
75169-178108	VK/03001/Y ■ Yellow. GU10. Max 35w.	10pcs
75169-198108	VK/03001/OR ■ Orange. GU10. Max 35w.	10pcs
75169-193108	VK/03001/DB ■ Deep Blue. GU10. Max 35w.	10pcs
75169-179108	VK/03001/LB ■ Light Blue. GU10. Max 35w.	10pcs

## Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



- White.
- Black.
- Chrome.
- Aluminium.
- Red.
- Green.
- Yellow.
- Orange.
- Deep Blue.
- Light Blue.



VK/03005



Product Models


Code	Model	Box
75169-205108	VK/03005/W □ White. GU10. Max 35w.	1pc
75169-206108	VK/03005/B ■ Black. GU10. Max 35w.	1pc
75169-191108	VK/03005/AL ■ Aluminium. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.

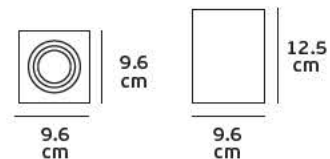

VK/03081CE



Product Models


Code	Model	Box
75169-227108	VK/03081CE/COP ■ Copper. GU10. Max 35w.	20pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.

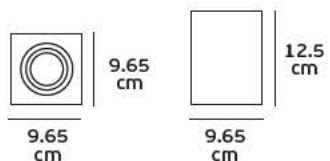

VK/03086CE




**Product Models**

Code	Model	Box
75169-232108	VK/03086CE/BGD ■ Black sanded+Gold. <b>GU10.</b> Max 35w.	20pcs

**Details**

Voltage **240V.** Max watt **35w.** GU10/Par16. Working temperature **-20°C ~ 40°C.**  
Material **Aluminium.**

  **IP20. GU10.**

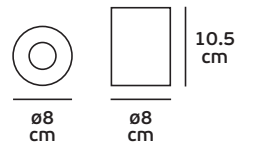

VK/03085CE




**Product Models**

Code	Model	Box
75169-231108	VK/03085CE/BGD ■ Black sanded+Gold. <b>GU10.</b> Max 35w.	20pcs

**Details**

Voltage **240V.** Max watt **35w.** GU10/Par16. Working temperature **-20°C ~ 40°C.**  
Material **Aluminium.**

  **IP20. GU10.**



VK/03083CE


Product Models

Code	Model	Box
75169-229108	VK/03083CE/COP ■ Copper. GU10. Max 35w.	20pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.

  IP20. GU10.

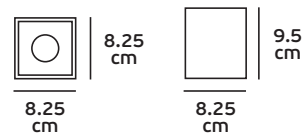

VK/03057


Product Models

Code	Model	Box
75169-217108	VK/03057/W □ White. GU10. Max 35w.	1pc
75169-218108	VK/03057/B ■ Black. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.

  IP20. GU10.



VK/03055

## Product Models



Code	Model	Box
75169-213108	VK/03055/W □ White. GU10. Max 35w.	1pc
75169-214108	VK/03055/B ■ Black. GU10. Max 35w.	1pc
64174-952121	VK/03055/CH-GD ■ Champaign Gold. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



VK/03090CE

Product Models


Code	Model	Box
75169-242108	VK/03090CE/W □ White sanded. GU10. Max 35w.	20pcs
75169-243108	VK/03090CE/B ■ Black sanded. GU10. Max 35w.	20pcs
75169-244108	VK/03090CE/COP ■ Copper. GU10. Max 35w.	20pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.

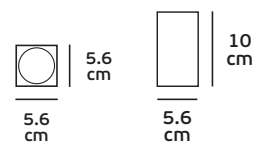

VK/03110CE

Product Models


Code	Model	Box
75169-268108	VK/03110CE/W □ White. GX53. Max 7w.	25pcs

Details

Voltage 240V. Max watt 7w. GX53. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GX53.



VK/03095CE

**Product Models**

Code	Model	Box
64174-013108	VK/03095CE/W □ White. GU10. Max 35w.	30pcs
64174-014108	VK/03095CE/B ■ Black. GU10. Max 35w.	30pcs

**Details**

Voltage **240V**. Max watt **35w**. GU10/Par16. Working temperature **-20°C ~ 40°C**.  
Material **Aluminium**.




**IP20. GU10.**



12.6  
cm

10.9  
cm



12.6  
cm

10  
cm



VK/03108CE

### Product Models



Code	Model	Box
75169-266108	VK/03108CE/W □ White sanded. GU10x2. Max 2x35w.	20pcs
75169-267108	VK/03108CE/B ■ Black sanded. GU10x2. Max 2x35w.	20pcs


### Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.

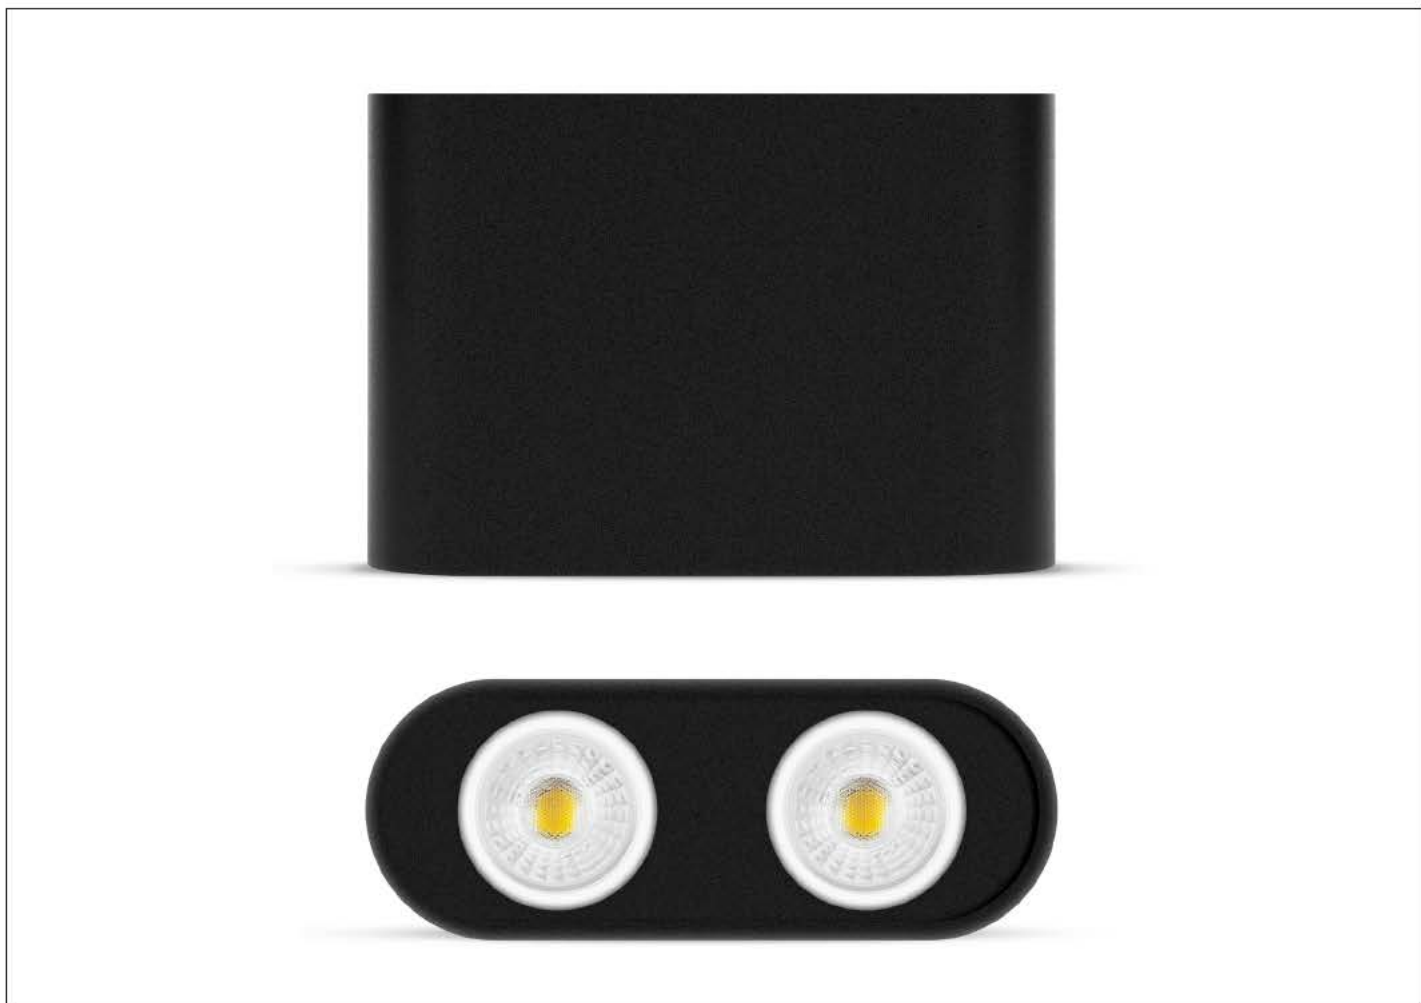

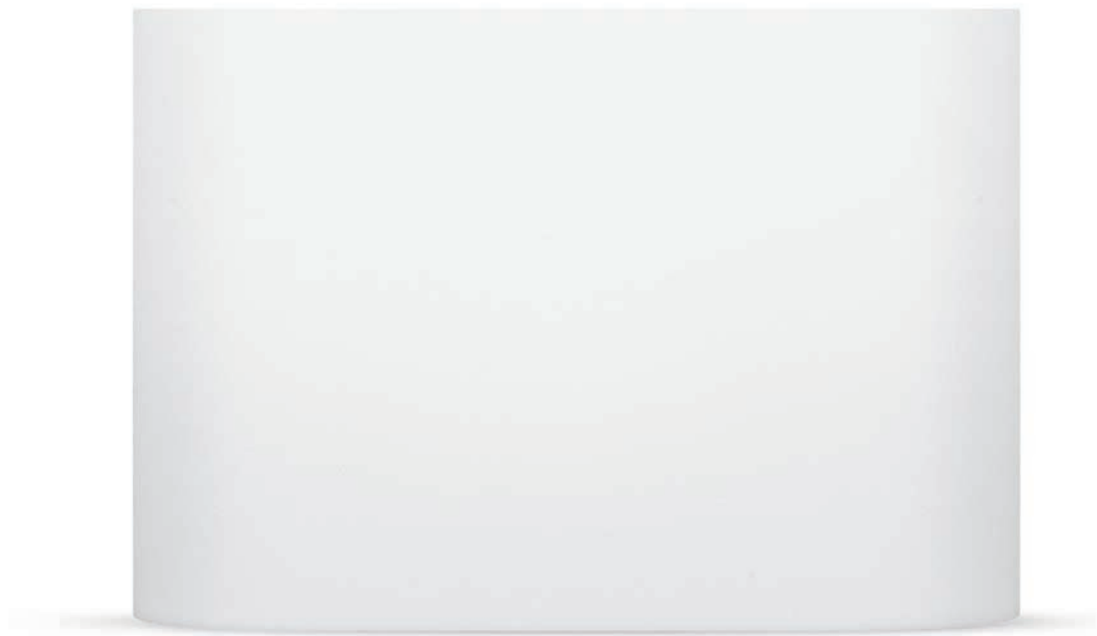



VK/04351G/WA



Product Models


Code	Model	Box
64174-511269	VK/04351G/WA/W □ White. GU10. Max 35w.	1pc
64174-707269	VK/04351G/WA/B ■ Black. GU10. Max 35w.	1pc
64174-708269	VK/04351G/WA/GD ■ Gold. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.



VK/04053WA



Product Models


Code	Model	Box
64174-420269	VK/04053WA/B/L ■ Black. GU10. Max 50w.	1pc
64174-421269	VK/04053WA/W/L □ White. GU10. Max 50w.	1pc
64174-422269	VK/04053WA/G/L ■ Grey. GU10. Max 50w.	1pc
64174-423269	VK/04053WA/AN/L ■ Anthracite. GU10. Max 50w.	1pc
64174-424269	VK/04053WA/MC/L ■ Brushed chrome. GU10. Max 50w.	1pc

Details

Voltage 240V. Max watt 50w. GU10/R111. Material Aluminium. IP Rating IP20.



IP20. GU10.



VK/04351G/PE



Product Models


Code	Model	Box
64174-705269	VK/04351G/PE/W □ White. GU10. Max 35w.	1pc
64174-512269	VK/04351G/PE/B ■ Black. GU10. Max 35w.	1pc
64174-706269	VK/04351G/PE/GD ■ Gold. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.

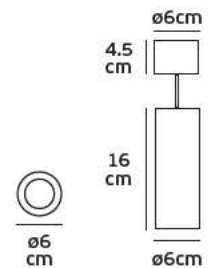

VK/04351G/CE



Product Models


Code	Model	Box
64174-703269	VK/04351G/CE/W □ White. GU10. Max 35w.	1pc
64174-513269	VK/04351G/CE/B ■ Black. GU10. Max 35w.	1pc
64174-704269	VK/04351G/CE/GD ■ Gold. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10.



VK/04194CE



Product Models


Code	Model	Box
64174-938121	VK/04194CE/W □ White. GU10. Max 35w.	1pc
64174-939121	VK/04194CE/B ■ Black. GU10. Max 35w.	1pc
64174-953121	VK/04194CE/CH-GD ■ Champaign Gold. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



VK/04195CE



Product Models



Code	Model	Box
64174-940121	VK/04195CE/W □ White. GU10. Max 35w.	1pc
64174-941121	VK/04195CE/B ■ Black. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.



## VK/03190CE



## Product Models


Code	Model	Box
64174-331131	VK/03190CE/W/40 □ White. GU10. Max 13w. L55cm.	30pcs
64174-330131	VK/03190CE/B/40 ■ Black. GU10. Max 13w. L55cm.	30pcs
64174-329131	VK/03190CE/W/70 □ White. GU10. Max 13w. L85cm.	30pcs
64174-328131	VK/03190CE/B/70 ■ Black. GU10. Max 13w. L85cm.	30pcs

## Details

Voltage 220-240V. Max watt 13w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.

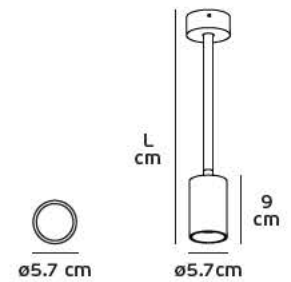

## VK/03190



## Product Models


Code	Model	Box
64174-323131	VK/03190/W/40 □ White. GU10. Max 13w. L55cm.	30pcs
64174-322131	VK/03190/B/40 ■ Black. GU10. Max 13w. L55cm.	30pcs
64174-321131	VK/03190/W/70 □ White. GU10. Max 13w. L85cm.	30pcs
64174-320131	VK/03190/B/70 ■ Black. GU10. Max 13w. L85cm.	30pcs

## Details

Voltage 220-240V. Max watt 13w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10.

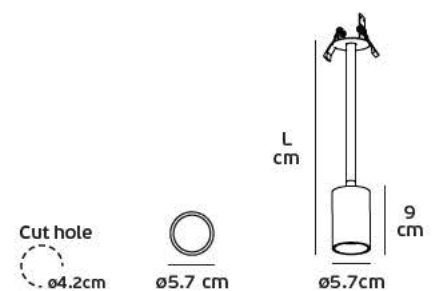

VK/03093WA




Product Models

Code	Model	Box
64174-007108	VK/03093WA/W □ White sanded. GU10. Max 35w.	50pcs
64174-008108	VK/03093WA/B ■ Black sanded. GU10. Max 35w.	50pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Material Aluminium. IP Rating IP20.

  IP20. GU10.



VK/04052WA




Product Models

Code	Model	Box
64174-333269	VK/04052WA/W □ White. GU10. Max 35w.	1pc
64174-332269	VK/04052WA/B ■ Black. GU10. Max 35w.	1pc
64174-334269	VK/04052WA/G ■ Grey. GU10. Max 35w.	1pc
64174-335269	VK/04052WA/AN ■ Anthracite. GU10. Max 35w.	1pc
64174-336269	VK/04052WA/MC ■ Brushed chrome. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10/Par16. Material Aluminium. IP Rating IP20.

  IP20. GU10.



## VK/04043WA




## Product Models

Code	Model	Box
64174-304269	VK/04043WA/W □ White. GU10. Max 35w.	1pc
64174-302269	VK/04043WA/B ■ Black. GU10. Max 35w.	1pc
64174-305269	VK/04043WA/VE ■ Venge. GU10. Max 35w.	1pc
64174-303269	VK/04043WA/MC ■ Brushed chrome. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. GU10/Par16. Material Aluminium. IP Rating IP20.

  IP20. GU10.



## VK/03094CE




## Product Models

Code	Model	Box
64174-011108	VK/03094CE/BGD ■ Black+Gold. GU10. Max 35w.	24pcs

## Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium.

   IP20. GU10.

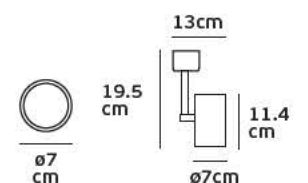

VK/04053CE/S



Product Models


Code	Model	Box
64174-358269	VK/04053CE/W/S □ White. GU10. Max 50w.	1pc
64174-357269	VK/04053CE/B/S ■ Black. GU10. Max 50w.	1pc
64174-359269	VK/04053CE/G/S ■ Grey. GU10. Max 50w.	1pc
64174-360269	VK/04053CE/AN/S ■ Anthracite. GU10. Max 50w.	1pc
64174-361269	VK/04053CE/MC/S ■ Brushed Chrome. GU10. Max 50w.	1pc

Details

Voltage 240V. Max watt 50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10/ES111.



VK/04053CE/L



Product Models


Code	Model	Box
64174-363269	VK/04053CE/W/L □ White. GU10. Max 50w.	1pc
64174-362269	VK/04053CE/B/L ■ Black. GU10. Max 50w.	1pc
64174-364269	VK/04053CE/G/L ■ Grey. GU10. Max 50w.	1pc
64174-365269	VK/04053CE/AN/L ■ Anthracite. GU10. Max 50w.	1pc
64174-366269	VK/04053CE/MC/L ■ Brushed Chrome. GU10. Max 50w.	1pc

Details

Voltage 240V. Max watt 50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10/ES111.



## VK/03109CE



## Product Models


Code	Model	Box
64174-024108	VK/03109CE/W □ White. GU10. Max 50w.	10pcs
64174-025108	VK/03109CE/B ■ Black. GU10. Max 50w.	10pcs

## Details

Voltage **240V**. Max watt **50w**. GU10/ES111. Working temperature  $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ .  
Material **Aluminium**.



IP20. GU10/ES111.

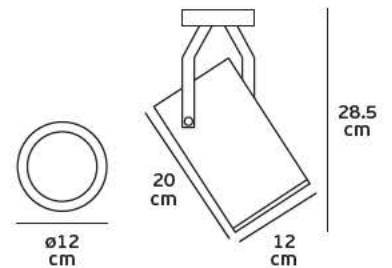

## VK/03097CE



## Product Models


Code	Model	Box
64174-016108	VK/03097CE/W □ White. GU10. Max 50w.	20pcs
64174-017108	VK/03097CE/B ■ Black. GU10. Max 50w.	20pcs

## Details

Voltage **240V**. Max watt **50w**. GU10/ES111. Working temperature  $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ .  
Material **Aluminium**.



IP20. GU10/ES111.

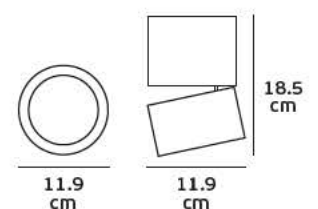



VK/03111CE



Product Models


Code	Model	Box
75169-269108	VK/03111CE/W □ White sanded. GU10. Max 50w.	12pcs
75169-270108	VK/03111CE/B ■ Black sanded. GU10. Max 50w.	12pcs

Details

Voltage 240V. Max watt 50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium, metal.



IP20. GU10/ES111.

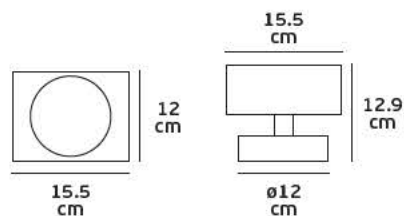

VK/03111CE/2



Product Models


Code	Model	Box
75169-271108	VK/03111CE/2/W □ White sanded. GU10x2. Max 2x50w.	9pcs
75169-272108	VK/03111CE/2/B ■ Black sanded. GU10x2. Max 2x50w.	9pcs

Details

Voltage 240V. Max watt 2x50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium, metal.



IP20. GU10/ES111.

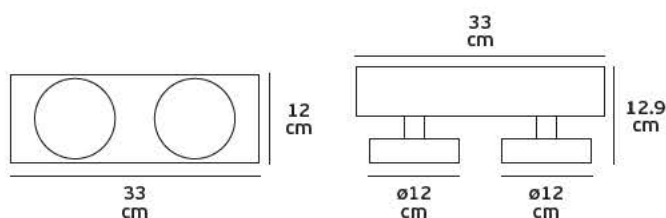



VK/03111CE/3

**Product Models**


Code	Model	Box
75169-273108	VK/03111CE/3/W □ White sanded. GU10x3. Max 3x50w.	6pcs
75169-274108	VK/03111CE/3/B ■ Black sanded. GU10x3. Max 3x50w.	6pcs

**Details**

Voltage 240V. Max watt 3x50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium, metal.



IP20. GU10/ES111.

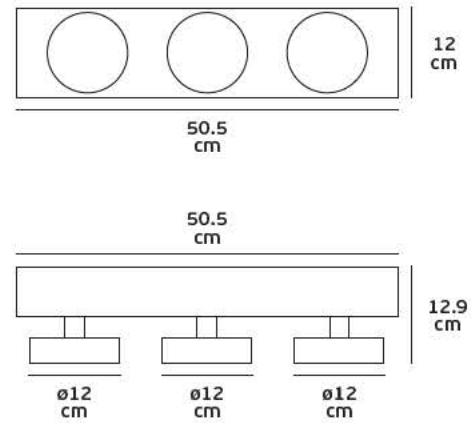

VK/03107CE



Product Models

Code	Model	Box
75169-260108	VK/03107CE/W □ White sanded. GU10. Max 50w.	16pcs
75169-261108	VK/03107CE/B ■ Black sanded. GU10. Max 50w.	16pcs

Details


Voltage 240V. Max watt 50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10/ES111.



13.2  
cm



12  
cm

13.2  
cm

13.2  
cm

VK/03107CE/2



Product Models


Code	Model	Box
75169-262108	VK/03107CE/2/W □ White sanded. GU10x2. Max 2x50w.	8pcs
75169-263108	VK/03107CE/2/B ■ Black sanded. GU10x2. Max 2x50w.	8pcs

Details


Voltage 240V. Max watt 50w. GU10/ES111. Working temperature -20°C ~ 40°C.  
Material Aluminium.



IP20. GU10/ES111.



13.2  
cm



12  
cm

26.4  
cm



26.4  
cm



VK/03107CE/3

Product Models

Code	Model	Box
75169-264108	VK/03107CE/3/W □ White sanded. GU10x3. Max 3x50w.	6pcs
75169-265108	VK/03107CE/3/B ■ Black sanded. GU10x3. Max 3x50w.	6pcs

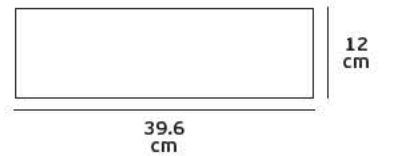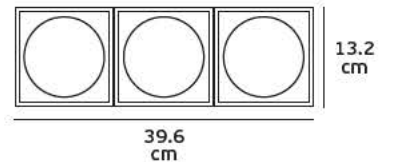

Details

Voltage 240V. Max watt 3x50w. GU10/ES111. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. GU10/ES111.



VK/05112G

VK/05146G

Modules 111 OSRAM



# 07 reading lights

φωτιστικά διαβάσματος



VK/04229

### Product Models

Code	Model	Box
64171-258727	VK/04229/W/W □ White. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	12pcs
64171-259727	VK/04229/B/W ■ Black. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	12pcs

### Details


Voltage 220-240V. Watt 3w & 6w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, iron, acrylic. USB charger. 2 years guarantee.



IP20. 3w & 6w.



with USB



VK/04233

## Product Models


Code	Model	Box
64171-270727	VK/04233/W/W □ White. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	8pcs
64171-271727	VK/04233/B/W ■ Black. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	8pcs

## Details

Voltage 220-240V. Watt 3w & 6w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835.  
Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C.  
Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w &amp; 6w.





## Wall lights LED

### VK/04230/30/L




#### Product Models



Code	Model	Box
64171-260727	VK/04230/W/W/30/L □ White. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc
64171-261727	VK/04230/B/W/30/L ■ Black. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc

#### Details

Voltage 220-240V. Watt 3w & 6w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C → 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w & 6w.



### VK/04230/60/L




#### Product Models


Code	Model	Box
64171-262727	VK/04230/W/W/60/L □ White. 3200K. 690lm. 3w & 12w. 25°. CRI>70.	1pc
64171-263727	VK/04230/B/W/60/L ■ Black. 3200K. 690lm. 3w & 12w. 25°. CRI>70.	1pc

#### Details

Voltage 220-240V. Watt 3w & 12w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C → 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w & 12w.



VK/04230/30/R




RIGHT

Product Models



Code	Model	Box
64171-272727	VK/04230/W/W/30/R □ White. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc
64171-273727	VK/04230/B/W/30/R ■ Black. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc

Details

Voltage 220-240V. Watt 3w & 6w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w & 6w.



VK/04230/60/R




RIGHT

Product Models



Code	Model	Box
64171-274727	VK/04230/W/W/60/R □ White. 3200K. 690lm. 3w & 12w. 25°. CRI>70.	1pc
64171-275727	VK/04230/B/W/60/R ■ Black. 3200K. 690lm. 3w & 12w. 25°. CRI>70.	1pc

Details

Voltage 220-240V. Watt 3w & 12w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w & 12w.

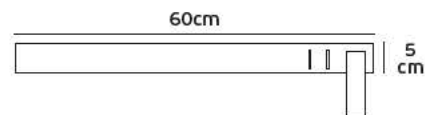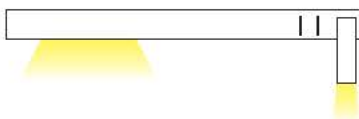

# Wall lights LED

VK/04231/40/L

## Product Models



Code	Model	Box
64171-264727	VK/04231/W/W/40/L □ White. 3200K. 690lm. 3w & 2x6w. 25°. CRI>70.	1pc
64171-265727	VK/04231/B/W/40/L ■ Black. 3200K. 690lm. 3w & 2x6w. 25°. CRI>70.	1pc

## Details

Voltage 220-240V. Watt 3w & 12w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835.  
Beam angle 25°. No dimmable. Lifetime 30.000hrs.  
Working temperature -20°C → 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.



IP20. 3w & 2x6w.

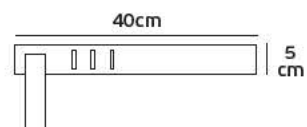

LEFT



VK/04231/40/R

Product Models



Code	Model	Box
64171-276727	VK/04231/W/W/40/R □ White. 3200K. 690lm. 3w & 2x6w. 25°. CRI>70.	1pc
64171-277727	VK/04231/B/W/40/R ■ Black. 3200K. 690lm. 3w & 2x6w. 25°. CRI>70.	1pc

Details

Voltage 220-240V. Watt 3w & 12w. CRI>70. Type of LED SMD Samsung 3535/Edison 2835. Beam angle 25°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, iron, acrylic. 2 years guarantee.




**IP20. 3w & 2x6w.**

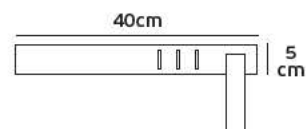

VK/04151



Product Models


Code	Model	Box
64171-055126	VK/04151/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	24pcs
64171-056126	VK/04151/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	24pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led CREE. Working temperature -20°C→ 40°C. Lifetime 50.000hrs. Material Aluminium. 2 years guarantee.



IP20. 3w.

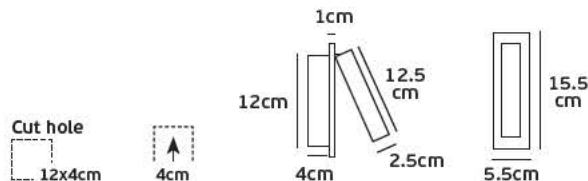

VK/04153



Product Models


Code	Model	Box
64171-060126	VK/04153/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs
64171-061126	VK/04153/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led 3535. Working temperature -20°C→ 40°C. Lifetime 30.000hrs. Material Aluminium. 3 years guarantee.



IP20. 3w.

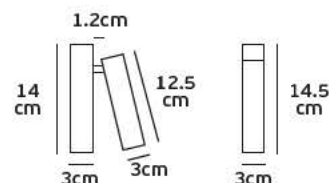

VK/04152


Product Models

Code	Model	Box
64171-057126	VK/04152/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs
64171-058126	VK/04152/WA/BS/W ■ Brushed brass. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs
64171-059126	VK/04152/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led CREE.  
Working temperature -20°C→ 40°C. Lifetime 50.000hrs. Material Aluminium.  
2 years guarantee.

   IP20. 3w.

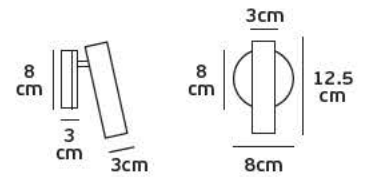


Obo

Reading  
Light



VK/04178

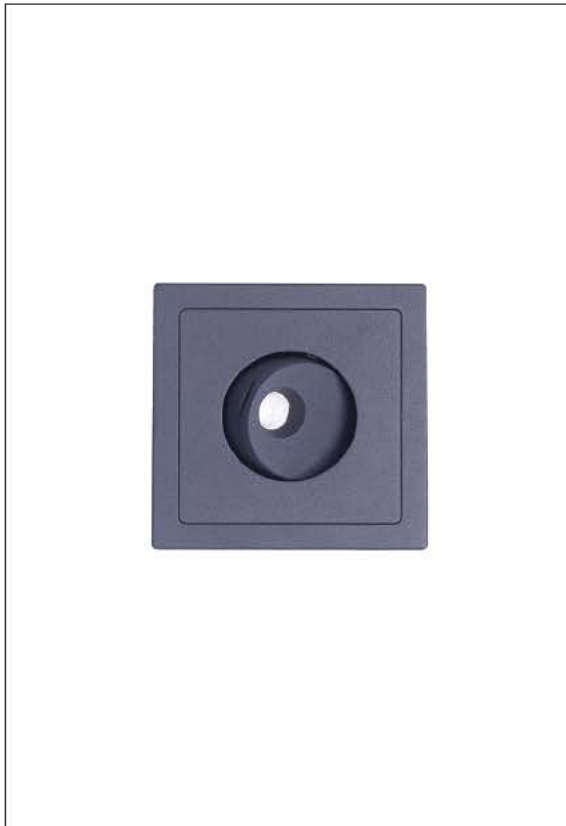


Product Models

Code	Model	Box
64174-021126	VK/04178/WA/W/W □ White. 3000K. 120lm. 2w. 24°. CRI>80.	10pcs
64174-022126	VK/04178/WA/W/C □ White. 4000K. 120lm. 2w. 24°. CRI>80.	10pcs
64174-023126	VK/04178/WA/AN/W ■ Anthracite. 3000K. 120lm. 2w. 24°. CRI>80.	10pcs
64174-024126	VK/04178/WA/AN/C ■ Anthracite. 4000K. 120lm. 2w. 24°. CRI>80.	10pcs

Details

AC 100-265V Driver (Included). Watt 2w. CRI>80. Beam Angle 24°. Type of Led CREE High power. Working temperature -20°C→ 40°C. Lifetime 50.000hrs. Material Aluminium. 2 years guarantee.



VK/04155




Product Models

Code	Model	Box
64171-064126	VK/04155/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	36pcs
64171-065126	VK/04155/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	36pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led CREE. Working temperature -20°C→ 40°C. Lifetime 50.000hrs. Material Aluminium. 2 years guarantee.

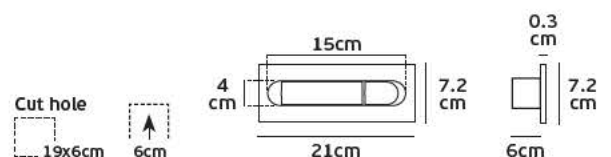

VK/04154

Product Models


Code	Model	Box
64171-062126	VK/04154/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs
64171-063126	VK/04154/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	40pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led 3535.  
Working temperature -20°C→ 40°C. Lifetime 30,000hrs. Material Aluminium.  
3 years guarantee.




**IP20. 3w.**

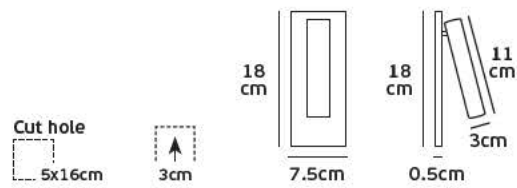



VK/04176




Product Models

Code	Model	Box
64171-069126	VK/04176/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs
64171-068126	VK/04176/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led CREE. Working temperature -20°C→ 40°C. Lifetime 50.000hrs. Material Aluminium. USB charger. 2 years guarantee.

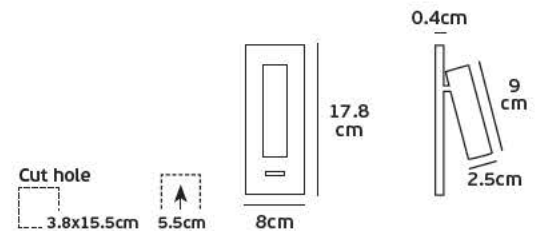

VK/04177




Product Models

Code	Model	Box
64171-071126	VK/04177/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs
64171-070126	VK/04177/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led 3535. Working temperature -20°C→ 40°C. Lifetime 30.000hrs. Material Aluminium. USB charger. 3 years guarantee.

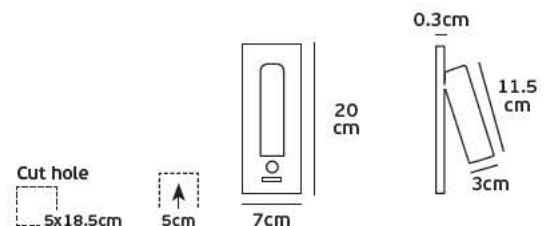

VK/04175

Product Models


Code	Model	Box
64171-067126	VK/04175/WA/B/W ■ Black matt. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs
64171-066126	VK/04175/WA/W/W □ White. 3000K. 110lm. 3w. 30°. CRI>80.	10pcs

Details

AC 100-265V Driver (Included). Watt 3w. CRI>80. Beam Angle 30°. Type of Led 3535.  
Working temperature -20°C→ 40°C. Lifetime 30,000hrs. Material Aluminium. USB charger.  
3 years guarantee.




**IP20. 3w.**

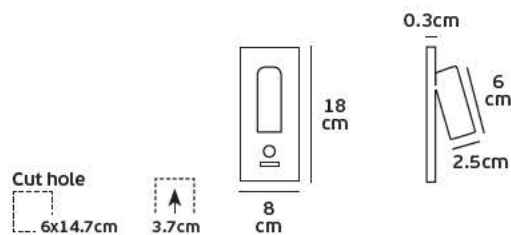

VK/04232



with USB

Product Models


Code	Model	Box
64171-268727	VK/04232/W/W □ White. 3200K. 205lm. 3w. 25°. CRI>70.	20pcs
64171-269727	VK/04232/B/W ■ Black. 3200K. 205lm. 3w. 25°. CRI>70.	20pcs

Details

AC 220-240V Driver (Included). Watt 3w. CRI>70. Beam Angle 25°. Type of Led SMD 3535. Working temperature -20°C → 45°C. Lifetime 30.000hrs. Material Aluminium, iron. USB charger. 2 years guarantee.



IP20. 3w.



VK/04236



Product Models


Code	Model	Box
64174-944724	VK/04236/W/W □ White. 3000K. 78lm. 7w. CRI>82.	3pcs

Details

AC 220-240V Driver (Included). Watt 7w. CRI>82. Type of Led SMD 5730. Working temperature -20°C → 30°C. Lifetime 50.000hrs. Clicks 30.000. Material Aluminium. 2 years guarantee.



IP20. 7w.

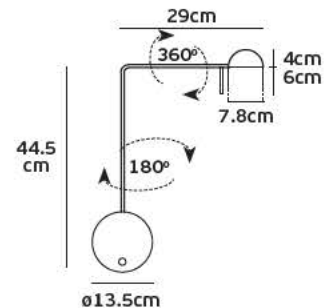

Owl  
Reading  
Light

**VK/04110**  
with Switch




with switch

**Product Models**

Code	Model	Box
64171-053126	VK/04110/W/W □ White. 3000K. 100lm. 3w. 25°. CRI>80.	50pcs
64171-054126	VK/04110/B/W ■ Black. 3000K. 100lm. 3w. 25°. CRI>80.	50pcs

**Details**

AC 100-240V Driver (Included). Watt 3w. CRI>80. Beam Angle 25°. Type of Led CREE.  
Working temperature -20°C→ 45°C. Lifetime 50.000hrs. Clicks 50.000.  
Material Aluminium, spiral. With switch. 2 years guarantee.



**VK/04110NS**  
NO Switch




**Product Models**

Code	Model	Box
64171-073126	VK/04110NS/W/W □ White. 3000K. 100lm. 3w. 25°. CRI>80.	50pcs
64171-072126	VK/04110NS/B/W ■ Black. 3000K. 100lm. 3w. 25°. CRI>80.	50pcs

**Details**

AC 100-240V Driver (Included). Watt 3w. CRI>80. Beam Angle 25°. Type of Led CREE.  
Working temperature -20°C→ 45°C. Lifetime 50.000hrs. Clicks 50.000.  
Material Aluminium, spiral. NO switch. 2 years guarantee.



**VK/03096WA**




**Product Models**

Code	Model	Box
64174-015108	VK/03096WA/B ■ Black sanded. GU10. Max 35w.	8pcs

**Details**

Voltage 240V. Max watt 35w. Working temperature -20°C→ 45°C. Material Aluminium.  
IP Rating IP20.

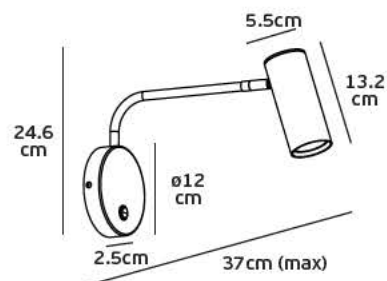

VK/04224



Product Models

Code	Model	Box
75169-042721	VK/04224/W/W □ White matt. 3000K. 40lm. 3w. CRI>80.	300pcs
75169-044721	VK/04224/W/C □ White matt. 4000K. 40lm. 3w. CRI>80.	300pcs

Details

AC Driver 100-240V (Included). Watt 3w. CRI>80. Beam Angle Diffuser light.  
Type of Led CREE XPE. Lifetime 50.000hrs. Working temperature < 45°C.  
Material Aluminium. 2 years guarantee.

   IP20. 3w.

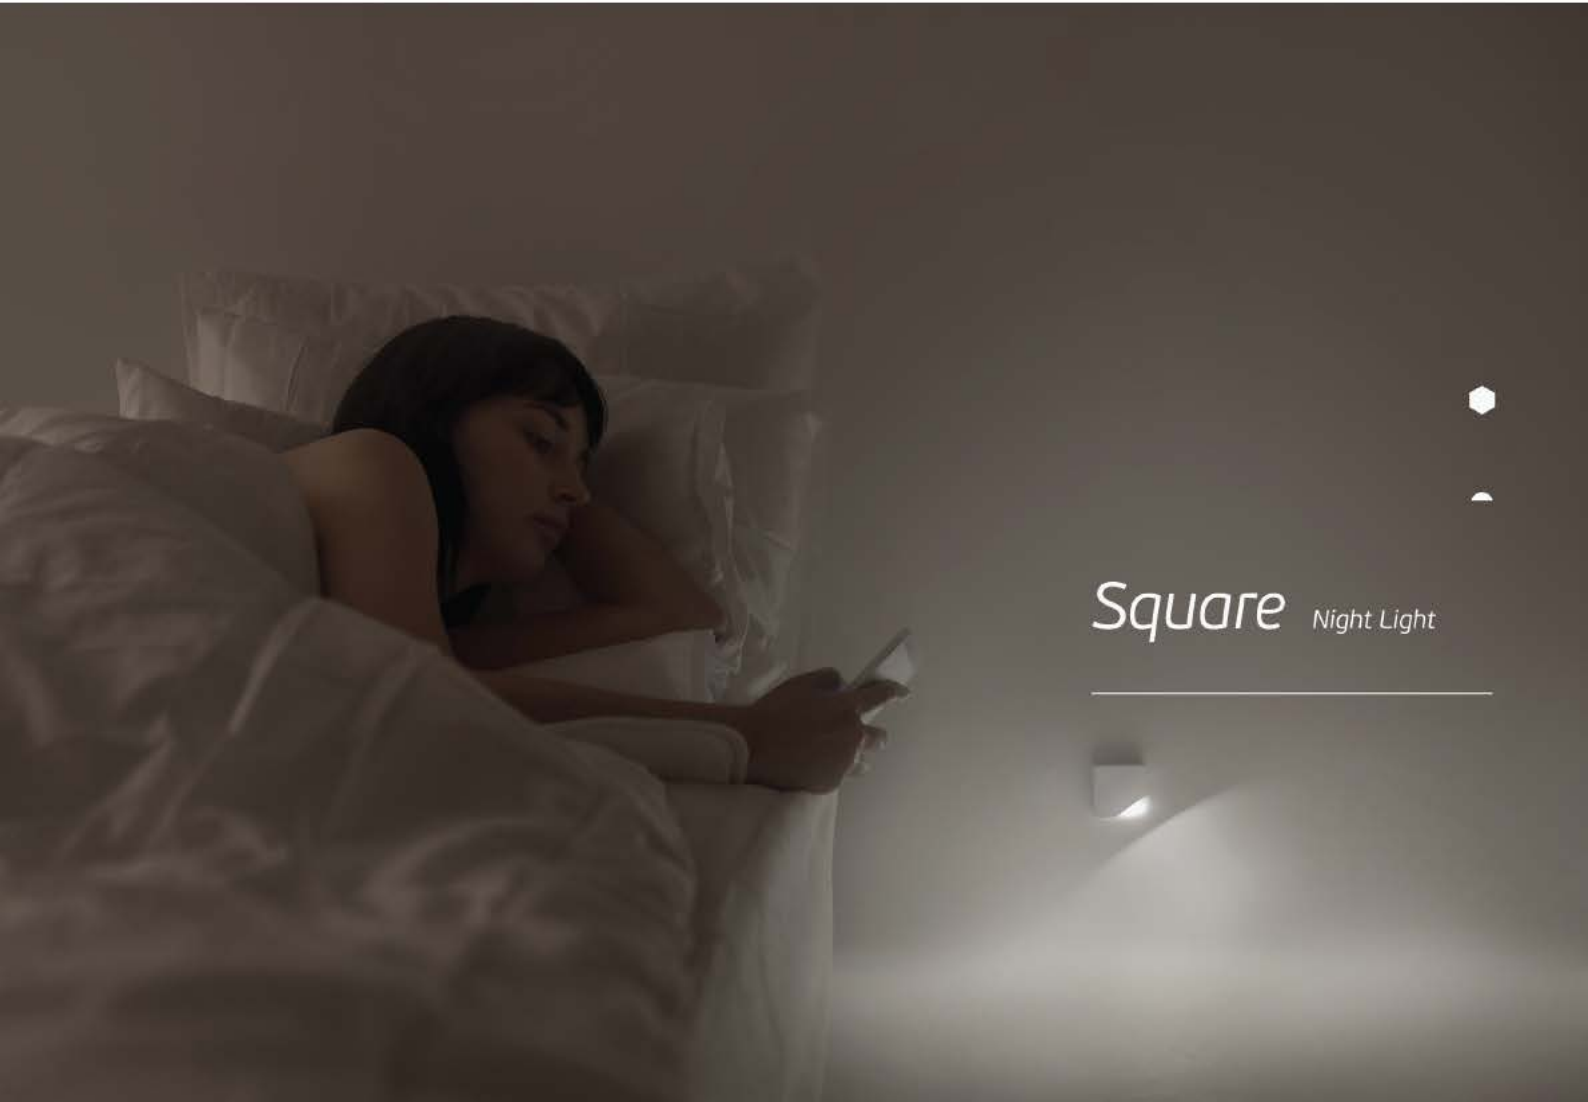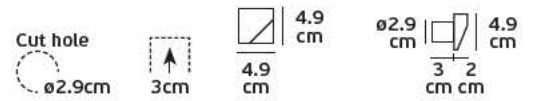

Square Night Light

VK/04225

Product Models

Code	Model	Box
75169-043721	VK/04225/W/W □ White matt. 3000K. 20lm. 1w. CRI>80.	300pcs

Details


AC Driver 100-240V (Included). Watt 1w. CRI>80. Beam Angle Diffuser light. Type of Led Edison. Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.




**IP20. 3w.**



Round Night Light

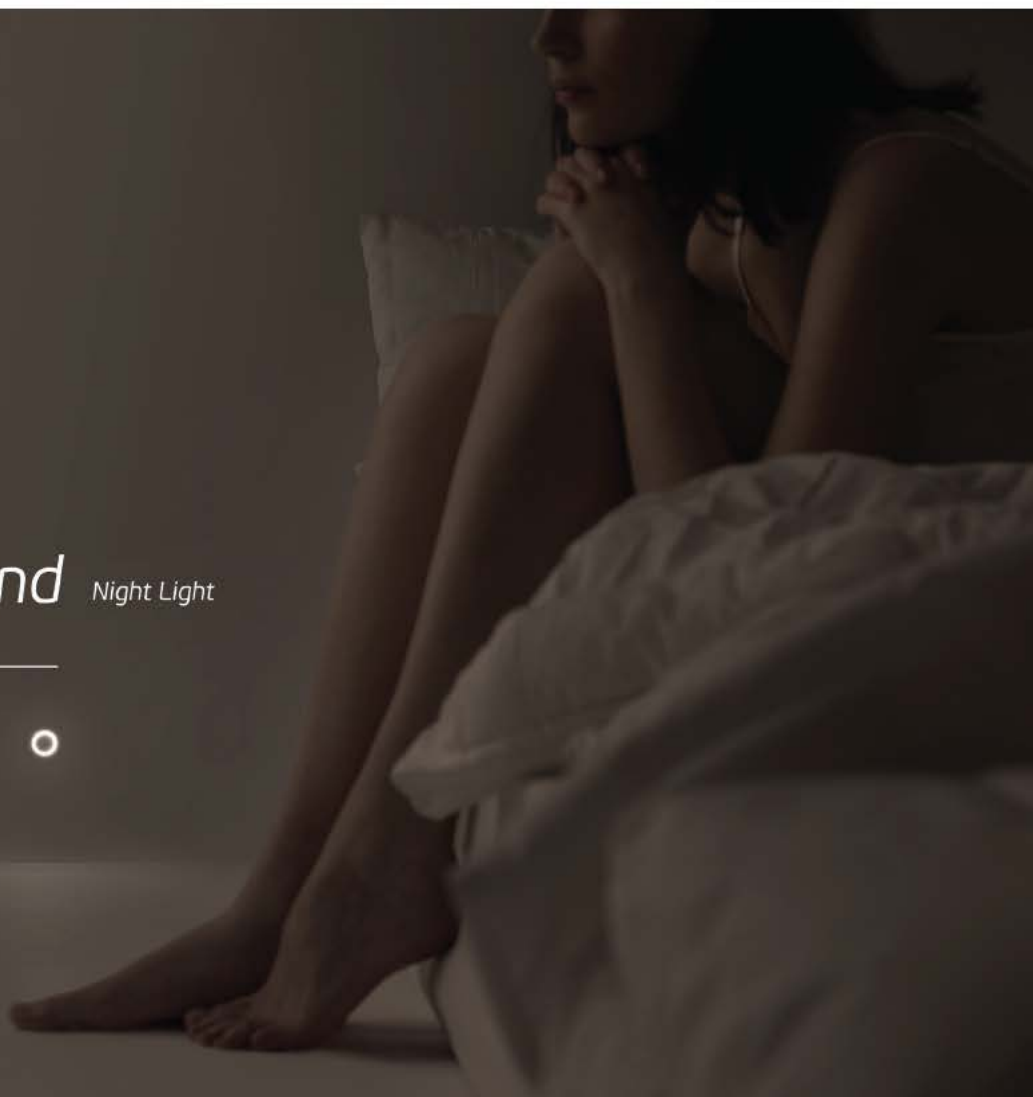

VK/04023



Product Models


Code	Model	Box
64171-011171	VK/04023/C ■ Chrome. 50lm. 1w. 25°. CRI>80.	10pcs
64171-021171	VK/04023/MC ■ Brushed Chrome. 50lm. 1w. 25°. CRI>80.	10pcs
64171-022171	VK/04023/BS ■ Brass. 50lm. 1w. 25°. CRI>80.	10pcs

Details

AC 240V Driver (Included). Watt 1w. CRI>80. Beam Angle 25°. Type of Led CREE. Working temperature -20°C→ 45°C. Lifetime 50.000hrs. Material Aluminium. 2 years guarantee.



IP20. 1w.



VK/04031/SPIRAL



Product Models

Code	Model	Box
64171-024126	VK/04031/SPIRAL/H5 ■ Chrome.	10pcs

Details

Spiral 30x0.8cm. Head 5cm.

VK/04031/CREE



Product Models

Code	Model	Box
64171-026126	VK/04031/CREE 1w.	10pcs

Details

Led CREE. Watt 1w.

VK/04031/LENS



Product Models

Code	Model	Box
64171-027126	VK/04031/LENS	10pcs

Details

Lens.

VK/04031/DRIVER



Product Models

Code	Model	Box
64171-028126	VK/04031/DRIVER 300mA. 1w. DC300mA. L3.6xW1.8xH1.8cm	10pcs

Details

Voltage 100-240V. Watt 1w. Material Plastic. 2 years guarantee.



IP20. 1w.

1.8cm | □ 1.8cm  
1.8cm 3.6cm

VK/SW1/1




Product Models

Code	Model	Box
64171-031126	VK/SW1/1 Switch On-Off.	10pcs

Details

Material Metal. 3 years guarantee.

IP20.



VK/SW1/2




Product Models

Code	Model	Box
64171-032126	VK/SW1/2 Switch On-Off-On.	10pcs

Details

Material Metal. 3 years guarantee.

IP20.



VK/SW2/1



Product Models

Code	Model	Box
64171-033126	VK/SW2/1 Switch On-Off.	10pcs

Details

Material Plastic. 3 years guarantee.

IP20.





VK/04032






Product Models

Code	Model	Box
64171-025171	VK/04032/MC/W □ White shade. Nickel. 1w. E14.	10pcs
64171-024171	VK/04032/MC/B ■ Black shade. Nickel. 1w. E14.	10pcs

Details

Voltage 240V. Watt 1w. Lampholder E14. Max watt 42w. Working temperature -20°C→ 45°C. Material Aluminium, metal, TC shade (included). IP Rating IP20.

  IP20. 1w & E14.

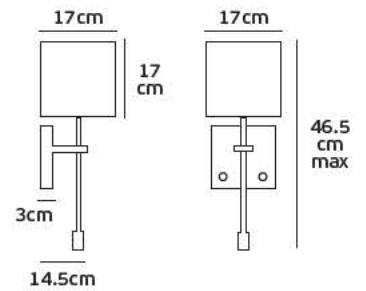

VK/04033






Product Models

Code	Model	Box
64171-027171	VK/04033/MC/W □ White shade. Nickel mat. 1w. E14.	10pcs
64171-026171	VK/04033/MC/B ■ Black shade. Nickel mat. 1w. E14.	10pcs

Details

Voltage 240V. Watt 1w. Lampholder E14. Max watt 42w. Working temperature -20°C→ 45°C. Material Aluminium, metal, TC shade (included). IP Rating IP20.

  IP20. 1w & E14.

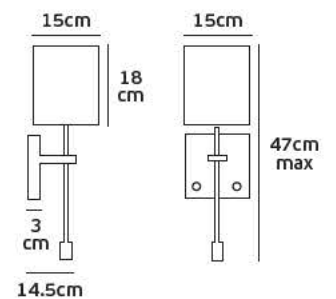



VK/04034


## Product Models

Code	Model	Box
64171-029171	VK/04034/MC/W □ White shade. Nickel. 1w. E14.	10pcs
64171-028171	VK/04034/MC/B ■ Black shade. Nickel. 1w. E14.	10pcs

## Details

Voltage 240V. Watt 1w. Lampholder E14. Max watt 42w. Working temperature -20°C→ 45°C.  
Material Aluminium, metal, TC shade (included). IP Rating IP20.

  IP20. 1w & E14.

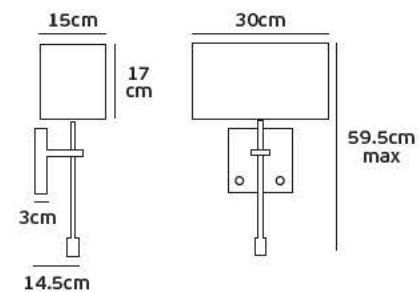


VK/04245, VK/04244, VK/04246

Product Models

Code	Model							Box
64174-029126	VK/04245/MC/W	■ Matt Nickel	3000K	300lm	2w	120°	CRI>70	30pcs
64174-028126	VK/04245/MC/D	■ Matt Nickel	6000K	300lm	2w	120°	CRI>70	30pcs
64174-032126	VK/04245/MC/BL	■ Matt Nickel	Blue	300lm	2w	120°	CRI>70	30pcs
64174-027126	VK/04244/MC/W	■ Matt Nickel	3000K	300lm	2w	120°	CRI>70	30pcs
64174-026126	VK/04244/MC/D	■ Matt Nickel	6000K	300lm	2w	120°	CRI>70	30pcs
64174-031126	VK/04246/MC/W	■ Matt Nickel	3000K	300lm	2w	120°	CRI>70	30pcs
64174-030126	VK/04246/MC/D	■ Matt Nickel	6000K	300lm	2w	120°	CRI>70	30pcs

Details

Voltage 230V. Watt 2w. Type of LED SMD 5730. CRI>70. Beam angle 120°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Acrylic, iron base. 2 years guarantee.

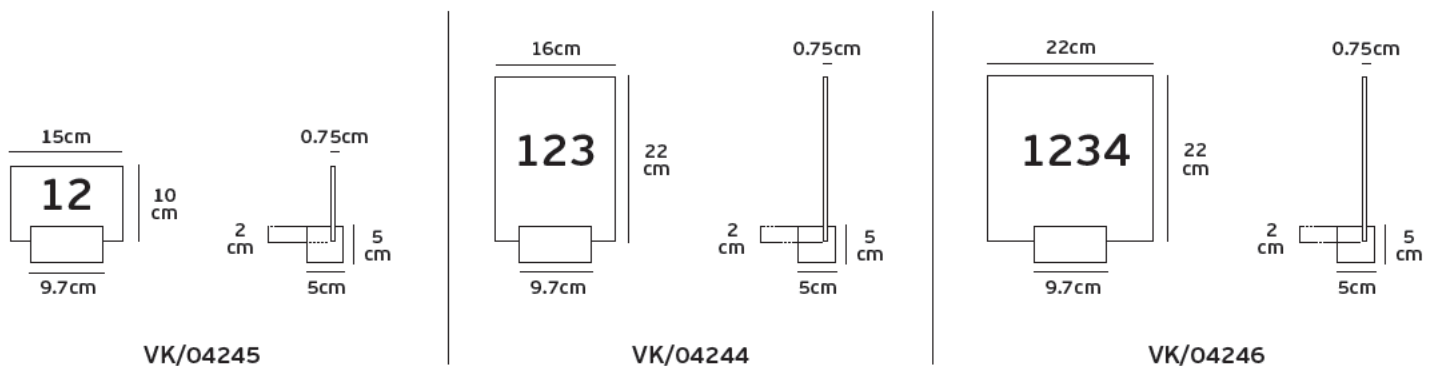




←619

620▶



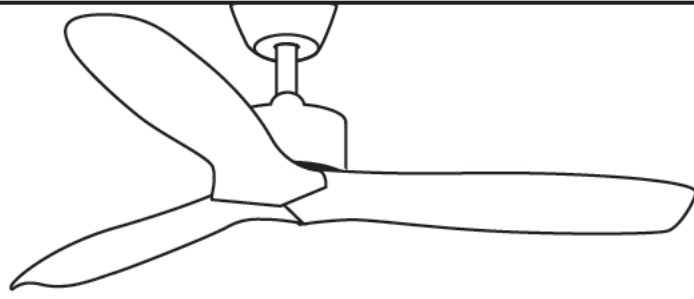

## 08 *ceiling fans*

ανεμιστήρες οροφής

## Ceiling Fans

### VK/04241/AIR



#### Product Models


<u>Code</u>	<u>Model</u>	<u>Box</u>
77161-476724	VK/04241/AIR/W White. 65w.	1pc

#### Details

Voltage 220-240V. Power 65w. Material Aluminium + Wood. IP Rating IP20.



Included Remote  
& wall control

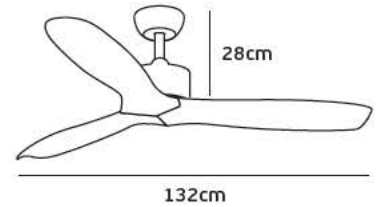

### VK/04235/AIR



#### Product Models


<u>Code</u>	<u>Model</u>	<u>Box</u>
77161-474724	VK/04235/AIR/WOOD Wood. 65w.	1pc
77161-477724	VK/04235/AIR/L-WOOD Light Wood. 65w.	1pc

#### Details

Voltage 220-240V. Power 65w. Material Aluminium + Wood. IP Rating IP20.



Included Remote  
& wall control

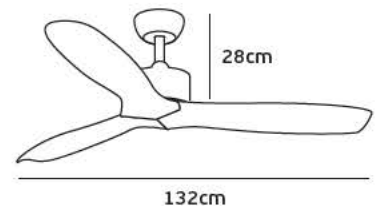



VK/04235/AIR/WOOD

VK/04235/AIR/L-WOOD





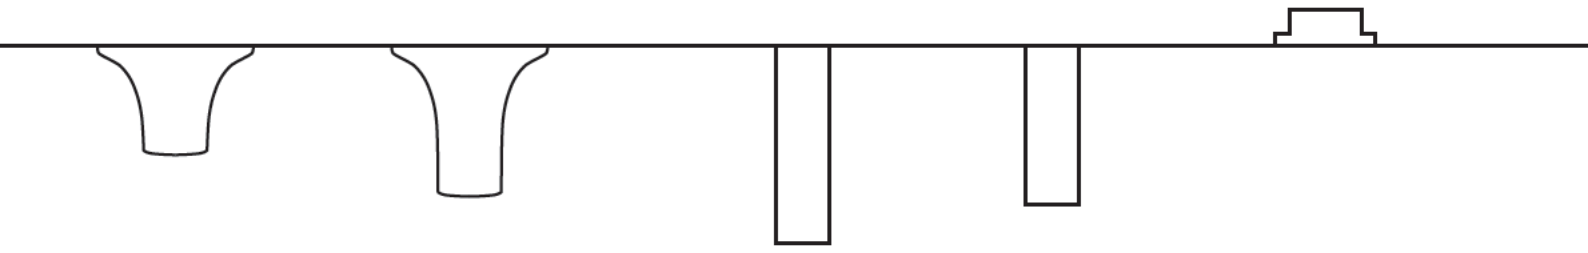

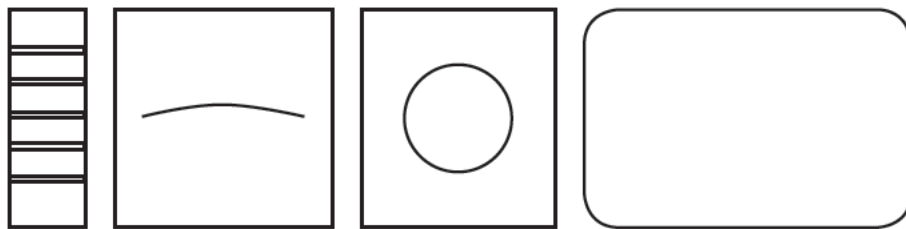

## 09 *gypsum*

γύψινα

VK/09010




Product Models

Code	Model	Box
64174-229131	VK/09010 □ White. E14. Max 40w.	6pcs

Details

Voltage 240V. Max watt 40w. E14. Material Gypsum. Possibility to paint.

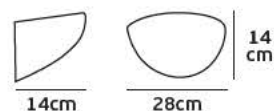

VK/09013




Product Models

Code	Model	Box
64174-232131	VK/09013 □ White. E14. Max 40w.	6pcs

Details

Voltage 240V. Max watt 40w. E14. Material Gypsum. Possibility to paint.



VK/09011




Product Models

Code	Model	Box
64174-230131	VK/09011 □ White. E14. Max 40w.	12pcs

Details

Voltage 240V. Max watt 40w. E14. Material Gypsum. Possibility to paint.



VK/09014




## Product Models

Code	Model	Box
64174-233131	VK/09014	9pcs
	□ White. E14. Max 40w.	

## Details

Voltage 240V. Max watt 40w. E14. Material Gypsum. Possibility to paint.

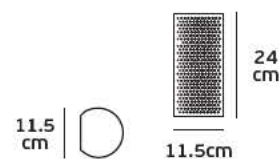

VK/09044




## Product Models

Code	Model	Box
64174-263131	VK/09044	24pcs
	□ White. G9. Max 40w.	

## Details

Voltage 240V. Max watt 40w. G9. Material Gypsum. Possibility to paint.

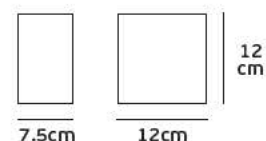

VK/09040




## Product Models

Code	Model	Box
64174-259131	VK/09040	9pcs
	□ White. G9. Max 40w.	

## Details

Voltage 240V. Max watt 40w. G9. Material Gypsum. Possibility to paint.

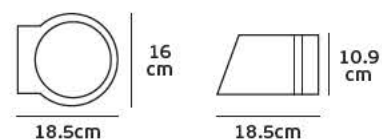

VK/09018



**Product Models**


Code	Model	Box
64174-237131	VK/09018 □ White. GU10. Max 2x35w.	9pcs

**Details**

Voltage 240V. Max watt 2x35w. GU10x2. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09019



**Product Models**


Code	Model	Box
64174-238131	VK/09019 □ White. GU10. Max 2x35w.	9pcs

**Details**

Voltage 240V. Max watt 2x35w. GU10x2. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09043



**Product Models**


Code	Model	Box
64174-262131	VK/09043 □ White. G9. Max 40w.	18pcs

**Details**

Voltage 240V. Max watt 40w. G9. Material Gypsum. Possibility to paint.




**IP20. G9.**



VK/09012




Product Models

Code	Model	Box
64174-231131	VK/09012 □ White. G9. Max 40w.	6pcs

Details

Voltage 240V. Max watt 40w. G9. Material Gypsum. Possibility to paint.

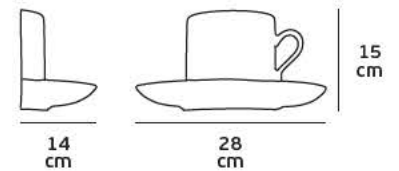

VK/09064




Product Models

Code	Model	Box
64174-293131	VK/09064 □ White. 3000K. 5w. CRI>80	12pcs

Details

AC Driver 220-240V (Included). Watt 5w. CRI>80. Beam Angle Diffuser light. Type of Led COB. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

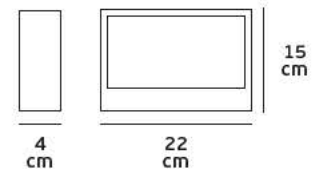

VK/09065




Product Models

Code	Model	Box
64174-294131	VK/09065 □ White. 3000K. 5w. CRI>80	12pcs

Details

AC Driver 220-240V (Included). Watt 5w. CRI>80. Beam Angle Diffuser light. Type of Led COB. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

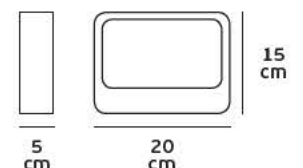

VK/09021




Product Models

Code	Model	Box
64174-240131	VK/09021 □ White. G9. Max 40w.	3pcs

Details

Voltage 240V. Max watt 40w. G9. Material Gypsum. Possibility to paint.

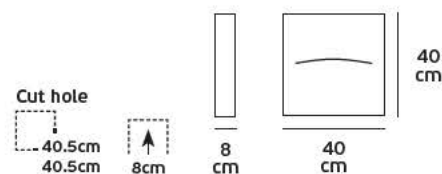

VK/09020




Product Models

Code	Model	Box
64174-239131	VK/09020 □ White. E14. Max 40w.	4pcs

Details

Voltage 240V. Max watt 40w. E14. Material Gypsum. Possibility to paint.

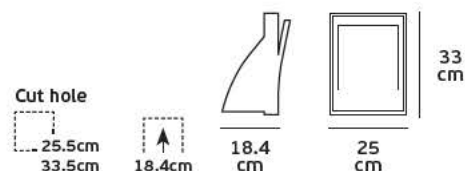

VK/09026




Product Models

Code	Model	Box
64174-245131	VK/09026 □ White. 3000K. 1w. CRI>80	8pcs

Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

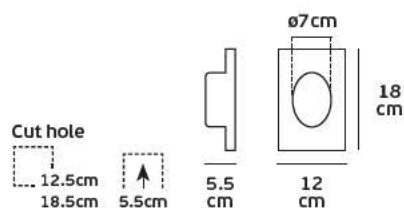

VK/09026/MR11




Product Models

Code	Model	Box
64174-339131	VK/09026/MR11 □ White. GU10/MR11. Max 35w.	8pcs

Details

Voltage 240V. Max watt 35w. GU10/MR11. Material Gypsum. Possibility to paint.

   IP20. GU10.

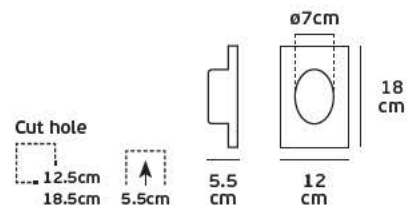

VK/09027




Product Models

Code	Model	Box
64174-246131	VK/09027 □ White. GU10. Max 35w.	4pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.

   IP20. GU10.

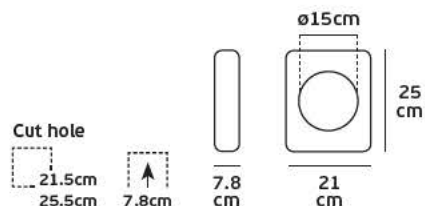

VK/09028




Product Models

Code	Model	Box
64174-247131	VK/09028 □ White. GU10. Max 35w.	3pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.

   IP20. GU10.

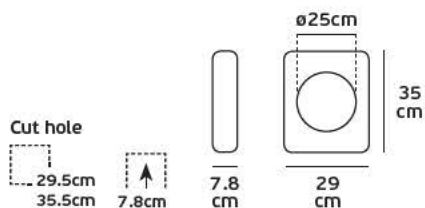



VK/09024



Product Models


Code	Model	Box
64174-243131	VK/09024 □ White. 3000K. 1w. CRI>80	12pcs

Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.




**IP20. 1w.**

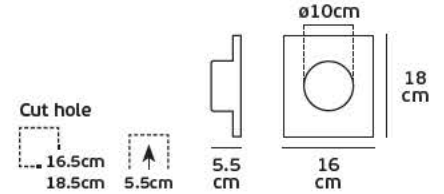

VK/09025



Product Models


Code	Model	Box
64174-244131	VK/09025 □ White. 3000K. 1w. CRI>80	8pcs

Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.




**IP20. 1w.**

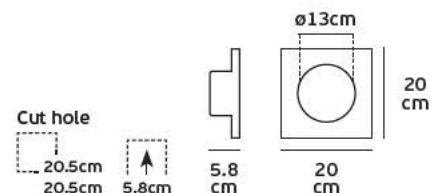

VK/09023



Product Models


Code	Model	Box
64174-242131	VK/09023 □ White. 3000K. 1w. CRI>80	12pcs

Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.




**IP20. 1w.**

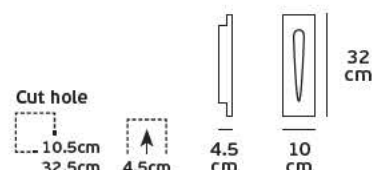

VK/09022



Product Models

Code	Model	Box
64174-241131	VK/09022	12pcs
	□ White. 3000K. 1w. CRI>80	


Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.





**IP20. 1w.**

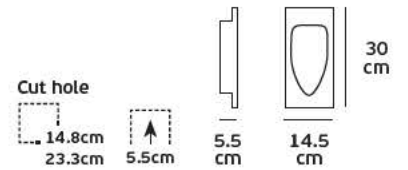

VK/09042



Product Models

Code	Model	Box
64174-261131	VK/09042	8pcs
	□ White. 3000K. 1w. CRI>80	


Details

AC Driver 220-240V (Included). Watt 1w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.





**IP20. 1w.**

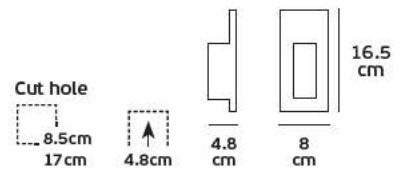

VK/04227



Product Models


Code	Model	Box
64174-314131	VK/04227	4pcs
	□ White. GU10. Max 35w.	

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**

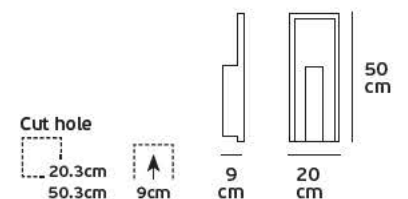

VK/09045




Product Models

Code	Model	Box
64174-264131	VK/09045 □ White. 3000K. 5w. CRI>80	6pcs

Details

AC Driver 220-240V (Included). Watt 5w. Beam Angle Diffuser Light. Type of Led COB Edison. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

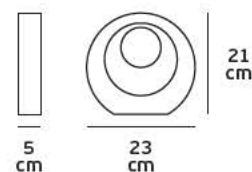

VK/09070




Product Models

Code	Model	Box
64174-300131	VK/09070 □ White. G9. Max 42w.	8pcs

Details

Voltage 240V. Max watt 42w. G9. Material Gypsum. Possibility to paint.

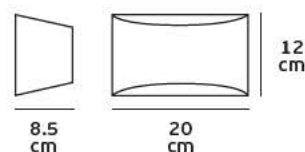

VK/09071




Product Models

Code	Model	Box
64174-301131	VK/09071 □ White. E14. Max 42w.	8pcs

Details

Voltage 240V. Max watt 42w. E14. Material Gypsum. Possibility to paint.

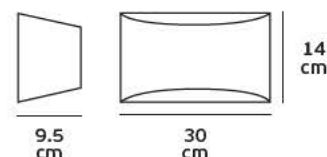

VK/09068




Product Models

Code	Model	Box
64174-298131	VK/09068	16pcs
□ White. 3000K. 4w. CRI>80		

Details

AC Driver 220-240V (Included). Watt 4w. Beam Angle Diffuser light perimeter.  
 Type of Led SMD Hongli 5050. No Dimmable. Lifetime 30.000 hrs.  
 Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

    IP20. 4w.

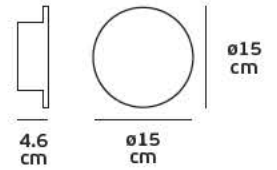

VK/09069




Product Models

Code	Model	Box
64174-299131	VK/09069	8pcs
□ White. 3000K. 7w. CRI>80		

Details

AC Driver 220-240V (Included). Watt 7w. Beam Angle Diffuser light perimeter.  
 Type of Led SMD Hongli 5050. No Dimmable. Lifetime 30.000 hrs.  
 Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

    IP20. 7w.

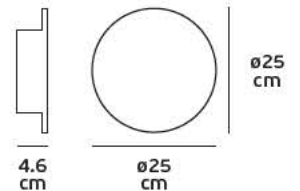

VK/09017




Product Models

Code	Model	Box
64174-236131	VK/09017 □ White. 3000K. 5.5w. CRI>80	8pcs

Details

AC Driver 220-240V (Included). Watt 5.5w. Beam Angle Diffuser light. Type of Led SMD 5050. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

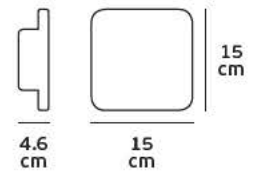

VK/09015




Product Models

Code	Model	Box
64174-234131	VK/09015 □ White. 3000K. 8w. CRI>80	8pcs

Details

AC Driver 220-240V (Included). Watt 8w. Beam Angle Diffuser light. Type of Led SMD 5050. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

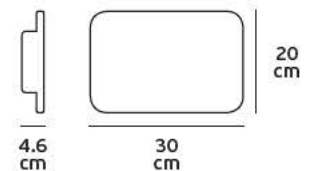

VK/09016




Product Models

Code	Model	Box
64174-235131	VK/09016 □ White. 3000K. 10.5w. CRI>80	5pcs

Details

AC Driver 220-240V (Included). Watt 10.5w. Beam Angle Diffuser light. Type of Led SMD 5050. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.

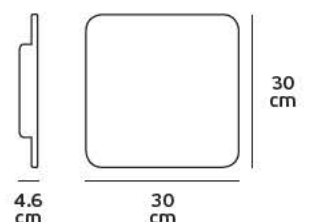

VK/04226

Product Models

Code	Model	Box
64174-311131	VK/04226/W/W □ White. 3000K. 2w. CRI>80	4pcs
64174-312131	VK/04226/B/W ■ Black. 3000K. 2w. CRI>80	4pcs



Details

AC Driver 220-240V (Included). Watt 2w. Beam Angle Diffuser light. Type of Led CREE. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum, aluminium. Possibility to paint. 2 years guarantee.





 IP20. 2w.



VK/09077

Product Models

Code	Model	Box
64174-315131	VK/09077 □ White. GU10. Max 35w. L10.5cm.	4pcs
64174-318131	VK/09077/12 □ White. GU10. Max 35w. L12cm.	4pcs
64174-319131	VK/09077/16 □ White. GU10. Max 35w. L16cm.	4pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




IP20. GU10.

Cut hole



22.5cm



L cm



22.5 cm

22.5 cm



VK/09031



## Product Models

Code	Model	Box
64174-250131	VK/09031 □ White. 3000K. 18w. CRI>80	4pcs

## Details


AC Driver 220-240V (Included). Watt 18w. Beam Angle Diffuser light. Type of Led SMD 2835. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.



IP20. 18w.



Cut hole

33  
cm

VK/09032



## Product Models

Code	Model	Box
64174-251131	VK/09032 □ White. 3000K. 9w. CRI>80	16pcs

## Details


AC Driver 220-240V (Included). Watt 9w. Beam Angle Diffuser light. Type of Led SMD 2835. No Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.



IP20. 9w.



Cut hole

22  
cm

VK/09033



## Product Models

Code	Model	Box
64174-252131	VK/09033 □ White. 3000K. 18w. CRI>80	4pcs

## Details


AC Driver 220-240V (Included). Watt 18w. Beam Angle Diffuser light. Type of Led SMD 2835. WNo Dimmable. Lifetime 30.000 hrs. Working temperature < 45°C. Material Gypsum. Possibility to paint. 2 years guarantee.



IP20. 18w.



Cut hole

ø33  
cm



VK/09004



Product Models

Code	Model	Box
64174-223131	VK/09004 □ White. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09002



Product Models

Code	Model	Box
64174-221131	VK/09002 □ White. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09029



Product Models

Code	Model	Box
64174-248131	VK/09029 □ White. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09003



Product Models

Code	Model	Box
64174-222131	VK/09003 □ White. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09001



Product Models

Code	Model	Box
64174-220131	VK/09001 □ White. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




**IP20. GU10.**



VK/09006



Product Models


Code	Model	Box
64174-225131	VK/09006 □ White. GU10x2. Max 2x35w.	12pcs

Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Gypsum. Possibility to paint.




**IP20. GU10.**

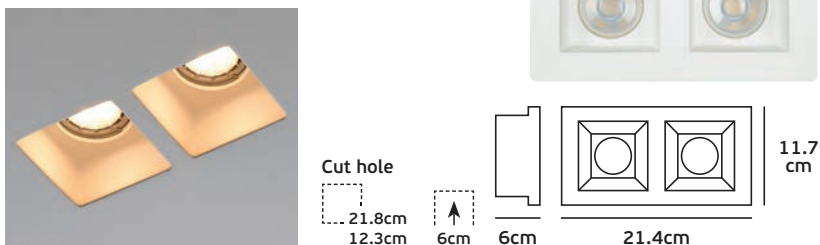

VK/09005

Product Models

Code  
64174-224131

Model  
VK/09005  
□ White. GU10. Max 35w.

Box  
24pcs

Details


Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.



IP20. GU10.



Cut hole



12  
cm



VK/09060



Product Models

Code	Model	Box
64174-289131	VK/09060	50pcs
	□ White. GU10. Max 35w.	

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Adjustable. Possibility to paint.





**IP20. GU10.**



VK/09061



Product Models

Code	Model	Box
64174-290131	VK/09061	50pcs
	□ White. GU10. Max 35w.	

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Adjustable. Possibility to paint.





**IP20. GU10.**



VK/09062



Product Models

Code	Model	Box
64174-291131	VK/09062	50pcs
	□ White. GU10. Max 35w.	

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Adjustable. Possibility to paint.





**IP20. GU10.**



VK/09072

Product Models





Code	Model	Box
64174-307131	VK/09072 □ White. GU10. Max 35w.	4pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.



IP20. GU10.

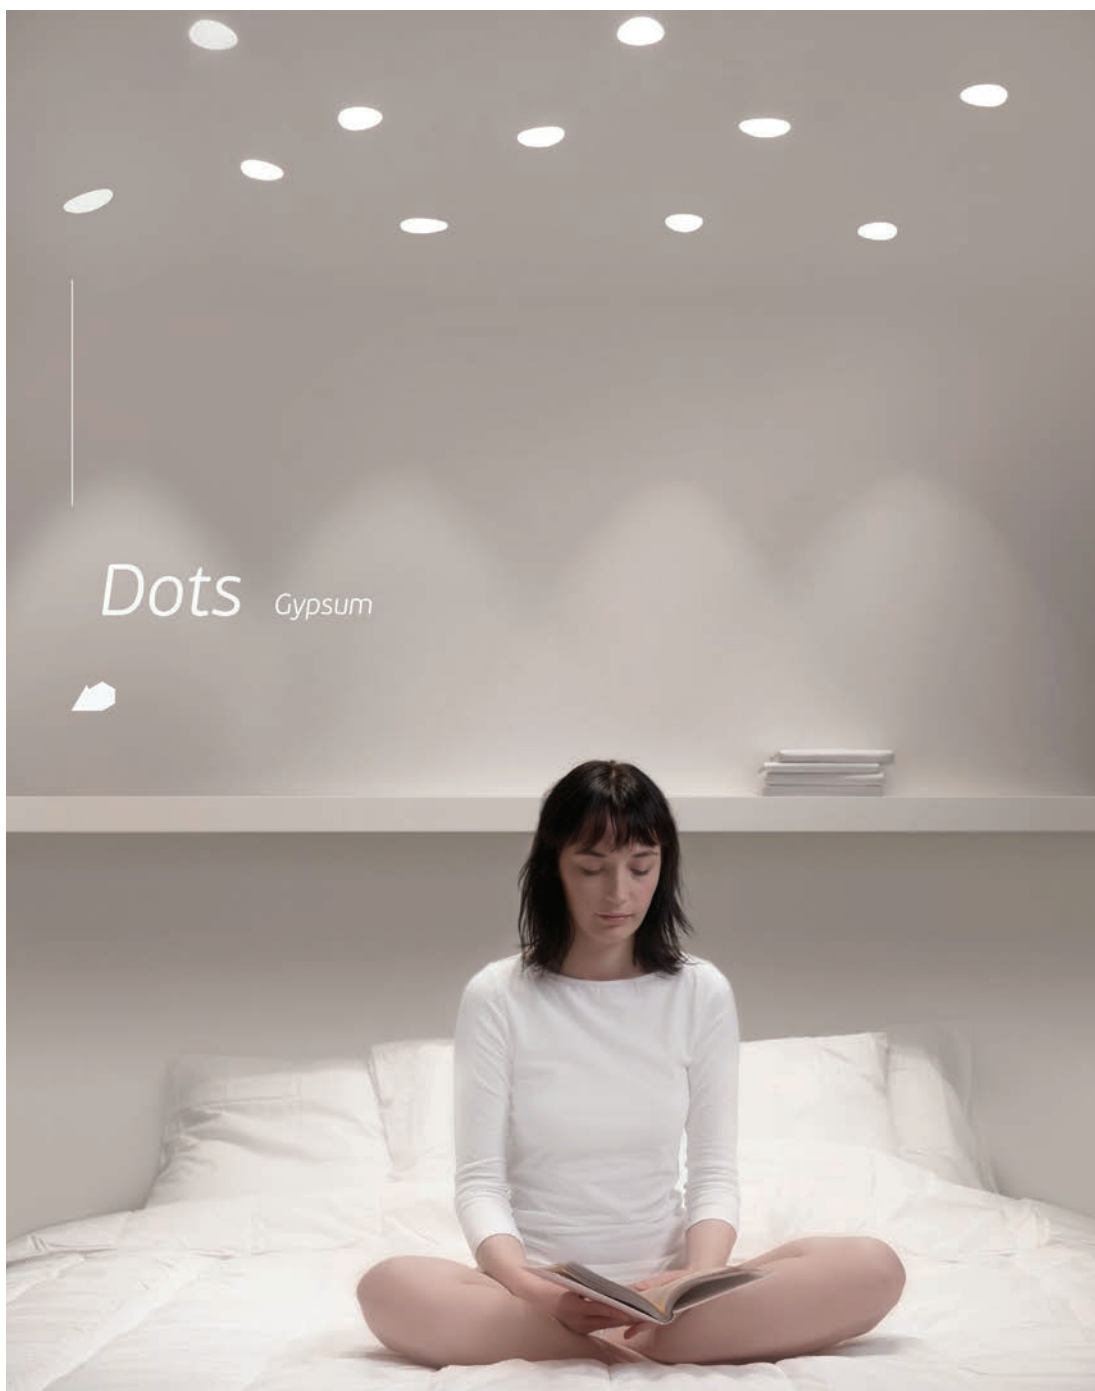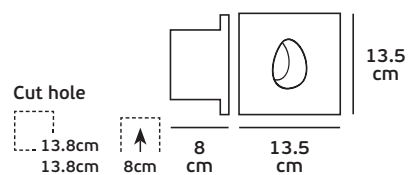


VK/09075

Product Models

**Code**  
64174-310131

**Model**  
VK/09075  
□ White. GU10. Max 35w.

**Box**  
24pcs


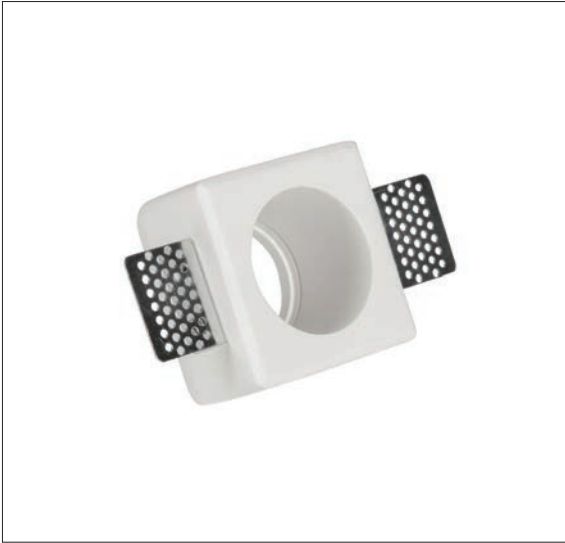


Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.



IP20. GU10.

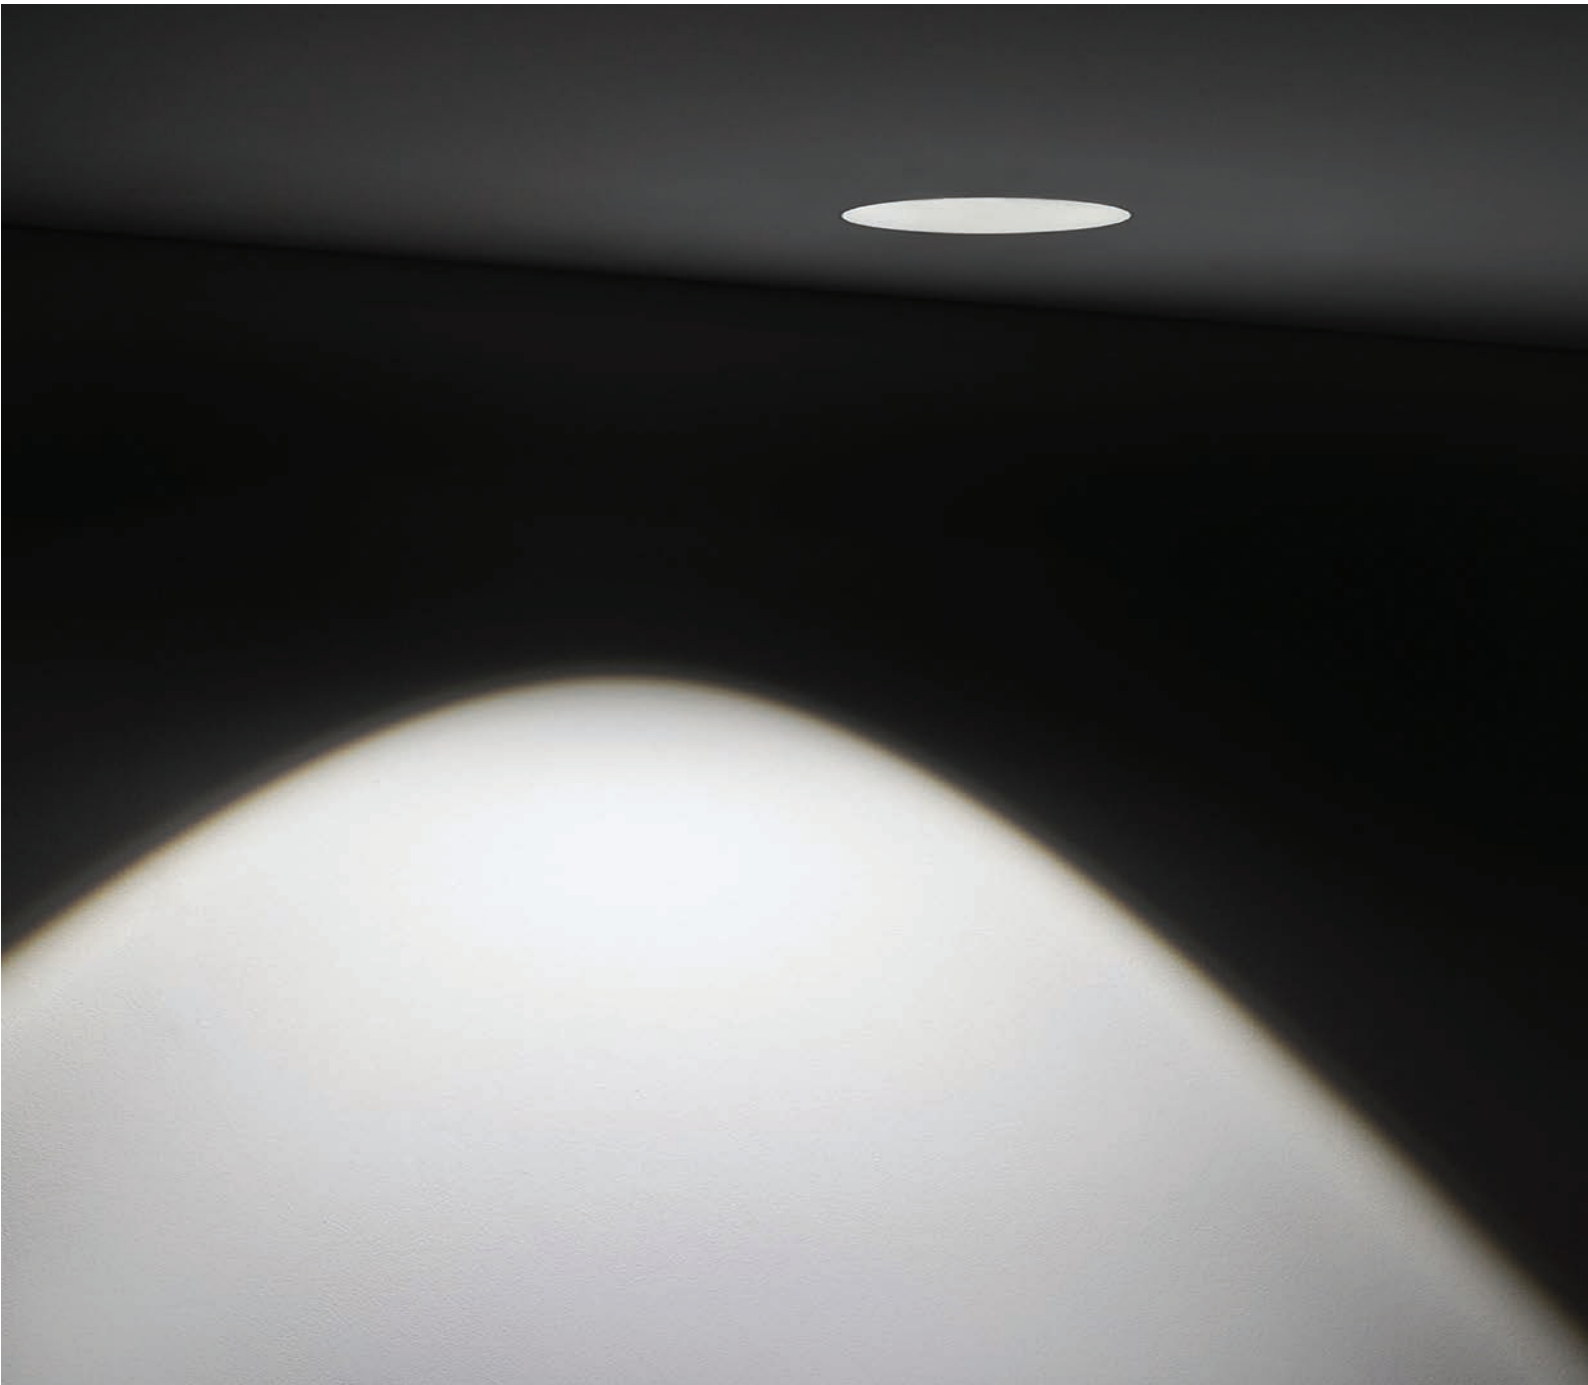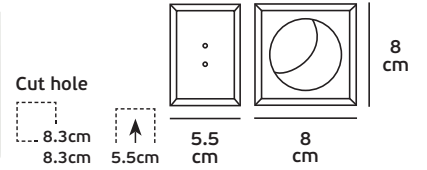

VK/09008



Product Models



Code	Model	Box
64174-227131	VK/09008 □ White. G53/R111. Max 50w.	6pcs

Details

Voltage 12V. Max watt 50w. G53/R111. Material Gypsum. Possibility to paint.



IP20. G53/R111.



VK/09007



Product Models



Code	Model	Box
64174-226131	VK/09007 □ White. G53/R111. Max 50w.	6pcs

Details

Voltage 12V. Max watt 50w. G53/R111. Material Gypsum. Possibility to paint.



IP20. G53/R111.



VK/09078



Product Models




Code	Model	Box
64174-317131	VK/09078 □ White. G53/R111. Max 50w.	8pcs

Details

Voltage 12V. Max watt 50w. G53/R111. Material Gypsum. Possibility to paint.



IP20. G53/R111.



VK/09030



Product Models

Code	Model	Box
64174-249131	VK/09030	4pcs
□ White. G53/R111. Max 50w.		

Details

Voltage 12V. Max watt 50w. G53/R111. Material Gypsum. Adjustable. Possibility to paint.






**IP20. G53/R111.**



VK/09009

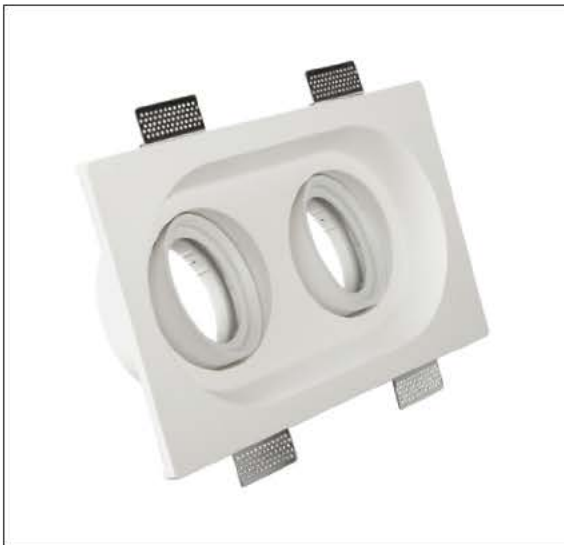

Product Models

Code	Model	Box
64174-228131	VK/09009	4pcs
□ White. G53/R111. Max 50w.		

Details

Voltage 12V. Max watt 50w. G53/R111. Material Gypsum. Adjustable. Possibility to paint.





**IP20. G53/R111.**





VK/09034



Product Models


Code	Model	Box
64174-253131	VK/09034 □ White. LED STRIP. Max 14.4w/m.	4pcs

Details

Voltage 24V. Max watt 14.4w/m. LED STRIP. Material Gypsum. Possibility to paint.



IP20. LED strip.



VK/09036, VK/09037, VK/09038



Product Models


Code	Model	Box
64174-255131	VK/09036 □ White. GU10. Max 35w. L 9cm.	1pc
64174-256131	VK/09037 □ White. GU10. Max 35w. L 13cm.	1pc
64174-257131	VK/09038 □ White. GU10. Max 35w. L 17cm.	1pc

Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.



IP20. GU10.

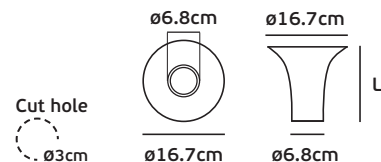

VK/09039



Product Models


Code	Model	Box
64174-286131	VK/09039/12 □ White. GU10. Max 35w. L 11.2cm.	18pcs
64174-302131	VK/09039/14 □ White. GU10. Max 35w. L 14cm.	18pcs
64174-258131	VK/09039/17 □ White. GU10. Max 35w. L 17cm.	18pcs


Details

Voltage 240V. Max watt 35w. GU10. Material Gypsum. Possibility to paint.




IP20. GU10.



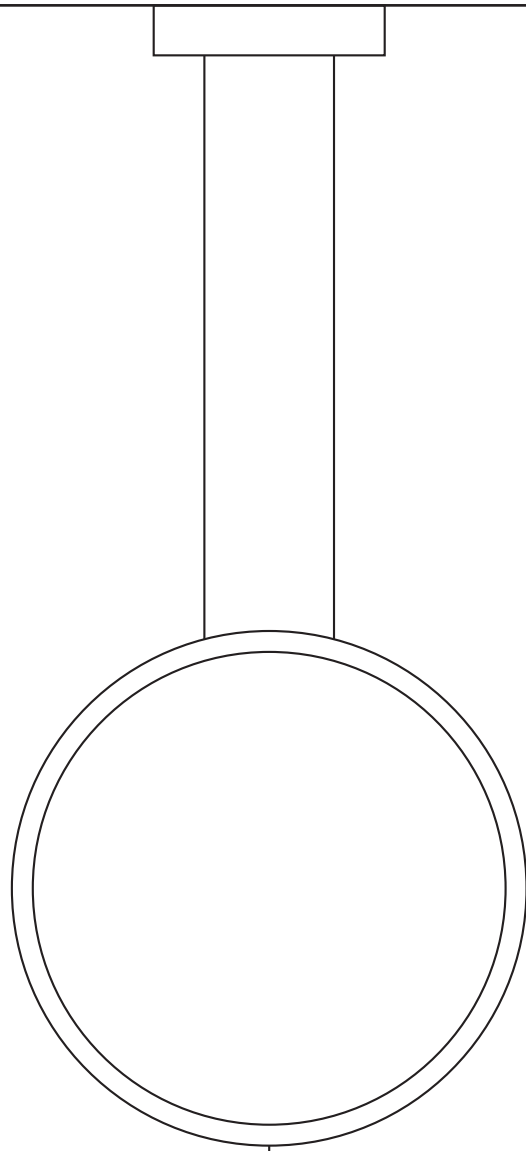

10 *decorative lighting*




VK/04400


### Product Models



Code	Model	E
71164-017724	VK/04400/B/W ■ Matt Black. 3000K. 2.070lm. 19w.  . CRI>80	...

### Details

Led Pendant Light 220-240V. Watt 19w. CRI>80. Type of Led  2835 with driver. Dimmable Euchip Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C. Material Iron+aluminium+acrylic, cable 1.4m.

   IP20. 19w.

 5 years guarantee

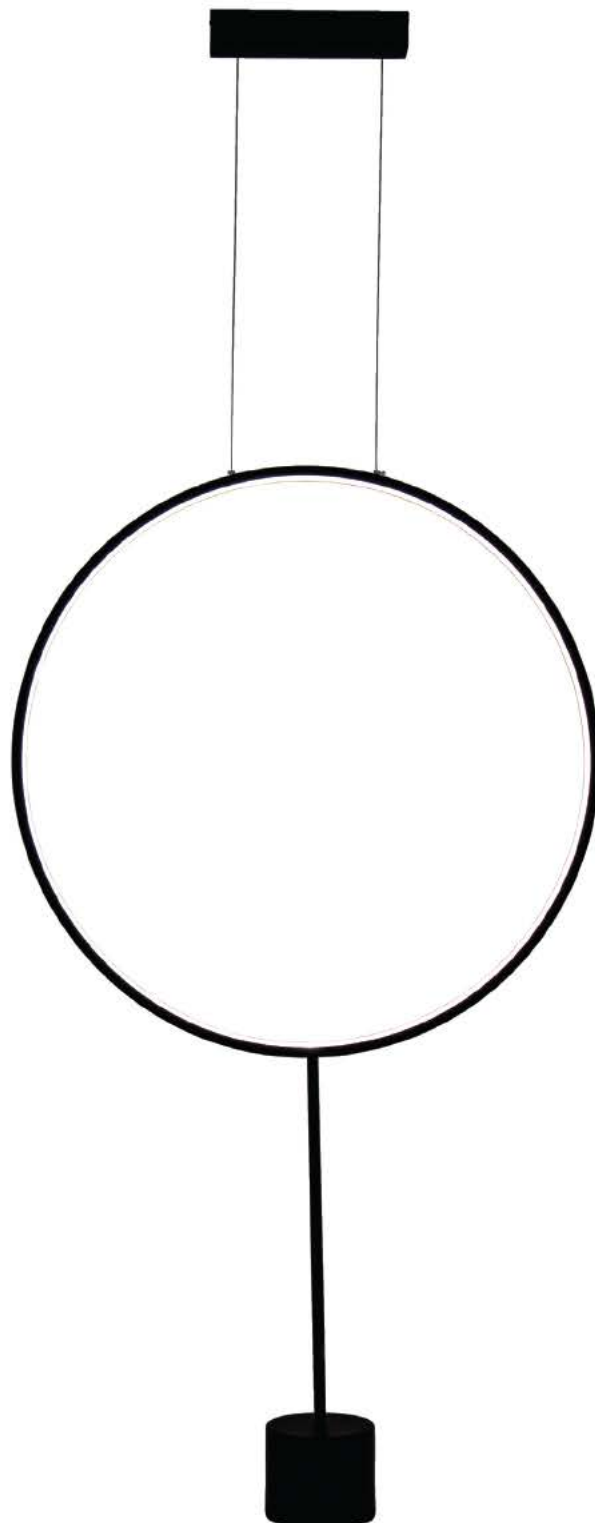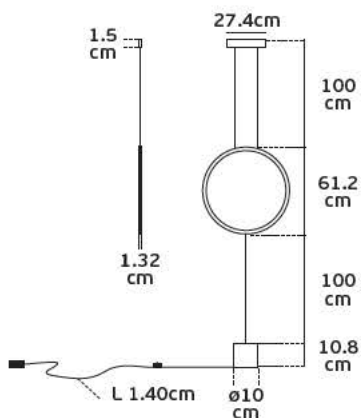







VK/04401

### Product Models



Code	Model	Box
71164-018724	VK/04401/GD/W ■ Matt Gold. 3000K. 2.898lm. 28w.  CRI>80	1pc

### Details


Led Pendant Light 220-240V. Watt 28w. CRI>80. Type of Led  2835 with driver. Dimmable Euchip Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C. Material Iron+aluminium+acrylic, cable 1.4m.

   IP20. 28w.

 5 years guarantee

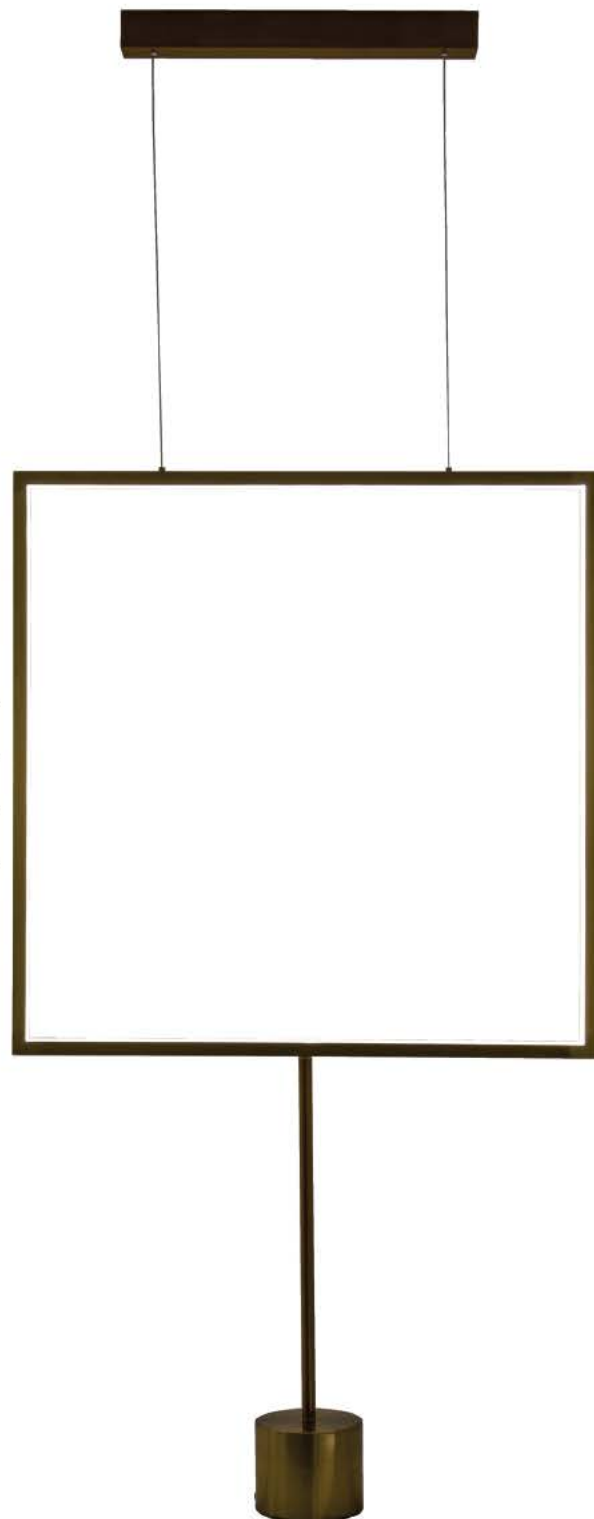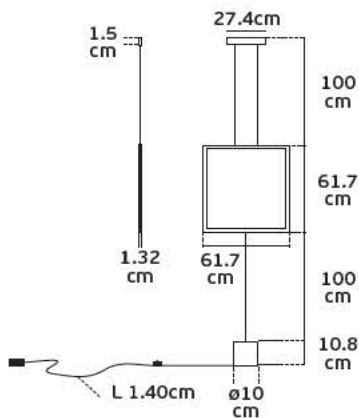



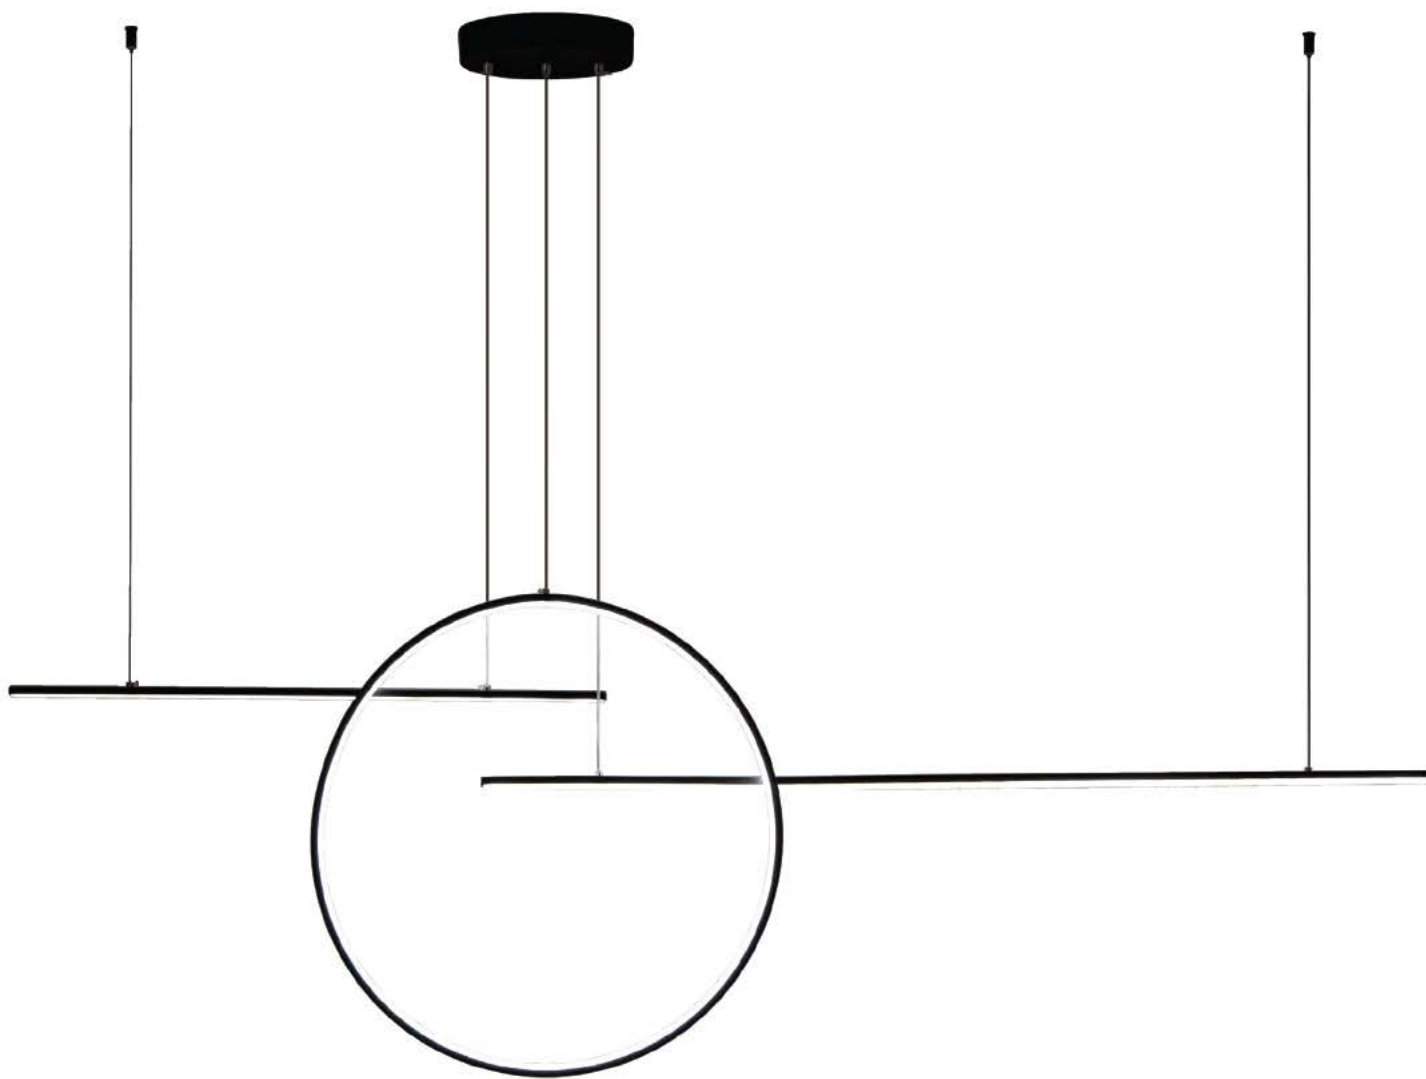


VK/04399/PE

### Product Models


Code	Model	Box
71164-016724	VK/04399/PE/B/W ■ Matt Black. 3000K. 6.800lm. 68w.  . CRI>80	1pc

### Details

Led Pendant Light 220-240V. Watt 68w. CRI>80. IP Rating IP20. Type of Led  2835 with driver. Dimmable Euchip Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C  
Material Iron+aluminium+silicone strip, cable 1.5m.


   IP20. 68w.

 5 years guarantee

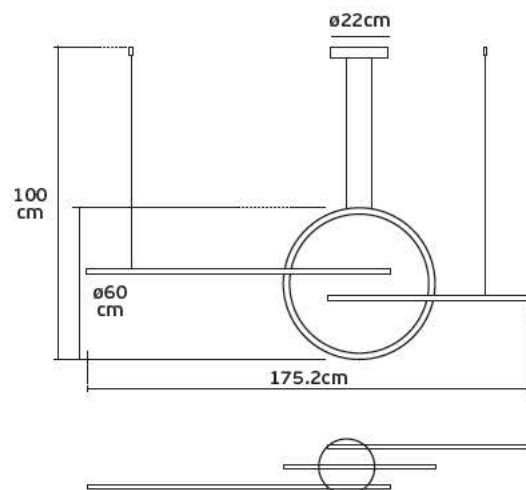





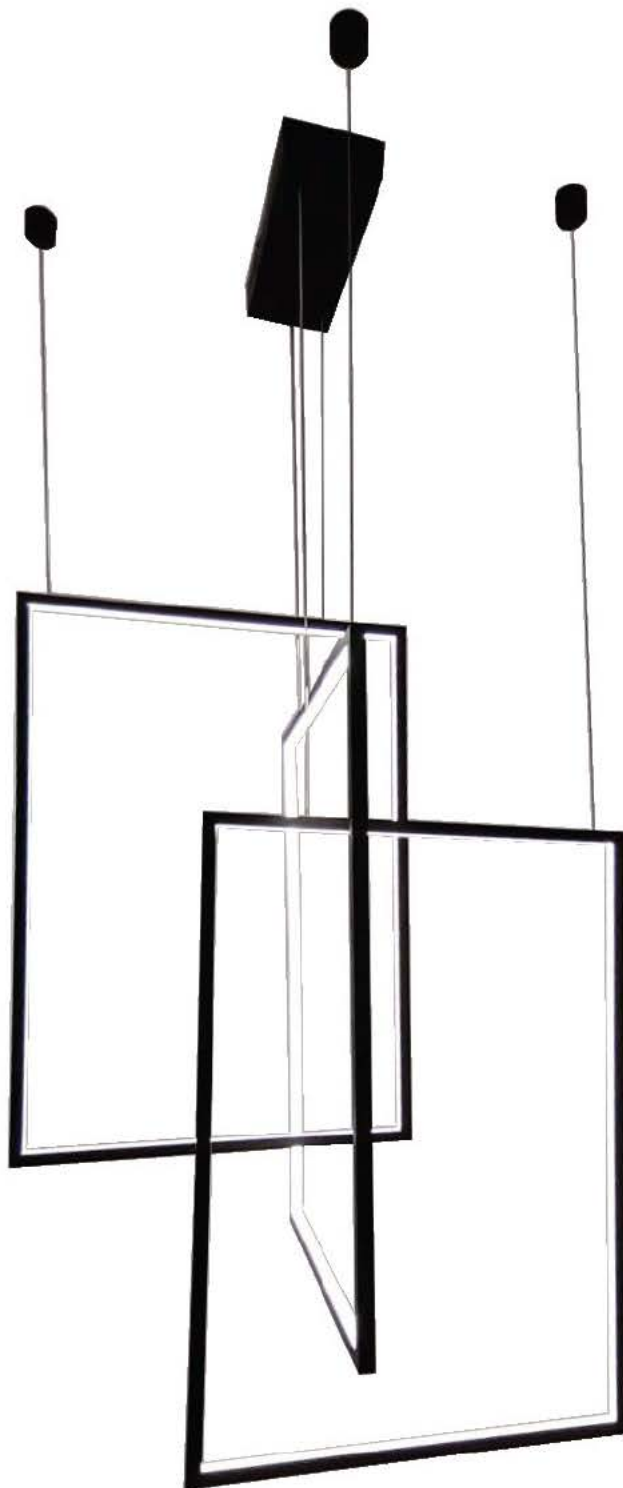

**VK/04414PE**


**Product Models**

Code	Model	Box
71164-013755	VK/04414PE/B/W ■ Matt Black. 3000K. 7.000lm. 100w. CRI>80.	1pc

**Details**

Led Pendant Light 220V. Watt 100w. CRI>80. IP Rating IP20. Type of Led Epistar.  
Driver Mean well. Dimmable No. Lifetime 50.000hrs. Working temperature -20°C → 60°C.  
Material Aluminium+acrylic. 3 years guarantee.

   **IP20. 100w.**

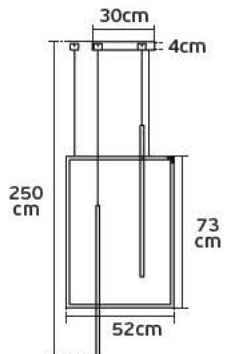





**VK/04270**

**Product Models**


Code	Model	Box
75169-045721	VK/04270/B/W ■ Black. 3000K. 12w.  CRI>80	1pc
75169-046721	VK/04270/B/C ■ Black. 4000K. 12w.  CRI>80	1pc

**Details**

Voltage 200-240V. Watt 12w. CRI>80. Diffuse lighting. Type of Led .  
Lifetime 50.000hrs. Working temperature < 45°C. Material Aluminium. 2 years guarantee.



IP20. 12w.

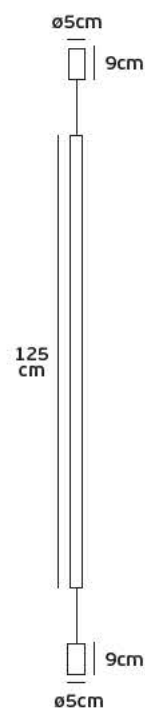





■ VK/03217/CE  
VK/03218/CE



Product Models

Code	Model	Color	Length	Max width LED Strip	Box
75169-048721	VK/03217/CE/B/6	■ Black	6m	10mm	1pc
75169-049721	VK/03218/CE/B/12	■ Black	12m	10mm	1pc

Details

DC 24V. Working temperature <45°C. Material Stainless steel+iron. Length 6m or 12m.  
**Attention:** Max width of LED Strip cannot over 10mm. The power supply put inside the ceiling!  
 2 years guarantee.

IP20

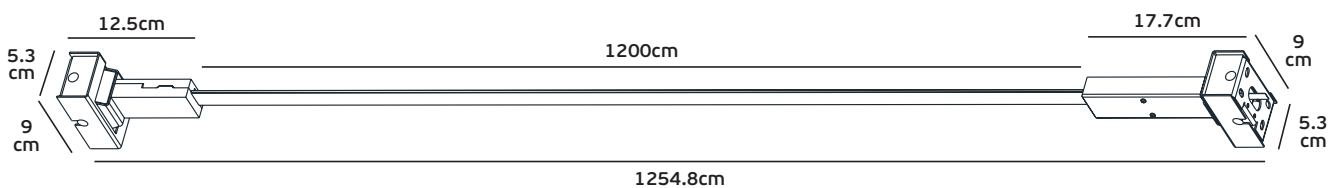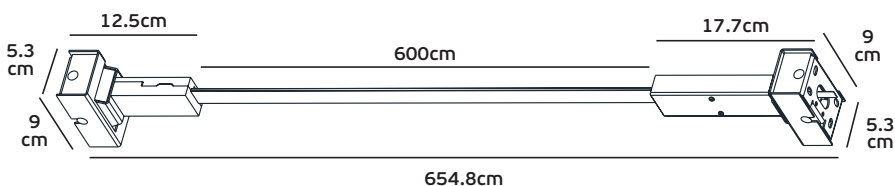



**VK/03217/CHB**  
Cable holder



**Product Models**

Code	Model	Box
78000-052721	VK/03217/B/CHB Black. Fix the cable.	1pc

*Details*

Cable holder. Working temperature <45°C. Material Stainless steel+iron. Fix the cable.  
Use environment: Concrete/Cement ceiling or wall.  
2 years guarantee.

**IP20**



**VK/03217/PS75**  
Power Box






**Product Models**

Code	Model	Box
78000-050721	VK/03217/B/PS75 Black. Power 75w.	1pc

*Details*

Power box. Voltage AC 100-240V, DC 24V. Power 75w. Working temperature <45°C. Hours 50.000hrs. Material Stainless steel+iron. Use environment: Concrete/Cement ceiling or wall. 2 years guarantee.

**IP20. 75w.**

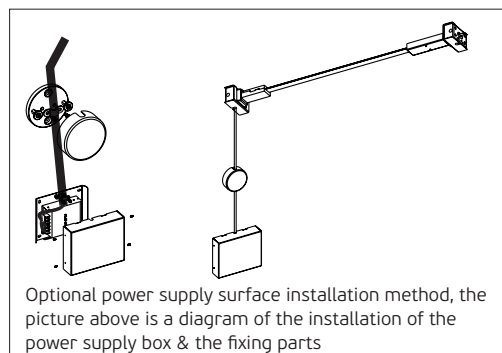

**VK/03218/PS150**  
Power Box




**Product Models**

Code	Model	Box
78000-051721	VK/03218/B/PS150 Black. Power 150w.	1pc

*Details*

Power box. Voltage AC 100-240V, DC 24V. Power 150w. Working temperature <45°C. Hours 50.000hrs. Material Stainless steel+iron. Use environment: Concrete/Cement ceiling or wall. 2 years guarantee.

**IP20. 150w.**

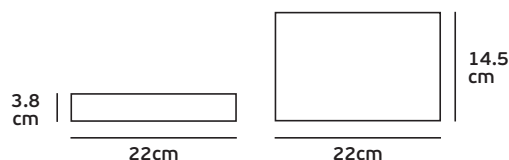





Floor to ceiling suspension LED



**VK/03217/FL**

**Product Models** 17.7 cm

Code 75169-054721 Model VK/03217/FL/B/4 ■ Black

Length 4m Max width LED Strip 10mm


Box 1pc

**Details**

DC 24V. Working temperature <45°C. Material Stainless steel+iron. Length 6m or 12m.  
**Attention:** Max width of LED Strip cannot over 10mm. Included driver 24V, 48w.  
 2 years guarantee.

**IP20**

**Included**

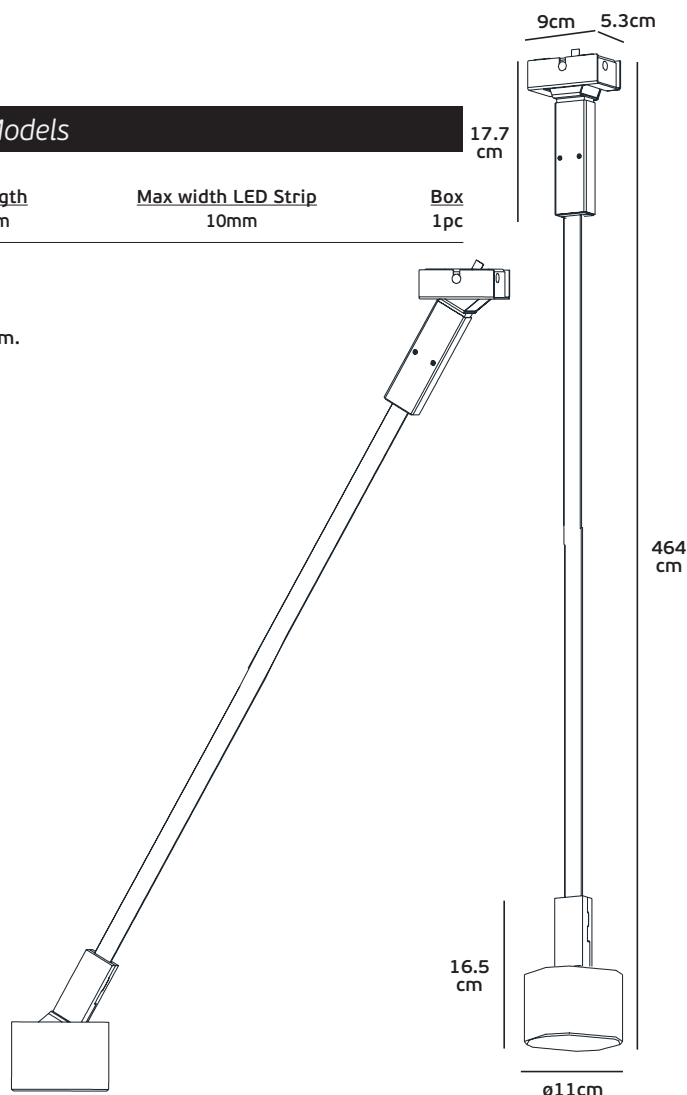




Pendant lights LED



VK/04402/120/...

Product Models

Code	Model	Box
75165-001115	VK/04402/120/B/W ■ Black. 3000K. 595lm. 25w. 71°. CRI>80.	1pc
75165-002115	VK/04402/120/B/C ■ Black. 4000K. 595lm. 25w. 71°. CRI>80.	1pc

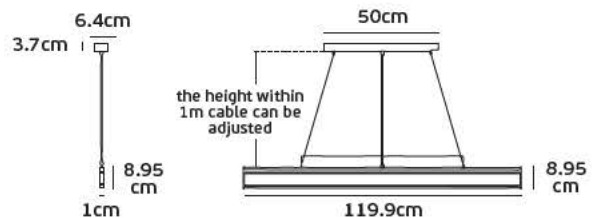

Details

Led Pendant Light 220-240V. Watt 25w. CRI>80. IP Rating IP45.  
Type of Led 2835 with driver Meanwell. Lifetime 20.000hrs.  
Working temperature -40°C → 50°C. Material Aluminium.



IP45. 25w.

5 years guarantee



Bottom side




Pendant lights LED



VK/04404PE/.../53

### Product Models

Code	Model	Box
71164-001115	VK/04404PE/B/W/53 ■ Black. 3000K. 2.400lm. 24w. CRI>80.	1pc
71164-002115	VK/04404PE/W/W/53 □ White. 3000K. 2.400lm. 24w. CRI>80.	1pc

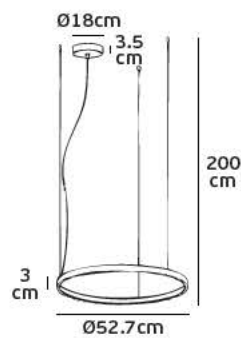

### Details

Led Pendant Light 220-240V. Watt 24w. CRI>80. IP Rating IP20.  
Type of Led 2835 with driver. Dimmable Triac. Lifetime 20.000hrs.  
Working temperature -20°C → 40°C. Material Aluminium.



IP20. 24w.

5 years guarantee





Pendant lights LED




VK/04405PE/.../66

### Product Models


Code	Model	Box
71164-003115	VK/04405PE/B/W/66 ■ Black. 3000K. 3.000lm.  led. 30w. CRI>80.	1pc
71164-004115	VK/04405PE/W/W/66 □ White. 3000K. 3.000lm.  led. 30w. CRI>80.	1pc

### Details

Led Pendant Light 220-240V. Watt 30w. CRI>80. IP Rating IP20. Type of Led  2835 with driver. Dimmable Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C. Material Aluminium.

   IP20. 30w.

 5 years guarantee





Montforte  
Sempione  
Magenta

Woods





# Pendant lights LED




VK/04406PE/.../92


## Product Models


Code	Model	Box
71164-005115	VK/04406PE/B/W/92 ■ Black. 3000K. 4.200lm.  led. 42w. CRI>80.	1pc
71164-006115	VK/04406PE/W/W/92 □ White. 3000K. 4.200lm.  led. 42w. CRI>80.	1pc

## Details

Led Pendant Light 220-240V. Watt 42w. CRI>80. IP Rating IP20. Type of Led  2835 with driver. Dimmable Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C  
Material Aluminium.

   IP20. 42w.

 5 years guarantee





Pendant lights LED



VK/04407PE/.../3C

### Product Models


Code	Model	Box
71164-007115	VK/04407PE/B/W/3C ■ Black. 3000K. 10.800lm.  108w. CRI>80.	1pc
71164-008115	VK/04407PE/W/W/3C □ White. 3000K. 10.800lm.  108w. CRI>80.	1pc

### Details

Led Pendant Light 220-240V. Watt 108w. CRI>80. IP Rating IP20. Type of Led 2835 with driver. Dimmable Triac. Lifetime 20.000hrs. Working temperature -20°C → 40°C. Material Aluminium.


IP20. 108w.

5 years guarantee

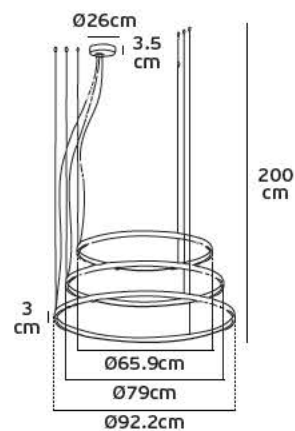



## Pendant lights LED

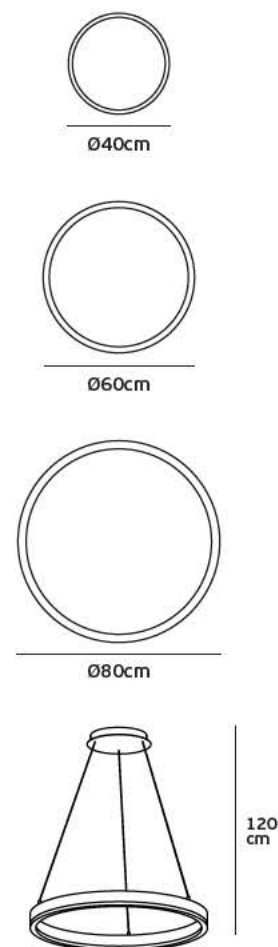

### VK/04251PE

### Product Models

Code	Model							Box
71164-021702	VK/04251PE/W/W/40	□ White sandy.	3000K.	2.240lm.	32w	CRI>80	Dø40cm.	1pc
71164-022702	VK/04251PE/B/W/40	■ Black sandy.	3000K.	2.080lm.	32w	CRI>80	Dø40cm.	1pc
71164-023702	VK/04251PE/CG/W/40	■ Champaign Gold.	3000K.	2.080lm.	32w	CRI>80	Dø40cm.	1pc
71164-024702	VK/04251PE/W/W/60	□ White sandy.	3000K.	2.940lm.	42w	CRI>80	Dø60cm.	1pc
71164-025702	VK/04251PE/B/W/60	■ Black sandy.	3000K.	2.730lm.	42w	CRI>80	Dø60cm.	1pc
71164-026702	VK/04251PE/CG/W/60	■ Champaign Gold.	3000K.	2.730lm.	42w	CRI>80	Dø60cm.	1pc
71164-027702	VK/04251PE/W/W/80	□ White sandy.	3000K.	4.340lm.	62w	CRI>80	Dø80cm.	1pc
71164-028702	VK/04251PE/B/W/80	■ Black sandy.	3000K.	4.030lm.	62w	CRI>80	Dø80cm.	1pc
71164-029702	VK/04251PE/CG/W/80	■ Champaign Gold.	3000K.	4.030lm.	62w	CRI>80	Dø80cm.	1pc

### Details

AC 200-240V. Watt 32w./42w./62w. Type of Led SMD 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material Aluminium. Cable 1m + 12.5cm ceiling plate. 2 years guarantee.



IP20. 32w./42w./62w.






**VK/04252PE**

**Product Models**

Code	Model	Box
71164-030702	VK/04252PE/W/W/4060 □ White sandy. 3000K. 5.032lm. 74w. CRI>80	1pc
71164-031702	VK/04252PE/B/W/4060 ■ Black sandy. 3000K. 4.588lm. 74w. CRI>80	1pc
71164-032702	VK/04252PE/CG/W/4060 ■ Champaign Gold. 3000K. 4.588lm. 74w. CRI>80	1pc



**Details**  
 AC 200-240V. Watt 74w. Type of Led SMD 2835. Working temperature -20°C ~ 60°C.  
 Lifetime 50.000hrs. Material Aluminium+Acrylic. 2 years guarantee.




**IP20. 74w.**









### VK/04243PE


#### Product Models

Code	Model	Box
71164-017702	VK/04243PE/W/W/60 □ White sanded. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc
71164-018702	VK/04243PE/AN/W/60 ■ Anthracite. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc
71164-019702	VK/04243PE/W/W/80 □ White sanded. 3000K. 4.000lm. 80w. CRI>80. ø80cm.	1pc
71164-020702	VK/04243PE/AN/W/80 ■ Anthracite. 3000K. 4.000lm. 80w. CRI>80. ø80cm.	1pc

#### Details

AC 220-240V Driver (Included). Watt 50w/80w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material Aluminium, Acrylic. 2 years guarantee.

   IP20. 50w./80w.

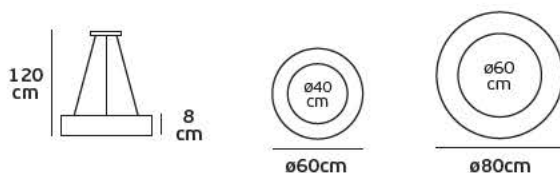

### VK/04243CE


#### Product Models

Code	Model	Box
71164-013702	VK/04243CE/W/W/60 □ White sanded. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc
71164-014702	VK/04243CE/AN/W/60 ■ Anthracite. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc
71164-015702	VK/04243CE/W/W/80 □ White sanded. 3000K. 4.000lm. 80w. CRI>80. ø80cm.	1pc
71164-016702	VK/04243CE/AN/W/80 ■ Anthracite. 3000K. 4.000lm. 80w. CRI>80. ø80cm.	1pc

#### Details

AC 220-240V Driver (Included). Watt 50w/80w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material Aluminium, Acrylic. 2 years guarantee.

   IP20. 50w./80w.

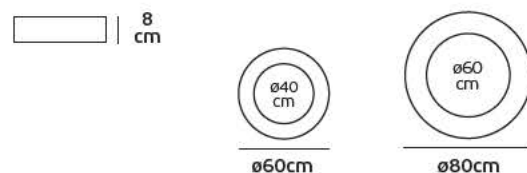



VK/04131PE  
VK/04132PE

### Product Models

Code	Model	Box
71164-005702	VK/04131PE/W/W □ White sanded. 3000K. 1.600lm. 32w. CRI>80. ø45.5cm.	1pc
71164-007702	VK/04131PE/AN/W ■ Anthracite. 3000K. 1.600lm. 32w. CRI>80. ø45.5cm.	1pc
71164-006702	VK/04132PE/W/W □ White sanded. 3000K. 2.100lm. 42w. CRI>80. ø60cm.	1pc
71164-008702	VK/04132PE/AN/W ■ Anthracite. 3000K. 2.100lm. 42w. CRI>80. ø60cm.	1pc

### Details

AC 220-240V. Driver (Included). Watt 32w/42w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material Aluminium, Acrylic. 2 years guarantee.

   IP20. 32w/42w.



VK/04129CE  
VK/04130CE

### Product Models

Code	Model	Box
71164-001702	VK/04129CE/W/W □ White sanded. 3000K. 1.600lm. 32w. CRI>80. ø45.5cm.	1pc
71164-003702	VK/04129CE/AN/W ■ Anthracite. 3000K. 1.600lm. 32w. CRI>80. ø45.5cm.	1pc
71164-002702	VK/04130CE/W/W □ White sanded. 3000K. 2.100lm. 42w. CRI>80. ø60cm.	1pc
71164-004702	VK/04130CE/AN/W ■ Anthracite. 3000K. 2.100lm. 42w. CRI>80. ø60cm.	1pc

### Details

AC 220-240V Driver (Included). Watt 32w/42w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material Aluminium, Acrylic. 2 years guarantee.

   IP20. 32w/42w.








**VK/04415PE**

**Product Models**

Code	Model	Box
71164-014755	VK/04415PE/W/W □ White. 3000K. 2.940lm. 42w. CRI>80.	1pc
71164-015755	VK/04415PE/AN/W ■ Anthracite. 3000K. 2.940lm. 42w. CRI>80.	1pc

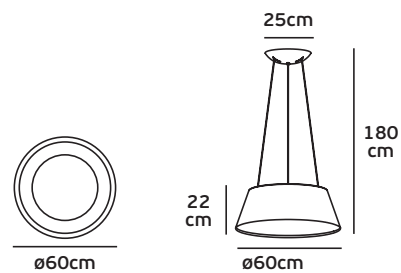

**Details**

Led Pendant Light 220V. Watt 42w. CRI>80. IP Rating IP20. Type of Led Epistar.  
 Driver **Eaglerise. Dimmable triac.** Lifetime 50.000hrs. Working temperature -20°C → 60°C.  
 Material **Aluminium+acrylic.** 3 years guarantee.




**IP20. 42w.**



Pendant - Ceiling lights LED



VK/04242PE


Product Models

Code	Model	Box
71164-011702	VK/04242PE/W/W/45 □ White. 3000K. 1.900lm. 38w. CRI>80. ø45cm.	1pc
71164-012702	VK/04242PE/W/W/60 □ White. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc

Details

AC 220-240V Driver (Included). Watt 38w/50w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material PE. 2 years guarantee.

   IP20. 38w./50w.

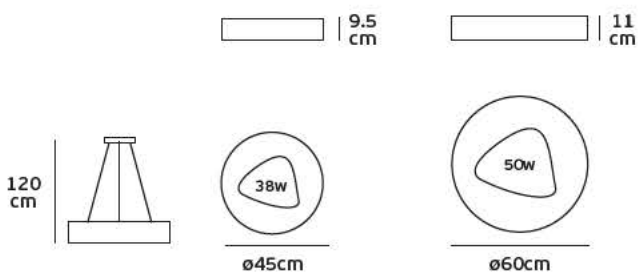

VK/04242CE


Product Models

Code	Model	Box
71164-009702	VK/04242CE/W/W/45 □ White. 3000K. 1.900lm. 38w. CRI>80. ø45cm.	1pc
71164-010702	VK/04242CE/W/W/60 □ White. 3000K. 2.500lm. 50w. CRI>80. ø60cm.	1pc

Details

AC 220-240V Driver (Included). Watt 38w/50w. Beam Angle 120°. Type of Led SMD Epistar 2835. Working temperature -20°C ~ 60°C. Lifetime 50.000hrs. Material PE. 2 years guarantee.

   IP20. 38w./50w.

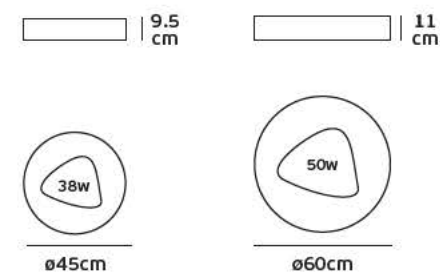







VK/04347/CE/.../45-95




Product Models

Code	Model	Color	Temp	Light	Power	Brand	Beam	CRI	Size	Box
71164-069721	VK/04347/CE/W/W/45	White	3000K	3.100lm	40w	bridgelux.	110°	CRI>90	ø45cm	1pc
71164-070721	VK/04347/CE/W/C/45	White	4000K	3.250lm	40w	bridgelux.	110°	CRI>90	ø45cm	1pc
71164-071721	VK/04347/CE/W/W/65	White	3000K	5.200lm	60w	bridgelux.	110°	CRI>90	ø65cm	1pc
71164-072721	VK/04347/CE/W/C/65	White	4000K	5.460lm	60w	bridgelux.	110°	CRI>90	ø65cm	1pc
71164-073721	VK/04347/CE/W/W/95	White	3000K	10.000lm	114w	bridgelux.	110°	CRI>90	ø95cm	1pc
71164-074721	VK/04347/CE/W/C/95	White	4000K	10.500lm	114w	bridgelux.	110°	CRI>90	ø95cm	1pc

Details

AC Driver 220-240V (included). Watt 40w/60w/114w. CRI>90. Type of Led *bridgelux.* 2835 with driver. No Dimmable. Lifetime 50.000 hrs. Working temperature < 45°C. Material Aluminium. Ceiling. 2 years guarantee.

   IP20. 40w/60w/114w.







VK/04416CE

Product Models


Code	Model								Box
71164-016755	VK/04416CE/W/W/46	□ Sand White	3000K	2.240lm	32w	CRI>80	Ø46.5cm		1pc
71164-017755	VK/04416CE/AN/W/46	■ Anthracite	3000K	2.240lm	32w	CRI>80	Ø46.5cm		1pc
71164-020755	VK/04416CE/GD/W/46	■ Golden	3000K	2.240lm	32w	CRI>80	Ø46.5cm		1pc
71164-018755	VK/04416CE/W/W/61	□ Sand White	3000K	3.500lm	50w	CRI>80	Ø61.5cm		1pc
71164-019755	VK/04416CE/AN/W/61	■ Anthracite	3000K	3.500lm	50w	CRI>80	Ø61.5cm		1pc
71164-021755	VK/04416CE/GD/W/61	■ Golden	3000K	3.500lm	50w	CRI>80	Ø61.5cm		1pc

Details


Led Ceiling Light 220V. Watt 32/50w. CRI>80. IP Rating IP20. Type of Led Epistar. Driver Eaglerise. Dimmable triac. Lifetime 50.000hrs. Working temperature -20°C → 60°C. Material Steel+acrylic. 3 years guarantee.




IP20. 32w./50w.



Ø46.5cm




Ø61.5cm



Ø46.5cm

8 cm



Ø61.5cm

8 cm






VK/04418CE

Product Models

Code	Model	Box
71164-022755	VK/04418CE/W/W/45 □ Sand White. 3000K. 2.100lm. 30w. CRI>80. Ø45cm.	1pc
71164-023755	VK/04418CE/AN/W/45 ■ Abthracite. 3000K. 2.100lm. 30w. CRI>80. Ø45cm.	1pc
71164-024755	VK/04418CE/W/W/60 □ Sand White. 3000K. 4.200lm. 40w. CRI>80. Ø60cm.	1pc
71164-025755	VK/04418CE/AN/W/60 ■ Abthracite. 3000K. 4.200lm. 40w. CRI>80. Ø60cm.	1pc

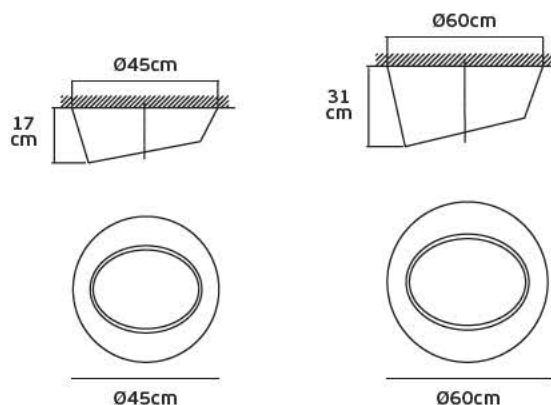

Details

Led Pendant Light 220V. Watt 30/40w. CRI>80. IP Rating IP20. Type of Led Epistar. Dimmable triac. Driver Eaglerise. Lifetime 50.000hrs. Working temperature -20°C → 60°C Material Steel+acrylic. 3 years guarantee.




**IP20. 30/60w.**





VK/03152/CE

Product Models


Code	Model	Box
71164-003724	VK/03152/CE/30/B ■ Black. E27x2. Max 2x40w.	1pc
71164-004724	VK/03152/CE/30/W □ White. E27x2. Max 2x40w.	1pc

Details

Voltage 240V. Max watt 2x40w. E27. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. E27.



VK/03151/CE

Product Models


Code	Model	Box
71164-001724	VK/03151/CE/50/B ■ Black. E27x3. Max 3x40w.	1pc
71164-002724	VK/03151/CE/50/W □ White. E27x3. Max 3x40w.	1pc

Details

Voltage 240V. Max watt 3x40w. E27. Working temperature -20°C ~ 40°C. Material Aluminium.



IP20. E27.

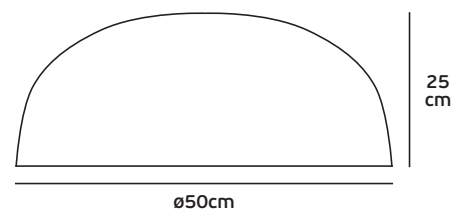





VK/04133CE



Product Models


Code	Model	Box
71164-001108	VK/04133CE/B/W ■ Black shade-white plate. 3000K. 1.100lm. 10w. CRI>80	1pc

Details

AC 175-265V Driver (Included). Watt 10w. Beam Angle 125°. Type of Led SMD 2835. Working temperature -25°C ~ 40°C. Lifetime 50.000hrs. Material Metal, Fabric, PMMA. 2 years guarantee.




**IP20. 10w.**

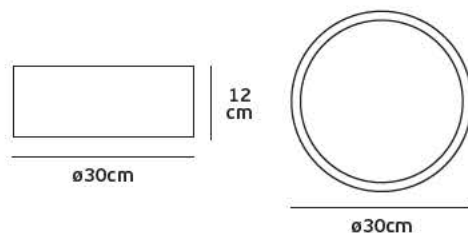

VK/04134CE



Product Models


Code	Model	Box
71164-002108	VK/04134CE/B/W ■ Black shade-white plate. 3000K. 2.200lm. 20w. CRI>80	1pc

Details

AC 175-265V Driver (Included). Watt 20w. Beam Angle 125°. Type of Led SMD 2835. Working temperature -25°C ~ 40°C. Lifetime 50.000hrs. Material Metal, Fabric, PMMA. 2 years guarantee.




**IP20. 20w.**

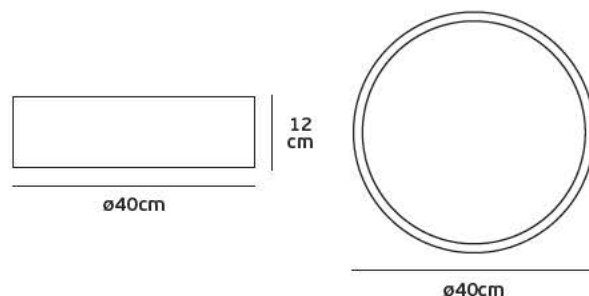

## VK/04253CE



## Product Models


Code	Model	Box
71164-033702	VK/04253CE/B/W/45 ■ Black sandy. 3000K. 2.100lm. 35w. Dø45xH10cm. CRI>80	1pc
71164-034702	VK/04253CE/B/W/58 ■ Black sandy. 3000K. 3.000lm. 50w. Dø58xH12cm. CRI>80	1pc

## Details

AC 220-240V. Watt 35w/50w. Type of Led SMD 2835. Working temperature -20°C ~ 60°C. Material Metal+Acrylic. Lifetime 50.000hrs. Material Metal, Acrylic. 2 years guarantee.



IP20. 35w./50w.

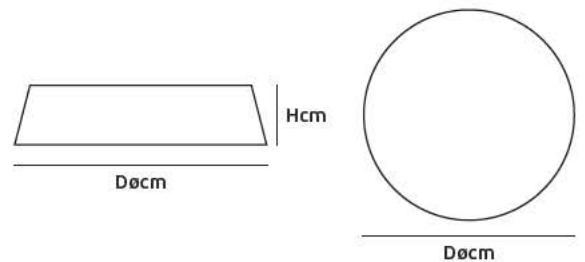

## VK/03098CE



## Product Models


Code	Model	Box
71164-003108	VK/03098CE/W □ White shade+white plate. E27x4. Max 4x42w.	1pc
71164-004108	VK/03098CE/B ■ Black shade+ white plate. E27x4. Max 4x42w.	1pc


## Details


Voltage 230V. Max watt 4x42w. E27. Material Metal+Fabric+PMMA.



IP20. 230V.

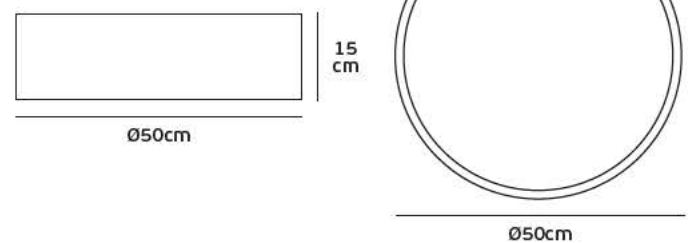

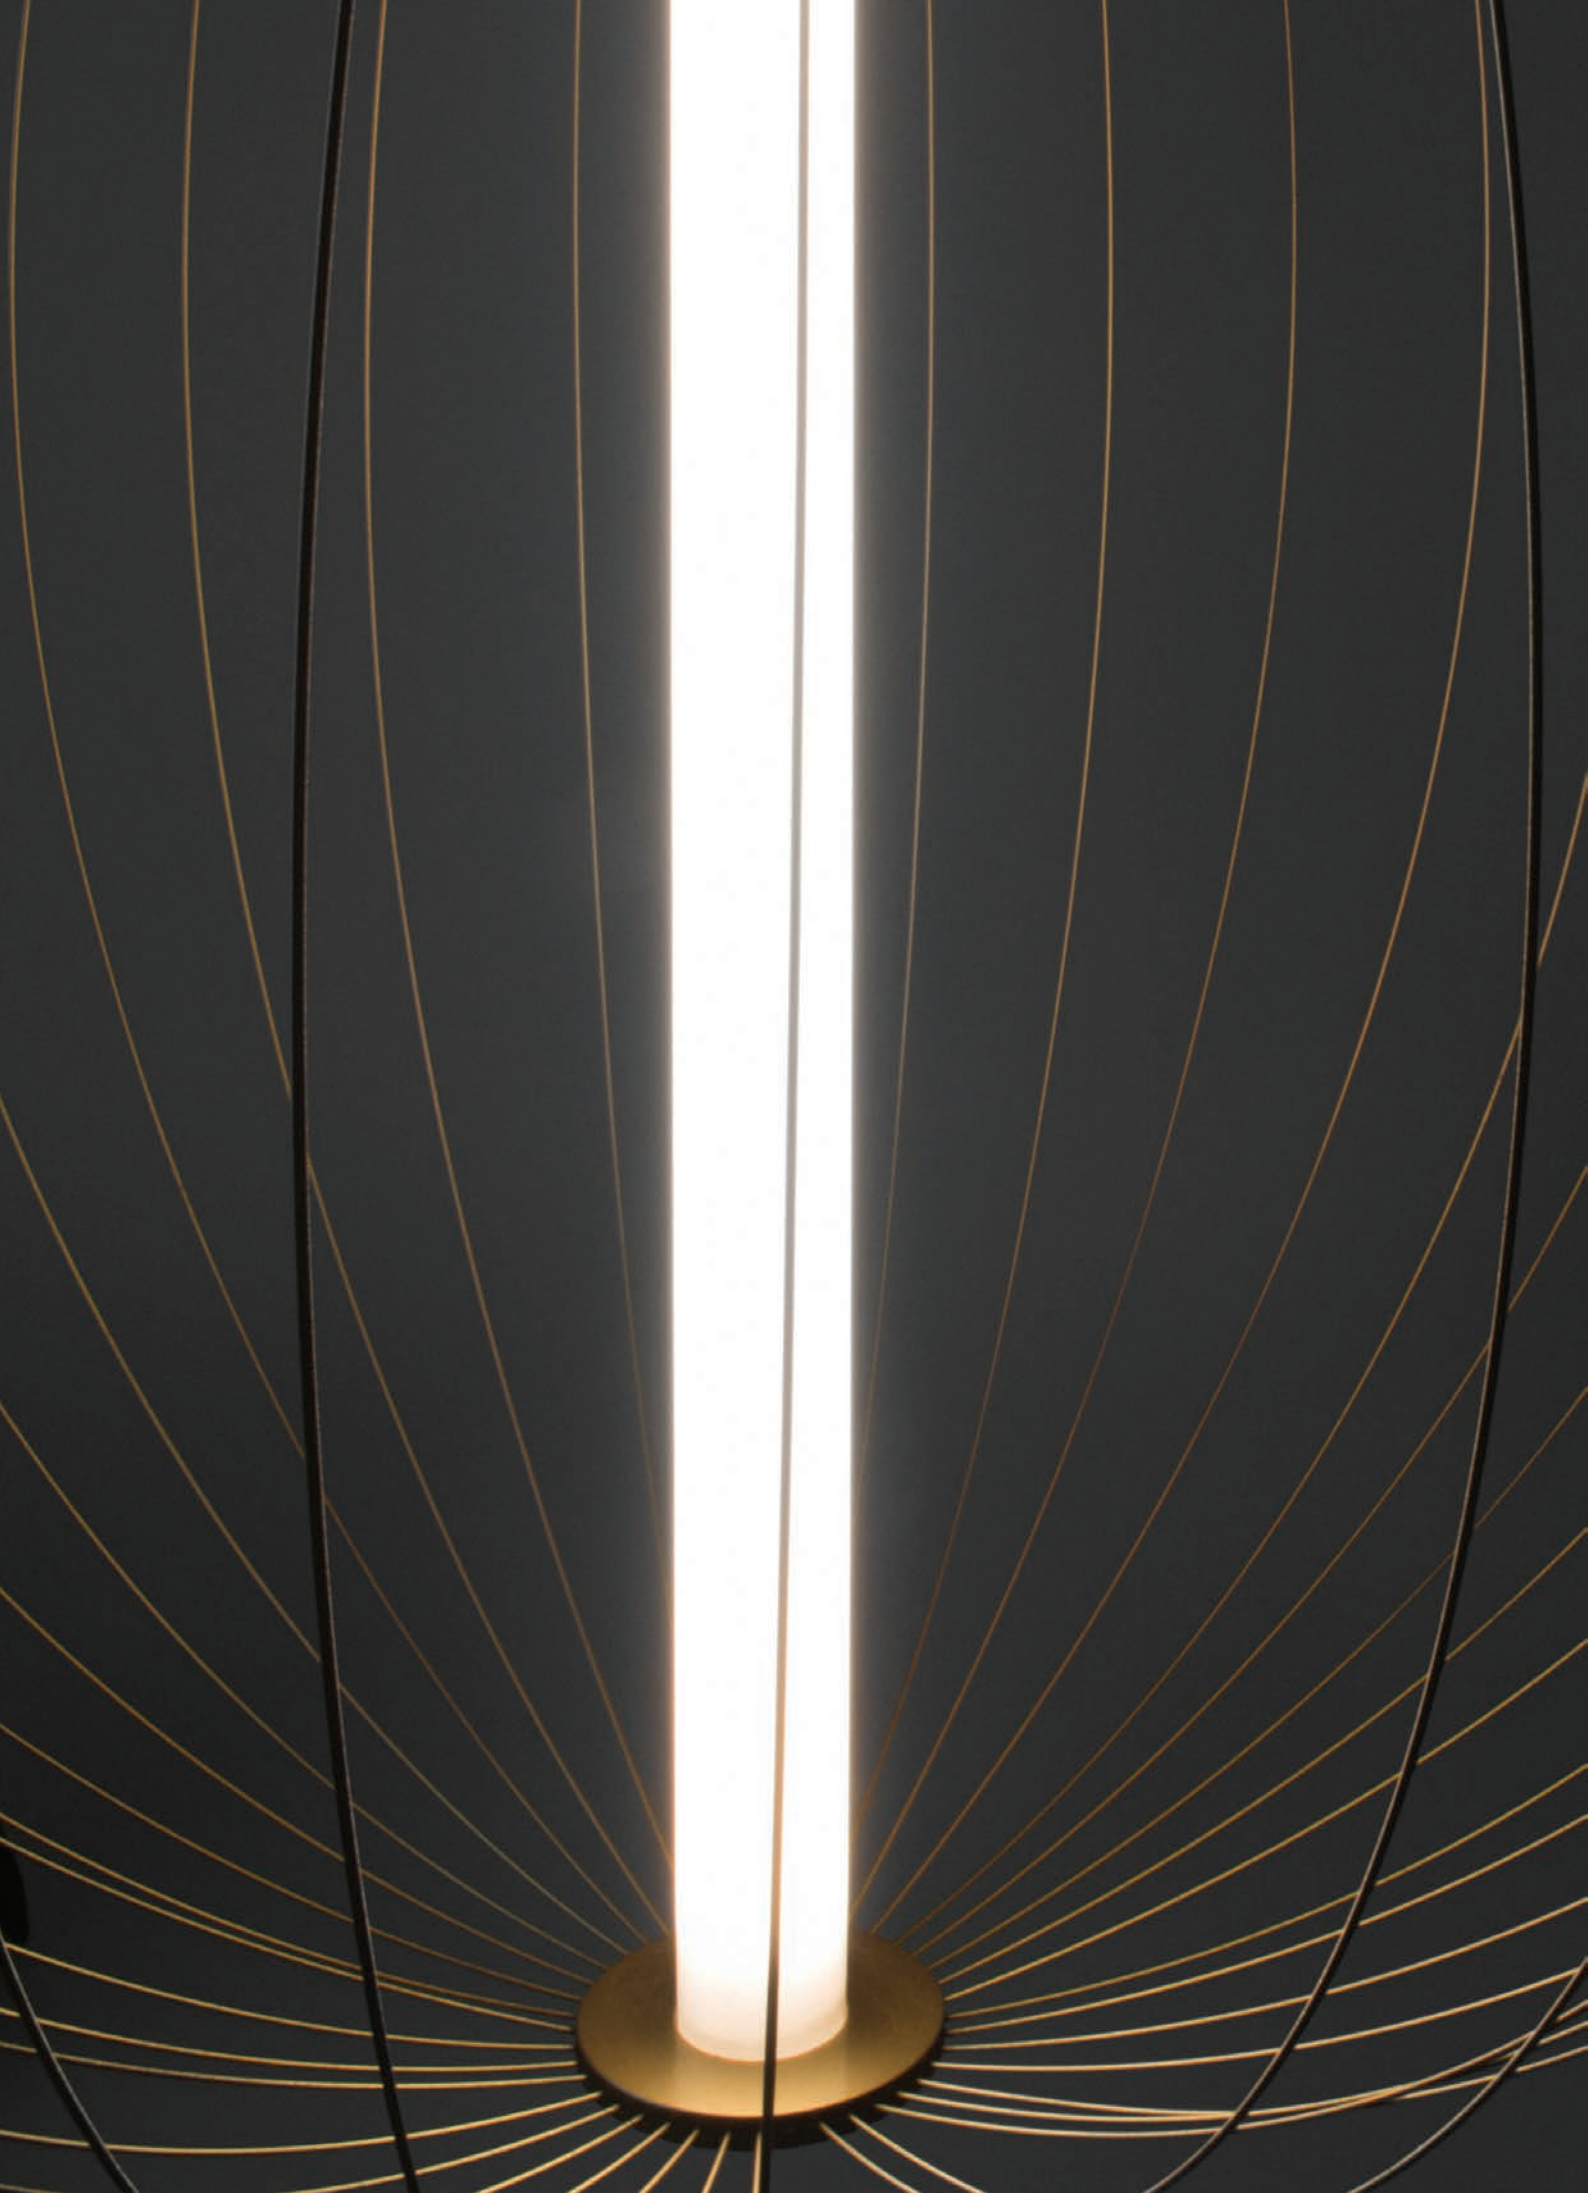

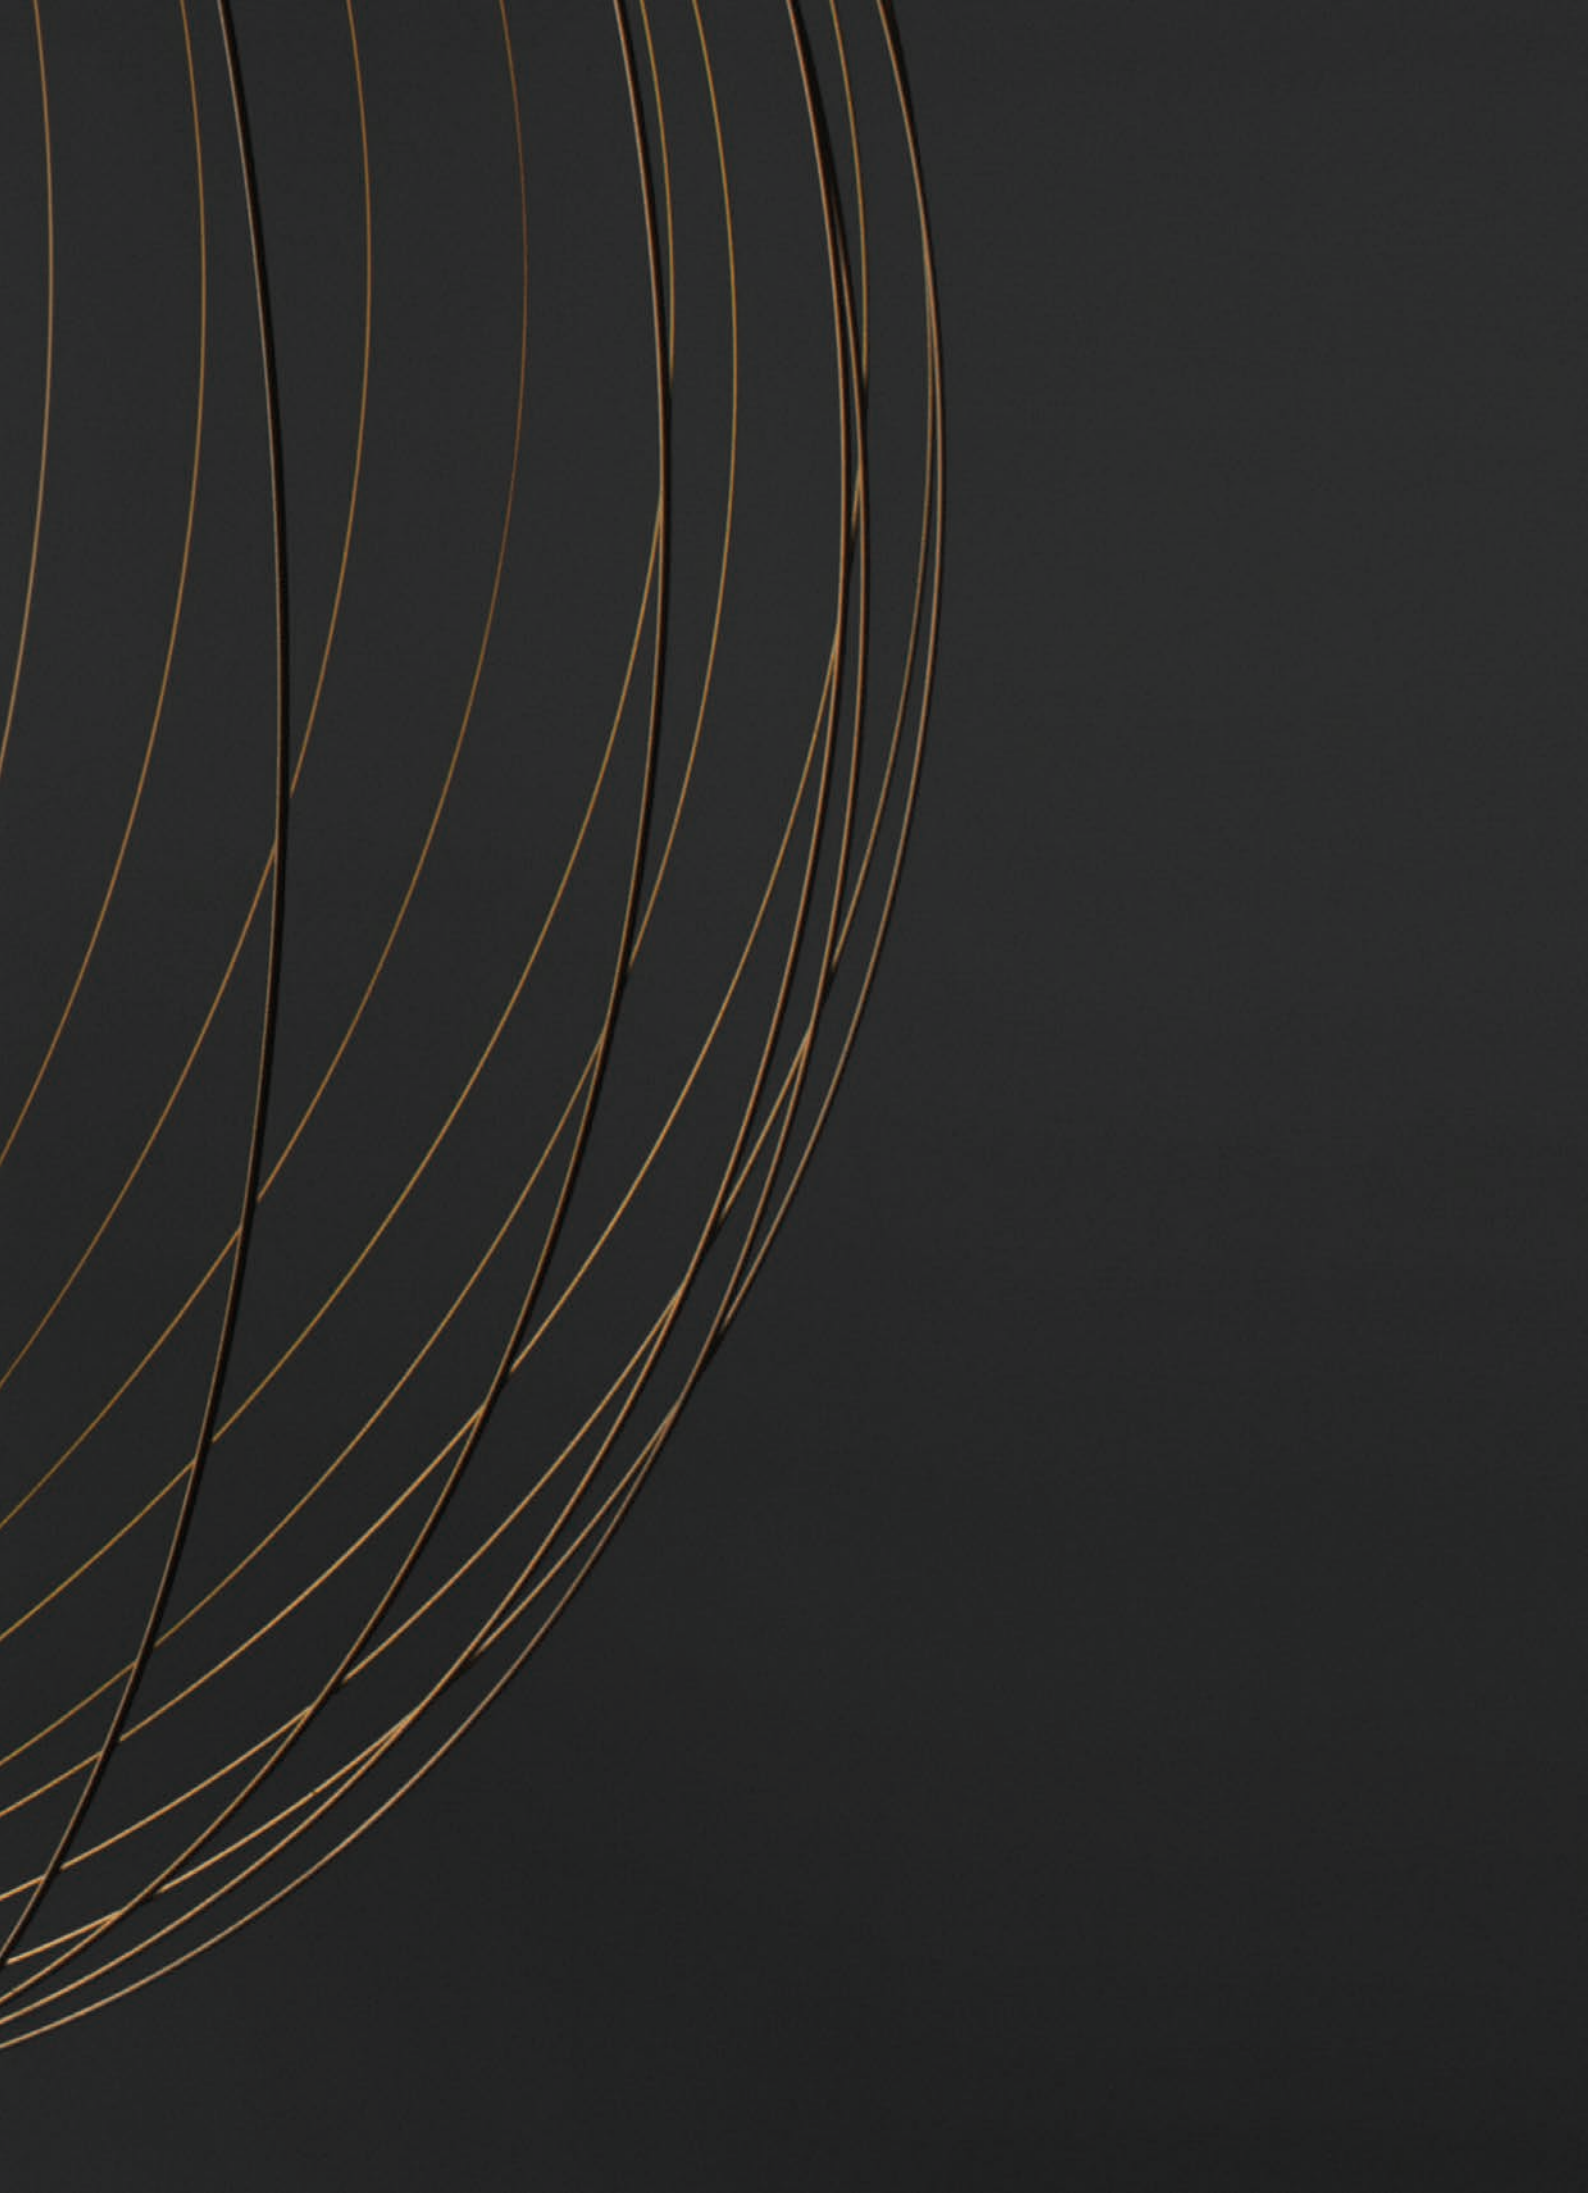



VK/04389/PE/.../W  
VK/04390/PE/.../W

### Product Models



Code	Model	Box
75169-013741	VK/04389/PE/BS/W ■ Brass. 2700K. 700lm. 10w. CRI>80. ø50cm	1pc
75169-014741	VK/04389/PE/B/W ■ Black. 2700K. 700lm. 10w. CRI>80. ø50cm	1pc
75169-015741	VK/04390/PE/BS/W ■ Brass. 2700K. 700lm. 10w. CRI>80. ø60cm	1pc
75169-016741	VK/04390/PE/B/W ■ Black. 2700K. 700lm. 10w. CRI>80. ø60cm	1pc

### Details

Led Pendant Light 220-240V. Watt 10w. CRI>80. Type of Led SMD with driver. No dimmable. Lifetime 10.000hrs. Working temperature -20°C → 45°C. Material Metal wires, black painting metal canopy, black textile cable. 3 years guarantee.



IP20. 10w.

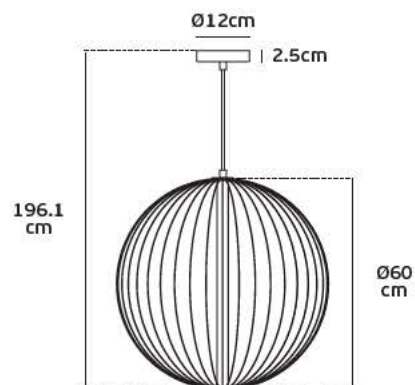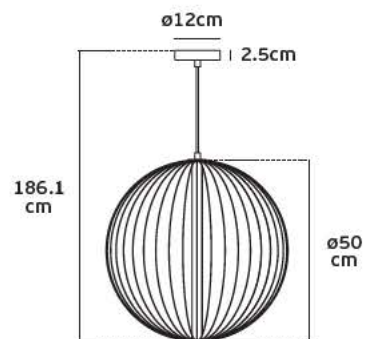





VK/04388/PE/.../W

### Product Models


Code	Model	Box
75169-011741	VK/04388/PE/BS/W ■ Brass. 2700K. 350lm. 5w. CRI>80.	1pc
75169-012741	VK/04388/PE/B/W ■ Black. 2700K. 350lm. 5w. CRI>80.	1pc


### Details

Led Pendant Light 220-240V. Watt 5w. CRI>80. Type of Led SMD with driver. No dimmable. Lifetime 10.000hrs. Working temperature -20°C → 45°C. Material Metal wires, black painting metal canopy, black textile cable. 3 years guarantee.



IP20. 5w.

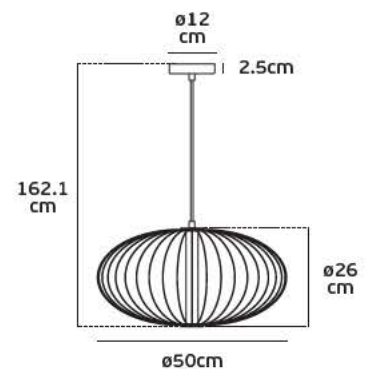

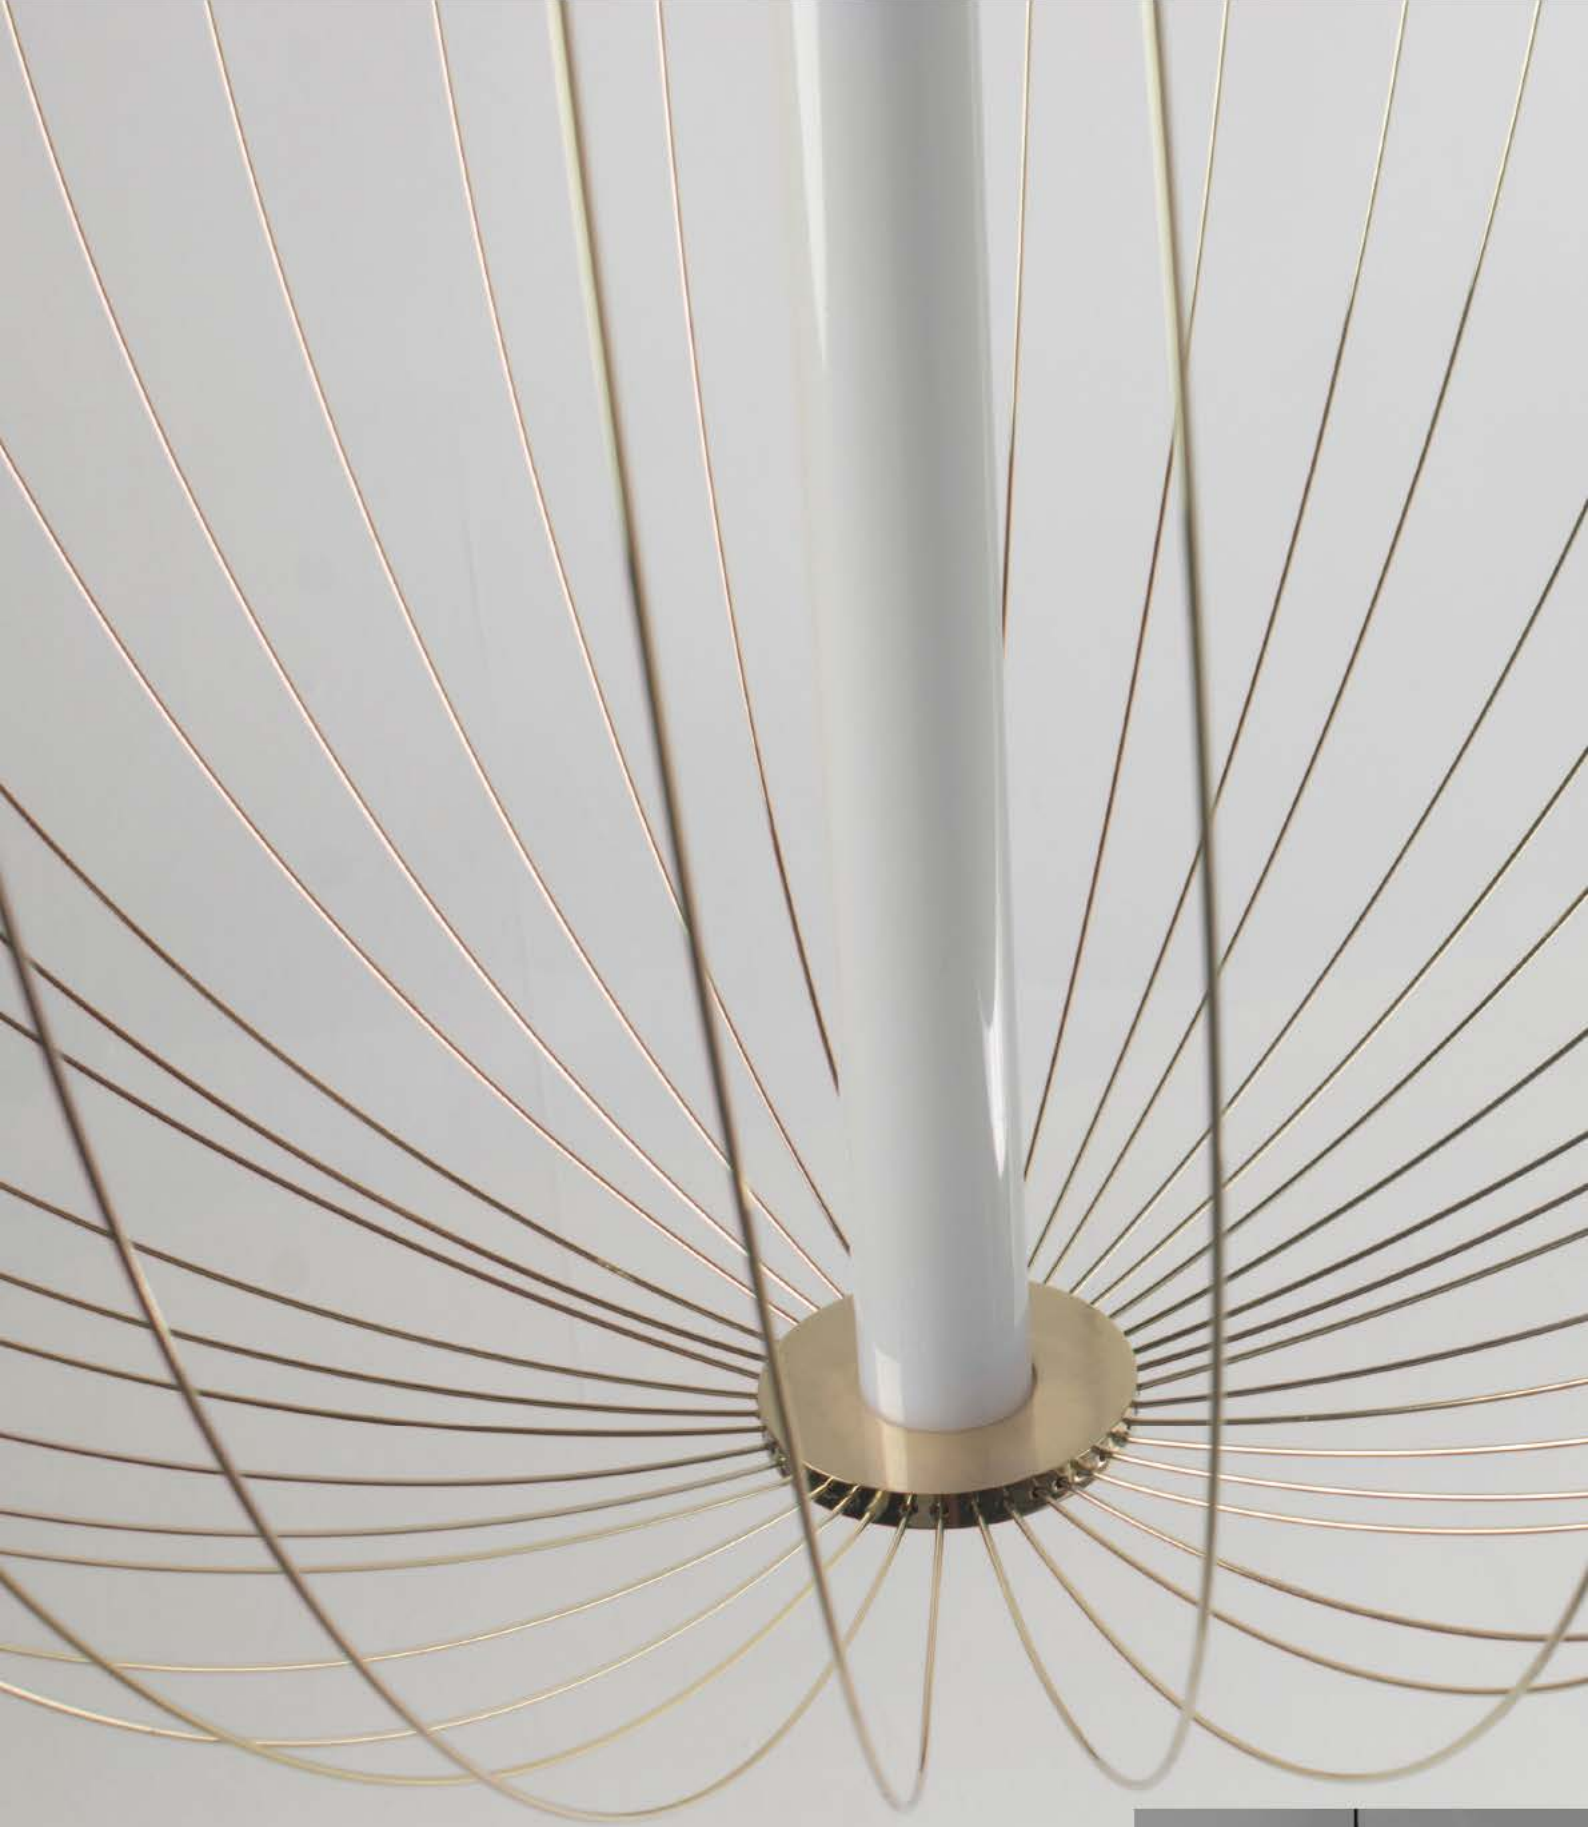



Pendant lights LED




VK/04254PE

Product Models



Code	Model	Box
75169-001741	VK/04254PE/B/WW ■ Black, 2700K, 8w.	1pc
75169-002741	VK/04254PE/GD/WW ■ Gold, 2700K, 8w.	1pc

Details



AC 220-240V. Watt 8w. Cable Black textile. Material Metal. 2 years guarantee.



Side light + Down light

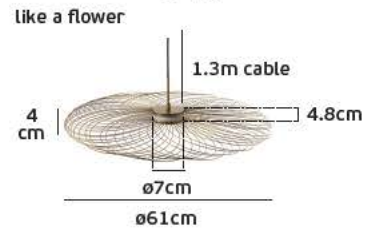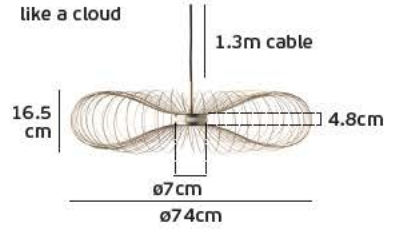

The wire can be assembled into 2 configurations, like the cloud or like the flower. Different configuration with different diameter.

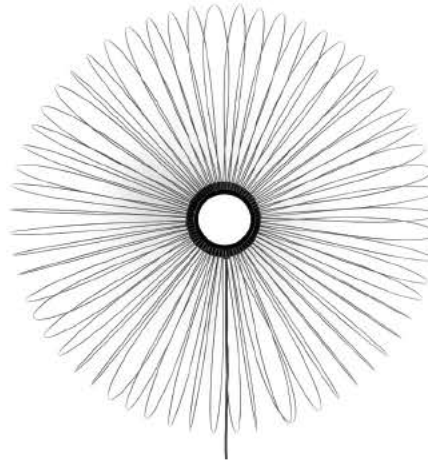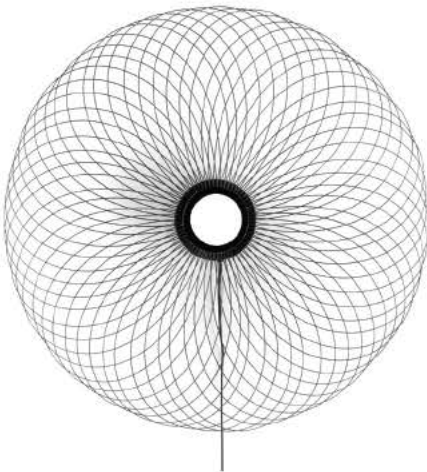

VK/04255WA

Product Models




Code	Model	Box
75169-003741	VK/04255WA/B/WW ■ Black, 2700K, 8w.	1pc
75169-004741	VK/04255WA/GD/WW ■ Gold, 2700K, 8w.	1pc

Details


AC 220-240V. Watt 8w. Cable Black textile with dimmer switch. Material Metal. 2 years guarantee.



Side light + Front light

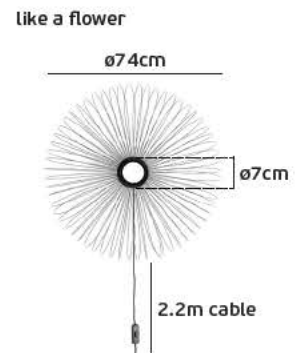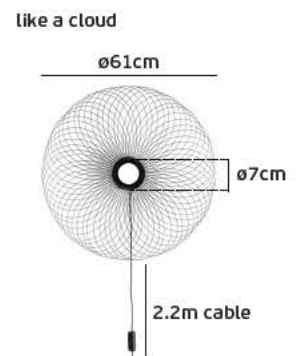

The wire can be assembled into 2 configurations, like the cloud or like the flower. Different configuration with different diameter.

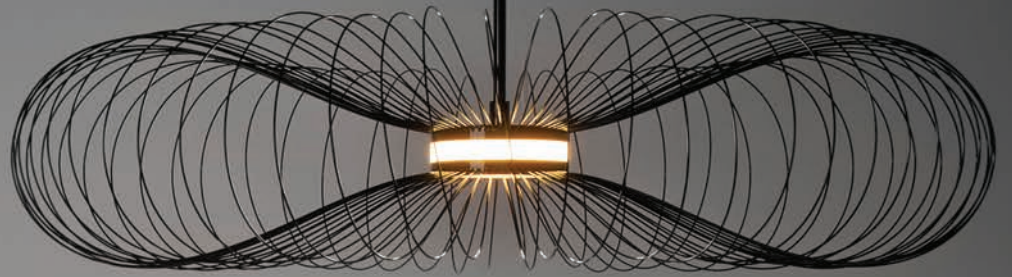

## Pendant lights LED



### VK/04396/.../W/...

#### Product Models

Code	Model					bridgelux.	Length of body	Box
75169-497724	VK/04396/W/W/35	□ Sand White	3000K	675lm	7w	bridgelux.	35cm	1pc
75169-498724	VK/04396/B/W/35	■ Sand Black	3000K	675lm	7w	bridgelux.	35cm	1pc
75169-499724	VK/04396/BR/W/35	■ Sand Brown	3000K	675lm	7w	bridgelux.	35cm	1pc
75169-500724	VK/04396/RG/W/35	■ Rose Gold	3000K	675lm	7w	bridgelux.	35cm	1pc
75169-501724	VK/04396/BS/W/35	■ Sand Brass	3000K	675lm	7w	bridgelux.	35cm	1pc
75169-502724	VK/04396/W/W/55	□ Sand White	3000K	675lm	7w	bridgelux.	55cm	1pc
75169-503724	VK/04396/B/W/55	■ Sand Black	3000K	675lm	7w	bridgelux.	55cm	1pc
75169-504724	VK/04396/BR/W/55	■ Sand Brown	3000K	675lm	7w	bridgelux.	55cm	1pc
75169-505724	VK/04396/RG/W/55	■ Rose Gold	3000K	675lm	7w	bridgelux.	55cm	1pc
75169-506724	VK/04396/BS/W/55	■ Sand Brass	3000K	675lm	7w	bridgelux.	55cm	1pc
75169-507724	VK/04396/W/W/75	□ Sand White	3000K	675lm	7w	bridgelux.	75cm	1pc
75169-508724	VK/04396/B/W/75	■ Sand Black	3000K	675lm	7w	bridgelux.	75cm	1pc
75169-509724	VK/04396/BR/W/75	■ Sand Brown	3000K	675lm	7w	bridgelux.	75cm	1pc
75169-510724	VK/04396/RG/W/75	■ Rose Gold	3000K	675lm	7w	bridgelux.	75cm	1pc
75169-511724	VK/04396/BS/W/75	■ Sand Brass	3000K	675lm	7w	bridgelux.	75cm	1pc

### VK/04396CAN/.../1

#### Product Models



Code	Model	Box
75169-512724	VK/04396CAN/W/1 □ White. Canopy with driver (1 head). IP20.	1pc
75169-513724	VK/04396CAN/B/1 ■ Black. Canopy with driver (1 head). IP20.	1pc

#### Details

Voltage 220-240V. IP Rating IP20. Working temperature -20 ~ 45°C. Material Iron. Canopy with driver (1 head) HBL, 5-8w, 16-27Vdc, 300Ma. 3 years guarantee.




IP20. 1 head.



ø8cm

3.8cm | | 3.1cm  
ø8cm

Pendant lights LED

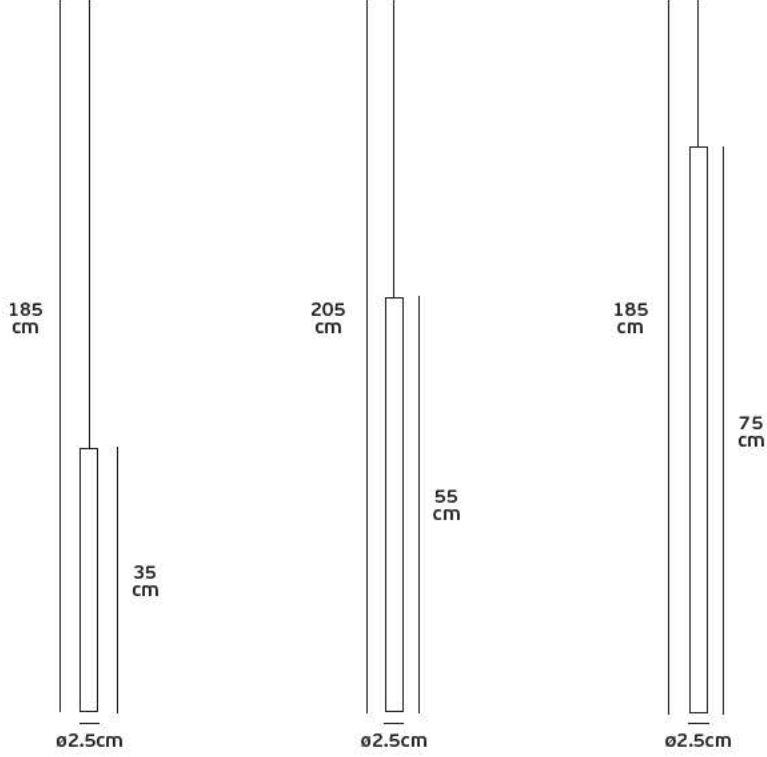

Details

Led Pendant Light 220-240V. Watt 7w. Beam angle 18°. CRI>90. IP Rating IP20. Type of Led *bridgelux*. No dimmable. Lifetime 30.000hrs. Working temperature -20°C → 45°C. Material Aluminium, transparent cable 1.5m. 2 years guarantee.



IP20. 7w.



1 x VK/04396CAN/B/1



1 x VK/04396/BS/W/75



VK/04396CAN/.../3





Product Models

Code	Model	Box
75169-514724	VK/04396CAN/W/3 □ White. Canopy with driver (3 heads). IP20.	1pc
75169-515724	VK/04396CAN/B/3 ■ Black. Canopy with driver (3 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron. Canopy with driver (3 heads) HBL, 20-25w, 28-36Vdc, 700Ma. 3 years guarantee.

 IP20. 3 heads.



VK/04396CAN/.../5





Product Models

Code	Model	Box
75169-516724	VK/04396CAN/W/5 □ White. Canopy with driver (5 heads). IP20.	1pc
75169-517724	VK/04396CAN/B/5 ■ Black. Canopy with driver (5 heads). IP20.	1pc


Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron. Canopy with driver (5 heads) HBL, 31-36w, 25-30Vdc, 1.200Ma. 3 years guarantee.

 IP20. 5 heads.



Lighting combination proposal

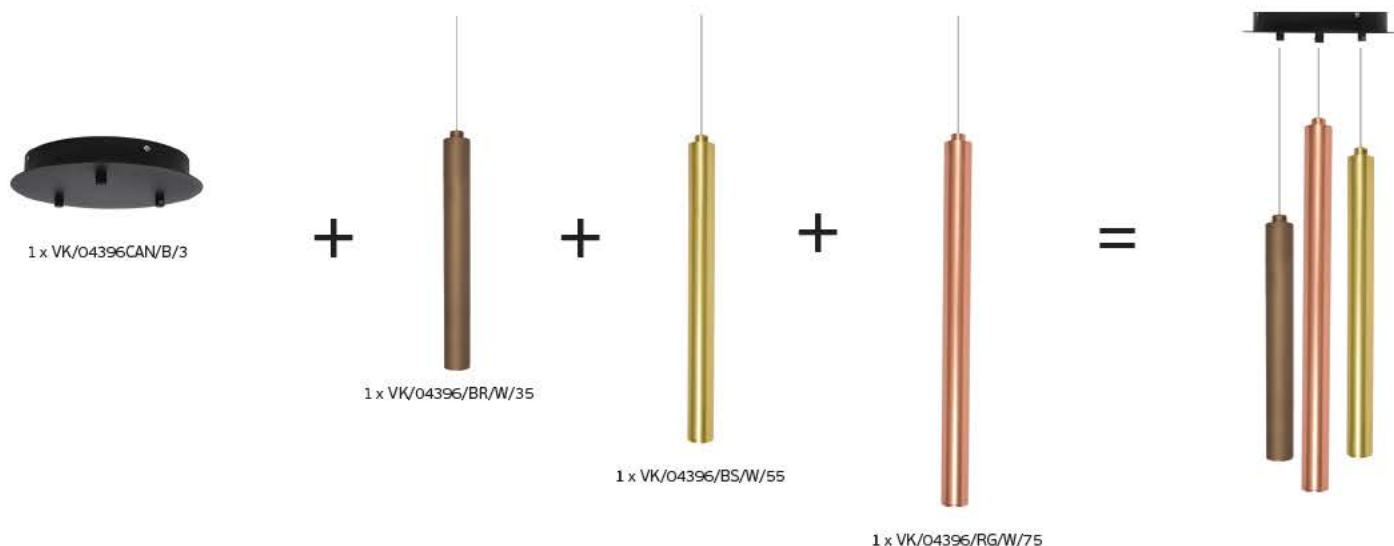

VK/04396CAN/.../10




Product Models

Code	Model	Box
75169-518724	VK/04396CAN/W/10 □ White. Canopy with 2 drivers (10 heads). IP20.	1pc
75169-519724	VK/04396CAN/B/10 ■ Black. Canopy with 2 drivers (10 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron.  
Canopy with 2 drivers (10 heads) HBL, 31-36w, 25-30Vdc, 1.200Ma. 3 years guarantee.

IP20. 10 heads.

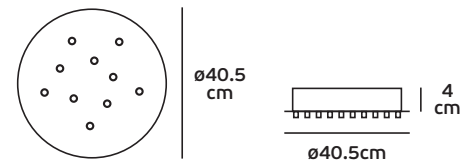

VK/04396CAN/.../15





Product Models

Code	Model	Box
75169-520724	VK/04396CAN/W/15 □ White. Canopy with 2 drivers (15 heads). IP20.	1pc
75169-521724	VK/04396CAN/B/15 ■ Black. Canopy with 2 drivers (15 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron.  
Canopy with 2 drivers (15 heads) 1st Driver HBL, 42-50w, 28-33Vdc, 1.500Ma.  
2nd Driver HBL, 50-60w, 33-40Vdc, 1.750Ma. 3 years guarantee.

IP20. 15 heads.

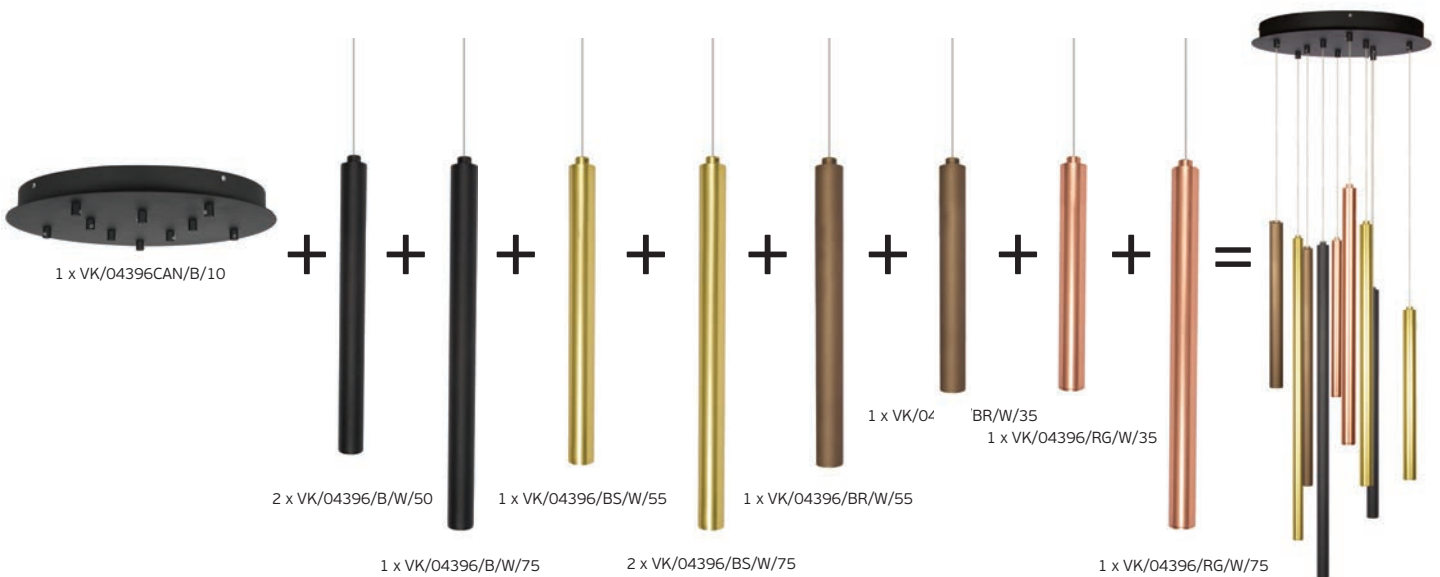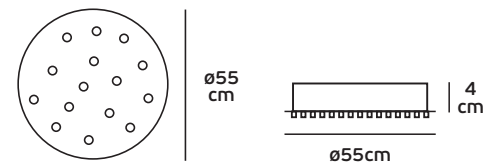

VK/04396CAN/.../8




Product Models

Code	Model	Box
75169-522724	VK/04396CAN/W/8 □ White. Canopy with driver (8 heads). IP20.	1pc
75169-523724	VK/04396CAN/B/8 ■ Black. Canopy with driver (8 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron.  
Canopy with driver (8 heads) HBL, 50-60w, 33-40Vdc, 1.750Ma. 3 years guarantee.

 IP20. 8 heads.



VK/04396CAN/.../14





Product Models

Code	Model	Box
75169-524724	VK/04396CAN/W/14 □ White. Canopy with driver (14 heads). IP20.	1pc
75169-525724	VK/04396CAN/B/14 ■ Black. Canopy with driver (14 heads). IP20.	1pc


Details

Voltage 220-240V. IP Rating IP20, Working temperature -20 ~ 45°C. Material Iron.  
Canopy with 2 drivers (14 heads) HBL, 42-50w, 28-33Vdc, 1.500Ma. 3 years guarantee.

 IP20. 14 heads.



Lighting combination proposal

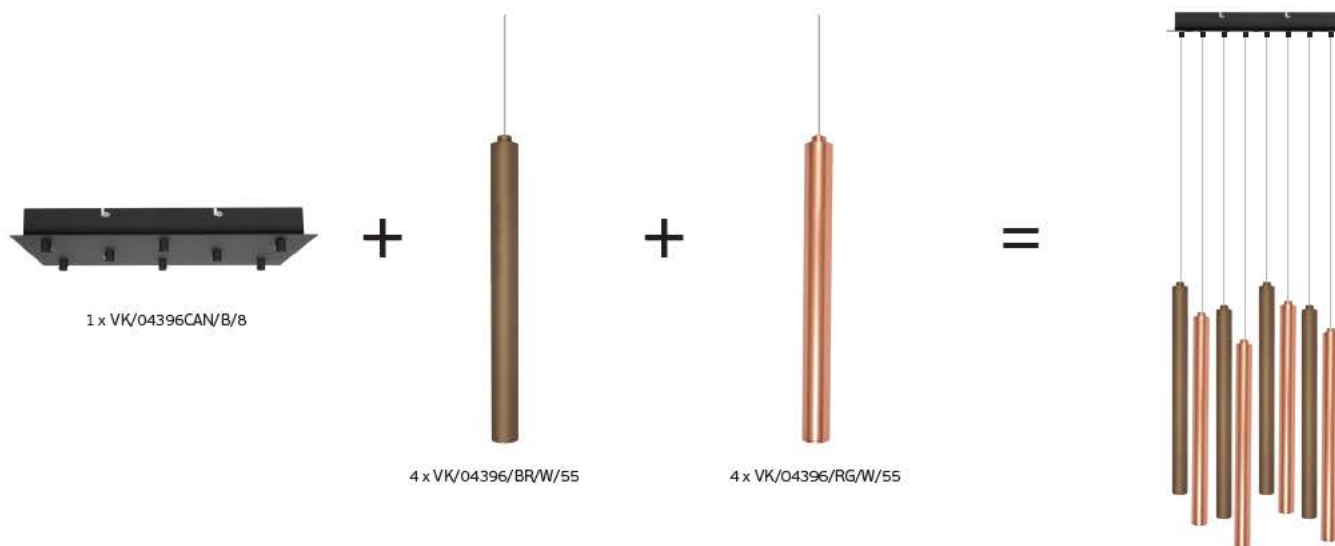





VK/04396LIN/.../3


Product Models

Code	Model	Box
75169-526724	VK/04396LIN/W/3 □ White. Canopy with driver (3 heads). IP20.	1pc
75169-527724	VK/04396LIN/B/3 ■ Black. Canopy with driver (3 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20. Working temperature -20 ~ 45°C. Material Iron. Canopy with driver (3 heads) HBL, 20-25w, 28-36Vdc, 700Ma. 3 years guarantee.

 IP20. 3 heads.




Product Models

Code	Model	Box
75169-528724	VK/04396LIN/W/5 □ White. Canopy with driver (5 heads). IP20.	1pc
75169-529724	VK/04396LIN/B/5 ■ Black. Canopy with driver (5 heads). IP20.	1pc

Details

Voltage 220-240V. IP Rating IP20. Working temperature -20 ~ 45°C. Material Iron. Canopy with driver (5 heads) HBL, 31-36w, 25-30Vdc, 1.200Ma. 3 years guarantee.

 IP20. 5 heads.




VK/04396LIN/.../5

Lighting combination proposal



VK/04396LIN/.../7

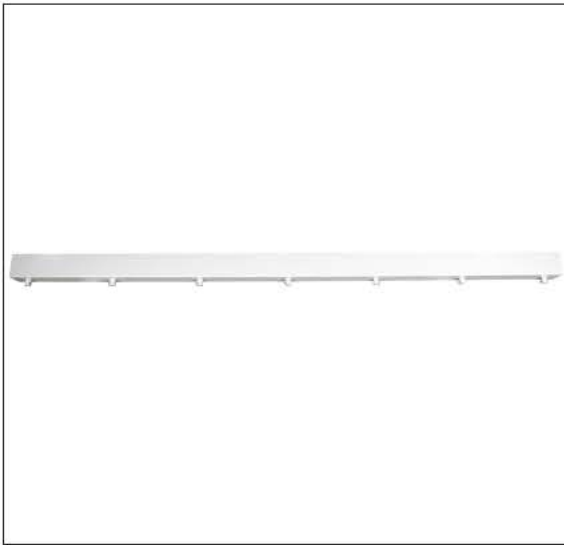



### Product Models

Code	Model	Box
75169-530724	VK/04396LIN/W/7 □ White. Canopy with driver (7 heads). IP20.	1pc
75169-531724	VK/04396LIN/B/7 ■ Black. Canopy with driver (7 heads). IP20.	1pc

### Details

Voltage 220-240V. IP Rating IP20. Working temperature -20 ~ 45°C. Material Iron.  
Canopy with driver (7 heads) HBL, 42-50w, 28-33Vdc, 1.500Ma. 3 years guarantee.

 IP20. 7 heads.



## Pendant lights LED

VK/04413PE

### Product Models



Code	Model	Box
71164-001755	VK/04413PE/B/W/25 ■ Matt Black. 3000K. 560lm. 8w. CRI>80. Canopie dø10cm. Dø25cm.	1pc
71164-002755	VK/04413PE/GD/W/25 ■ Gold. 3000K. 560lm. 8w. CRI>80. Canopie dø10cm. Dø25cm.	1pc
71164-003755	VK/04413PE/OR/W/25 ■ Orange. 3000K. 560lm. 8w. CRI>80. Canopie dø10cm. Dø25cm.	1pc
71164-004755	VK/04413PE/G/W/25 ■ Grey. 3000K. 560lm. 8w. CRI>80. Canopie dø10cm. Dø25cm.	1pc
71164-005755	VK/04413PE/B/W/35 ■ Matt Black. 3000K. 840lm. 12w. CRI>80. Canopie dø15cm. Dø35cm.	1pc
71164-006755	VK/04413PE/GD/W/35 ■ Gold. 3000K. 840lm. 12w. CRI>80. Canopie dø15cm. Dø35cm.	1pc
71164-007755	VK/04413PE/OR/W/35 ■ Orange. 3000K. 840lm. 12w. CRI>80. Canopie dø15cm. Dø35cm.	1pc
71164-008755	VK/04413PE/G/W/35 ■ Grey. 3000K. 840lm. 12w. CRI>80. Canopie dø15cm. Dø35cm.	1pc
71164-009755	VK/04413PE/B/W/45 ■ Matt Black. 3000K. 1.120lm. 16w. CRI>80. Canopie dø18cm. Dø45cm.	1pc
71164-010755	VK/04413PE/GD/W/45 ■ Gold. 3000K. 1.120lm. 16w. CRI>80. Canopie dø18cm. Dø45cm.	1pc
71164-011755	VK/04413PE/OR/W/45 ■ Orange. 3000K. 1.120lm. 16w. CRI>80. Canopie dø18cm. Dø45cm.	1pc
71164-012755	VK/04413PE/G/W/45 ■ Grey. 3000K. 1.120lm. 16w. CRI>80. Canopie dø18cm. Dø45cm.	1pc

### Details

Led Pendant Light 220V. Watt 8w/12w/16w. CRI>80. IP Rating IP20. Type of Led Epistar. Driver Eaglerise. Dimmable triac. Lifetime 50.000hrs, Working temperature -20°C → 60°C. Material Steel+rasin+acrylic. Cable 180cm. 3 years guarantee.



IP20. 8w/12w/16w.

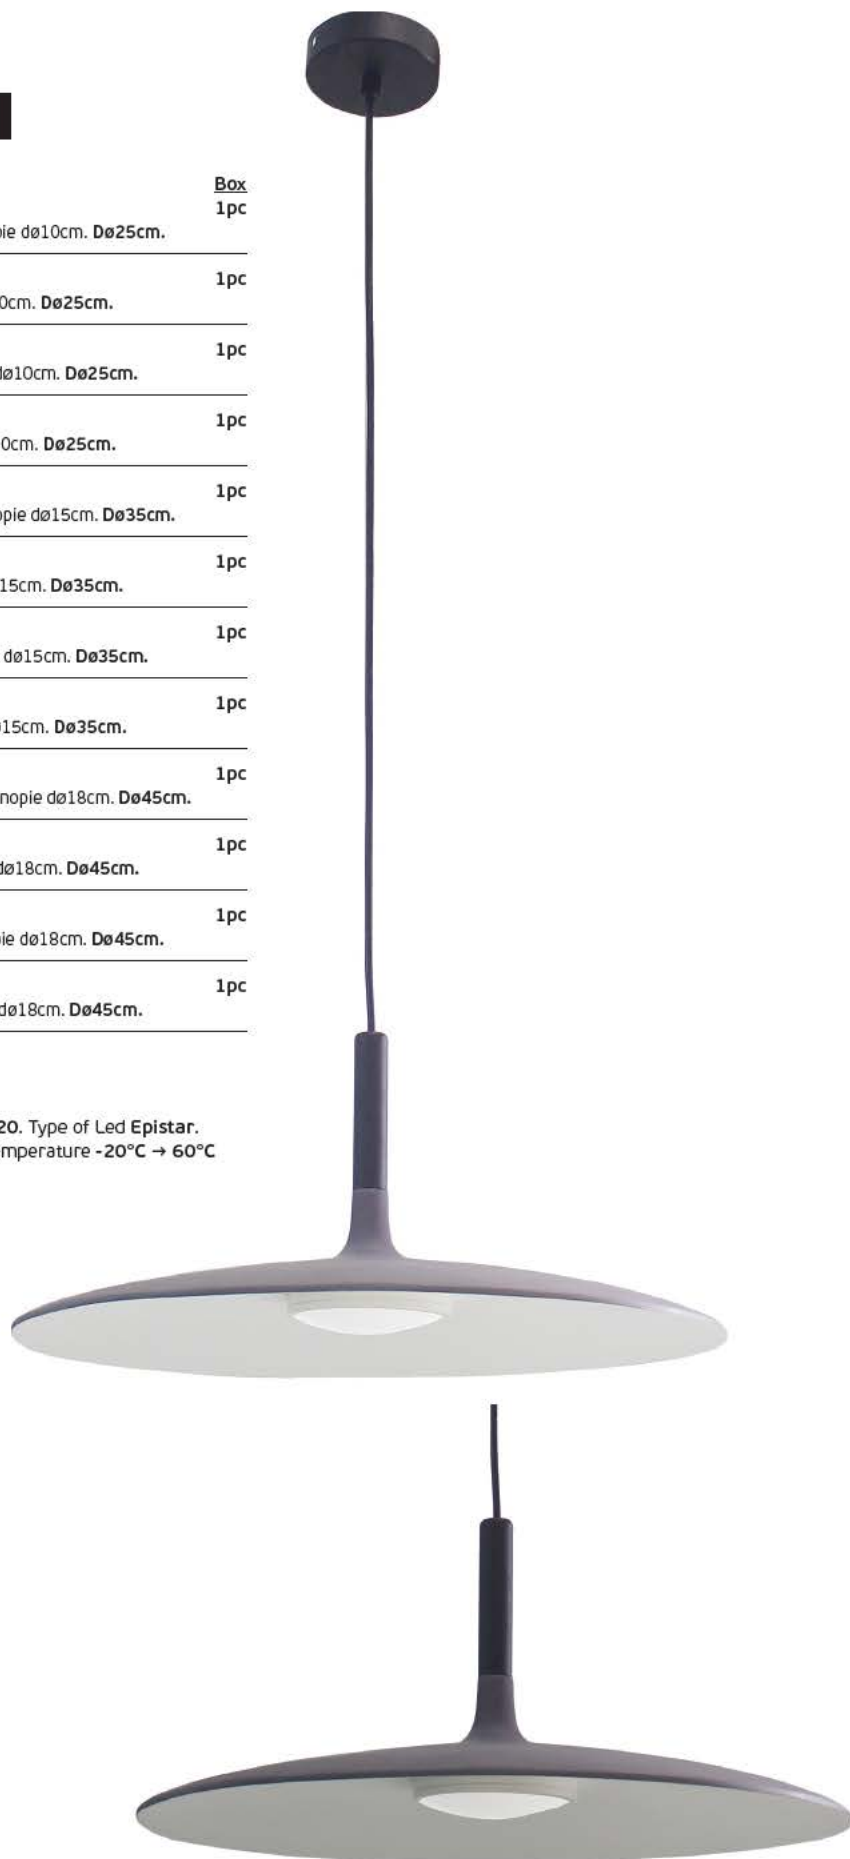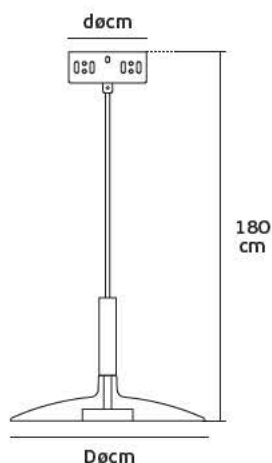





VK/04305PE


Product Models

Code	Model	Box
64174-115721	VK/04305PE/W/W/40 □ White sand. 3000K. 373lm. 5w. <i>bridgelux</i> . 20°. CRI>90. L40cm	1pc
64174-116721	VK/04305PE/B/W/60 ■ Black sand. 3000K. 373lm. 5w. <i>bridgelux</i> . 20°. CRI>90. L60cm	1pc

Details

AC Driver 220-240V (Included). Watt 5w. Beam Angle 20°. CRI>90. Type of Led *bridgelux*.5050. No dimmable. Working temperature < 45°C. Lifetime 50.000hrs. Clicks 50.000. Material Aluminium. 2 years guarantee.

   IP20. 5w.

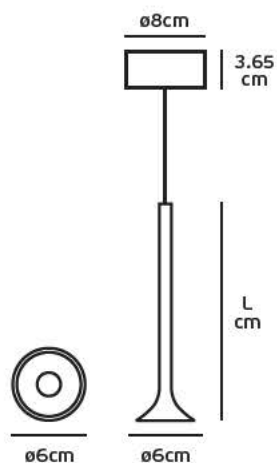





VK/04016

### Product Models


Code	Model	Box
64173-039118	VK/04016/W/W □ White. 3000K. 1.350lm. 18w. CRI>80	10pcs
64173-040118	VK/04016/W/C □ White. 4000K. 1.400lm. 18w. CRI>80	10pcs
64173-037118	VK/04016/OR/W ■ Orange. 3000K. 1.350lm. 18w. CRI>80	10pcs
64173-038118	VK/04016/OR/C ■ Orange. 4000K. 1.400lm. 18w. CRI>80	10pcs
64173-041118	VK/04016/B/W ■ Black. 3000K. 1.350lm. 18w. CRI>80	10pcs
64173-042118	VK/04016/B/C ■ Black. 4000K. 1.400lm. 18w. CRI>80	10pcs

### Details

AC 110-240V Driver (Included). Watt 18w. Beam Angle 120°. Type of Led COB Edison. Working temperature -20°C ~ 45°C. Lifetime 50.000hrs. Material Aluminium. Cable 1m + 12.5cm ceiling plate. 2 years guarantee.



IP20. 18w.

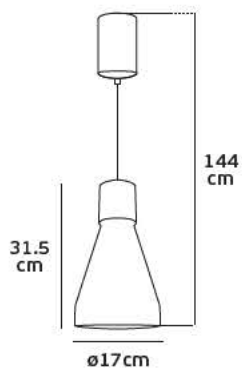





VK/04256PE



Product Models


Code	Model	Box
75169-005741	VK/04256PE/6R ■ Green+white. GU10.	1pc

Details

AC 220-240V. Max Watt 7w. Base GU10. Color Green metal shade with white inside.  
Cable Black textile. Material Metal.




**IP20. GU10**

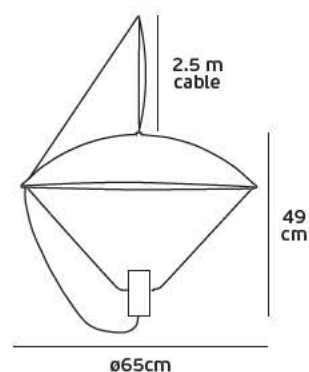

VK/04257PE



Product Models


Code	Model	Box
75169-006741	VK/04257PE/W □ White. GU10.	1pc

Details

AC 220-240V. Max Watt 7w. Base GU10. Color White metal shade with white inside.  
Cable Black textile. Material Metal.




**IP20. GU10**

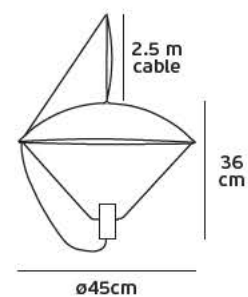









VK/04392/PE


### Product Models

Code	Model	Box
75169-019741	VK/04392/PE/B ■ Black shade + canopy. E27. Max 40w.	1pc
75169-020741	VK/04392/PE/BL ■ Blue shade + canopy. E27. Max 40w.	1pc
75169-021741	VK/04392/PE/G ■ Grey shade + canopy. E27. Max 40w.	1pc
75169-022741	VK/04392/PE/GD ■ Gold shade + canopy. E27. Max 40w.	1pc

### Details

Pendant Light 220-240V. Max watt 40w. IP Rating IP20. Working temperature -20°C → 45°C.  
Material Metal shade, black textile cable, metal canopy.

  IP20. E27.

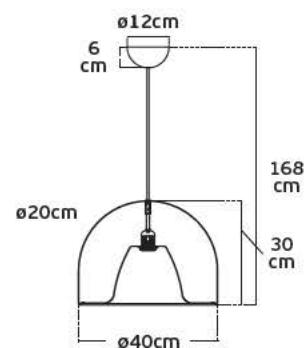





VK/04393/PE


Product Models

Code	Model				Box
75169-023741	VK/04393/PE/B	■ Black shade + canopy	E27	Max 40w	1pc
75169-024741	VK/04393/PE/BL	■ Blue shade + canopy	E27	Max 40w	1pc
75169-025741	VK/04393/PE/G	■ Grey shade + canopy	E27	Max 40w	1pc
75169-026741	VK/04393/PE/GD	■ Gold shade + canopy	E27	Max 40w	1pc

Details

Pendant Light 220-240V. Max watt 40w. IP Rating IP20. Working temperature -20°C → 45°C.  
Material Metal shade, black textile cable, metal canopy.

□ I IP20. E27.

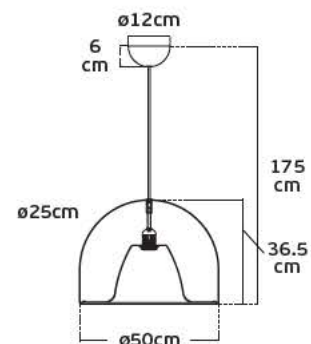







VK/04391/PE


### Product Models

Code	Model	Box
75169-018741	VK/04391/PE/GD ■ Gold shade + canopy. GU10. Max 25w.	1pc
75169-017741	VK/04391/PE/B ■ Black shade + canopy. GU10. Max 25w.	1pc


### Details

Pendant Light 220-240V. Max watt 25w. IP Rating IP20. Working temperature -20°C → 45°C.  
Material Metal shade, black textile cable, metal canopy.  
Included lamp Led 5w, 3000K, 435lm. 3 years guarantee.

□ I IP20. GU10.

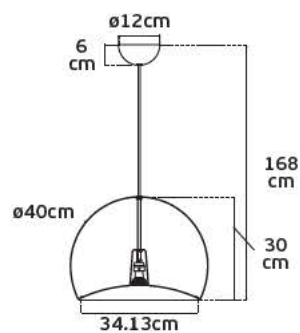



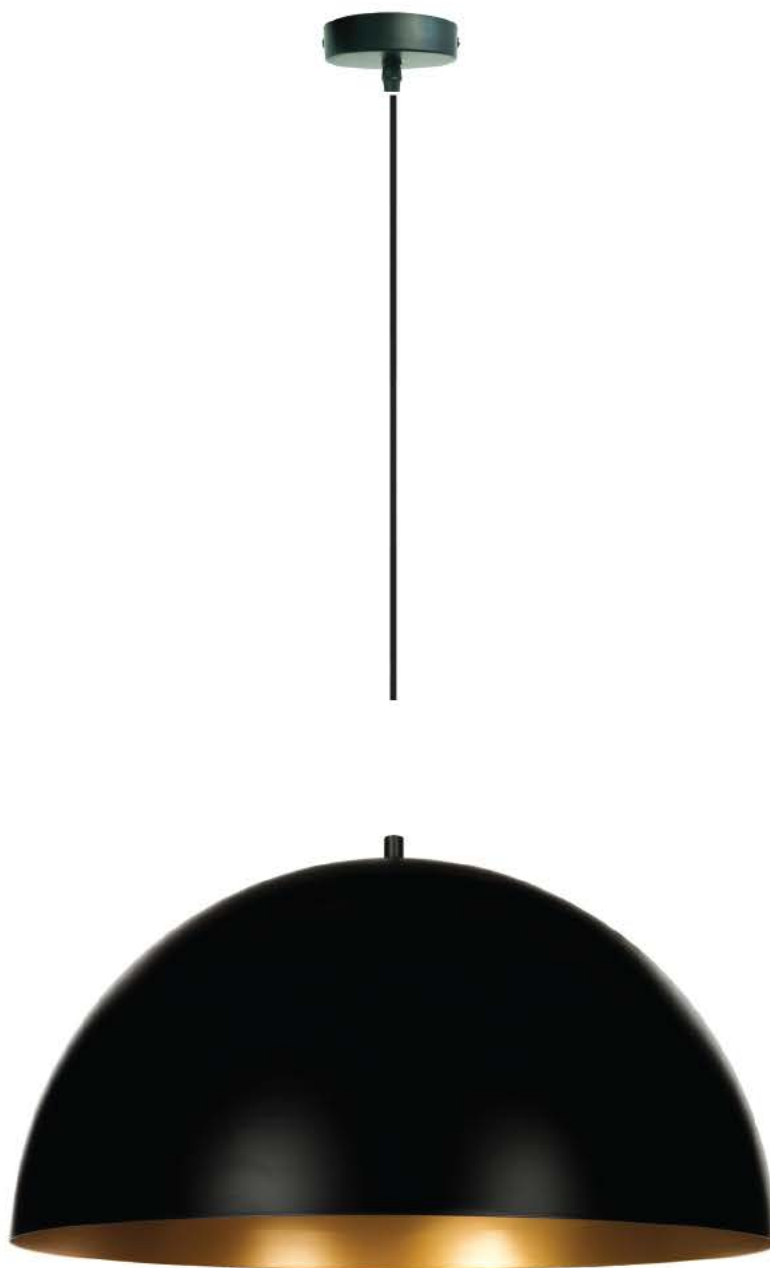

VK/03153/PE

### Product Models


Code	Model				Box
71164-005724	VK/03153/PE/50/B-GD	■ Black-Gold	E27	Max 60w	1pc
71164-006724	VK/03153/PE/50/W-GD	□ White-Gold	E27	Max 60w	1pc

### Details


Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2m black or white cable + black or white ceiling plate. Material Metal.



IP20. E27.

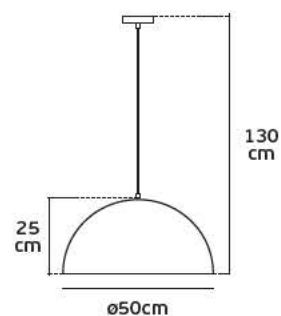



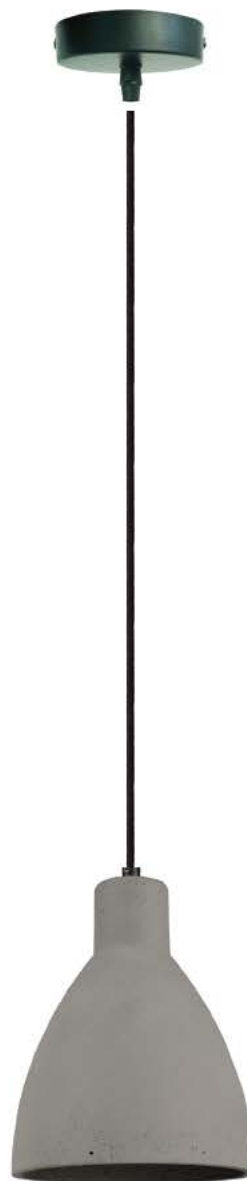

VK/09066

**Product Models**


Code	Model	Box
64174-295131	VK/09066 □ White. E27. Max 42w.	4pcs

**Details**

Voltage 240V. Max watt 42w. E27. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Gypsum. Possibility to paint.



IP20. E27.

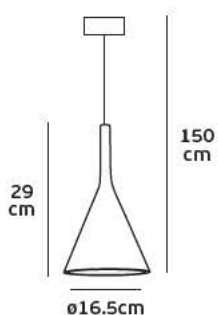

VK/09063

**Product Models**


Code	Model	Box
64174-292131	VK/09063 ■ Grey. E27. Max 42w.	4pcs


**Details**

Voltage 240V. Max watt 42w. E27. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Concrete. Possibility to paint.



IP20. E27.

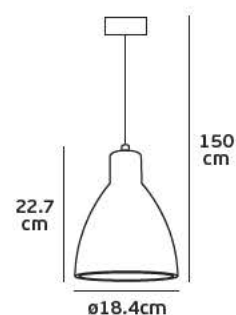

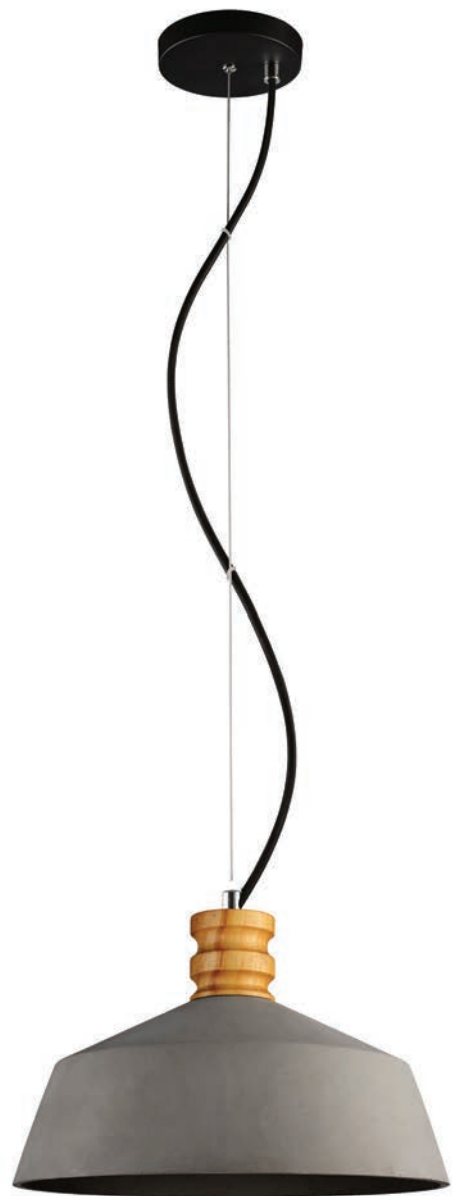

VK/09067/W

VK/09067/AN

Product Models

Product Models

Code	Model	Box
64174-296131	VK/09067/W □ White. E27. Max 42w.	4pcs


Code	Model	Box
64174-297131	VK/09067/AN ■ Anthracite. E27. Max 42w.	4pcs

Details

Voltage 240V. Max watt 42w. E27. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Concrete. Possibility to paint.




**IP20. E27.**





Details

Voltage 240V. Max watt 42w. E27. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Concrete. Possibility to paint.




**IP20. E27.**



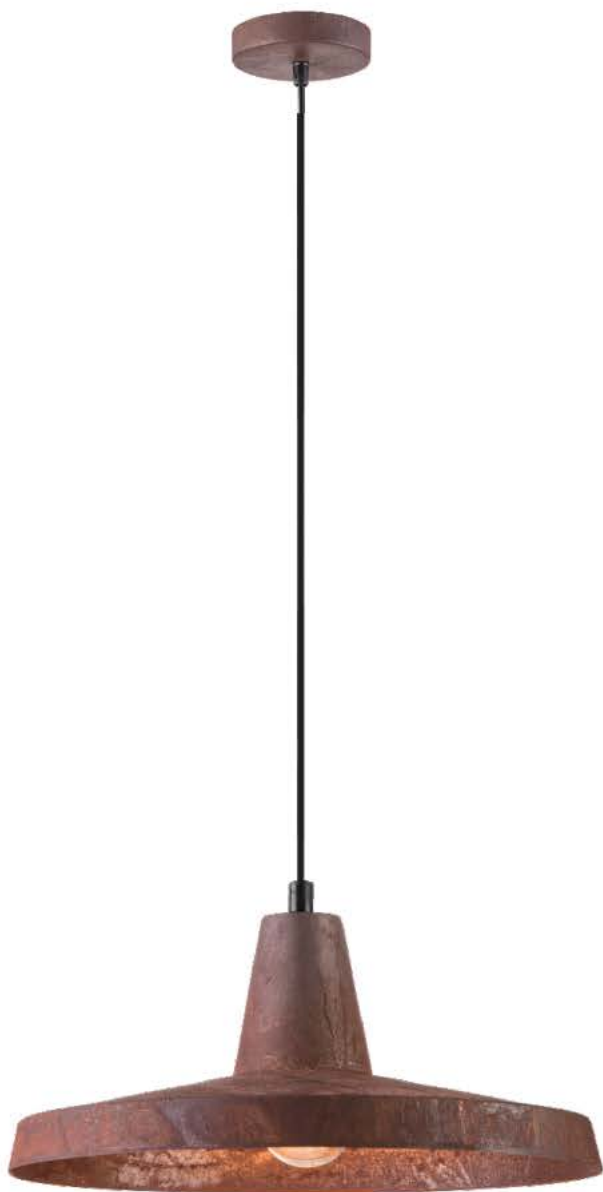

VK/03166/BR  
VK/03167/BR


Product Models

Code	Model	Box
75169-018733	VK/03166/BR ■ Rust brown. E27. Max 40w. Rust brown ceiling plate.	1pc
75169-020733	VK/03167/BR ■ Rust brown. E27. Max 40w. Rust brown ceiling plate.	1pc

Details


Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C.  
Cable 1m black cable + rust brown ceiling plate ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

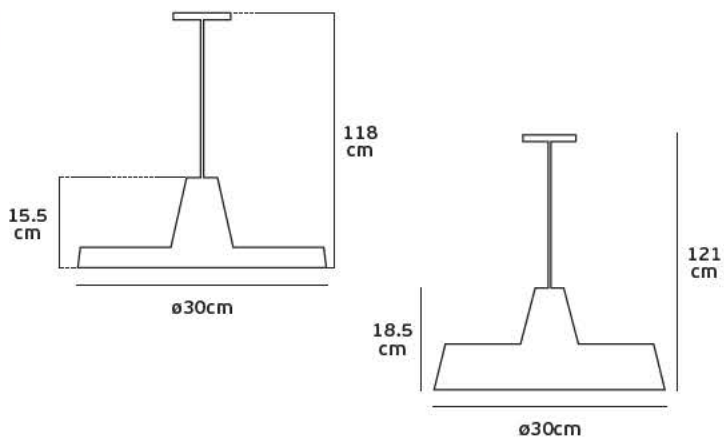





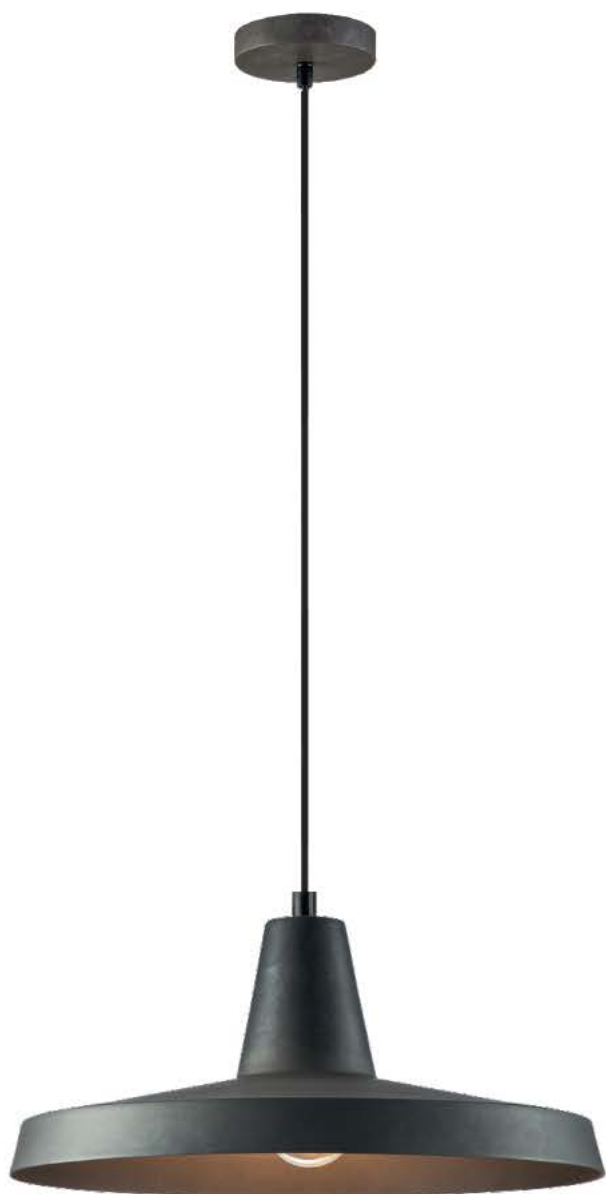

■ VK/03166/G  
VK/03167/G


### Product Models

Code	Model	Box
75169-019733	VK/03166/G ■ Dark grey. E27. Max 40w. Dark grey ceiling plate.	1pc
75169-021733	VK/03167/G ■ Dark grey. E27. Max 40w. Dark grey ceiling plate.	1pc

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C.  
Cable 1m black cable + dark grey ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

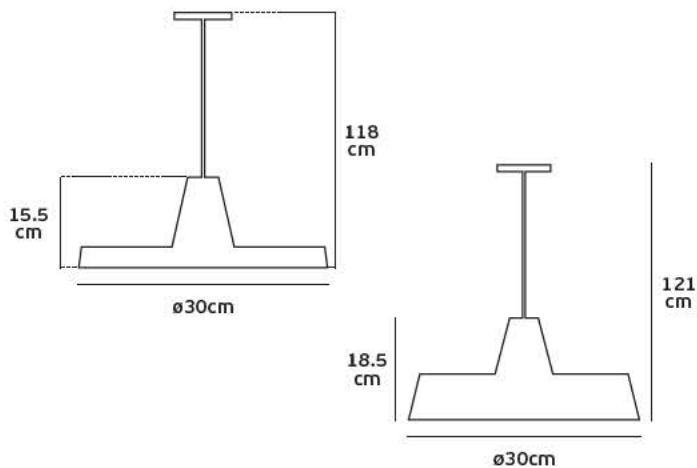





VK/03105PE



VK/03105PE/2

**Product Models**

Code	Model	Box
75169-252108	VK/03105PE/W □ White sanded. GU10. Max 35w.	20pcs
75169-253108	VK/03105PE/B ■ Black sanded. GU10. Max 35w.	20pcs


**Product Models**

Code	Model	Box
75169-254108	VK/03105PE/2/W □ White sanded. GU10x2. Max 2x35w.	10pcs
75169-255108	VK/03105PE/2/B ■ Black sanded. GU10x2. Max 2x35w.	10pcs

**Details**

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Aluminium, metal.


⚡ IP20. GU10.

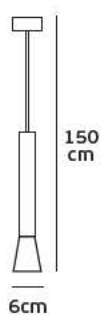

**Details**

Voltage 240V. Max watt 2x35w. GU10/Par16. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Aluminium, metal.

⚡ IP20. GU10.

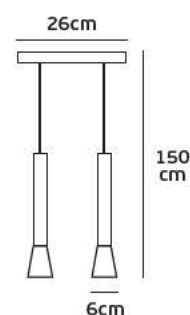



VK/03105PE/3

### Product Models


Code	Model				Box
75169-256108	VK/03105PE/3/W	□ White sanded	GU10x3	Max 3x35w	6pcs
75169-257108	VK/03105PE/3/B	■ Black sanded	GU10x3	Max 3x35w	6pcs

### Details

Voltage 240V. Max watt 3x35w. GU10/Par16. Working temperature -20°C ~ 40°C. Cable 1.20 m + ceiling plate. Material Aluminium, metal.



IP20. GU10.





### VK/04011

#### Product Models


Code	Model	Box
75169-194108	VK/04011/W □ White. GU10. Max 35w.	10pcs
75169-195108	VK/04011/B ■ Black. GU10. Max 35w.	10pcs
75169-196108	VK/04011/R ■ Red. GU10. Max 35w.	10pcs

#### Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Cable 1.50 m + ceiling plate. Material Aluminium.



IP20. GU10.

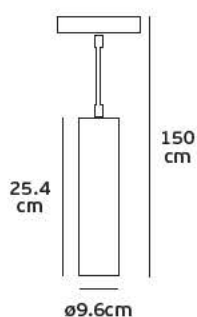

### VK/04043PE

#### Product Models


Code	Model	Box
64174-311269	VK/04043PE/W □ White. GU10. Max 35w.	1pc
64174-310269	VK/04043PE/B ■ Black. GU10. Max 35w.	1pc
64174-313269	VK/04043PE/G ■ Grey. GU10. Max 35w.	1pc
64174-347269	VK/04043PE/AN ■ Anthracite. GU10. Max 35w.	1pc
64174-312269	VK/04043PE/MC ■ Brushed Chrome. GU10. Max 35w.	1pc

#### Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Cable 96 cm + ceiling plate. Material Aluminium.



IP20. GU10.





Sample

**VK/04053PE/L**


**Product Models**

Code	Model	Box
64174-368269	VK/04053PE/W/L □ White. GU10. Max 50w.	1pc
64174-367269	VK/04053PE/B/L ■ Black. GU10. Max 50w.	1pc
64174-369269	VK/04053PE/G/L ■ Grey. GU10. Max 50w.	1pc
64174-370269	VK/04053PE/AN/L ■ Anthracite. GU10. Max 50w.	1pc
64174-371269	VK/04053PE/MC/L ■ Brushed Chrome. GU10. Max 50w.	1pc

**Details**

Voltage 240V. Max watt 50w. GU10/R111. Working temperature -20°C ~ 40°C. Cable 95 cm + ceiling plate. Material Aluminium.

⏚ ⚡ IP20. GU10.



**VK/03163**


**Product Models**

Code	Model	Box
75169-007733	VK/03163/B ■ Black sanded. E27. Max 40w.	1pc

**Details**

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 1 m + ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.



## Pendant LIGHTS



VK/03164/DG/10



VK/03164/DG/25



VK/03164/DG/35

### VK/03164

#### Product Models


Code	Model	■	■	■	■	■	Box
75169-008733	VK/03164/DG/10	■	■	■	■	■	1pc
75169-009733	VK/03164/DG/25	■	■	■	■	■	1pc
75169-010733	VK/03164/DG/35	■	■	■	■	■	1pc
75169-011733	VK/03164/DG/5030	■	■	■	■	■	1pc
75169-012733	VK/03164/DG/5045	■	■	■	■	■	1pc

#### Details


Voltage 240V. Max watt 10w LED. E27. Working temperature -20°C ~ 40°C. Cable 1m black cable + black ceiling plate. Material PVC, metal.




IP20. E27.

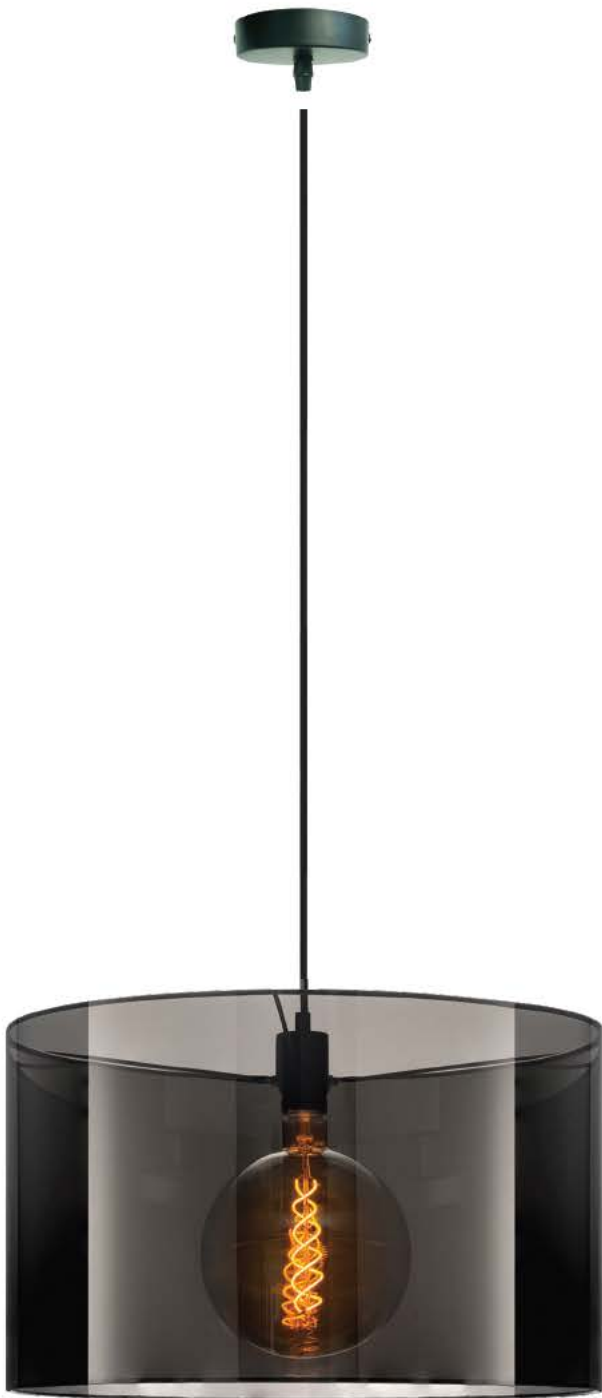

VK/03164/DG/5030

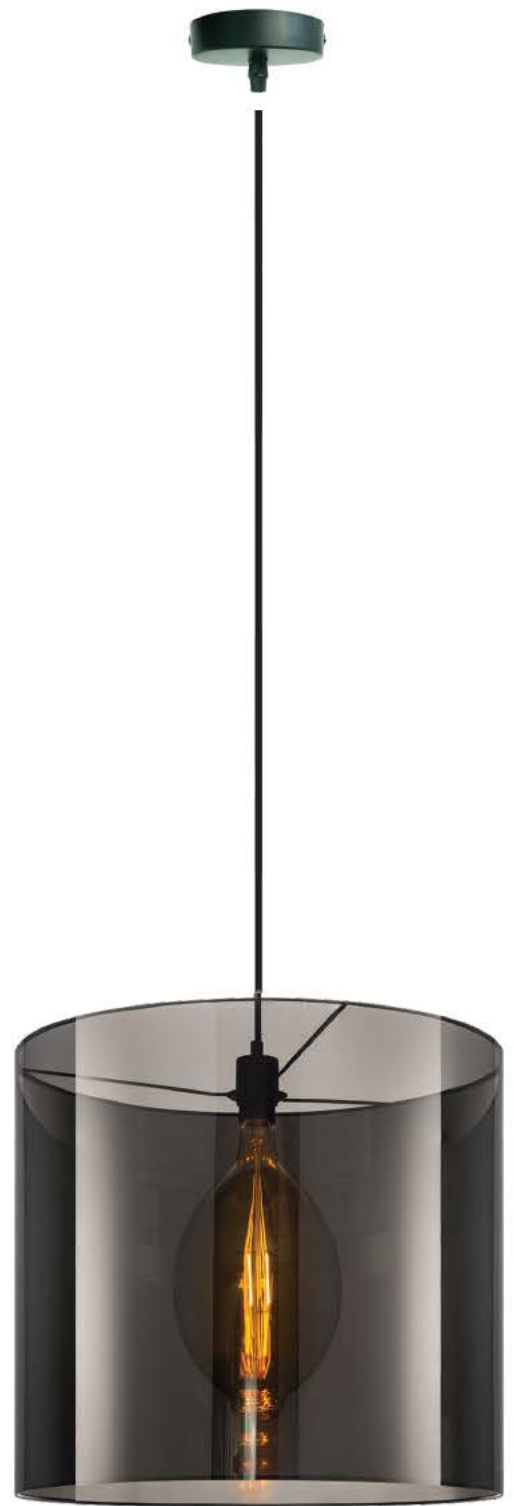

VK/03164/DG/5045

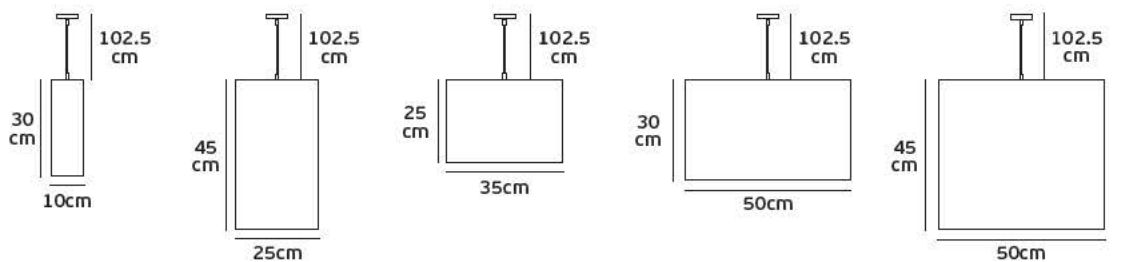







**VK/03099PE**

**VK/03100PE**

**Product Models**

**Product Models**

Code	Model	Box
71164-005108	VK/03099PE/W □ White. E27x3. Max 3x42w.	1pc

Code	Model	Box
71164-006108	VK/03100PE/W □ White. E27. Max 60w.	1pc

**Details**



Voltage 240V. Max watt 3x42w. E27x3. Working temperature -20°C ~ 40°C. Cable 1 m + ceiling plate. Material Fabric, metal, PMMA.

**Details**

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 1 m + ceiling plate. Material Fabric, metal, PMMA.

⏚ ⚡ IP20. E27.

⏚ ⚡ IP20. E27.

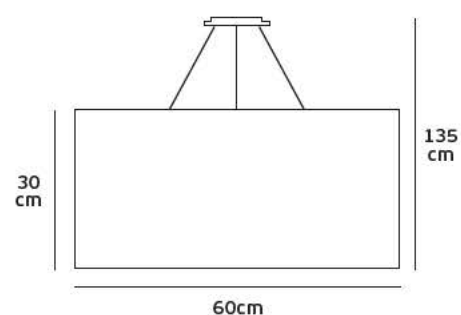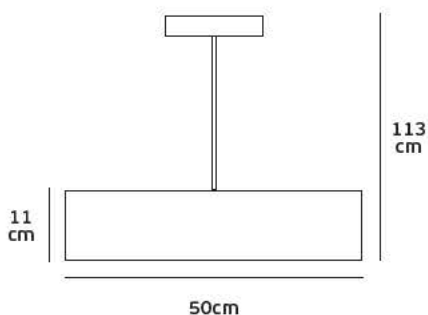





VK/03088/20

VK/03088/24

**Product Models**

**Product Models**

Code	Model	Box
64174-020108	VK/03088/20/BR ■ Brown. E27. Max 11w (LED).	1pc



Code	Model	Box
64174-021108	VK/03088/24/BR ■ Brown. E27. Max 11w (LED).	1pc

**Details**

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

**Details**

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

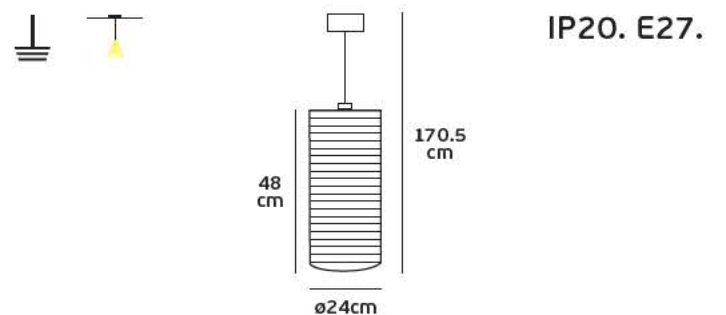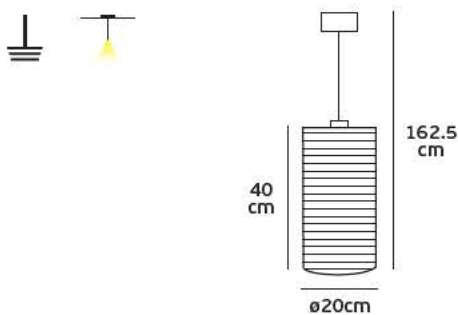




VK/03092/50

**Product Models**

Code	Model	Box
64174-022108	VK/03092/50/BR ■ Brown. E27. Max 11w (LED).	1pc

*Details*

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

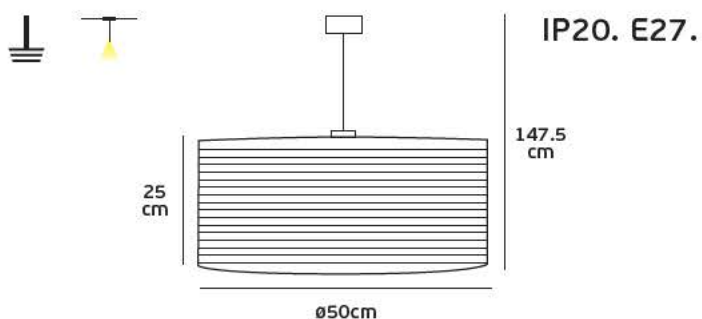


VK/03080/30

**Product Models**

Code	Model	Box
64174-023108	VK/03080/30/BR ■ Brown. E27. Max 11w (LED).	1pc

*Details*

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

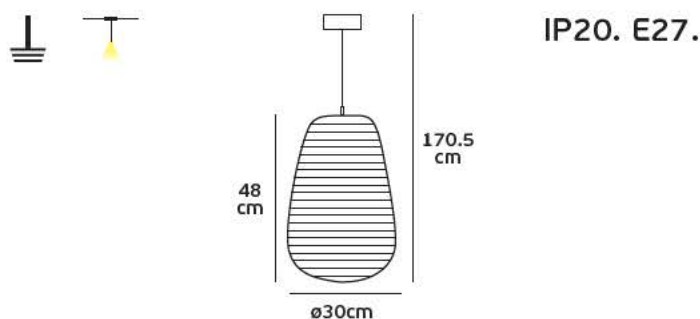



VK/03079/35

VK/03079/55

Product Models

Product Models

Code	Model	Box
64174-018108	VK/03079/35/BR ■ Brown. E27. Max 11w (LED).	1pc



Code	Model	Box
64174-019108	VK/03079/55/BR ■ Brown. E27. Max 11w (LED).	1pc

Details

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

Details

Voltage 240V. Max watt 11w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m fabric cable + black ceiling plate. Material Paper.

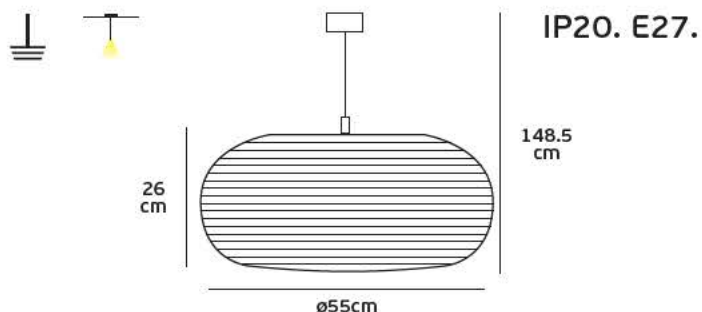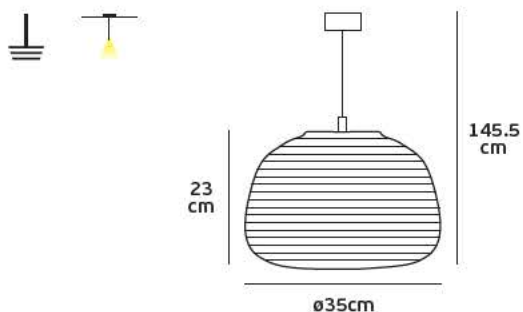



**VK/03160PE**


**Product Models**

<b>Code</b> 71164-013724	<b>Model</b> VK/03160PE/B	■ Black	E27	Max 40w	<b>Box</b> 1pc
-----------------------------	------------------------------	---------	-----	---------	-------------------

**Details**

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 1m black cable + black ceiling plate. Material Metal, glass.

  IP20. E27.









VK/03117/PE

### Product Models




Code	Model	Material	Socket	Max watt	Ø	Box
64174-013126	VK/03117/PE/15/GL	□ Milky glass	E27	Max 60w	ø15cm	1pc
64174-014126	VK/03117/PE/30/GL	□ Milky glass	E27	Max 60w	ø30cm	1pc
64174-015126	VK/03117/PE/40/GL	□ Milky glass	E27	Max 60w	ø40cm	1pc

### Details


Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 1.80 m + ceiling plate. Material Glass milky.



IP20. E27.

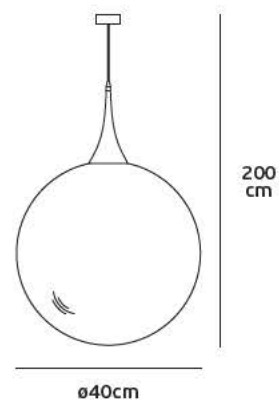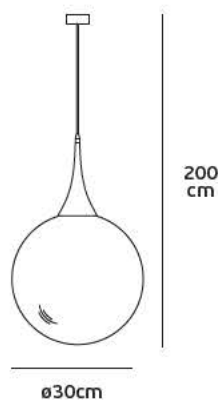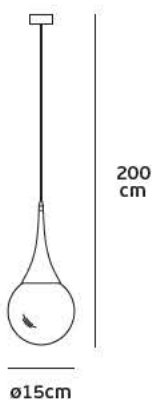



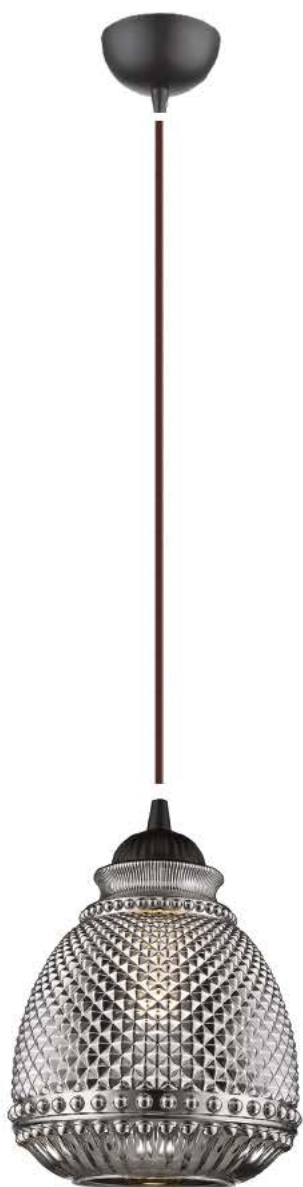

VK/03068/PE


Product Models

Code	Model	Box
64174-886697	VK/03068/PE/BR ■ Brown+Grey glass. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C.  
Cable 1 m + ceiling plate. Material Metal, Glass.

⏚ ⚡ IP20. E27.



VK/03069/PE


Product Models

Code	Model	Box
64174-887697	VK/03069/PE/BR ■ Brown+Grey glass. G9. Max 28w.	18pcs

Details

Voltage 240V. Max watt 28w. G9. Working temperature -20°C ~ 40°C.  
Cable 1 m + ceiling plate. Material Metal, Glass.

⏚ ⚡ IP20. G9.



VK/03069/WA




Product Models

Code	Model	Box
64171-055697	VK/03069/WA/BR ■ Brown. G9. Max 28w.	8pcs

Details

Voltage 230V. Max watt 28w. G9. Material Metal, glass. IP Rating IP20.

  IP20. G9.



VK/03069/2/WA




Product Models

Code	Model	Box
64171-056697	VK/03069/2/WA/BR ■ Brown. G9. Max 2x28w.	6pcs

Details

Voltage 230V. Max watt 2x28w. G9. Material Metal, glass. IP Rating IP20.

  IP20. G9.

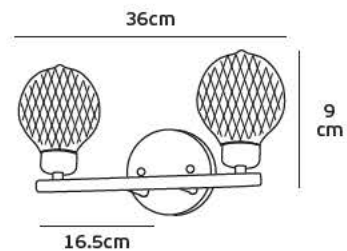

VK/03154PE




### Product Models

Code	Model	Box
71164-007724	VK/03154PE/B ■ Black. E27. Max 40w.	1pc

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C.  
Cable 1m black/chain + black ceiling plate. Material Metal, glass.

  IP20. E27.



VK/03156/WA




### Product Models

Code	Model	Box
71164-009724	VK/03156/WA/B ■ Black. E27. Max 40w.	1pc

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C→ 40°C. Material Metal, glass.  
IP Rating IP20.

  IP20. E27.





VK/03155PE

### Product Models


Code	Model	Color	Bulb Type	Max Wattage	Box
71164-008724	VK/03155PE/B	Black	E27x4	Max 4x40w	1pc

### Details

Voltage 240V. Max watt 4x40w. E27x4. Working temperature -20°C ~ 40°C. Cable 1m black/chain + black ceiling plate. Material Metal, glass.



IP20. E27.

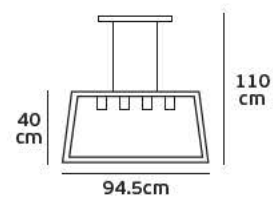

## Pendant LIGHTS



VK/03173/PE

### Product Models


<b>Code</b> 75169-485730	<b>Model</b> VK/03173/PE/B	■ Black	E27	Max 40w	<b>Box</b> 1pc
-----------------------------	-------------------------------	---------	-----	---------	-------------------

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 1.24m black cable + black ceiling plate. Material Metal.



IP20. E27.

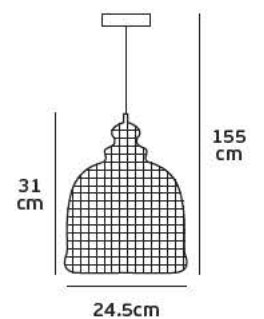



VK/03177/PE


**Product Models**

Code	Model	Box
75169-489730	VK/03177/PE/B ■ Black. E27. Max 25w.	1pc

**Details**

Voltage 240V. Max watt 25w. E27. Working temperature -20°C ~ 40°C. Cable 1.2m cable + black ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

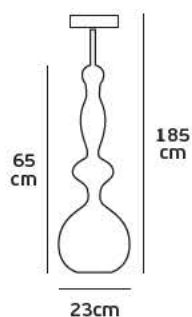

VK/03175/PE


**Product Models**

Code	Model	Box
75169-487730	VK/03175/PE/B ■ Black. E27. Max 25w.	1pc

**Details**

Voltage 240V. Max watt 25w. E27. Working temperature -20°C ~ 40°C. Cable 1.2m cable + black ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

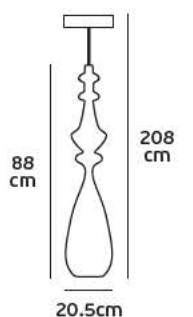





VK/03172/PE


**Product Models**

Code	Model	Box
75169-490730	VK/03172/PE/B ■ Black. E27. Max 25w.	1pc

**Details**

Voltage 240V. Max watt 25w. E27. Working temperature -20°C ~ 40°C.  
Cable 1.2m cable + black ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

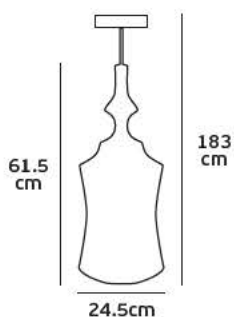

VK/03176/PE


**Product Models**

Code	Model	Box
75169-488730	VK/03176/PE/B ■ Black. E27. Max 25w.	1pc

**Details**

Voltage 240V. Max watt 25w. E27. Working temperature -20°C ~ 40°C.  
Cable 1.2m cable + black ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

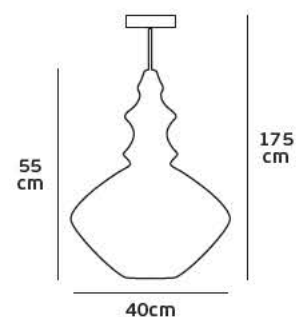





VK/03171/PE

### Product Models

Code	Model	Box
75169-483730	VK/03171/PE/ABS/26 ■ Bronze. E27. Max 40w.	1pc
75169-484730	VK/03171/PE/ABS/34 ■ Bronze. E27. Max 40w.	1pc



### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C.  
Cable 1.7m cable + ceiling plate. Material Metal.



 IP20. E27.

570

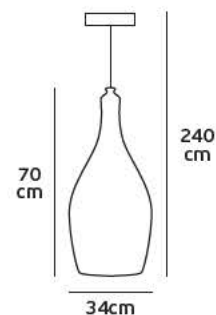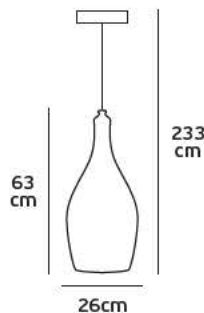







VK/03170/PE

### Product Models


Code	Model	Color	Socket	Power	Box
75169-482730	VK/03170/PE/ABS	■ Bronze	E27x3	Max 3x40w	1pc

### Details

Voltage 240V. Max watt 3x40w. E27. Working temperature -20°C ~ 40°C. Cable 1.6m black cable+chain + ceiling plate. Material Metal.



IP20. E27.

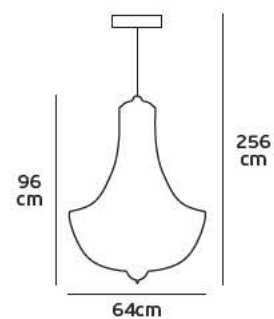



VK/03118PE

VK/03119PE

Product Models

Code	Model	Box
75169-222115	VK/03118PE/B ■ Black. E27. Max 60w.	1pc
75169-223115	VK/03118PE/GD ■ Gold. E27. Max 60w.	1pc

Product Models

Code	Model	Box
75169-224115	VK/03119PE/B ■ Black. E27. Max 60w.	1pc
75169-225115	VK/03119PE/GD ■ Gold. E27. Max 60w.	1pc


Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C.  
Cable 2m black fabric cable + black ceiling plate. Material Metal.


Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C.  
Cable 2m black fabric cable + black ceiling plate. Material Metal.

IP20. E27.

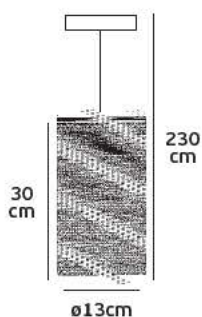

IP20. E27.

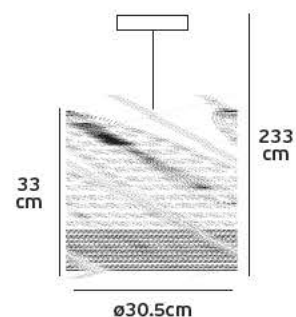



VK/03120PE

VK/03121PE

**Product Models**

**Product Models**

Code	Model	Box
75169-226115	VK/03120PE/B ■ Black. E27. Max 60w.	1pc

Code	Model	Box
75169-228115	VK/03121PE/B ■ Black. E27. Max 60w.	1pc

75169-227115	VK/03121PE/GD ■ Gold. E27. Max 60w.	1pc
--------------	--	-----

*Details*



Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C.  
Cable 2m black fabric cable + black ceiling plate. Material Metal.

*Details*

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C.  
Cable 2m black fabric cable + black ceiling plate. Material Metal.

⏚ ⚡ IP20. E27.

⏚ ⚡ IP20. E27.









VK/03181PE

### Product Models


Code	Model	Color	Socket	Max Power	Box
75169-483724	VK/03181PE/B	■ Black	E27	Max 60W	1pc

### Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2m black cable + black ceiling plate. Material Iron.



**IP20. E27.**

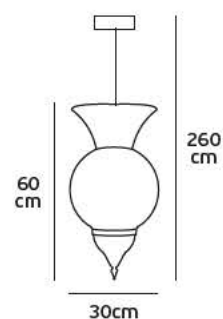





VK/03182PE

### Product Models


<u>Code</u> 75169-484724	<u>Model</u> VK/03182PE/B	■ Black	E27	Max 60W	<u>Box</u> 1pc
-----------------------------	------------------------------	---------	-----	---------	-------------------

### Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2m black cable + black ceiling plate. Material Iron.



IP20. E27.

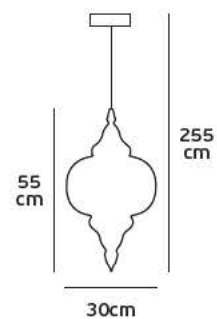





VK/03180PE

**Product Models**


Code	Model	Color	Base	Power	Box
75169-482724	VK/03180PE/B	■ Black	E27	Max 60W	1pc

**Details**

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2m black cable + black ceiling plate. Material Iron.



IP20. E27.

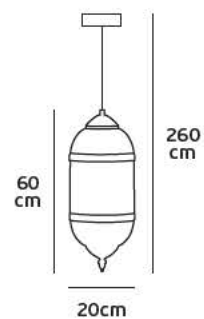





VK/03122PE

### Product Models


Code	Model				Box
75169-229115	VK/03122PE/GD	■ Gold	E27	Max 60W	1pc
75169-230115	VK/03122PE/W	□ White	E27	Max 60W	1pc

### Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2m white cable + white ceiling plate. Material Metal.



IP20. E27.

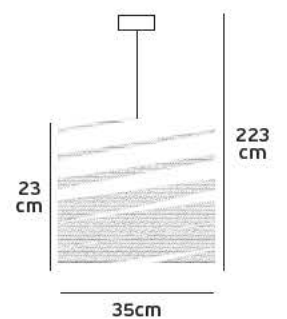





VK/03125PE/30


**Product Models**

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-234115	VK/03125PE/30	1pc
	□ White + wood. E27. Max 60w.	

*Details*

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.

⏚ ⚡ IP20. E27.

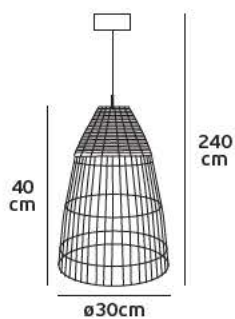

VK/03125PE/35


**Product Models**

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-235115	VK/03125PE/35	1pc
	□ White + wood. E27. Max 60w.	

*Details*

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.

⏚ ⚡ IP20. E27.

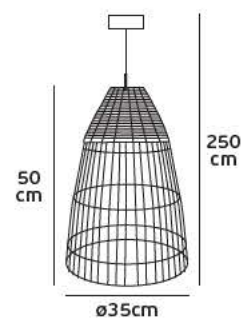



VK/03126PE/30

VK/03126PE/45

**Product Models**

**Product Models**

Code	Model	Box
75169-236115	VK/03126PE/30 ■ Wood. E27. Max 60w.	1pc

Code	Model	Box
75169-237115	VK/03126PE/45 ■ Black. E27. Max 60w.	1pc

**Details**



Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.

**Details**

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m black fabric cable + black ceiling plate. Material Bamboo.

⏚ ⚡ IP20. E27.

⏚ ⚡ IP20. E27.

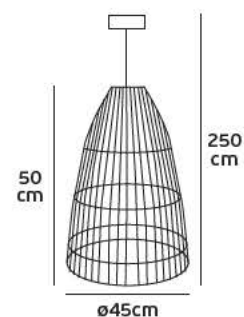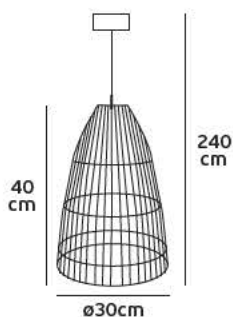



VK/03123PE/35


Product Models

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-231115	VK/03123PE/35/BMB	1pc
	■ Bamboo. E27. Max 60w.	

Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.

  IP20. E27.

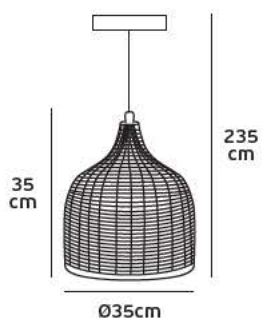

VK/03123PE/55


Product Models

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-232115	VK/03123PE/55/BMB	1pc
	■ Bamboo. E27. Max 60w.	

Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.

  IP20. E27.

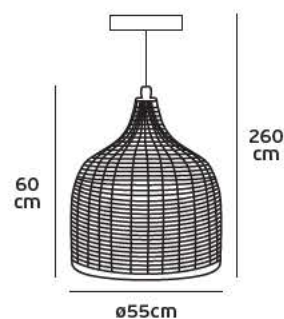



VK/03124PE/70

### Product Models


Code	Model	Material	Socket	Power	Box
75169-233115	VK/03124PE/70/BMB	Bamboo	E27	Max 60W	1pc

### Details

Voltage 240V. Max watt 60w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white fabric cable + white ceiling plate. Material Bamboo.



IP20. E27.

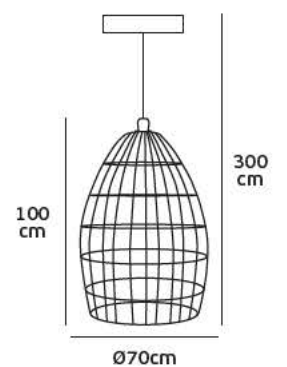



VK/03146PE/35


**Product Models**

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-477724	VK/03146PE/35	1pc
	■ Brown light. E27. Max 40w.	

*Details*

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white cable + white ceiling plate. Material Rattan, metal.

⚡ ⚡ IP20. E27.

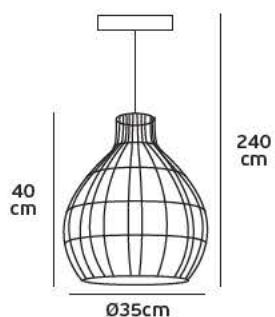

VK/03146PE/60


**Product Models**

<b>Code</b>	<b>Model</b>	<b>Box</b>
75169-478724	VK/03146PE/60	1pc
	■ Brown light. E27. Max 40w.	

*Details*

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white cable + white ceiling plate. Material Rattan, metal.

⚡ ⚡ IP20. E27.

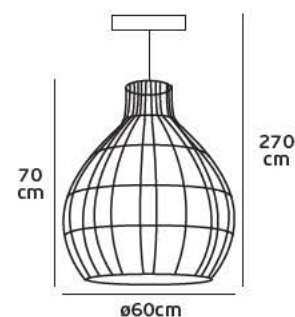



VK/03146PE/80

### Product Models


Code	Model	Color	Socket	Power	Box
75169-479724	VK/03146PE/80	■ Brown light	E27	Max 40w	1pc

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 2 m white cable + white ceiling plate. Material Rattan, metal.



IP20. E27.

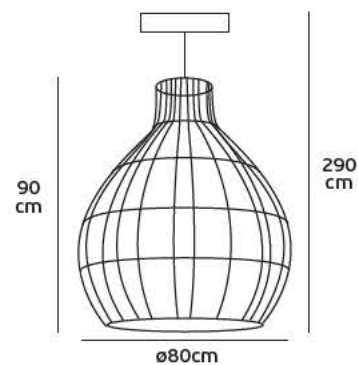



VK/03148PE/

### Product Models


<b>Code</b> 75169-481724	<b>Model</b> VK/03148PE/73	■ Black	E27	Max 40w	<b>Box</b> 1pc
-----------------------------	-------------------------------	---------	-----	---------	-------------------

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 2 m black fabric cable + black ceiling plate. Material PC Rattan, metal.



IP20. E27.

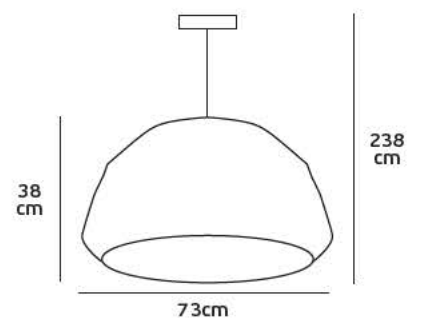



VK/03147PE/78

### Product Models


<b>Code</b> 75169-480724	<b>Model</b> VK/03147PE/78	■ Black	E27	Max 40w	<b>Box</b> 1pc
-----------------------------	-------------------------------	---------	-----	---------	-------------------

### Details

Voltage 240V. Max watt 40w. E27. Working temperature -20°C ~ 40°C. Cable 2m black fabric cable + black ceiling plate. Material PC Rattan, metal.



**IP20. E27.**

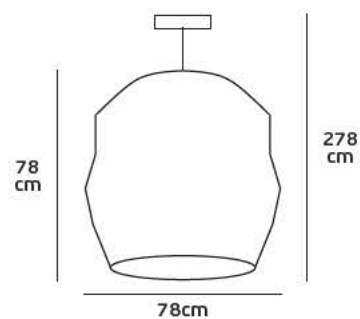



VK/04223/W/15




Product Models

Code	Model	Box
75169-039721	VK/04223/W/15/W □ White sand. 3000K. 305lm. 5w. CRI>80.	20pcs

Details

AC 220-240V Driver (Included). Watt 5w. CRI>80. Beam Angle Diffuse light.  
Type of Led Bridgelux 2835. Lifetime 50.000hrs. Working temperature <45°C.  
Material Aluminium. 2 years guarantee.

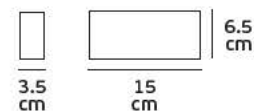

VK/04223/W/25




Product Models

Code	Model	Box
75169-040721	VK/04223/W/25/W □ White sand. 3000K. 493lm. 7w. CRI>80.	20pcs

Details

AC 220-240V Driver (Included). Watt 7w. CRI>80. Beam Angle Diffuse light.  
Type of Led Bridgelux 2835. Lifetime 50.000hrs. Working temperature <45°C.  
Material Aluminium. 2 years guarantee.

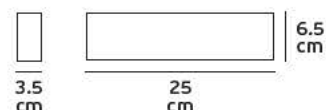

VK/04223/W/35




Product Models

Code	Model	Box
75169-041721	VK/04223/W/35/W □ White sand. 3000K. 965lm. 12w. CRI>80.	40pcs

Details

AC 220-240V Driver (Included). Watt 12w. CRI>80. Beam Angle Diffuse light.  
Type of Led Bridgelux 2835. Lifetime 50.000hrs. Working temperature <45°C.  
Material Aluminium. 2 years guarantee.

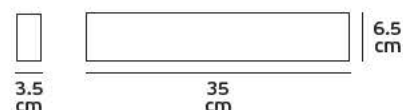

VK/04133WA

## Product Models



Code	Model	Box
75169-258108	VK/04133WA/W/W □ White sanded. 3000K. 480lm. 6w. CRI>80.	10pcs
75169-259108	VK/04133WA/B/W ■ Black sanded. 3000K. 480lm. 6w. CRI>80.	10pcs

## Details

AC 220-240V Driver (Included). Watt 6w. CRI>80. Beam Angle 120°.  
Type of Led SMD Edison. Lifetime 50.000hrs. Working temperature -20°C→ 45°C.  
Material Aluminium. 2 years guarantee.



IP20. 6w.

6  
cm10.5  
cm25  
cm

VK/04009




Product Models

Code	Model	Box
75169-209108	VK/04009/AL ■ Aluminium. 3000K. 180lm (90lmx2). 2w (2x1w). 60°. CRI>80.	10pcs

Details

AC 100-240V Driver (Included). Watt 2w. CRI>80. Beam Angle 60°.  
Type of Led High Power Led Edison. Lifetime 20.000hrs. Working temperature -20°C→ 45°C.  
Material Aluminium. 2 years guarantee.



VK/04010




Product Models

Code	Model	Box
75169-204108	VK/04010/AL ■ Aluminium. 3000K. 360lm (90lmx4). 4w (4x1w). 60°. CRI>80.	10pcs

Details

AC 100-240V Driver (Included). Watt 4w. CRI>80. Beam Angle 60°.  
Type of Led High Power Led Edison. Lifetime 20.000hrs. Working temperature -20°C→ 45°C.  
Material Aluminium. 2 years guarantee.

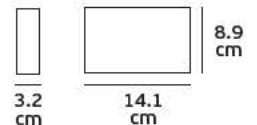

VK/04008




Product Models

Code	Model	Box
75169-210108	VK/04008/AL ■ Aluminium. 3000K. 540lm (90lmx6). 6w (6x1w). 60°. CRI>80.	10pcs

Details

AC 100-240V Driver (Included). Watt 6w. CRI>80. Beam Angle 60°.  
Type of Led High Power Led Edison. Lifetime 20.000hrs. Working temperature -20°C→ 45°C.  
Material Aluminium. 2 years guarantee.

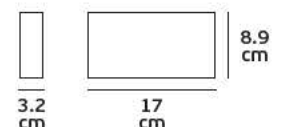

VK/04180/WA

## Product Models




Code	Model	Box
75169-356695	VK/04180/WA/W/W □ White. 3000K. 390lm. 3w. 120°. CRI>80.	5pcs
75169-357695	VK/04180/WA/B/W ■ Black. 3000K. 390lm. 3w. 120°. CRI>80.	5pcs
75169-358695	VK/04180/WA/GD/W ■ Gold. 3000K. 390lm. 3w. 120°. CRI>80.	5pcs

## Details

AC 220-240V Driver (Included). Watt 3w. CRI>80. Beam Angle 120°.  
Type of Led CREE. Lifetime 30.000hrs. Working temperature -20°C→ 40°C. Material Iron.  
2 years guarantee.



IP20. 3w.

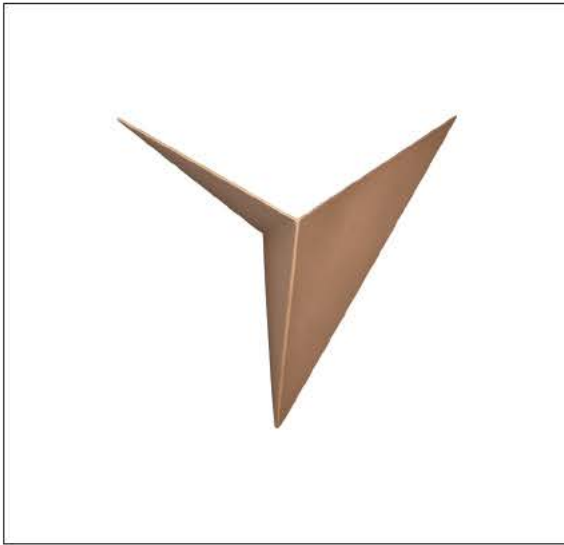

VK/03072WA




Product Models

Code	Model	Box
75169-220108	VK/03072WA/BGD ■ Black+Gold sanded. G9. Max 42w.	20pcs

Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.

 IP20. G9.

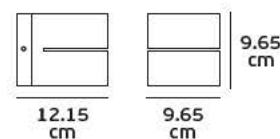

VK/03073WA




Product Models

Code	Model	Box
75169-221108	VK/03073WA/BGD ■ Black+Gold sanded. G9. Max 42w.	20pcs

Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.

 IP20. G9.

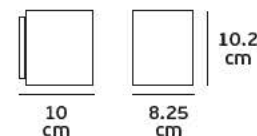

VK/03074WA




Product Models

Code	Model	Box
75169-222108	VK/03074WA/BGD ■ Black+Gold sanded. G9. Max 42w.	20pcs

Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.

 IP20. G9.



VK/03075WA




Product Models

Code	Model	Box
75169-223108	VK/03075WA/BGD ■ Black+Gold sanded. G9. Max 42w.	20pcs

Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.

 IP20. G9.

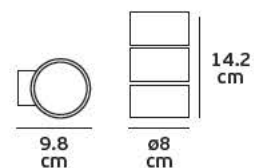

VK/03076WA




Product Models

Code	Model	Box
75169-224108	VK/03076WA/BGD ■ Black+Gold sanded. G9. Max 42w.	20pcs

Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.

 IP20. G9.



## Wall LIGHTS

### VK/03127WA



#### Product Models


Code	Model	Box
75169-275108	VK/03127WA/BGD ■ Black+Gold. G9. Max 42w.	20pcs

#### Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.



IP20. G9.



### VK/03128WA



#### Product Models


Code	Model	Box
75169-276108	VK/03128WA/BGD ■ Black+Gold. G9. Max 42w.	20pcs

#### Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.



IP20. G9.



VK/03077WA

## Product Models


Code	Model	Box
75169-225108	VK/03077WA/AL ■ Aluminium+Frosted glass. G9. Max 42w.	20pcs
75169-226108	VK/03077WA/COP ■ Copper+Frosted glass. G9. Max 42w.	20pcs

## Details

Voltage 220-240V. Max watt 42w. G9. Material Aluminium. IP Rating IP20.



IP20. G9.

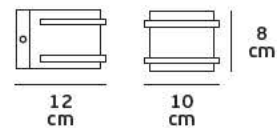



VK/03174/WA

Product Models

Code	Model	Box
75169-486730	VK/03174/WA/B ■ Black. E27. Max 42w.	1pc

Details



Voltage 240V. Max watt 42w. E27. Material Metal, glass. IP Rating IP20.

  IP20. E27.



Cut hole  
11x53cm

2.5cm

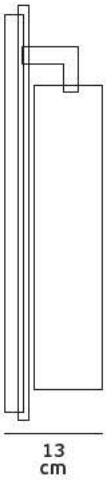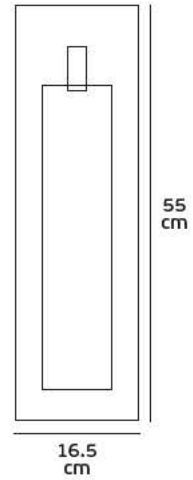

VK/03149/WA




Product Models

Code	Model	Box
64174-945724	VK/03149/WA/GD ■ Gold mat. E27. Max 40w.	1pc

Details

Voltage 240V. Max watt 40w. E27. Material Aluminium. IP Rating IP20.

⏚ ⚡ IP20. E27.

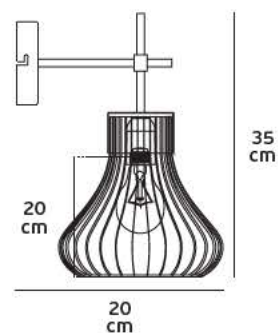

VK/03161/WA




Product Models

Code	Model	Box
71164-014724	VK/03161/WA/B ■ Black. E27. Max 42w.	1pc

Details

Voltage 240V. Max watt 42w. E27. Material Metal. IP Rating IP20.

⏚ ⚡ IP20. E27.

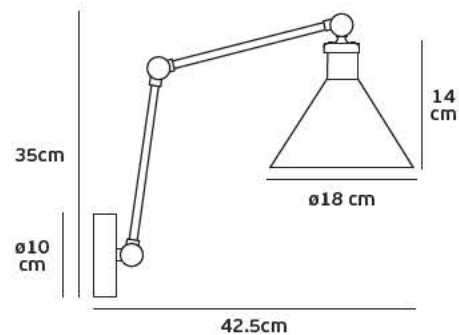

VK/03106CE



Product Models


Code	Model	Box
64174-029108	VK/03106CE/COP ■ Copper+Black. GU10. Max 35w.	24pcs
64174-030108	VK/03106CE/B ■ Black. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium, iron.



IP20. GU10.



VK/03106CE/2



Product Models


Code	Model	Box
64174-031108	VK/03106CE/2/COP ■ Copper+Black. GU10x2. Max 2x35w.	12pcs
64174-032108	VK/03106CE/2/B ■ Black. GU10x2. Max 2x35w.	12pcs

Details

Voltage 240V. Max watt 2x35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium, iron.



IP20. GU10.

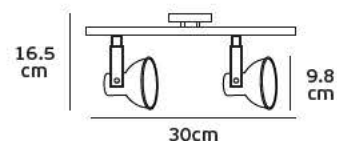



VK/03016



Product Models

Code	Model	Box
64174-004123	VK/03016/W □ White. E27. Max 40w.	10pcs
64174-003123	VK/03016/B ■ Black. E27. Max 40w.	10pcs

Details

Voltage 240V. Max watt 40w. E27/Par30. Material Aluminium. IP Rating IP20.

⏚ ⚡ IP20. E27.



VK/03078CE




Product Models

Code	Model	Box
64174-001108	VK/03078CE/W □ White sanded. GU10. Max 35w.	36pcs
64174-002108	VK/03078CE/B ■ Black sanded. GU10. Max 35w.	36pcs

Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C. Material Aluminium, metal.

⏚ ⚡ ⚙ Adjustable IP20. GU10.



## VK/03078CE/2



## Product Models


Code	Model	Box
64174-003108	VK/03078CE/2/W □ White sanded. GU10x2. Max 2x35w.	18pcs
64174-004108	VK/03078CE/2/B ■ Black sanded. GU10x2. Max 2x35w.	18pcs

## Details

Voltage 240V. Max watt 2x35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium, metal.



IP20. GU10.

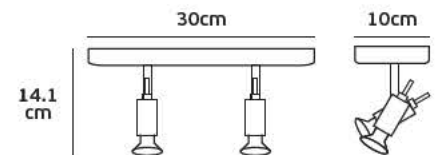

## VK/03078CE/3



## Product Models


Code	Model	Box
64174-005108	VK/03078CE/3/W □ White sanded. GU10x3. Max 3x35w.	15pcs
64174-006108	VK/03078CE/3/B ■ Black sanded. GU10x3. Max 3x35w.	15pcs


## Details

Voltage 240V. Max watt 35w. GU10/Par16. Working temperature -20°C ~ 40°C.  
Material Aluminium, metal.



IP20. GU10.

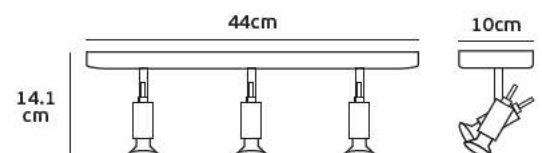

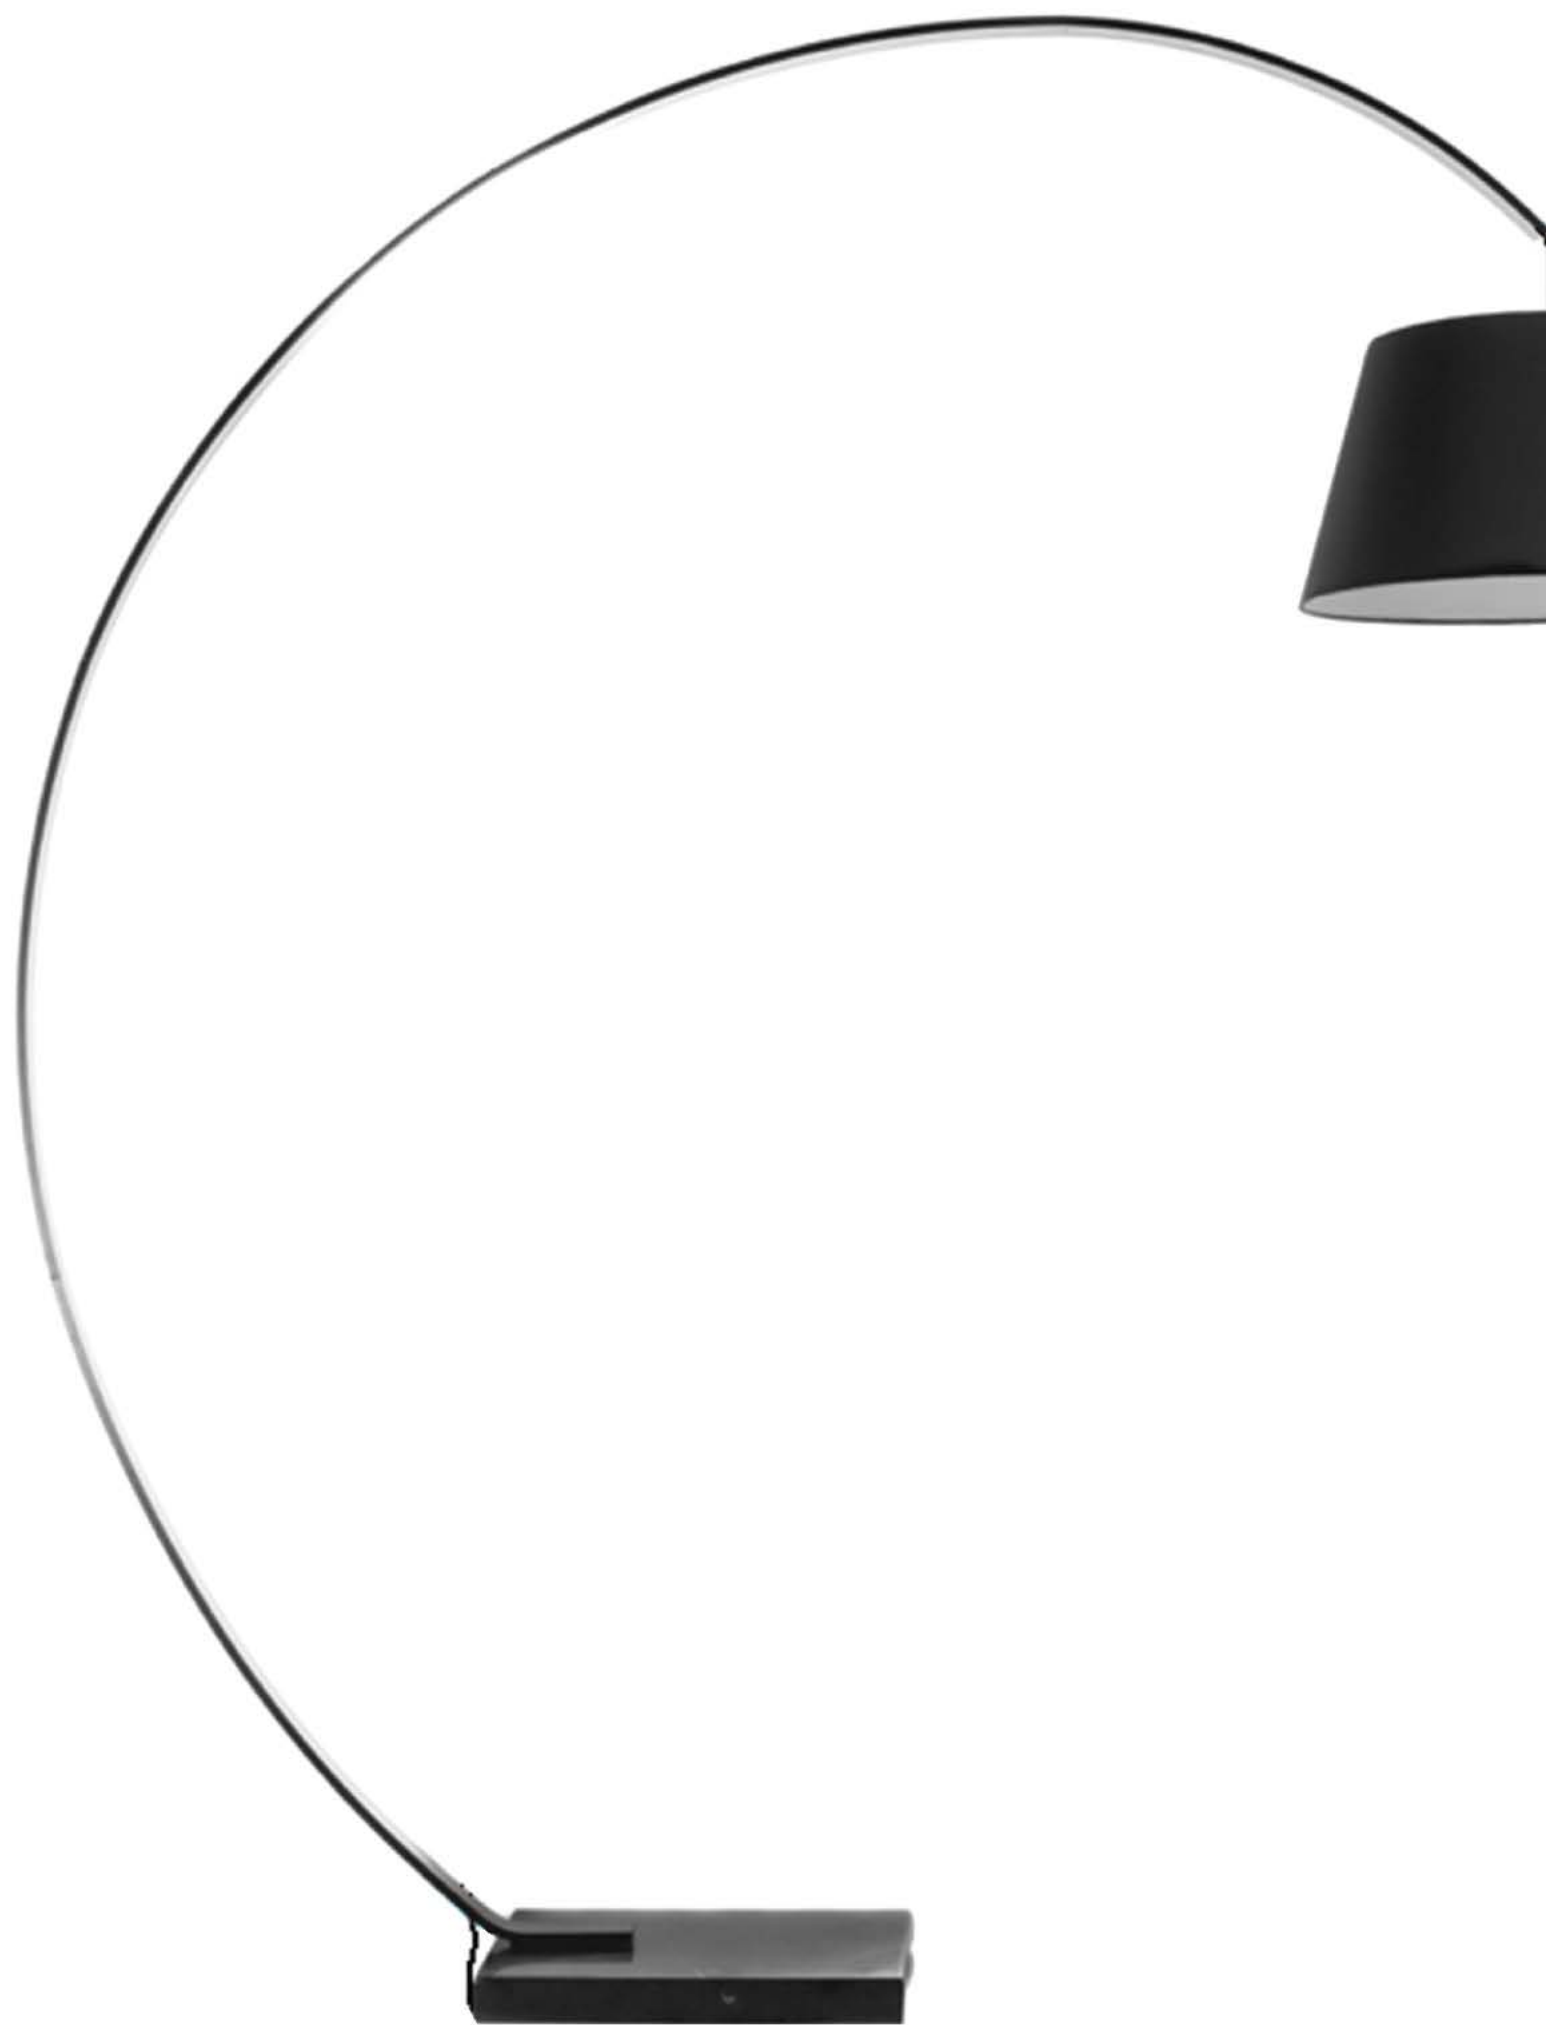



**Floor & table lightings**





■ VK/04385/B

### Product Models


Code	Model	Box
75169-008741	VK/04385/B ■ Black. E27. Max 40w.	1pc

### Details

Floor Light 220-240V. Max watt 40w. Working temperature -20°C → 45°C. Material Matt Black painting metal lamp body, black fabric KD shade, black textile cable with foot on/off switch, black marble base. IP Rating IP20.



IP20. E27.

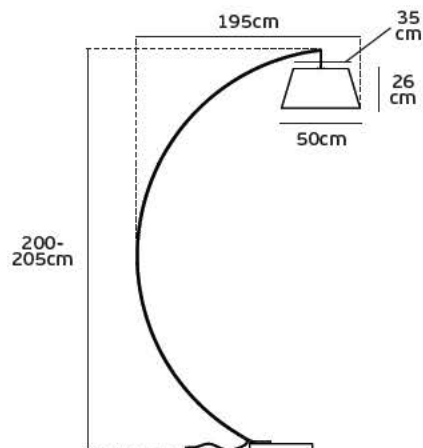



## Ceiling LIGHTS



VK/04387/CE/B

Product Models

**Code**  
75169-010741

**Model**  
VK/04387/CE/B

■ Black

E27

Max 40w

**Box**  
1pc


### Details

Ceiling Light 220-240V. Max watt 40w. IP Rating IP20. Working temperature -20°C → 45°C. Material Matt Black painting metal lamp body, black fabric KD shade.



IP20. Max 40w.



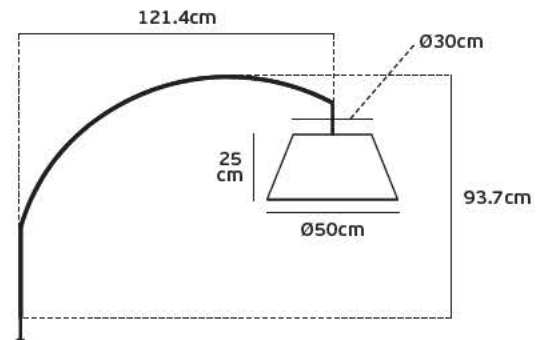

VK/04386/WA/B

Product Models

<u>Code</u> 75169-009741	<u>Model</u> VK/04386/WA/B	■ Black	E27	Max 40w	<u>Box</u> 1pc
-----------------------------	-------------------------------	---------	-----	---------	-------------------

Details

Wall Light 220-240V. Max watt 40w. IP Rating IP20. Working temperature -20°C → 45°C. Material Matt Black painting metal lamp body, black fabric KD shade, black textile cable.

  IP20. Max 40w.





■ VK/04258

### Product Models


<u>Code</u>	<u>Model</u>	<u>Box</u>
75169-007741	VK/04258/B/W ■ Black. 3000K. 11w.	1pc

### Details

AC 220-240V. Watt 11w. Color Black metal body & base. Material Metal body & marble base. Cable Black textile.



IP20. 11w.

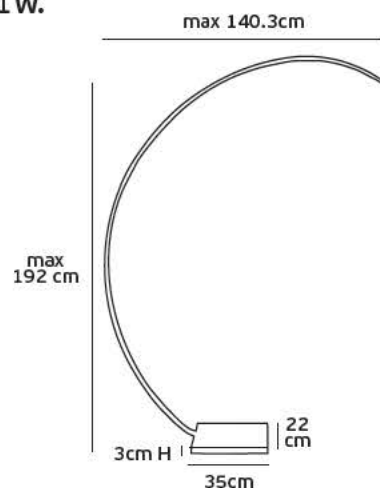







VK/03131


### Product Models

<u>Code</u>	<u>Model</u>	<u>Box</u>
61171-230747	VK/03131/WD/RD40W ■ Wooden. Max 53w. E27	1pc

### Details

Voltage 240V. Max watt 53w. Lampholder E27. Material Wood, fabric.

IP20. E27.

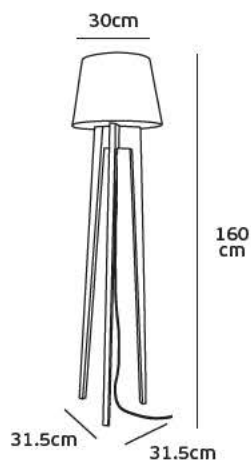

IP20

VK/03168




**Product Models**

Code	Model	Box
61171-022733	VK/03168/G ■ Dark grey. Max 40w. E27	1pc

**Details**

Voltage 240V. Max watt 40w. Lampholder E27. Material Metal.

IP20. E27.

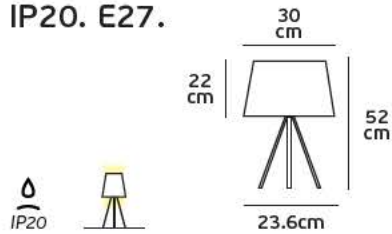

VK/03169


**Product Models**

Code	Model	Box
61171-023733	VK/03169/G ■ Dark grey. Max 40w. E27	1pc

**Details**

Voltage 240V. Max watt 40w. Lampholder E27. Material Metal.

IP20. E27.

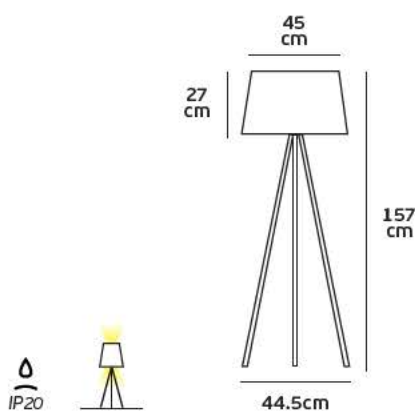

VK/03157/WD




Product Models

Code	Model	Box
61171-010724	VK/03157/WD/W □ White & wood. Max 40w. E27	1pc

Details

Voltage 240V. Max watt 40w. Lampholder E27. Material Wood, metal, TC shade.

IP20. E27.

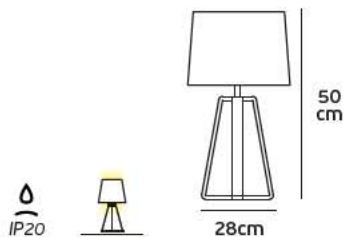

VK/03158/WD



Product Models

Code	Model	Box
61171-011724	VK/03158/WD/W □ White & wood. Max 40w. E27	1pc

Details

Voltage 240V. Max watt 40w. Lampholder E27. Material Wood, metal, TC shade.

IP20. E27.

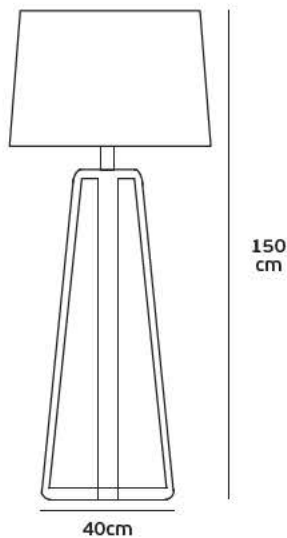

VK/03159

## Product Models


Code	Model	Box
61171-012724	VK/03159/W □ White & wood. Max 40w. E27	6pcs



## Details

Voltage 240V. Max watt 40w. Lampholder E27. Material Wood, metal, TC shade.

IP20. E27.

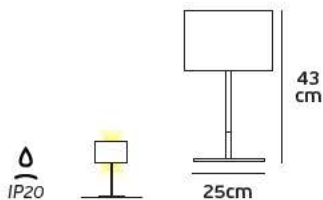

VK/04161

Product Models




Code	Model	Box
58610-111739	VK/04161/B ■ Black. 3000K-6000K. 350lm. 10w. CRI>70.	1pc
58610-112739	VK/04161/AL ■ Aluminium. 3000K-6000K. 350lm. 10w. CRI>70.	1pc

Details

Voltage 100-230V. Watt 10w. CRI>70. Type of LED SMD Epistar. Working temperature -20°C→40°C. Lifetime 20.000hrs. Material Aluminium, acrylic. 2 years guarantee.




**IP20. 10w.**

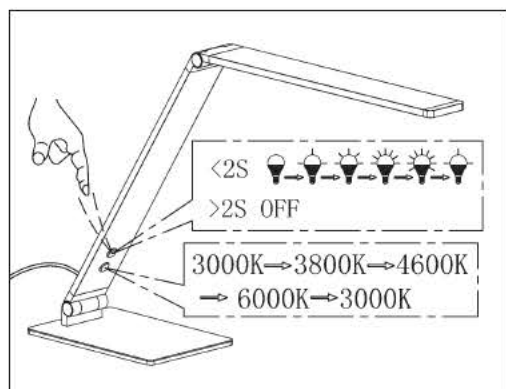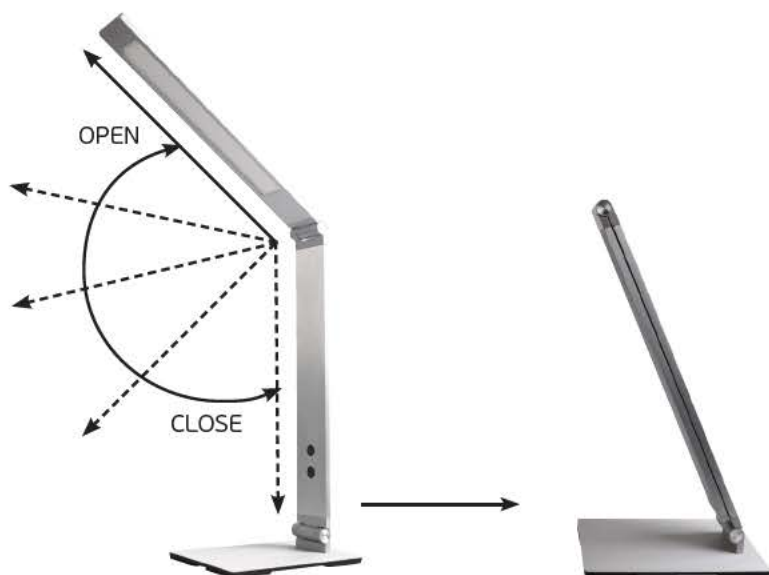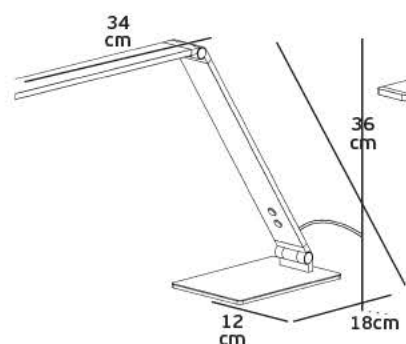

VK/04234



## Product Models


Code	Model	Box
64171-267727	VK/04234/B/W ■ Black. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc
64171-266727	VK/04234/W/W □ White. 3200K. 480lm. 3w & 6w. 25°. CRI>70.	1pc

## Details

Voltage 220-240V. Watt 3w & 6w. CRI>70. Type of LED SMD Samsung 3535, Edison 3014. Beam angle 25°. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, iron & acrylic. 2 years guarantee.



IP20. 3w &amp; 6w.

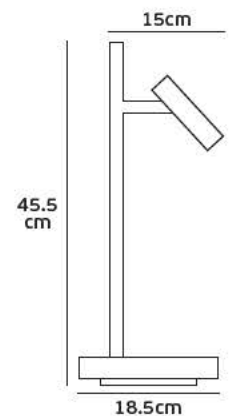

VK/04238



## Product Models


Code	Model	Box
58610-115728	VK/04238/W/WCD □ White. 3000K-6000K. 400lm. 7w. CRI>80.	8pcs
58610-116728	VK/04238/B/WCD ■ Black. 3000K-6000K. 400lm. 7w. CRI>80.	8pcs

## Details

Voltage 220-240V. Watt 7w. CRI>80. Type of LED SMD. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. Clicks 25.000. Material Aluminium, ABS, PC. 2 years guarantee.



IP20. 7w.

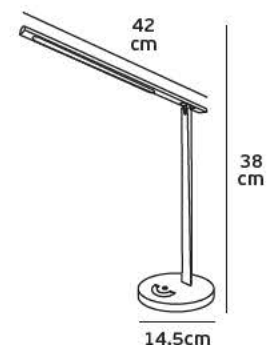

VK/04239



Product Models


Code	Model	Box
58610-117728	VK/04239/W/C □ White. 4000K. 400lm. 7w. CRI>80.	8pcs
58610-118728	VK/04239/B/C ■ Black. 4000K. 400lm. 7w. CRI>80.	8pcs

Details

Voltage 220-240V. Watt 7w. CRI>80. Type of LED SMD. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. Clicks 25.000. Material ABS, PC. 2 years guarantee.



IP20. 7w.

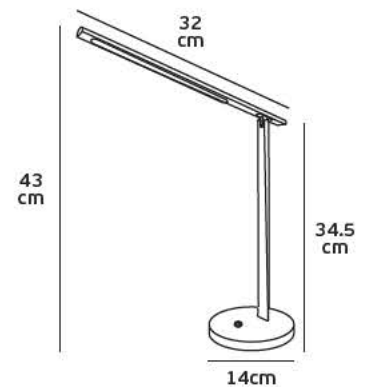

VK/04240



Product Models


Code	Model	Box
58610-119728	VK/04240/W/D □ White. 5000K. 235lm. 4w. CRI>80.	8pcs
58610-120728	VK/04240/B/D ■ Black. 5000K. 235lm. 4w. CRI>80.	8pcs

Details

Voltage 220-240V. Watt 4w. CRI>80. Type of LED SMD. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. Clicks 25.000. Material ABS, PC. 2 years guarantee.



IP20. 4w.



VK/04237



## Product Models


Code	Model	Box
58610-113728	VK/04237/W/D □ White. 5000K. 280lm. 5w. CRI>80.	24pcs
58610-114728	VK/04237/B/D ■ Black. 5000K. 280lm. 5w. CRI>80.	24pcs

## Details

Input 5V1A. Watt 5w. CRI>80. Type of LED SMD. Working temperature -25°C→ 45°C. Lifetime 25.000hrs. Clicks 25.000. Material ABS, PC. 2 years guarantee.



IP20. 5w.



VK/03096



## Product Models


Code	Model	Box
64174-028108	VK/03096/B ■ Black sanded. Max 35w. GU10	6pcs

## Details

Voltage 230V. Max watt 35w. Lampholder GU10. Material Aluminium, metal. IP Rating IP20.



IP20. GU10.

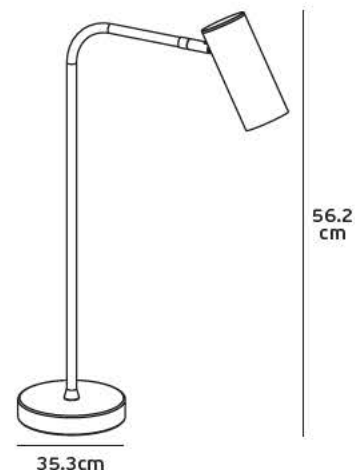





# 11

## *Cabinet lights*





Sensor PIR





VK/04308

Product Models

Code	Model	Color	Temp	Beam	Power	Angle	Efficiency	Box
64174-960115	VK/04308/W/30	White	3000K	230lm	3w	120°	CRI>80	1pc

Details

Voltage 12V (included). Watt 3w. CRI>80. IP Rating IP20. Type of Led SMD2835 x 12pcs. No Dimmable, Lifetime 30.000 hrs, Working temperature -20 ~ 45°C. Material Aluminum + PMMA. Total length should be no longer than 2m. 2 years guarantee.



VK/04308/.../PIR

Product Models

Code	Model	Color	Temp	Beam	Power	Angle	Efficiency	Box
64174-961115	VK/04308/W/30/PIR	White	3000K	230lm	3w	120°	CRI>80	1pc

Details

Voltage 12V (included). Watt 3w. CRI>80. IP Rating IP20. Type of Led SMD2835 x 12pcs. No Dimmable, Lifetime 30.000 hrs, Working temperature -20 ~ 45°C. Material Aluminum + PMMA. Total length should be no longer than 2m. With sensor PIR. 2 years guarantee.









VK/04309/.../PIR



Product Models

Code	Model	Color	Temp	Beam	Power	Angle	Efficiency	Box
64174-962115	VK/04309/W/50/PIR	White	3000K	425lm	5.5w	120°	CRI>80	1pc

Details

Voltage 12V (included). Watt 5.5w. CRI>80. IP Rating IP20. Type of Led SMD2835 x 24pcs. No Dimmable. Lifetime 30.000 hrs. Working temperature -20 ~ 45°C. Material Aluminum + PMMA. Total length should be no longer than 2m. With sensor PIR. 2 years guarantee.





**IP20. 5.5w.**







VK/04310/.../PIR



Product Models

Code	Model	Color	Temp	Beam	Power	Angle	Efficiency	Box
64174-963115	VK/04310/W/100/PIR	White	3000K	815lm	10.5w	120°	CRI>80	1pc

Details

Voltage 12V (included). Watt 10.5w. CRI>80. IP Rating IP20. Type of Led SMD2835x48pcs. No Dimmable. Lifetime 30.000 hrs. Working temperature -20 ~ 45°C. Material Aluminum + PMMA. Total length should be no longer than 2m. With sensor PIR. 2 years guarantee.





**IP20. 10.5w.**



VK/04311/CON



### Product Models

**Code**  
64174-964115

**Model**  
VK/04311/CON

**Box**  
1pc

□ Grey. Inter connector for led cabinet lights.

### Details

Inter-connectors for LED cabinet lights (VK/04308, VK/04309, VK/04310).

VK/04312/CON



### Product Models

**Code**  
64174-965115

**Model**  
VK/04312/CON

**Box**  
1pc

■ Black. Connectors for led cabinet lights 3.5DC.

### Details

Connectors for LED cabinet lights 3.5DC double male headline 3.5x1.35 L: 1m (VK/04308, VK/04309, VK/04310).



VK/04163

Product Models



Code	Model	Material	Color	Light Output	Power	Beam Angle	CRI	Box
57610-139115	VK/04163/AL/W	Aluminium	3000K	800lm	8w	180°	CRI>80	1pc
57610-140115	VK/04163/AL/C	Aluminium	4000K	800lm	8w	180°	CRI>80	1pc

Details

Voltage 85-265V. Watt 8w. CRI>Ra80. Type of LED SMD 2835. Beam angle 180°. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, acrylic. 2 years guarantee.



IP44. 8w.



VK/04164

Product Models


Code	Model	Material	Color	Light Output	Power	Beam Angle	CRI	Box
57610-141115	VK/04164/AL/W	Aluminium	3000K	700lm	7w	180°	CRI>80	10pcs
57610-142115	VK/04164/AL/C	Aluminium	4000K	700lm	7w	180°	CRI>80	10pcs

Details

Voltage 85-265V. Watt 7w. CRI>Ra80. Type of LED SMD 2835. Beam angle 180°. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, acrylic. 2 years guarantee.



IP44. 7w.





**VK/04165**

**Product Models**


Code	Model								Box
57610-143115	VK/04165/AL/W	■ Aluminium	3000K	1.400lm	14w	180°	CRI>80		1pc
57610-144115	VK/04165/AL/C	■ Aluminium	4000K	1.400lm	14w	180°	CRI>80		1pc

**Details**

Voltage 85-265V. Watt 14w. CRI>Ra80. Type of LED SMD 2835. Beam angle 180°. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, acrylic. 2 years guarantee.



**IP44. 14w.**



3.2  
cm



5.7  
cm



**VK/04162**

**Product Models**


Code	Model								Box
57610-136115	VK/04162/AL/W	■ Aluminium	3000K	1.400lm	14w	180°	CRI>80		1pc
57610-137115	VK/04162/AL/C	■ Aluminium	4000K	1.400lm	14w	180°	CRI>80		1pc

**Details**

Voltage 85-265V. Watt 14w. CRI>Ra80. Type of LED SMD 2835. Beam angle 180°. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Aluminium, acrylic. 2 years guarantee.



**IP44. 14w.**



3.7  
cm



5.6  
cm





**Nog-mos**

*portable collection*



## *outdoor lights* 12

φωτισμός εξωτερικού χώρου

VK/02154



Product Models

Code	Model	Box
75169-396694	VK/02154/W/W □ White shining. 3000K. 192lm. 2.2w. CRI>84	1pc
75169-398694	VK/02154/B/W ■ Black shining. 3000K. 192lm. 2.2w. CRI>84	1pc

Details

Portable led light. Voltage 2x2200mAh lithium battery. Watt 2.2w. Location **Outdoor table/pendant**. CRI>84. Charge 5-7 hours. Work time 9 hours. Lumen 192lm. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast aluminium & clear PC. With Touch switch. 2 years guarantee.

  IP54. 2.2w.


Included



Power adapter



USB micro

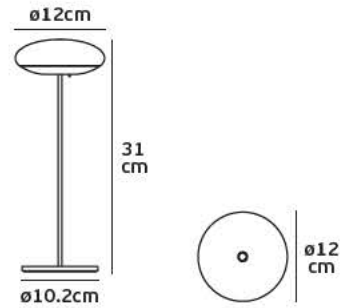

VK/02154/PEN




Product Models

Code	Model	Box
75169-397694	VK/02154/W/PEN □ White shining suspension.	1pc
75169-399694	VK/02154/B/PEN ■ Black shining suspension.	1pc

Details

Material Die-cast Aluminum Powder coated with pretreatment for outdoor use. with 2m wire rope. Use With VK/02154/W to be Pendant Light.

 IP54.

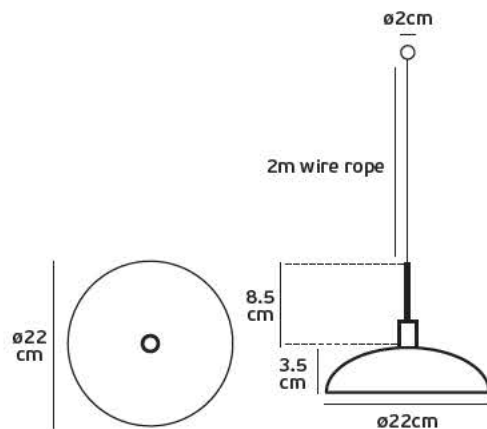



VK/03210




Product Models

Code	Model	Box
61171-244694	VK/03210/W/W □ White. 3000K. 204lm. 2.2w. 33°. CRI>85	1pc
61171-243694	VK/03210/B/W ■ Black. 3000K. 204lm. 2.2w. 33°. CRI>85	1pc


Details

Portable led light. Voltage 2x2200mAh lithium battery. Charge 6-8 hours. Work time 12 hours. Location Outdoor table/floor. CRI>85. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.

   IP54. 2.2w.

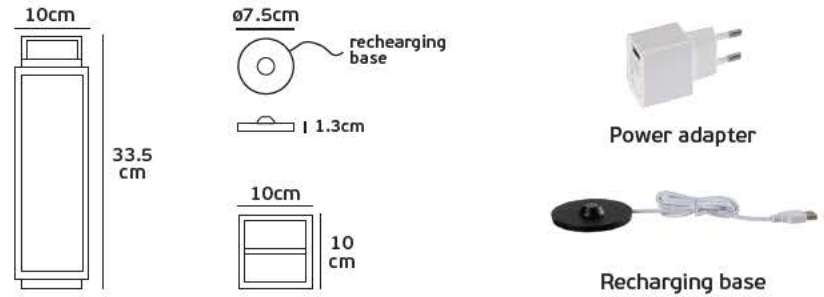

VK/03211

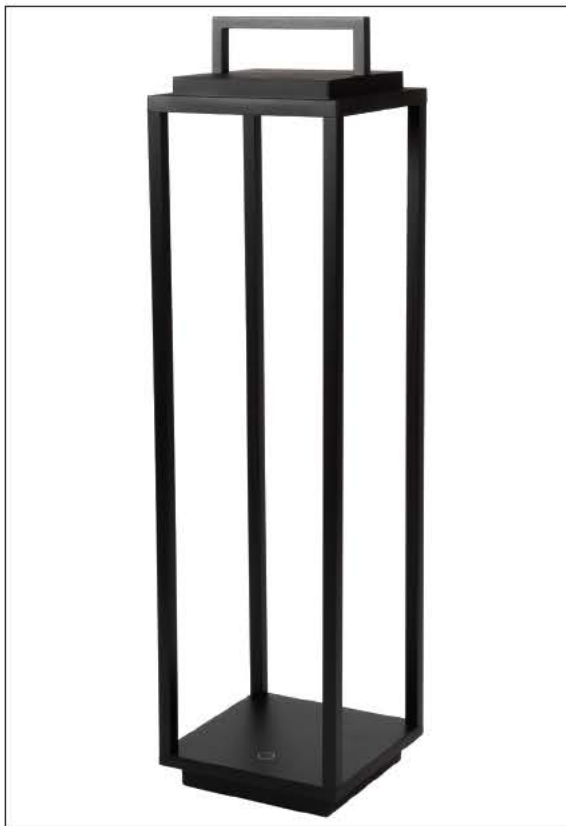


Product Models

Code	Model	Box
61171-246694	VK/03211/W/W □ White. 3000K. 180lm. 2.2w. 42°. CRI>85	1pc
61171-245694	VK/03211/B/W ■ Black. 3000K. 180lm. 2.2w. 42°. CRI>85	1pc

Details

Portable led light. Voltage 2x2200mAh lithium battery. Charge 6-8 hours. Work time 12 hours. Location Outdoor floor. CRI>85. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.

   IP54. 2.2w.

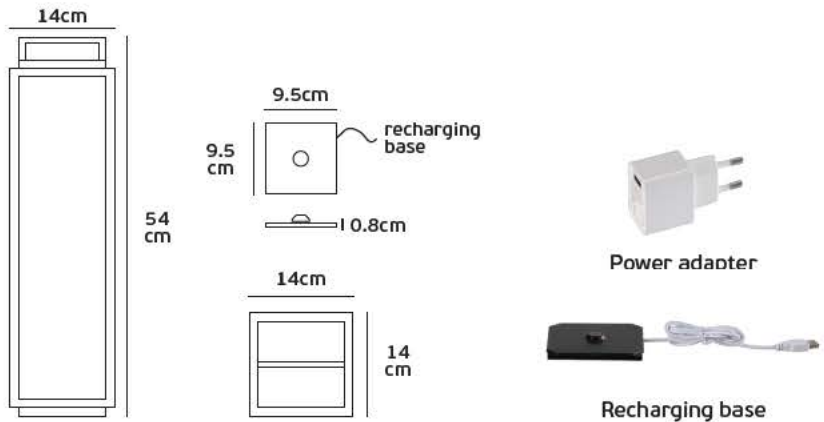



VK/03214

Product Models


Code	Model	Box
61171-251694	VK/03214/W/W □ White. 3000K. 196lm. 2.2w. 47°. CRI>85	1pc
61171-252694	VK/03214/B/W ■ Black. 3000K. 196lm. 2.2w. 47°. CRI>85	1pc
61171-253694	VK/03214/RB/W ■ Rusty brown. 3000K. 196lm. 2.2w. 47°. CRI>85	1pc

Details

Portable led light. Voltage 2x2200mAh lithium battery. Charge 5-7 hours. Work time 12 hours. Location Outdoor table. CRI>85. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.




**IP54. 2.2w.**



Power adapter



usb type-C







VK/03141

Product Models

Code	Model	Box
61171-237694	VK/03141/W/W □ White. 3000K. 188lm. 2.2w. 45°. CRI>85	6pcs
61171-238694	VK/03141/B/W ■ Black. 3000K. 188lm. 2.2w. 45°. CRI>85	6pcs
61171-239694	VK/03141/RB/W ■ Rusty brown. 3000K. 188lm. 2.2w. 45°. CRI>85	6pcs

Details

Portable led light. Voltage 2x2200mAh lithium battery. Charge 5-7 hours. Work time 9 hours. Location Outdoor table. CRI>85. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.


⌚ A+ ⚡ IP54. 2.2w.



USB micro



Power adapter

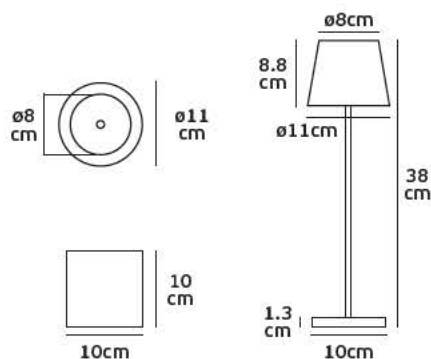

VK/03209

## Product Models



Code	Model	Box
61171-240694	VK/03209/W/W □ White. 3000K. 530lm. 10w. 41°. CRI>83	1pc
61171-241694	VK/03209/B/W ■ Black. 3000K. 530lm. 10w. 41°. CRI>83	1pc
61171-242694	VK/03209/RB/W ■ Rusty brown. 3000K. 530lm. 10w. 41°. CRI>83	1pc

## Details

Portable led light. Voltage 6x2200mAh lithium battery. Charge 18-20 hours.  
Work time 15 hours. Location Outdoor floor. CRI>83. IP Rating IP54. With Touch switch.  
Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum.  
2 years guarantee.



IP54. 10w.

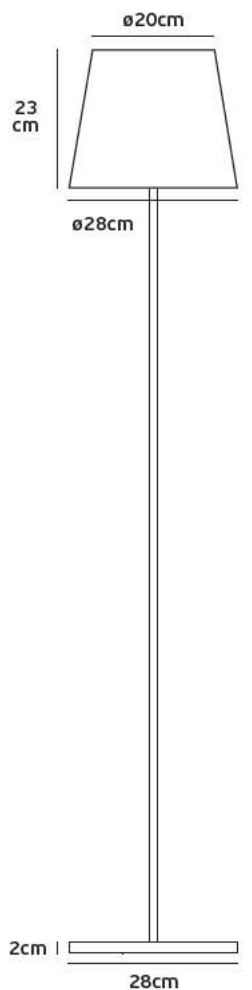150  
cm

VK/03212

Product Models


Code	Model	Box
61171-248694	VK/03212/W/W □ White. 3000K. 393lm. 4.5w. 43°. CRI>84	1pc
61171-247694	VK/03212/B/W ■ Black. 3000K. 393lm. 4.5w. 43°. CRI>84	1pc

Details



Portable led light. Voltage 3x2200mAh lithium battery. Charge 9 hours. Work time 9 hours. Location Outdoor Table. CRI>84. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.




**IP54. 4.5w.**

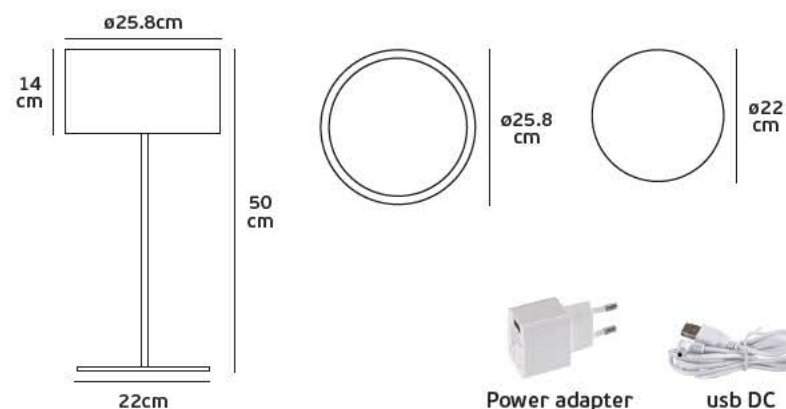

VK/03213

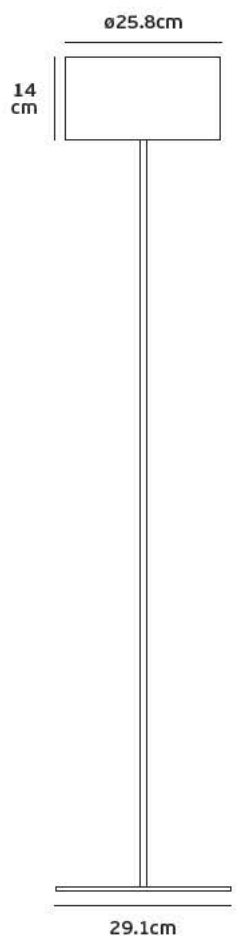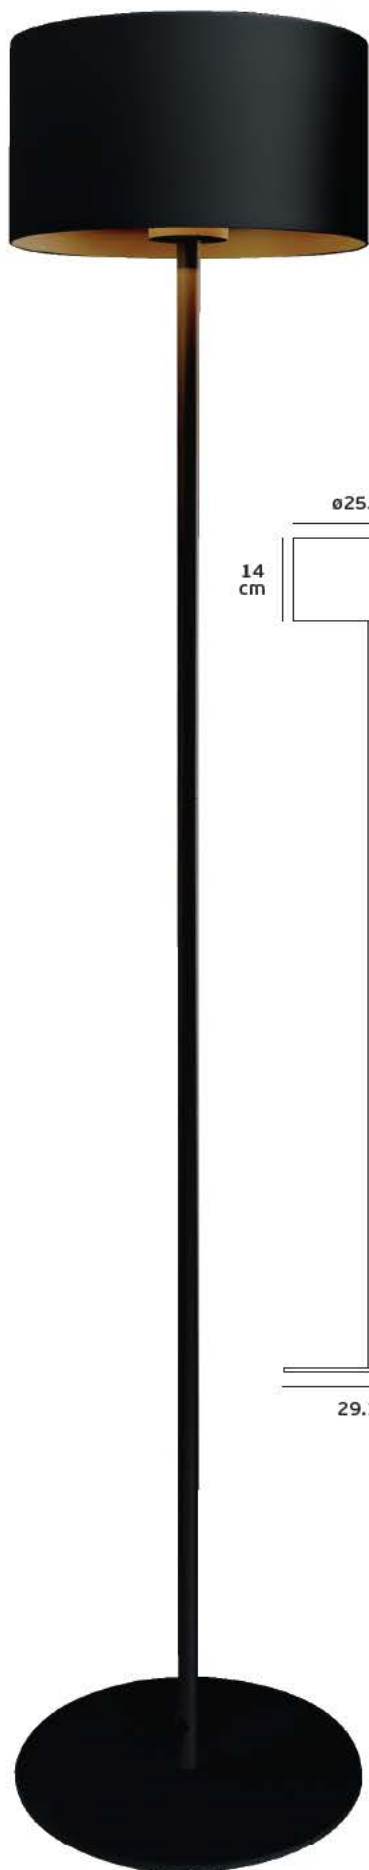

## Product Models



Code	Model	Box
61171-250694	VK/03213/W/W □ White. 3000K. 406lm. 4.5w. 62°. CRI>84	1pc
61171-249694	VK/03213/B/W ■ Black. 3000K. 406lm. 4.5w. 62°. CRI>84	1pc

## Details

Portable led light. Voltage 3x2200mAh lithium battery. Charge 9 hours. Work time 9 hours. Location Outdoor Floor. CRI>84. IP Rating IP54. With Touch switch. Dimmable. Working temperature -20 ~ 50°C. Material Die-cast Aluminum. 2 years guarantee.



IP54. 4.5w.



 $\varnothing 25.8\text{cm}$  $\varnothing 29.1\text{cm}$ 

usb DC




Power adapter





*outdoor wall lights*

VK/02109

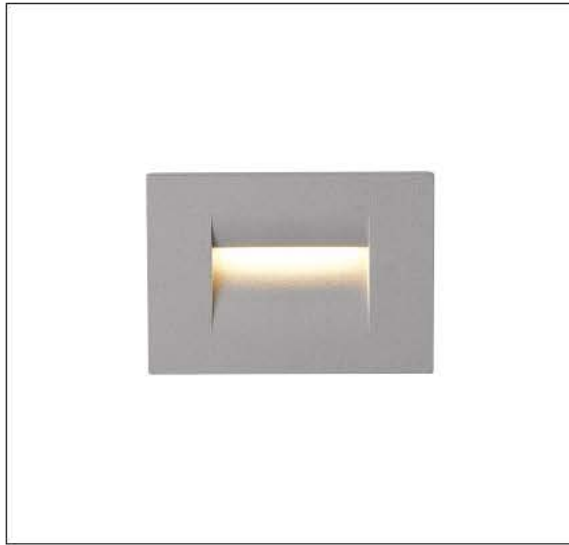

Product Models



Code	Model	Box
75169-339694	VK/02109/G/W ■ Grey. 3000K. 75lm. 3.6w. PHILIPS led. 33°. CRI>80	24pcs
75169-338694	VK/02109/W/W □ White. 3000K. 75lm. 3.6w. PHILIPS led. 33°. CRI>80	24pcs

Details

AC Driver 100-240V (Included). Watt 3.6w. Beam Angle 33°. CRI>80.  
Type of Led SMD 3014/PHILIPS. Lifetime 30.000hrs. No Dimmable.  
Working temperature <45°C. Material Aluminium. 2 years guarantee.



IP65. 3.6w.



VK/02110



Product Models



Code	Model	Box
75169-340694	VK/02110/G/W ■ Grey. 3000K. 99lm. 3.6w. PHILIPS led. 48°. CRI>80	24pcs
75169-341694	VK/02110/W/W □ White. 3000K. 99lm. 3.6w. PHILIPS led. 48°. CRI>80	24pcs

Details

AC Driver 100-240V (Included). Watt 3.6w. Beam Angle 48°. CRI>80.  
Type of Led SMD 3014/PHILIPS. Lifetime 30.000hrs. No Dimmable.  
Working temperature <45°C. Material Aluminium. 2 years guarantee.



IP65. 3.6w.



VK/02108

## Product Models

Code	Model	Box
75169-336694	VK/02108/AN/W ■ Anthracite. 3000K. 190lm. 8.5w. <b>PHILIPS</b> led. 42°. CRI>82	12pcs
75169-337694	VK/02108/W/W □ White. 3000K. 190lm. 8.5w. <b>PHILIPS</b> led. 42°. CRI>82	12pcs





## Details

AC Driver 100-240V (Included). Watt 8.5w. Beam Angle 42°. CRI>82. Type of Led SMD 3014/**PHILIPS**. Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 8.5w.

Cut hole

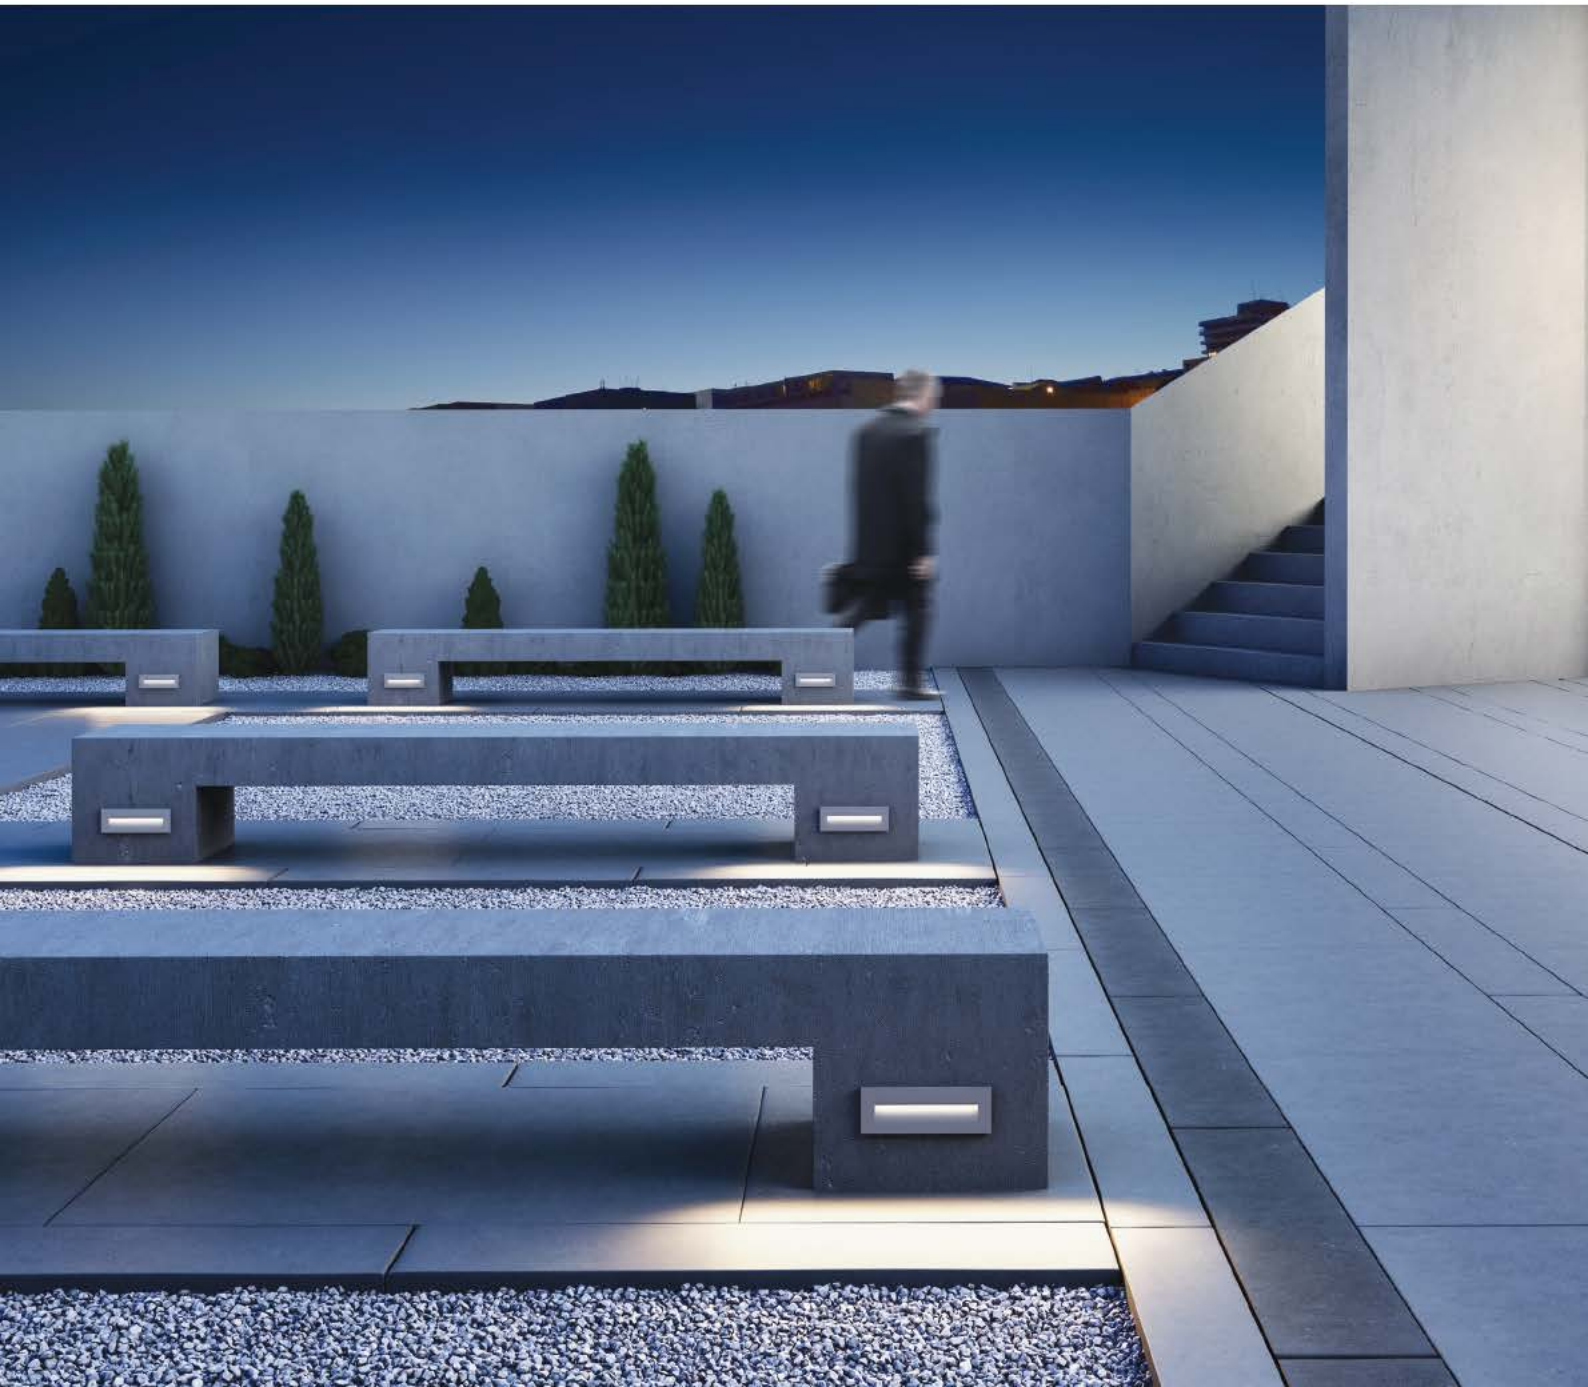8.7  
cm



VK/02106



Product Models


Code	Model	Box
75169-334694	VK/02106/G/W ■ Grey, 3000K, 169lm, 2w, 29°. CRI>80	24pcs

Details

AC Driver 200-240V (Included). Watt 2w. Beam Angle 29°. CRI>80. Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 2w.

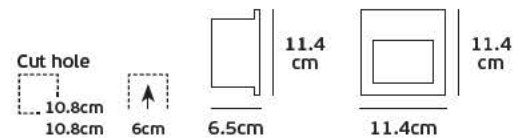

VK/04138



Product Models


Code	Model	Box
75169-272997	VK/04138/AN/W ■ Anthracite, 3000K, 105lm, 1.5w, CRI>80	20pcs
75169-273997	VK/04138/G/W ■ Grey, 3000K, 105lm, 1.5w, CRI>80	20pcs
75169-276997	VK/04138/W/W □ White, 3000K, 105lm, 1.5w, CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 1.5w. CRI>80. Type of Led SMD 2835. Lifetime 20.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. glass. 2 years guarantee.



IP54. 1.5w.

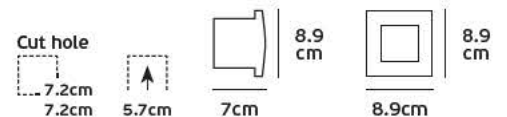

VK/04139



Product Models


Code	Model	Box
75169-274997	VK/04139/AN/W ■ Anthracite, 3000K, 210lm, 3w, CRI>80	20pcs
75169-275997	VK/04139/G/W ■ Grey, 3000K, 210lm, 3w, CRI>80	20pcs
75169-277997	VK/04139/W/W □ White, 3000K, 210lm, 3w, CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 3w. CRI>80. Type of Led SMD 2835. Lifetime 20.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. glass. 2 years guarantee.



IP54. 3w.



VK/02107

Product Models



Code	Model	Box
75169-335694	VK/02107/G/W ■ Grey. 3000K. 46lm. 3.6w. PHILIPS led. 56°. CRI>80	18pcs

Details

AC Driver 100-240V (Included). Watt 3.6w. Beam Angle 56°. CRI>80. Type of Led SMD 3014/  
**PHILIPS**. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable.  
 Material Aluminium. 2 years guarantee.




**IP65. 3.6w.**

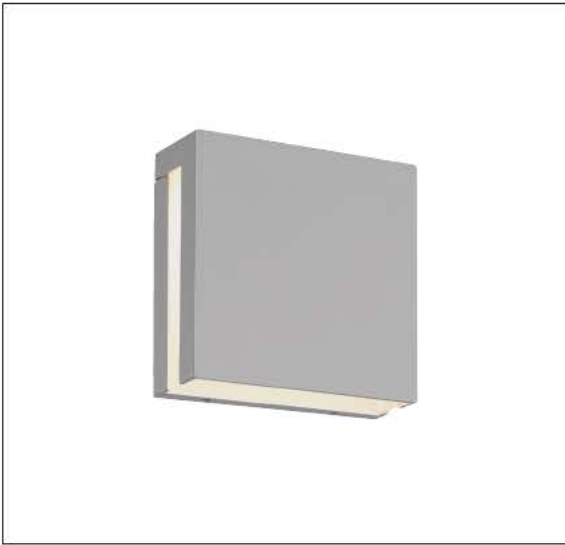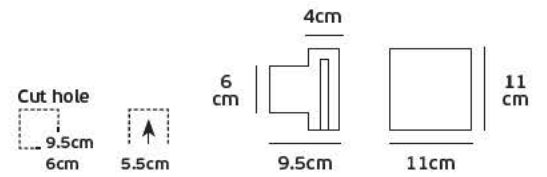

VK/02055



Product Models


Code	Model	Box
75169-319692	VK/02055/G/W ■ Grey. 3000K. 35lm. 3w. 51°. CRI>80	25pcs
75169-320692	VK/02055/W/W □ White. 3000K. 35lm. 3w. 51°. CRI>80	25pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 51°. CRI>80. Type of Led SMD 3535. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 3w.

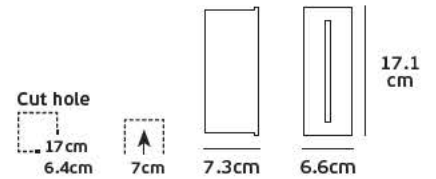

VK/02111



Product Models


Code	Model	Box
75169-342694	VK/02111/AL/W ■ Stainless. 3000K. 54lm. 3w. 62°. CRI>80	24pcs

Details

AC Driver 200-240V (Included). Watt 3w. Beam Angle 62°. CRI>80. Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. Steel. 2 years guarantee.



IP65. 3w.

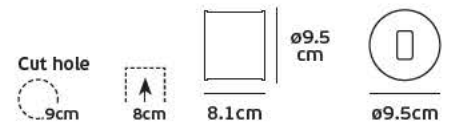

VK/02147



Product Models


Code	Model	Box
75169-322997	VK/02147/W/W □ White. 3000K. 120lm. 2w. 120°. CRI>80	1pc
75169-323997	VK/02147/B/W ■ Black. 3000K. 120lm. 2w. 120°. CRI>80	1pc

Details

AC Driver 220-240V (Included). Watt 2w. Beam Angle 120°. CRI>80. Type of Led COB. Lifetime 20.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 2w.

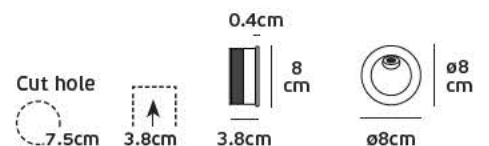

VK/02007



Product Models

Code	Model	Box
75169-163997	VK/02007/MC/W ■ Nickel mat. 3000K. 60lm. 1.2w. 120°. CRI>80	40pcs
75169-164997	VK/02007/MC/D ■ Nickel mat. 6000K. 60lm. 1.2w. 120°. CRI>80	40pcs
75169-165997	VK/02007/MC/BL ■ Nickel mat. BLUE. -lm. 1.2w. 120°. CRI>80	40pcs

Details

AC Driver 100-240V (Included). Watt 1.2w. Beam Angle 120°. CRI>80. Type of Led DIP 12pcs. Lifetime 20.000hrs. Working temperature -20°C→35°C. No Dimmable. Material Steel. glass. plastic. 2 years guarantee.



IP54. 1.2w.



VK/02013



Product Models


Code	Model	Box
75169-177997	VK/02013/MC/W ■ Light Grey. 3000K. 90lm. 1.6w. 120°. CRI>80	50pcs
75169-178997	VK/02013/MC/D ■ Light Grey. 6000K. 90lm. 1.6w. 120°. CRI>80	50pcs
75169-179997	VK/02013/MC/BL ■ Light Grey. BLUE. -lm. 1.6w. 120°. CRI>80	50pcs

Details

AC Driver 100-240V (Included). Watt 1.6w. Beam Angle 120°. CRI>80. Type of Led DIP 16pcs. Lifetime 20.000hrs. Working temperature -20°C→35°C. No Dimmable. Material Steel. glass. plastic. 2 years guarantee.



IP54. 1.6w.



VK/02057



Product Models


Code	Model	Box
75169-322692	VK/02057/W/W □ White. 3000K. 130lm. 6w. 118°. CRI>80	30pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 118°. CRI>80.  
Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C.  
Material Aluminium. 2 years guarantee.



IP54. 6w.



VK/02056



Product Models


Code	Model	Box
75169-321692	VK/02056/W/W □ White. 3000K. 130lm. 6w. 118°. CRI>80	30pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 118°. CRI>80.  
Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C.  
Material Aluminium. 2 years guarantee.



IP54. 6w.

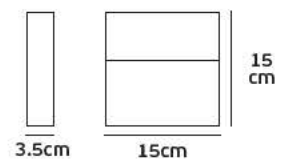

VK/02148



## Product Models


Code	Model	Box
75169-328997	VK/02148/W/W □ White. 3000K. 22lm. 3w. CRI>80	1pc
75169-329997	VK/02148/AN/W ■ Anthracite. 3000K. 22lm. 3w. CRI>80	1pc

## Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD. Working temperature -20°C → 40°C. Lifetime 50.000hrs. No Dimmable. Material Die casting aluminium + PC.



IP54. 3w.

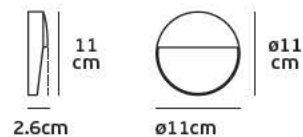

VK/02149



## Product Models


Code	Model	Box
75169-330997	VK/02149/W/W □ White. 3000K. 22lm. 3w. CRI>80	1pc
75169-331997	VK/02149/AN/W ■ Anthracite. 3000K. 22lm. 3w. CRI>80	1pc

## Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD. Working temperature -20°C → 40°C. Lifetime 50.000hrs. No Dimmable. Material Die casting aluminium + PC. 2 years guarantee.



IP54. 3w.

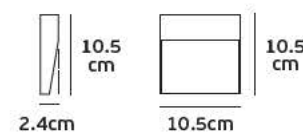

VK/02058



Product Models


Code	Model	Box
75169-323692	VK/02058/W/W □ White. 3000K. 245lm. 9w. 115°. CRI>80	15pcs

Details

AC Driver 220-240V (Included). Watt 9w. Beam Angle 115°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 9w.

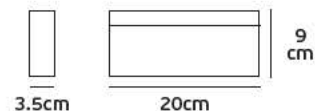

VK/02094



Product Models


Code	Model	Box
75169-318694	VK/02094/G/W ■ Grey. 3000K. 261lm. 6w. 30°. CRI>82	12pcs
75169-319694	VK/02094/W/W □ White. 3000K. 261lm. 6w. 30°. CRI>82	12pcs

Details

AC Driver 100-240V (Included). Watt 6w. Beam Angle 30°. CRI>82. Type of Led CREE LED XBD. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 6w.







VK/02145



Product Models


Code	Model	Box
75169-313997	VK/02145/W/W □ White. 3000K. 100lm. 3w. CRI>80	24pcs
75169-314997	VK/02145/G/W ■ Grey. 3000K. 100lm. 3w. CRI>80	24pcs
75169-315997	VK/02145/AN/W ■ Anthracite. 3000K. 100lm. 3w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD 2835.  
Working temperature -20°C → 45°C. Lifetime 20.000hrs. No Dimmable.  
Material ABS+PC. 2 years guarantee.



IP65. 3w.

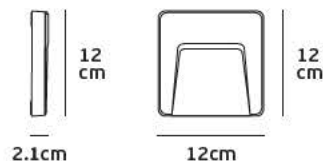

VK/02144



Product Models


Code	Model	Box
75169-310997	VK/02144/W/W □ White. 3000K. 100lm. 3w. CRI>80	24pcs
75169-311997	VK/02144/G/W ■ Grey. 3000K. 100lm. 3w. CRI>80	24pcs
75169-312997	VK/02144/AN/W ■ Anthracite. 3000K. 100lm. 3w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD 2835.  
Working temperature -20°C → 45°C. Lifetime 20.000hrs. No Dimmable.  
Material ABS+PC. 2 years guarantee.



IP65. 3w.

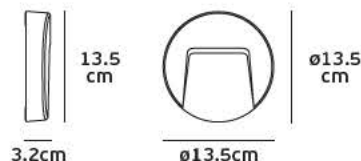

VK/02146

## Product Models




Code	Model	Box
75169-316997	VK/02146/W/W □ White. 3000K. 100lm. 3w. CRI>80	24pcs
75169-317997	VK/02146/G/W ■ Grey. 3000K. 100lm. 3w. CRI>80	24pcs
75169-318997	VK/02146/AN/W ■ Anthracite. 3000K. 100lm. 3w. CRI>80	24pcs

## Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD 2835.  
Working temperature -20°C → 45°C. Lifetime 20.000hrs. No Dimmable.  
Material ABS+PC. 2 years guarantee.



IP65. 3w.

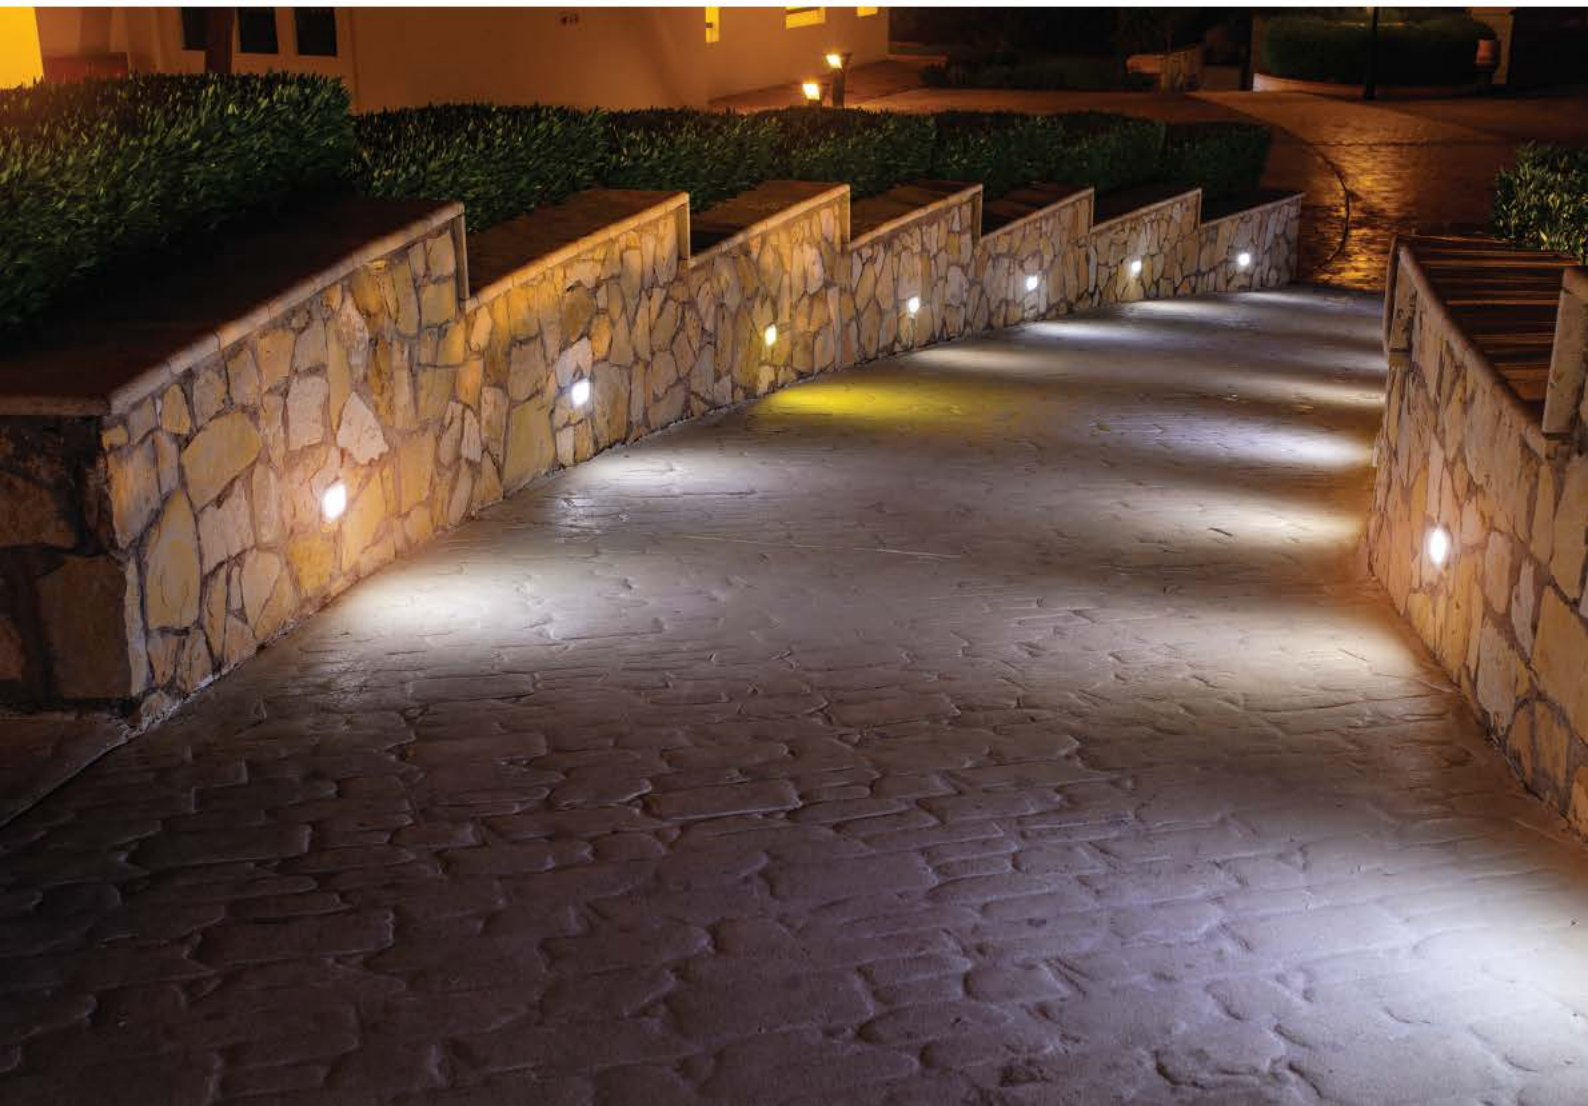

VK/02027

Product Models



Code	Model	Box
75169-268997	VK/02027/G/W ■ Grey. 3000K. 350lm. 6w. CRI>80	24pcs
75169-269997	VK/02027/G/D ■ Grey. 6000K. 350lm. 6w. CRI>80	24pcs
75169-270997	VK/02027/AN/W ■ Anthracite. 3000K. 350lm. 6w. CRI>80	24pcs
75169-271997	VK/02027/AN/D ■ Anthracite. 6000K. 350lm. 6w. CRI>80	24pcs
75169-305997	VK/02027/W/W □ White. 3000K. 350lm. 6w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 6w. CRI>80. Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS. 1 year guarantee.



IP65. 6w.

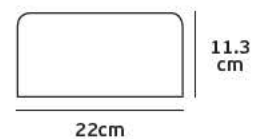



VK/02017



Product Models


Code	Model	Box
75169-228997	VK/02017/G/W ■ Grey. 3000K. 100lm. 1.5w. CRI>80	24pcs
75169-229997	VK/02017/G/D ■ Grey. 6000K. 100lm. 1.5w. CRI>80	24pcs
75169-230997	VK/02017/AN/W ■ Anthracite. 3000K. 100lm. 1.5w. CRI>80	24pcs
75169-231997	VK/02017/AN/D ■ Anthracite. 6000K. 100lm. 1.5w. CRI>80	24pcs
75169-303997	VK/02017/W/W □ White. 3000K. 100lm. 1.5w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 1.5w. CRI>80. Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 1.5w.



VK/02018



Product Models


Code	Model	Box
75169-232997	VK/02018/G/W ■ Grey. 3000K. 200lm. 3w. CRI>80	24pcs
75169-233997	VK/02018/G/D ■ Grey. 6000K. 200lm. 3w. CRI>80	24pcs
75169-234997	VK/02018/AN/W ■ Anthracite. 3000K. 200lm. 3w. CRI>80	24pcs
75169-235997	VK/02018/AN/D ■ Anthracite. 6000K. 200lm. 3w. CRI>80	24pcs
75169-324997	VK/02018/W/W □ White. 3000K. 200lm. 3w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 3w. CRI>80. Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 3w.



VK/02019

## Product Models



Code	Model	Box
75169-236997	VK/02019/G/W ■ Grey. 3000K. 250lm. 4w. CRI>80	24pcs
75169-237997	VK/02019/G/D ■ Grey. 6000K. 250lm. 4w. CRI>80	24pcs
75169-238997	VK/02019/AN/W ■ Anthracite. 3000K. 250lm. 4w. CRI>80	24pcs
75169-239997	VK/02019/AN/D ■ Anthracite. 6000K. 250lm. 4w. CRI>80	24pcs
75169-304997	VK/02019/W/W □ White. 3000K. 250lm. 4w. CRI>80	24pcs

## Details

Voltage 220-240V. Watt 4w. CRI>80. Type of Led SMD 2835. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 4w.

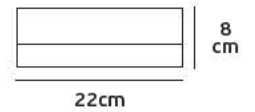

VK/02022



Product Models


Code	Model	Box
75169-248997	VK/02022/G/W ■ Grey. 3000K. 60lm. 1.6w. CRI>80	24pcs
75169-249997	VK/02022/G/D ■ Grey. 6000K. 60lm. 1.6w. CRI>80	24pcs
75169-250997	VK/02022/AN/W ■ Anthracite. 3000K. 60lm. 1.6w. CRI>80	24pcs
75169-251997	VK/02022/AN/D ■ Anthracite. 6000K. 60lm. 1.6w. CRI>80	24pcs
75169-307997	VK/02022/W/W □ White. 3000K. 60lm. 1.6w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 1.6w. CRI>80. Type of Led SMD 3014. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 1.6w.

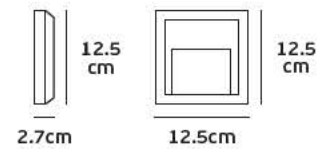

VK/02023



Product Models


Code	Model	Box
75169-252997	VK/02023/G/W ■ Grey. 3000K. 60lm. 1.5w. CRI>80	24pcs
75169-253997	VK/02023/G/D ■ Grey. 6000K. 60lm. 1.5w. CRI>80	24pcs
75169-254997	VK/02023/AN/W ■ Anthracite. 3000K. 60lm. 1.5w. CRI>80	24pcs
75169-255997	VK/02023/AN/D ■ Anthracite. 6000K. 60lm. 1.5w. CRI>80	24pcs
75169-306997	VK/02023/W/W □ White. 3000K. 60lm. 1.5w. CRI>80	24pcs

Details

Voltage 220-240V. Watt 1.5w. CRI>80. Type of Led SMD 3014. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 1.5w.

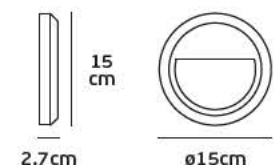

## VK/02020



## Product Models



Code	Model	Box
75169-240997	VK/02020/G/W ■ Grey. 3000K. 100lm. 3.5w. CRI>80	24pcs
75169-241997	VK/02020/G/D ■ Grey. 6000K. 100lm. 3.5w. CRI>80	24pcs
75169-242997	VK/02020/AN/W ■ Anthracite. 3000K. 100lm. 3.5w. CRI>80	24pcs
75169-243997	VK/02020/AN/D ■ Anthracite. 6000K. 100lm. 3.5w. CRI>80	24pcs
75169-308997	VK/02020/W/W □ White. 3000K. 100lm. 3.5w. CRI>80	24pcs

## Details

Voltage 220-240V. Watt 3.5w. CRI>80. Type of Led SMD 3014. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 3.5w.

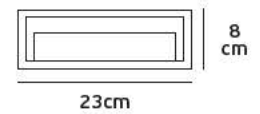

## VK/02021



## Product Models



Code	Model	Box
75169-244997	VK/02021/G/W ■ Grey. 3000K. 50lm. 1w. CRI>80	24pcs
75169-245997	VK/02021/G/D ■ Grey. 6000K. 50lm. 1w. CRI>80	24pcs
75169-246997	VK/02021/AN/W ■ Anthracite. 3000K. 50lm. 1w. CRI>80	24pcs
75169-247997	VK/02021/AN/D ■ Anthracite. 6000K. 50lm. 1w. CRI>80	24pcs
75169-309997	VK/02021/W/W □ White. 3000K. 50lm. 1w. CRI>80	24pcs

## Details

Voltage 220-240V. Watt 1w. CRI>80. Type of Led SMD 3014. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→45°C. Material ABS+PC. 1 year guarantee.



IP65. 1w.





VK/02026




Product Models

Code	Model	Box
75169-264997	VK/02026/G/W ■ Grey. 3000K. 190lm. 4w. 120°. CRI>80	24pcs
75169-265997	VK/02026/G/D ■ Grey. 6000K. 190lm. 4w. 120°. CRI>80	24pcs
75169-266997	VK/02026/AN/W ■ Anthracite. 3000K. 190lm. 4w. 120°. CRI>80	24pcs
75169-267997	VK/02026/AN/D ■ Anthracite. 6000K. 190lm. 4w. 120°. CRI>80	24pcs
75169-325997	VK/02026/W/W □ White. 3000K. 190lm. 4w. 120°. CRI>80	24pcs

Details

Voltage 220-240V. Watt 4w. CRI>80. Type of Led SMD 3014. Beam Angle 120°. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→30°C. Material ABS+PC. 1 year guarantee.

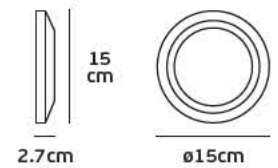

VK/02025




Product Models

Code	Model	Box
75169-260997	VK/02025/G/W ■ Grey. 3000K. 180lm. 4.5w. 120°. CRI>80	24pcs
75169-261997	VK/02025/G/D ■ Grey. 6000K. 180lm. 4.5w. 120°. CRI>80	24pcs
75169-262997	VK/02025/AN/W ■ Anthracite. 3000K. 180lm. 4.5w. 120°. CRI>80	24pcs
75169-263997	VK/02025/AN/D ■ Anthracite. 6000K. 180lm. 4.5w. 120°. CRI>80	24pcs
75169-326997	VK/02025/W/W □ White. 3000K. 180lm. 4.5w. 120°. CRI>80	24pcs

Details

Voltage 220-240V. Watt 4.5w. CRI>80. Type of Led SMD 3014. Beam Angle 120°. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→30°C. Material ABS+PC. 1 year guarantee.

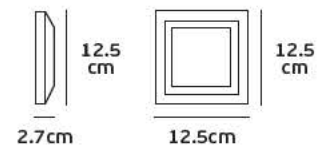

VK/02024

## Product Models

Code	Model	Box
75169-256997	VK/02024/G/W ■ Grey. 3000K. 180lm. 4.4w. 120°. CRI>80	24pcs
75169-257997	VK/02024/G/D ■ Grey. 6000K. 180lm. 4.4w. 120°. CRI>80	24pcs
75169-258997	VK/02024/AN/W ■ Anthracite. 3000K. 180lm. 4.4w. 120°. CRI>80	24pcs
75169-259997	VK/02024/AN/D ■ Anthracite. 6000K. 180lm. 4.4w. 120°. CRI>80	24pcs
75169-327997	VK/02024/W/W □ White. 3000K. 180lm. 4.4w. 120°. CRI>80	24pcs





## Details

Voltage 220-240V. Watt 4.4w. CRI>80. Type of Led SMD 3014. Beam Angle 120°. Lifetime 50.000hrs. Clicks 50.000. No Dimmable. Working temperature -20°C→30°C. Material ABS+PC. 1 year guarantee.



IP65. 4.4w.

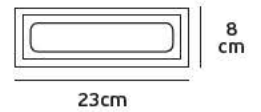

VK/02091



Product Models

Code	Model	Box
75169-312694	VK/02091/G/W ■ Grey. 3000K. 320lm. 8w. 50°. CRI>83	18pcs
75169-313694	VK/02091/W/W □ White. 3000K. 320lm. 8w. 50°. CRI>83	18pcs
75169-350694	VK/02091/AN/W ■ Anthracite. 3000K. 320lm. 8w. 50°. CRI>83	18pcs

Details


AC Driver 100-240V (Included). Watt 8w. Beam Angle 50°. CRI>83. Type of Led CREE MHB. Working temperature -20°C → 40°C. Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 8w.



9cm



4.3cm

12.5 cm

VK/02051



Product Models


Code	Model	Box
75169-314692	VK/02051/AN/W ■ Anthracite. 3000K. 129lm. 6w. 2x98°. CRI>80	20pcs
75169-315692	VK/02051/W/W □ White. 3000K. 129lm. 6w. 2x98°. CRI>80	20pcs

Details


AC Driver 220-240V (Included). Watt 6w. Beam Angle 2x98°. CRI>80. Type of Led SMD 2525. Working temperature -20°C → 40°C. Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.



9.3cm



10cm

10 cm

VK/02088



Product Models


Code	Model	Box
75169-307694	VK/02088/AN/W ■ Anthracite. 3000K. 158lm. 5w. 96°. CRI>85	24pcs
75169-306694	VK/02088/W/W □ White. 3000K. 158lm. 5w. 96°. CRI>85	24pcs

Details


AC Driver 220-240V (Included). Watt 5w. Beam Angle 96°. CRI>85. Type of Led SAMSUNG LED LH934A. Working temperature -20°C → 40°C. Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 5w.



5.8cm



8.2cm

8.2 cm



VK/02092



Product Models


Code	Model	Box
75169-314694	VK/02092/AN/W ■ Anthracite. 3000K. 85lm. 3w. 101°. CRI>83	24pcs
75169-315694	VK/02092/W/W □ White. 3000K. 85lm. 3w. 101°. CRI>83	24pcs

Details

AC Driver 100-240V (Included). Watt 3w. Beam Angle 101°. CRI>83.  
Type of Led CREE XBD. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 3w.



8.8  
cm

VK/02087



Product Models


Code	Model	Box
75169-305694	VK/02087/AN/W ■ Anthracite. 3000K. 385lm. 12w. 102°. CRI>80	12pcs
75169-304694	VK/02087/W/W □ White. 3000K. 385lm. 12w. 102°. CRI>80	12pcs

Details

AC Driver 100-240V (Included). Watt 12w. Beam Angle 102°. CRI>80.  
Type of Led CREE XBD. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 12w.



6.5  
cm



VK/02116



Product Models


Code	Model	Box
75169-347694	VK/02116/G/W ■ Grey. 3000K. 404lm. 8w. 22/90°. CRI>78	18pcs

Details

AC Driver 100-240V (Included). Watt 8w. Beam Angle 22/90°. CRI>78.  
Type of Led CREE MHB. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 8w.



VK/02093



Product Models


Code	Model	Box
75169-316694	VK/02093/G/W ■ Grey. 3000K. 883lm. 10w. 0-130°. CRI>82	8pcs
75169-317694	VK/02093/W/W □ White. 3000K. 883lm. 10w. 0-130°. CRI>82	8pcs
75169-371694	VK/02093/AN/W ■ Anthracite. 3000K. 883lm. 10w. 0-130°. CRI>82	8pcs

Details

AC Driver 100-240V (Included). Watt 10w. Beam Angle 0-130°. CRI>82. Type of Led CREE 1304. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 10w.



VK/02047



Product Models


Code	Model	Box
75169-306692	VK/02047/AN/W ■ Anthracite. 3000K. 280lm. 4w. 2x89°. CRI>80	20pcs
75169-307692	VK/02047/W/W □ White. 3000K. 280lm. 4w. 2x89°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 4w. Beam Angle 2x89°. CRI>80.  
Type of Led SMD 5630. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 4w.

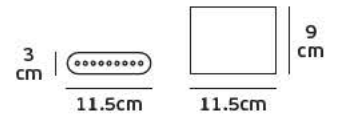

VK/02048



Product Models


Code	Model	Box
75169-308692	VK/02048/AN/W ■ Anthracite. 3000K. 405lm. 6w. 2x89°. CRI>80	20pcs
75169-309692	VK/02048/W/W □ White. 3000K. 405lm. 6w. 2x89°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 2x89°. CRI>80.  
Type of Led SMD 5630. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.

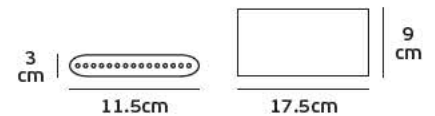

VK/02049



Product Models


Code	Model	Box
75169-310692	VK/02049/AN/W ■ Anthracite. 3000K. 520lm. 10w. 2x112°. CRI>80	20pcs
75169-311692	VK/02049/W/W □ White. 3000K. 520lm. 10w. 2x112°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 10w. Beam Angle 2x112°. CRI>80.  
Type of Led SMD 2835. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 10w.

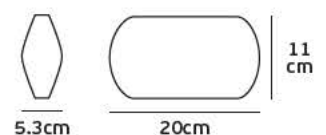

VK/02115

## Product Models


Code	Model	Box
75169-346694	VK/02115/AN/W ■ Anthracite. 3000K. 612lm. 18w. PHILIPS led. 28°. CRI>83	6pcs

## Details

AC Driver 220-240V (Included). Watt 18w. Beam Angle 28°. CRI>83.  
Type of Led PHILIPS SMD 2835. Working temperature -20°C → 40°C.  
Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 18w.

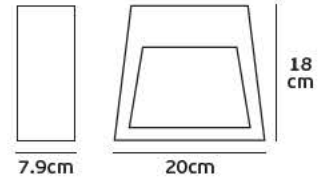



VK/02090

### Product Models


Code	Model	Box
75169-310694	VK/02090/AN/W ■ Anthracite. 3000K. 389lm. 7w. 108°. CRI>82	12pcs
75169-311694	VK/02090/W/W □ White. 3000K. 389lm. 7w. 108°. CRI>82	12pcs

### Details

AC Driver 100-240V (Included). Watt 7w. Beam Angle 108°. CRI>82.  
Type of Led CREE COB 1304. Lifetime 30.000hrs. No Dimmable.  
Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 7w.



12.5 cm

6.35 cm

12.5 cm



VK/02089

## Product Models

Code	Model	Box
75169-308694	VK/02089/G/W ■ Grey. 3000K. 160lm. 8w. 15°-78°. CRI>80	12pcs
75169-309694	VK/02089/W/W □ White. 3000K. 160lm. 8w. 15°-78°. CRI>80	12pcs
75169-372694	VK/02089/AN/W ■ Anthracite. 3000K. 160lm. 8w. 15°-78°. CRI>80	12pcs

## Details

AC Driver 100-240V (Included). Watt 8w. Beam Angle 15°-78°.  
CRI>80. Type of Led CREE LED MHB. Lifetime 30.000hrs. No Dimmable.  
Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 8w.

17.3  
cm6.3  
cm10.9  
cm

VK/02095



Product Models


Code	Model	Box
75169-320694	VK/02095/AN/W ■ Anthracite. 3000K. 364lm. 10w. 360°. CRI>80	8pcs
75169-321694	VK/02095/W/W □ White. 3000K. 364lm. 10w. 360°. CRI>80	8pcs

Details

AC Driver 100-240V (Included). Watt 10w. Beam Angle 360°. CRI>80. Type of Led CREE XBD. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 10w.



VK/02054



Product Models




Code	Model	Box
75169-318692	VK/02054/W/W □ White. 3000K. 630lm. 10w. 348°. CRI>80	20pcs

Details

AC Driver 100-240V (Included). Watt 10w. Beam Angle 348°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 10w.



VK/02053



Product Models




Code	Model	Box
75169-317692	VK/02053/W/W □ White. 3000K. 630lm. 10w. 348°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 10w. Beam Angle 348°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 10w.





VK/04179WA



Product Models

Code	Model	Box
75169--	VK/04179WA/B/W ■ Black. 3000K. 780lm. 6w. 2x52°. CRI>80	20pcs
75169-359695	VK/04179WA/W/W □ White. 3000K. 780lm. 6w. 2x52°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 2x52°. CRI>80.  
Type of Led CREE 2pcs. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.



12 cm

VK/02045



Product Models

Code	Model	Box
75169-302692	VK/02045/AN/W ■ Anthracite. 3000K. 110lm. 4w. 2x52°. CRI>80	20pcs
75169-303692	VK/02045/W/W □ White. 3000K. 110lm. 4w. 2x52°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 4w. Beam Angle 2x52°. CRI>80.  
Type of Led SMD HIGH POWER. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 4w.



12.4 cm



VK/02044

## Product Models


Code	Model	Box
75169-300692	VK/02044/AN/W ■ Anthracite. 3000K. 110lm. 4w. 4x52°. CRI>80	20pcs
75169-301692	VK/02044/W/W □ White. 3000K. 110lm. 4w. 4x52°. CRI>80	20pcs

## Details


AC Driver 220-240V (Included). Watt 4w. Beam Angle 4x52°. CRI>80.  
Type of Led SMD HIGH POWER. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.




IP54. 4w.



6cm



Ø12cm

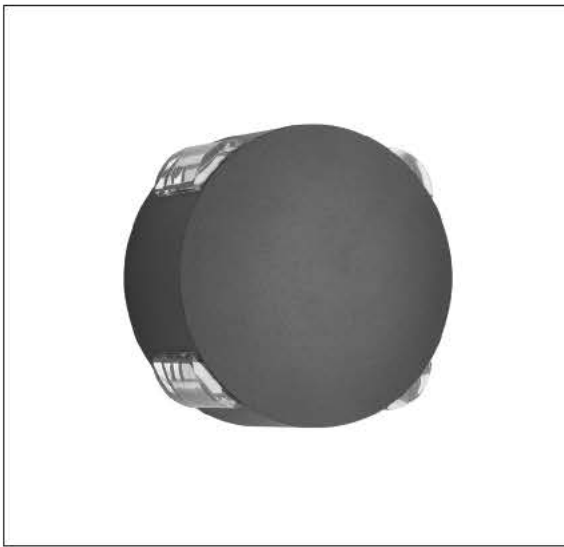

VK/02076



Product Models


Code	Model	Box
75169-347692	VK/02076/B/W ■ Black. 3000K. 677lm. 12w. 4x60°. CRI>80	10pcs

Details

AC Driver 220-240V (Included). Watt 12w. Beam Angle 4x60°. CRI>80.  
Type of Led SMD 2835. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 12w.

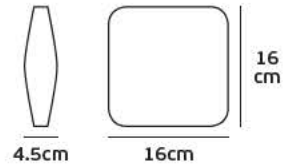

VK/02043



Product Models


Code	Model	Box
75169-298692	VK/02043/AN/W ■ Anthracite. 3000K. 168lm. 4w. 4x29°. CRI>80	10pcs
75169-299692	VK/02043/W/W □ White. 3000K. 168lm. 4w. 4x29°. CRI>80	10pcs

Details

AC Driver 220-240V (Included). Watt 4w. Beam Angle 4x29°. CRI>80.  
Type of Led SMD HIGH POWER. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 4w.

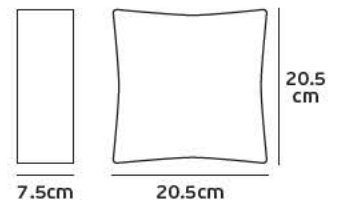

VK/02075




Product Models

Code	Model	Box
75169-346692	VK/02075/G/W ■ Grey. 3000K. 280lm. 12w. 4x68°. CRI>80	10pcs

Details

AC Driver 220-240V (Included). Watt 12w. Beam Angle 4x68°. CRI>80.  
Type of Led SMD HIGH POWER. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 12w.



VK/02050




Product Models

Code	Model	Box
75169-312692	VK/02050/AN/W ■ Anthracite. 3000K. 303lm. 12w. 4x90°. CRI>80	20pcs
75169-313692	VK/02050/W/W □ White. 3000K. 303lm. 12w. 4x90°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 12w. Beam Angle 4x90°. CRI>80.  
Type of Led SMD 2525. Lifetime 30.000hrs. Working temperature -20°C → 40°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 12w.





VK/02046




Product Models


Code	Model	Box
75169-304692	VK/02046/AN/W ■ Anthracite. 3000K. 386lm. 6w. 85°. CRI>80	20pcs
75169-305692	VK/02046/W/W □ White. 3000K. 386lm. 6w. 85°. CRI>80	20pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 85°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.

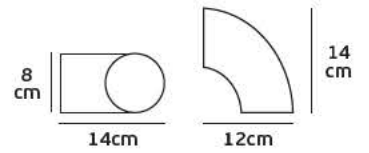

VK/02133




Product Models


Code	Model	Box
75169-364694	VK/02133/AN/W ■ Anthracite. 3000K. 68lm. 3w. 108°. CRI>78	12pcs
75169-363694	VK/02133/W/W □ White. 3000K. 68lm. 3w. 108°. CRI>78	12pcs

Details

AC Driver 220-240V (Included). Watt 3w. Beam Angle 108°. CRI>78. Type of Led CREE. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C → 45°C. Material Aluminium diecast. 2 years guarantee.



IP65. 3w.



VK/02086

## Product Models

Code	Model	Box
75169-374694	VK/02086/W/W □ White. 3000K. 238lm. 9w. 100°. CRI>85	6pcs
75169-303694	VK/02086/AN/W ■ Anthracite. 3000K. 238lm. 9w. 100°. CRI>85	6pcs

## Details


AC Driver 100-240V (Included). Watt 9w. Beam Angle 100°. CRI>85. Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 9w.

8.8  
cm

36cm



36cm

9.3  
cm

VK/02041



Product Models


Code	Model	Box
75169-285692	VK/02041/AN/W ■ Anthracite. 3000K. 254lm. 6w. 2x118°. CRI>80	20pcs

Details

AC Driver 230V (Included). Watt 6w. Beam Angle 2x118°. CRI>80. Type of Led SMD 3535. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.



VK/02074



Product Models


Code	Model	Box
75169-345692	VK/02074/BR/W ■ Brown. 3000K. 450lm. 6w. 337°. CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 6w. Beam Angle 337°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 6w.



VK/02052




Product Models

Code	Model	Box
75169-316692	VK/02052/W/W □ White. 3000K. 348lm. 6w. 2x70°. CRI>80	12pcs

Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 2x70°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 6w.



VK/02112




Product Models

Code	Model	Box
75169-343694	VK/02112/AN/W ■ Anthracite. 3000K. 616lm. 15w. 100°. CRI>82	4pcs

Details

AC Driver 100-240V (Included). Watt 15w. Beam Angle 100°. CRI>82. Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C → 40°C. No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 15w.

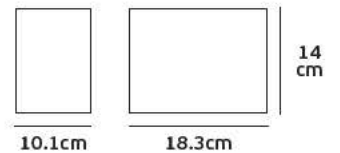

VK/02155/WA



Product Models


Code	Model	Box
75169-400694	VK/02155/WA/AN/W ■ Anthracite. 3000K. 212lm. 7w. 67° CRI>85	1pc

Details

AC 220-240V. Watt 7w. Beam Angle 67°. CRI>85. Type of Led SMD. Lifetime 30.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Die-cast aluminium, opal PC. 2 years guarantee.



IP54. 7w.

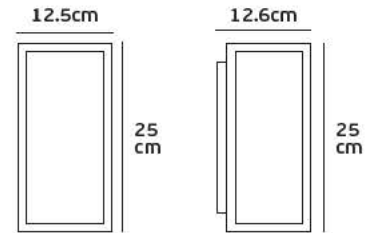

VK/02156



Product Models


Code	Model	Box
75169-401694	VK/02156/AN/W/34 ■ Anthracite. 3000K. 388lm. 7w. 66° L34cm. CRI>85	1pc
75169-402694	VK/02156/AN/W/50 ■ Anthracite. 3000K. 388lm. 7w. 66° L50cm. CRI>85	1pc

Details

AC 220-240V. Watt 7w. Beam Angle 66°. CRI>85. Type of Led SMD. Lifetime 30.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Die-cast aluminium, opal PC. 2 years guarantee.



IP54. 7w.

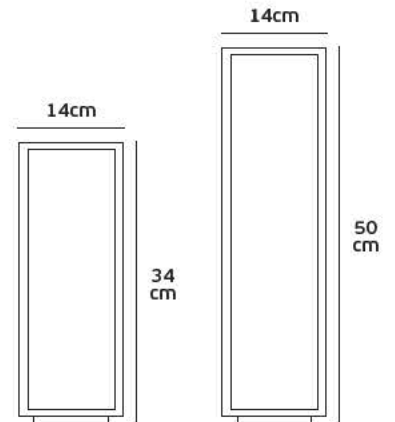



VK/02105



Product Models


Code	Model	Box
75169-333694	VK/02105/AN/W ■ Anthracite. 3000K. 233lm. 7w. 90°. CRI>83	24pcs

Details

AC Driver 220-240V (Included). Watt 7w. Beam Angle 90°. CRI>83.  
Type of Led SMD 3030. Working temperature -20°C → 40°C. Lifetime 30.000hrs.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 7w.



VK/02083



Product Models

Code	Model	Box
75169-295694	VK/02083/AN/W ■ Anthracite. 3000K. 1.140lm. 7w. PHILIPS led. 110°. CRI>84	8pcs
75169-296694	VK/02083/W/W □ White. 3000K. 1.140lm. 7w. PHILIPS led. 110°. CRI>84	8pcs

Details

AC Driver 220-240V (Included). Watt 7w. Beam Angle 110°. CRI>84.  
Type of Led SMD PHILIPS 2835. Working temperature -20°C → 40°C.  
Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 7w.



VK/02082




Product Models

Code	Model	Box
75169-293694	VK/02082/AN/W ■ Anthracite. 3000K. 1.263lm. 15w. PHILIPS led. 107°. CRI>84	4pcs
75169-294694	VK/02082/W/W □ White. 3000K. 1.263lm. 15w. PHILIPS led. 107°. CRI>84	4pcs

Details

AC Driver 220-240V (Included). Watt 15w. Beam Angle 107°. CRI>84.  
Type of Led SMD PHILIPS 2835. Working temperature -20°C → 40°C.  
Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.

   IP65. 15w.



VK/02081





Product Models

Code	Model	Box
75169-291694	VK/02081/AN/W ■ Anthracite. 3000K. 1.517lm. 20w. PHILIPS led. 107°. CRI>84	4pcs
75169-292694	VK/02081/W/W □ White. 3000K. 1.517lm. 20w. PHILIPS led. 107°. CRI>84	4pcs

Details

AC Driver 220-240V (Included). Watt 20w. Beam Angle 107°. CRI>84.  
Type of Led SMD PHILIPS 2835. Working temperature -20°C → 40°C.  
Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.

   IP65. 20w.

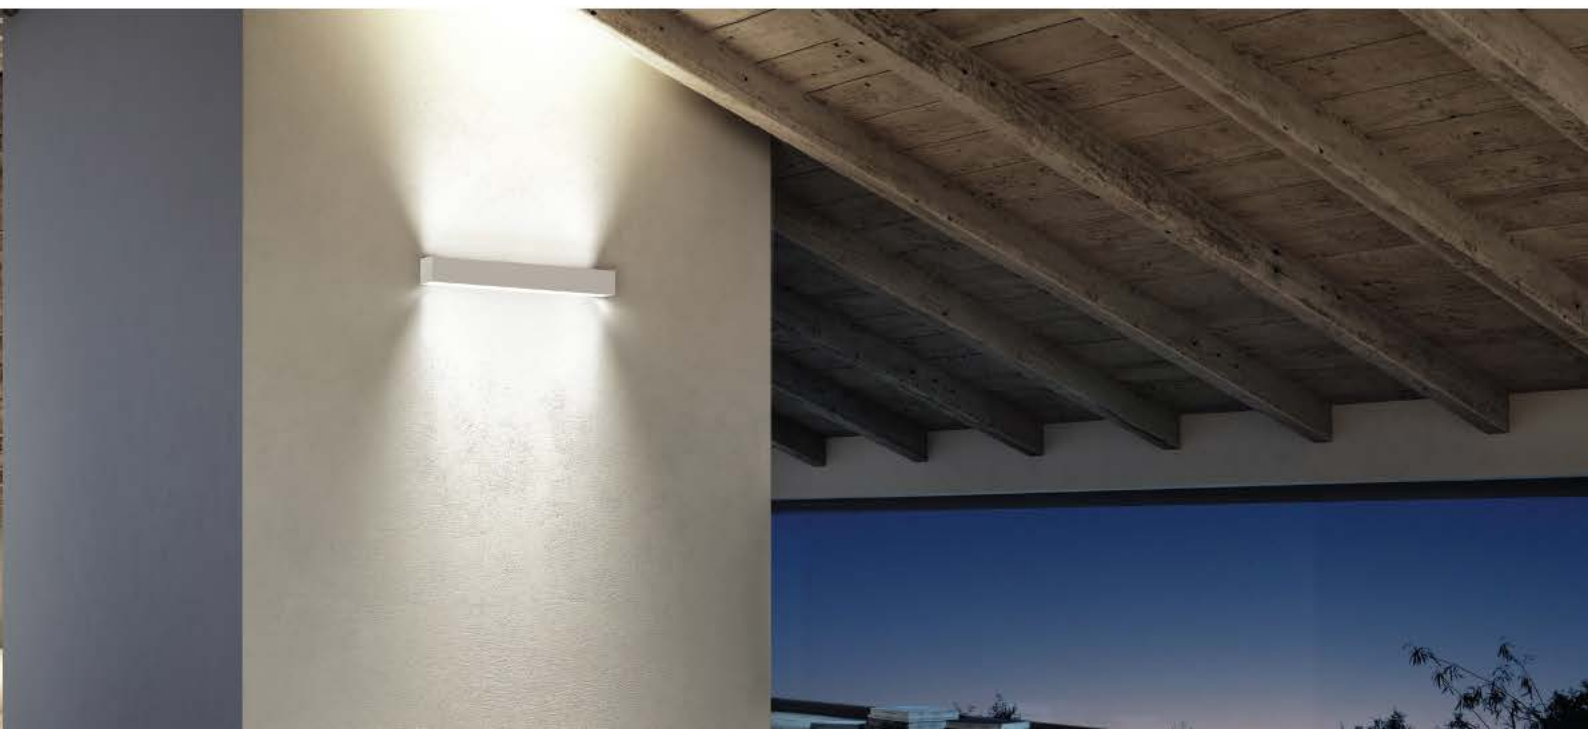



VK/02067



Product Models


Code	Model	Box
75169-333692	VK/02067/G/C ■ Grey, 4000K, 700lm, 12w, 120°. CRI>80	10pcs

Details

Voltage 230V. Watt 12w. CRI>80. Type of Led SMD 2835. Beam Angle 120°. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material ABS & PC housing and PC diffuser. 2 years guarantee.



IP65. 12w.

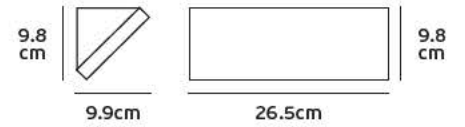

VK/02068



Product Models


Code	Model	Box
75169-334692	VK/02068/G/C ■ Grey, 4000K, 1.500lm, 24w, 120°. CRI>80	6pcs

Details


Voltage 230V. Watt 24w. CRI>80. Type of Led SMD 2835. Beam Angle 120°. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material ABS & PC housing and PC diffuser. 2 years guarantee.



IP65. 24w.

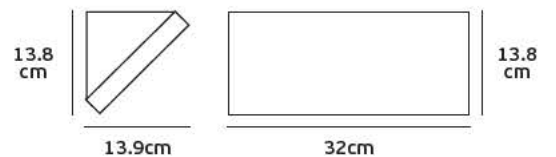

VK/02069

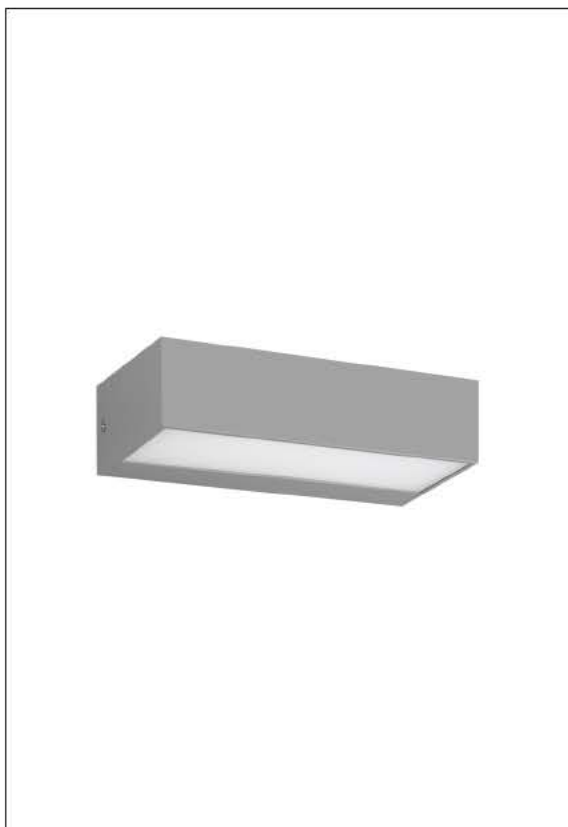

Product Models


Code	Model	Box
75169-335692	VK/02069/G/C ■ Grey. 4000K. 450lm. 8w. 110°. CRI>80	10pcs
75169-336692	VK/02069/AN/C ■ Anthracite. 4000K. 450lm. 8w. 110°. CRI>80	10pcs

Details


Voltage 230V. Watt 8w. CRI>80. Type of Led SMD 2835. Beam Angle 110°. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material ABS & PC housing and PC diffuser. 2 years guarantee.



IP65. 8w.



VK/02070

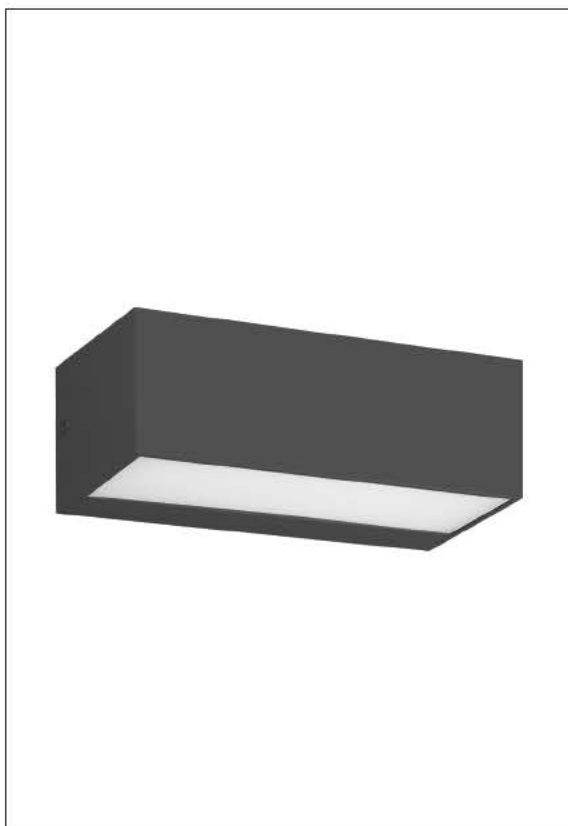

Product Models


Code	Model	Box
75169-337692	VK/02070/G/C ■ Grey. 4000K. 700lm. 12w. 110°. CRI>80	10pcs
75169-338692	VK/02070/AN/C ■ Anthracite. 4000K. 700lm. 12w. 110°. CRI>80	10pcs

Details

Voltage 230V. Watt 12w. CRI>80. Type of Led SMD 2835. Beam Angle 110°. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material ABS & PC housing and PC diffuser. 2 years guarantee.



IP65. 12w.

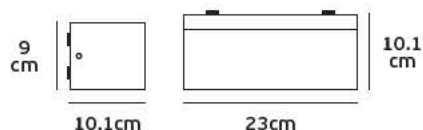

VK/02084



Product Models


Code	Model	Box
75169-297694	VK/02084/AN/W ■ Anthracite. 3000K. 1.964lm. 36w. 28°. CRI>84	4pcs
75169-298694	VK/02084/W/W □ White. 3000K. 1.964lm. 36w. 28°. CRI>84	4pcs

Details

AC Driver 200-240V (Included). Watt 36w. Beam Angle 28°. CRI>84. Type of Led CREE XBD. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP65. 36w.



VK/02122



Product Models


Code	Model	Box
75169-351694	VK/02122/AN/W ■ Anthracite. 3000K. 1.001lm. 16w. 45°. CRI>82	4pcs

Details

AC Driver 200-240V (Included). Watt 16w. Beam Angle 45°. CRI>82. Type of Led CREE. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium diecast. 2 years guarantee.



IP65. 16w.

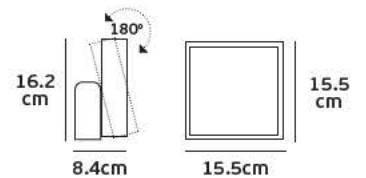

VK/02080



Product Models

Code	Model	Box
75169-289694	VK/02080/G/W ■ Grey. 3000K. 396lm. 20w. 98°. CRI>84	4pcs
75169-290694	VK/02080/W/W □ White. 3000K. 396lm. 20w. 98°. CRI>84	4pcs

Details

AC Driver 100-240V (Included). Watt 20w. Beam Angle 98°. CRI>84. Type of Led CREE XBD. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 20w.



VK/02085



Product Models



Code	Model	Box
75169-299694	VK/02085/AN/W ■ Anthracite. 3000K. 634lm. 15w. PHILIPS led. 101°. CRI>83	4pcs
75169-300694	VK/02085/W/W □ White. 3000K. 634lm. 15w. PHILIPS led. 101°. CRI>83	4pcs

Details

AC Driver 200-240V (Included). Watt 15w. Beam Angle 101°. CRI>83. Type of Led SMD PHILIPS 3030. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.



IP54. 15w.

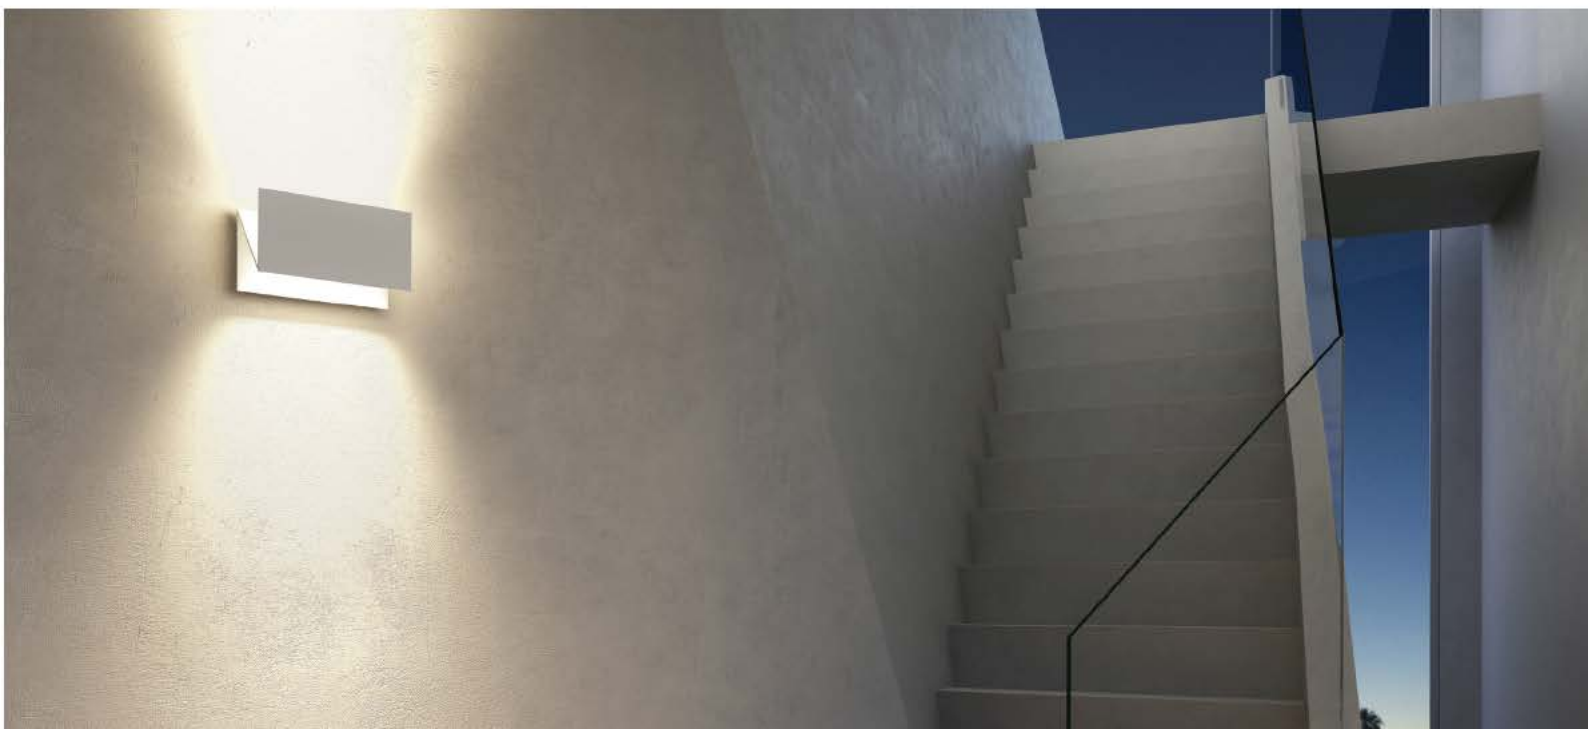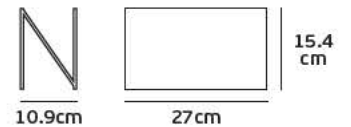

VK/01056



Product Models


Code	Model	Box
75169-180997	VK/01056/W □ White. GU10. Max 35w.	18pcs
75169-181997	VK/01056/B ■ Black. GU10. Max 35w.	18pcs
75169-182997	VK/01056/AN ■ Anthracite. GU10. Max 35w.	18pcs
75169-183997	VK/01056/G ■ Grey. GU10. Max 35w.	18pcs
75169-287997	VK/01056/BR ■ Rust Brown. GU10. Max 35w.	18pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Alu diecast/Glass.



IP54. GU10.

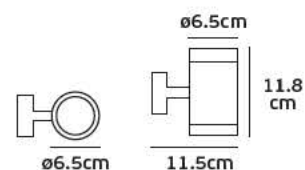

VK/01057



Product Models


Code	Model	Box
75169-184997	VK/01057/W □ White. GU10x2. Max 2x35w.	18pcs
75169-185997	VK/01057/B ■ Black. GU10x2. Max 2x35w.	18pcs
75169-186997	VK/01057/AN ■ Anthracite. GU10x2. Max 2x35w.	18pcs
75169-187997	VK/01057/G ■ Grey. GU10x2. Max 2x35w.	18pcs
75169-288997	VK/01057/BR ■ Rust Brown. GU10x2. Max 2x35w.	18pcs

Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Alu diecast/Glass.



IP54. GU10x2.

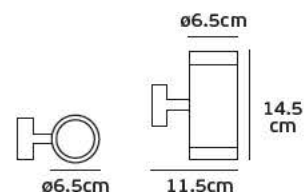

## VK/01067



## Product Models


Code	Model	Box
75169-216997	VK/01067/W □ White. GU10. Max 35w.	18pcs
75169-217997	VK/01067/B ■ Black. GU10. Max 35w.	18pcs
75169-218997	VK/01067/AN ■ Anthracite. GU10. Max 35w.	18pcs
75169-219997	VK/01067/G ■ Grey. GU10. Max 35w.	18pcs
75169-283997	VK/01067/BR ■ Rust Brown. GU10. Max 35w.	18pcs

## Details

Voltage 240V. Max watt 35w. GU10. Material Alu diecast/Glass.



IP54. GU10.

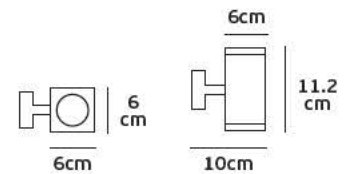

## VK/01068



## Product Models


Code	Model	Box
75169-220997	VK/01068/W □ White. GU10x2. Max 2x35w.	18pcs
75169-221997	VK/01068/B ■ Black. GU10x2. Max 2x35w.	18pcs
75169-222997	VK/01068/AN ■ Anthracite. GU10x2. Max 2x35w.	18pcs
75169-223997	VK/01068/G ■ Grey. GU10x2. Max 2x35w.	18pcs
75169-284997	VK/01068/BR ■ Rust Brown. GU10x2. Max 2x35w.	18pcs

## Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Alu diecast/Glass.



IP54. GU10x2.

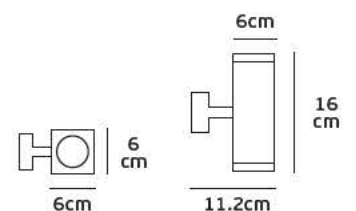

VK/01058



Product Models


Code	Model	Box
75169-188997	VK/01058/W □ White. E27. Max 60w.	12pcs
75169-189997	VK/01058/B ■ Black. E27. Max 60w.	12pcs
75169-190997	VK/01058/AN ■ Anthracite. E27. Max 60w.	12pcs
75169-191997	VK/01058/G ■ Grey. E27. Max 60w.	12pcs
75169-289997	VK/01058/BR ■ Rust Brown. E27. Max 60w.	12pcs

Details

Voltage 240V. Max watt 60w. E27. Material Alu diecast/Glass.



IP54. E27.

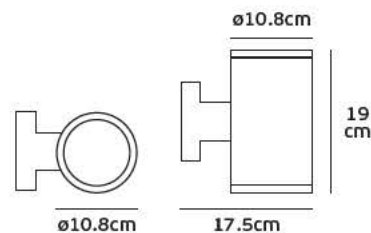

VK/01059



Product Models


Code	Model	Box
75169-192997	VK/01059/W □ White. E27x2. Max 2x60w.	12pcs
75169-193997	VK/01059/B ■ Black. E27x2. Max 2x60w.	12pcs
75169-194997	VK/01059/AN ■ Anthracite. E27x2. Max 2x60w.	12pcs
75169-195997	VK/01059/G ■ Grey. E27x2. Max 2x60w.	12pcs
75169-290997	VK/01059/RB ■ Rust Brown. E27x2. Max 2x60w.	12pcs

Details

Voltage 240V. Max watt 2x60w. E27x2. Material Alu diecast/Glass.



IP54. E27x2.

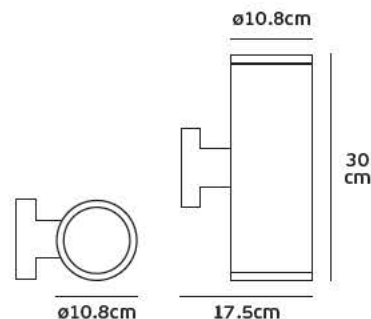

## VK/01064




## Product Models

Code	Model	Box
75169-204997	VK/01064/W □ White. E27. Max 60w.	12pcs
75169-205997	VK/01064/B ■ Black. E27. Max 60w.	12pcs
75169-206997	VK/01064/AN ■ Anthracite. E27. Max 60w.	12pcs
75169-207997	VK/01064/G ■ Grey. E27. Max 60w.	12pcs
75169-285997	VK/01064/BR ■ Rust Brown. E27. Max 60w.	12pcs

## Details

Voltage 240V. Max watt 60w. E27. Material Alu diecast/Glass.

 IP54. E27.

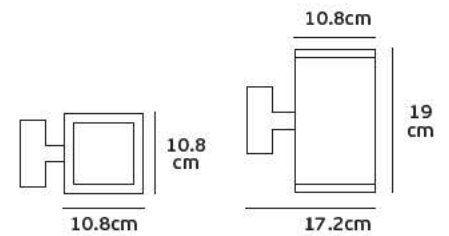

## VK/01065




## Product Models

Code	Model	Box
75169-208997	VK/01065/W □ White. E27x2. Max 2x60w.	12pcs
75169-209997	VK/01065/B ■ Black. E27x2. Max 2x60w.	12pcs
75169-210997	VK/01065/AN ■ Anthracite. E27x2. Max 2x60w.	12pcs
75169-211997	VK/01065/G ■ Grey. E27x2. Max 2x60w.	12pcs
75169-286997	VK/01065/BR ■ Rust Brown. E27x2. Max 2x60w.	12pcs

## Details

Voltage 240V. Max watt 2x60w. E27x2. Material Alu diecast/Glass.

 IP54. E27x2.

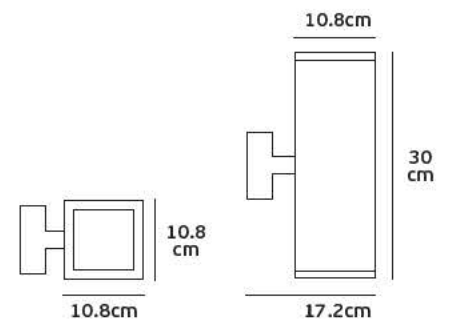



VK/01095


Product Models

Code	Model	Box
75169-31997	VK/01095/W □ White. GU10. Max 28w.	24pcs
75169-32097	VK/01095/B ■ Black. GU10. Max 28w.	24pcs
75169-32197	VK/01095/AN ■ Anthracite. GU10. Max 28w.	24pcs
75169-33297	VK/01095/BR ■ Brown. GU10. Max 28w.	24pcs

Details

Voltage 220-240V. Max watt 28w. GU10/MR16. Material Aluminium.

IP54. GU10.

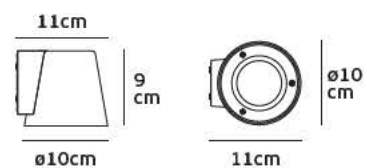

VK/01037/S



### Product Models


Code	Model	Box
75169-173997	VK/01037/S ■ Silver. GU10. Max 35w.	16pcs

### Details

Voltage 240V. Max watt 35w. GU10. Material Stainless steel/Glass.



IP44. GU10.



VK/01038



### Product Models


Code	Model	Box
75169-174997	VK/01038/S ■ Silver. GU10. Max GU10x2.	12pcs

### Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Stainless steel/Glass.



IP44. GU10x2.



VK/01045



Product Models



Code	Model	Box
74168-201677	VK/01045/MC ■ Brushed Chrome. GU10. Max 35w.	10pcs
74168-202677	VK/01045/ABS ■ Bronze. GU10. Max 35w.	10pcs
74168-158677	VK/01045/NB ■ Natural Brass. GU10. Max 35w.	10pcs
74168-225677	VK/01045/TC ■ Terracotta. GU10. Max 35w.	10pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Brass/Glass.



IP65. GU10.



VK/01046



Product Models


Code	Model	Box
74168-200677	VK/01046/MC ■ Brushed Chrome. GU10x2. Max 2x35w.	10pcs
74168-199677	VK/01046/ABS ■ Bronze. GU10x2. Max 2x35w.	10pcs
74168-156677	VK/01046/NB ■ Natural Brass. GU10x2. Max 2x35w.	10pcs
74168-227677	VK/01046/TR ■ Terracotta. GU10x2. Max 2x35w.	10pcs

Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Brass/Glass.



IP65. GU10x2.



## VK/01092



## Product Models


Code	Model	Box
74168-250677	VK/01092/MC ■ Brushed Chrome. GU10. Max 35w.	1pc
74168-252677	VK/01092/ABS ■ Bronze. GU10. Max 35w.	1pc
74168-251677	VK/01092/NB ■ Natural Brass. GU10. Max 35w.	1pc

## Details

Voltage 240V. Max watt 35w. GU10. Material Brass/Glass.

⏚ ⚡ IP65. GU10.

Mini lamp MR11-GU10 is placed, not included

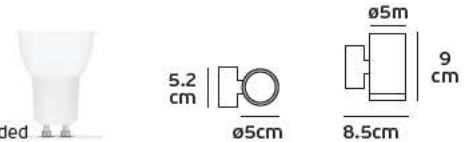

## VK/01093



## Product Models



Code	Model	Box
74168-253677	VK/01093/MC ■ Brushed Chrome. GU10x2. Max 2x35w.	1pc
74168-255677	VK/01093/ABS ■ Bronze. GU10x2. Max 2x35w.	1pc
74168-254677	VK/01093/NB ■ Natural Brass. GU10x2. Max 2x35w.	1pc

## Details

Voltage 240V. Max watt 2x35w. GU10x2. Material Brass/Glass.

⏚ ⚡ IP65. GU10x2.

Mini lamp MR11-GU10 is placed, not included

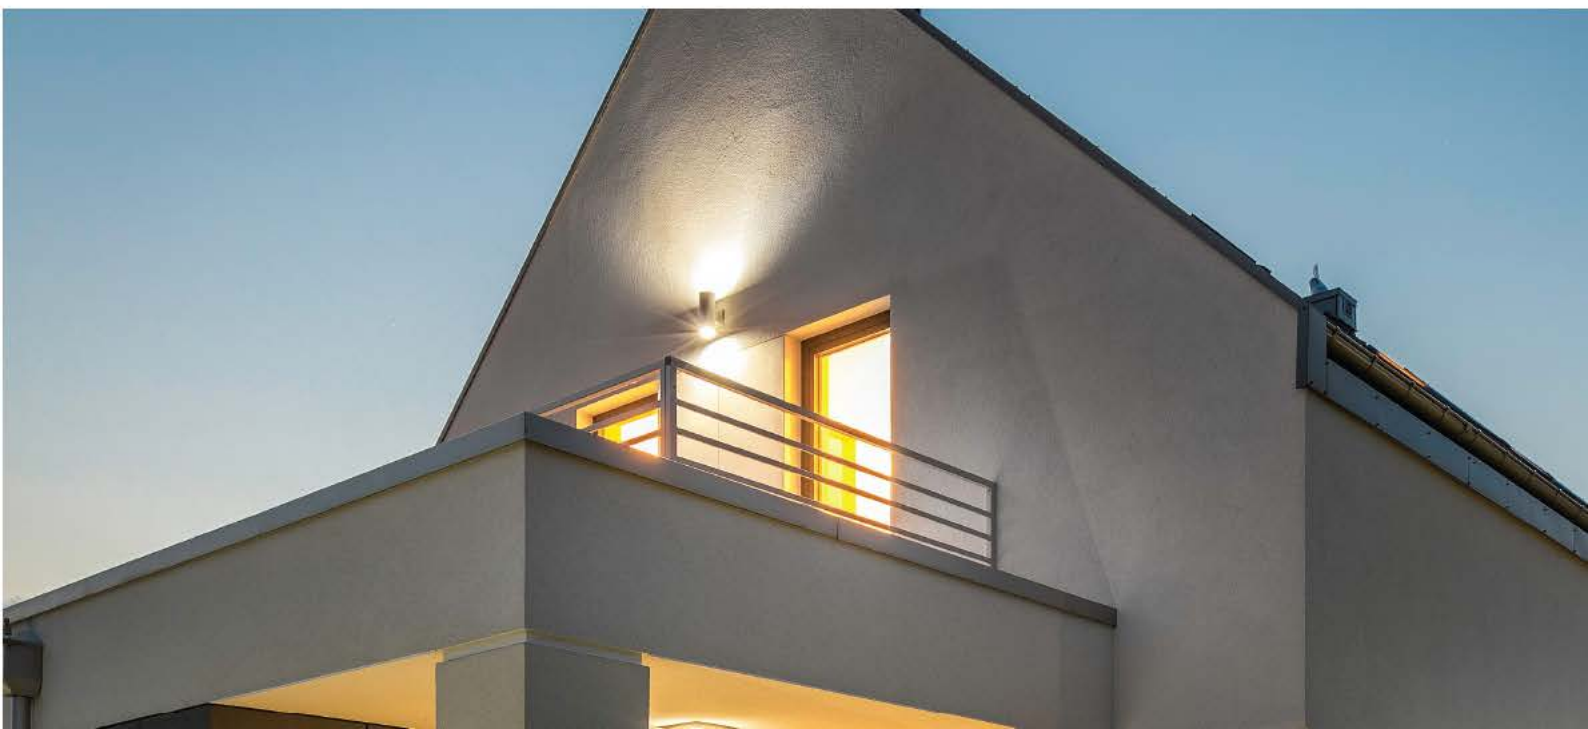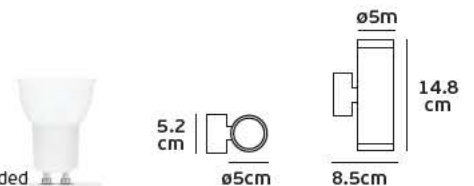

VK/01090



Product Models

Code	Model	Box
75169-291997	VK/01090/W □ White. E27. Max 20w.	8pcs
75169-292997	VK/01090/AN ■ Anthracite. E27. Max 20w.	8pcs
75169-293997	VK/01090/G ■ Grey. E27. Max 20w.	8pcs
75169-294997	VK/01090/BR ■ Rust Brown. E27. Max 20w.	8pcs

Details


Voltage 240V. Max watt 20w. E27. Material Alu diecast/Glass.



IP54. E27.



∅10.7 cm



17.7 cm

21 cm

VK/01077



Product Models


Code	Model	Box
75169-286692	VK/01077/AN ■ Anthracite. E27. Max 60w.	4pcs
75169-287692	VK/01077/W □ White. E27. Max 60w.	4pcs

Details


Voltage 240V. Max watt 60w. E27. Material Aluminium/PC.



IP54. E27.



10cm



∅30cm

VK/01078



Product Models


Code	Model	Box
75169-288692	VK/01078/AN ■ Anthracite. E27. Max 60w.	4pcs
75169-289692	VK/01078/W □ White. E27. Max 60w.	4pcs

Details


Voltage 240V. Max watt 60w. E27. Material Aluminium/PC.



IP54. E27.



10cm



30cm

30 cm

VK/01079




Product Models

Code	Model	Box
75169-290692	VK/01079/AN ■ Anthracite. E27. Max 60w.	10pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/PC.

  IP54. E27.

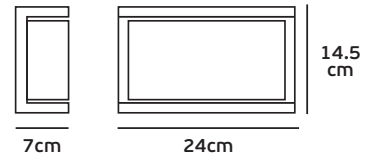

VK/01080




Product Models

Code	Model	Box
75169-291692	VK/01080/AN ■ Anthracite. E27. Max 60w.	4pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/PC.

  IP54. E27.

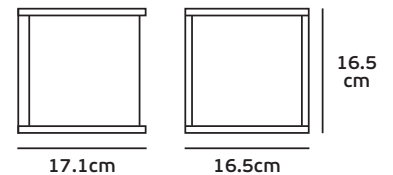

VK/01081




Product Models

Code	Model	Box
75169-292692	VK/01081/AN ■ Anthracite. E27. Max 60w.	4pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/PC.

  IP54. E27.

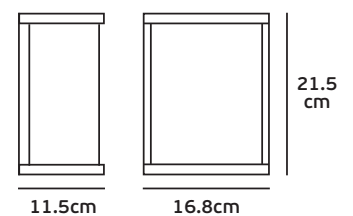

VK/01082



Product Models

Code	Model	Box
75169-339692	VK/01082/G ■ Grey. E27. Max 10w.	10pcs

Details

Voltage 240V. Max watt 10w. E27. Material ABS/PC.

 IP54. E27.

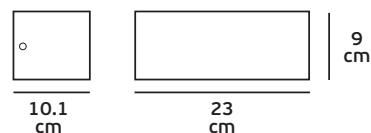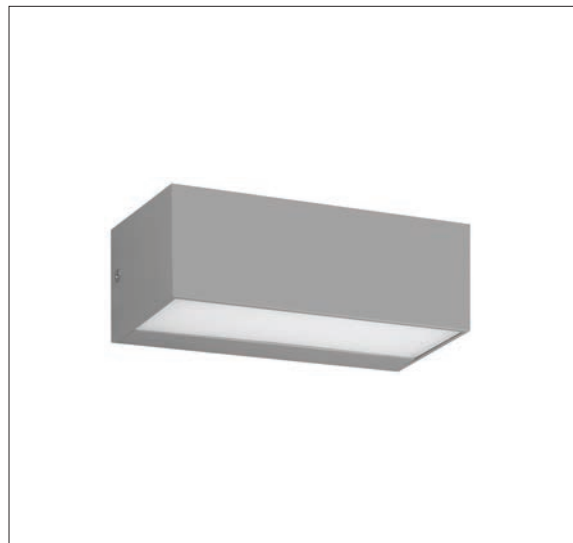

VK/01084


Product Models

Code	Model	Box
75169-302694	VK/01084/AN ■ Anthracite. E27. Max 18w.	8pcs

Details

Voltage 240V. Max watt 18w. E27. Material Aluminium.

 IP54. E27.

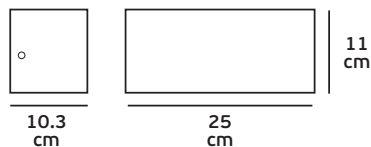

VK/01083



Product Models

Code	Model	Box
75169-301694	VK/01083/AN ■ Anthracite. E27x2. Max 2x15w.	4pcs

Details

Voltage 240V. Max watt 2x15w. E27x2. Material Aluminium.

 IP54. E27x2.

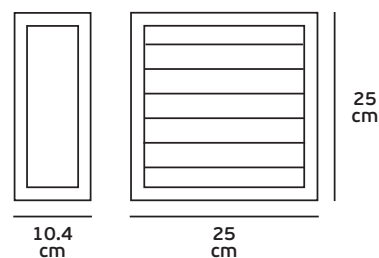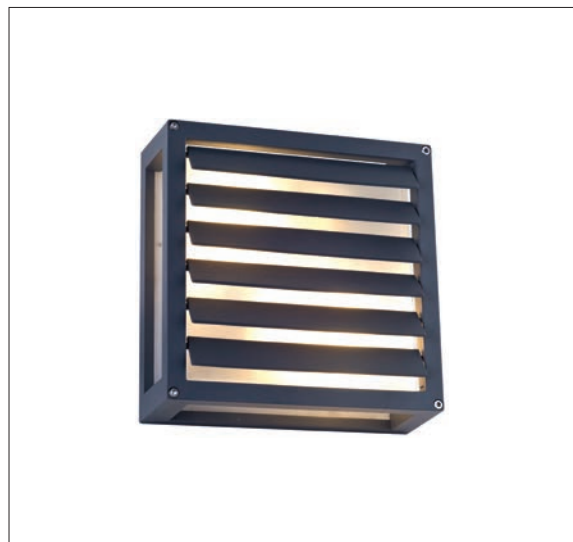

VK/01001

## Product Models

Code	Model	Box
75169-002997	VK/01001/W □ White. E27. Max 60w.	8pcs
75169-001997	VK/01001/G ■ Grey. E27. Max 60w.	8pcs



## Details


Voltage 240V. Max watt 60w. E27. Material Alu diecast/PVC.



IP54. E27.




12.9cm



29cm

11.3  
cm



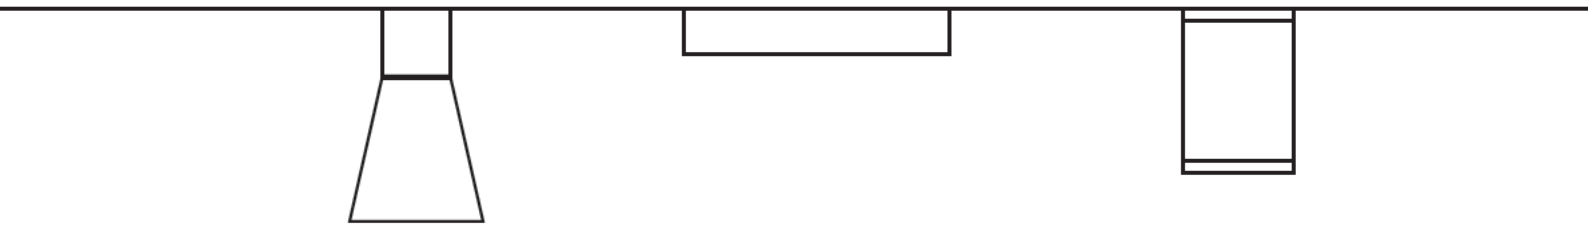



*outdoor ceiling lights*

VK/02152CE



Product Models


Code	Model	Box
64174-085721	VK/02152CE/W/W □ White. 3000K. 1.179lm. 15w. 35° CRI>80	1pc
64174-086721	VK/02152CE/W/C □ White. 4000K. 1.179lm. 15w. 35° CRI>80	1pc
64174-083721	VK/02152CE/B/W ■ Black. 3000K. 1.179lm. 15w. 35° CRI>80	1pc
64174-084721	VK/02152CE/B/C ■ Black. 4000K. 1.179lm. 15w. 35° CRI>80	1pc

Details

AC Driver 220V (Included). Watt 15w. Beam Angle 35°. CRI>80. Type of Led LUMENS. Working temperature < 45°C. Lifetime 50.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 15w.



VK/02151CE



Product Models

Code	Model	Box
64174-081721	VK/02151CE/W/W □ White. 3000K. 577lm. 8w. 35° CRI>80	1pc
64174-082721	VK/02151CE/W/C □ White. 4000K. 577lm. 8w. 35° CRI>80	1pc
64174-079721	VK/02151CE/B/W ■ Black. 3000K. 577lm. 8w. 35° CRI>80	1pc
64174-080721	VK/02151CE/B/C ■ Black. 4000K. 577lm. 8w. 35° CRI>80	1pc

Details

AC Driver 220V (Included). Watt 8w. Beam Angle 35°. CRI>80. Type of Led LUMENS. Working temperature < 45°C. Lifetime 50.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 8w.



Outdoor Ceiling Lights LED



VK/02077




Product Models

Code	Model	Box
75169-283694	VK/02077/AN/W ■ Anthracite. 3000K. 588lm. 9w. 55°. CRI>83	6pcs
75169-284694	VK/02077/W/W □ White. 3000K. 588lm. 9w. 55°. CRI>83	6pcs

Details

AC Driver 100-240V (Included). Watt 9w. Beam Angle 55°. CRI>83.  
Type of Led COB CREE 1340. Lifetime 30.000hrs. No Dimmable.  
Working temperature -20°C→45°C. Material Aluminium. 2 years guarantee.

   IP65. 9w.



VK/02079




Product Models

Code	Model	Box
75169-287694	VK/02079/G/W ■ Grey. 3000K. 591lm. 18w. PHILIPS led. 108°. CRI>85	6pcs
75169-288694	VK/02079/W/W □ White. 3000K. 591lm. 18w. PHILIPS led. 108°. CRI>85	6pcs

Details

AC Driver 200-240V (Included). Watt 18w. Beam Angle 108°. CRI>85.  
Type of Led SMD PHILIPS 3030. Lifetime 30.000hrs. No Dimmable.  
Working temperature -20°C→45°C. Material ABS PC. 2 years guarantee.

   IP54. 18w.

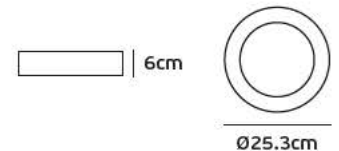

VK/02061




Product Models

Code	Model	Box
75169-326692	VK/02061/W/W □ White. 3000K. 1.200lm. 21w. 120°. CRI>80	10pcs
75169-327692	VK/02061/W/C □ White. 4000K. 1.200lm. 21w. 120°. CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 21w. Beam Angle 96°. CRI>80. Type of Led SMD 2835.  
Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C.  
Material ABS PC. 2 years guarantee.

   IP65. 21w.

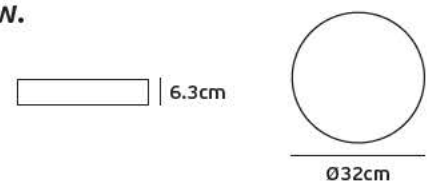

VK/02078

## Product Models

Code	Model	Box
75169-285694	VK/02078/G/W ■ Grey. 3000K. 927lm. 18w. <b>PHILIPS</b> led. 160°. CRI>81	4pcs
75169-286694	VK/02078/W/W □ White. 3000K. 927lm. 18w. <b>PHILIPS</b> led. 160°. CRI>81	4pcs





## Details

AC Driver 200-240V (Included). Watt 18w. Beam Angle 160°. CRI>81.  
Type of Led SMD **PHILIPS** 3030. Lifetime 30.000hrs. No Dimmable.  
Working temperature -20°C→45°C. Material Aluminium.  
2 years guarantee.



IP54. 18w.



VK/02062



Product Models

Code	Model	Box
75169-328692	VK/02062/G/C ■ Grey, 4000K, 1.000lm, 15w, 120°, CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 15w. Beam Angle 120°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Plastic (ABS). 2 years guarantee.




IP65. 15w.

4.4cm



Ø26cm



Ø26cm

VK/02063



Product Models

Code	Model	Box
75169-329692	VK/02063/G/C ■ Grey, 4000K, 1.100lm, 18w, 120°, CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 18w. Beam Angle 120°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Plastic (ABS). 2 years guarantee.




IP65. 18w.

4.4cm



Ø30cm



Ø30cm

VK/02064



Product Models

Code	Model	Box
75169-330692	VK/02064/G/C ■ Grey, 4000K, 1.600lm, 28w, 120°, CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 28w. Beam Angle 120°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Plastic (ABS). 2 years guarantee.




IP65. 28w.

4.7cm



Ø36cm



Ø36cm

VK/02065



Product Models


Code	Model	Box
75169-331692	VK/02065/G/C ■ Grey. 4000K. 800lm. 12w. 120°. CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 12w. Beam Angle 120°. CRI>80. Type of Led SMD 3014. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Plastic (ABS). 2 years guarantee.



IP65. 12w.



VK/02066



Product Models



Code	Model	Box
75169-332692	VK/02066/G/C ■ Grey. 4000K. 1.000lm. 16w. 120°. CRI>80	10pcs

Details

AC Driver 230V (Included). Watt 16w. Beam Angle 120°. CRI>80. Type of Led SMD 2835. Lifetime 30.000hrs. No Dimmable. Working temperature -20°C→45°C. Material Plastic (ABS). 2 years guarantee.



IP65. 16w.

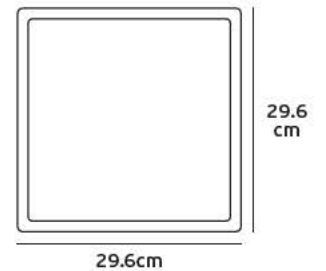



VK/01061



Product Models


Code	Model	Box
75169-200997	<b>VK/01061/W</b> □ White. GU10. Max 35w.	24pcs
75169-201997	<b>VK/01061/B</b> ■ Black. GU10. Max 35w.	24pcs
75169-202997	<b>VK/01061/AN</b> ■ Anthracite. GU10. Max 35w.	24pcs
75169-203997	<b>VK/01061/G</b> ■ Grey. GU10. Max 35w.	24pcs
75169-279997	<b>VK/01061/BR</b> ■ Rust Brown. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Alu diecast/Glass.



IP54. GU10.



10.5 cm

Ø6cm

Ø6cm

VK/01060



Product Models


Code	Model	Box
75169-196997	<b>VK/01060/W</b> □ White. E27. Max 60w.	18pcs
75169-197997	<b>VK/01060/B</b> ■ Black. E27. Max 60w.	18pcs
75169-198997	<b>VK/01060/AN</b> ■ Anthracite. E27. Max 60w.	18pcs
75169-199997	<b>VK/01060/G</b> ■ Grey. E27. Max 60w.	18pcs
75169-281997	<b>VK/01060/BR</b> ■ Rust Brown. E27. Max 60w.	18pcs

Details

Voltage 240V. Max watt 60w. E27. Material Alu diecast/Glass.



IP54. E27.




16 cm

Ø10.8cm

Ø10.8cm

## VK/01048

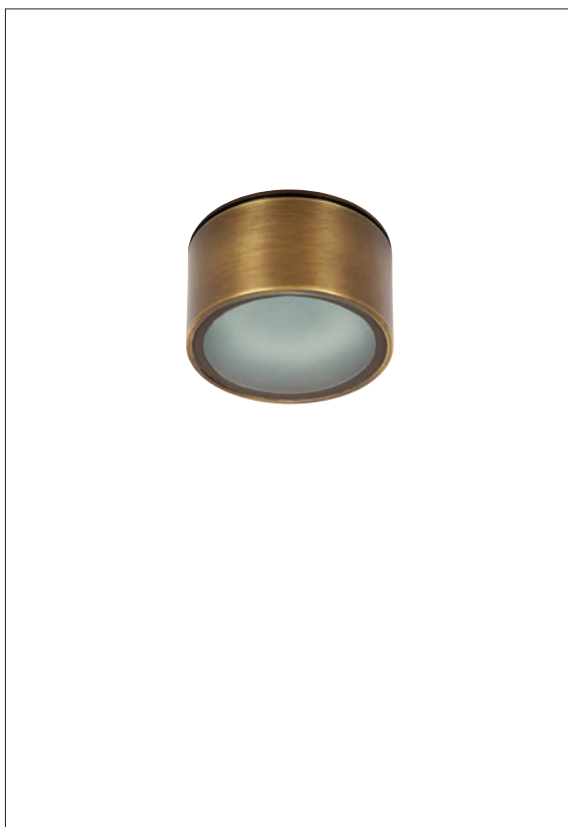

## Product Models

Code	Model	Box
74168-205677	VK/01048/MC ■ Brushed Chrome. GX53. Max 50w.	10pcs
74168-193677	VK/01048/ABS ■ Bronze. GX53. Max 50w.	10pcs
74168-206677	VK/01048/NB ■ Natural Brass. GX53. Max 50w.	10pcs

## Details

Voltage 240V. Max watt 50w. GX53. Material Brass/Glass.



IP65. GX53.



ø10cm



4,5  
cm

10cm

## VK/01106



## Product Models

Code	Model	Box
75169-343997	VK/01106/W □ White. GU10. Max 8w.	1pc
75169-344997	VK/01106/B ■ Black. GU10. Max 8w	1pc

## Details


Voltage 220-240V. Max watt 8w. GU10. Material ABS+PC.



IP44. GU10.



ø6cm



10,3  
cm

ø6cm

VK/01069



Product Models


Code	Model	Box
75169-224997	<b>VK/01069/W</b> □ White. GU10. Max 35w.	24pcs
75169-225997	<b>VK/01069/B</b> ■ Black. GU10. Max 35w.	24pcs
75169-226997	<b>VK/01069/AN</b> ■ Anthracite. GU10. Max 35w.	24pcs
75169-227997	<b>VK/01069/G</b> ■ Grey. GU10. Max 35w.	24pcs
75169-280997	<b>VK/01069/BR</b> ■ Rust Brown. GU10. Max 35w.	24pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Alu diecast/Glass.



IP54. GU10.

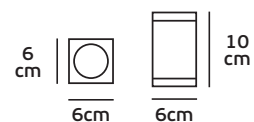

VK/01066



Product Models


Code	Model	Box
75169-212997	<b>VK/01066/W</b> □ White. E27. Max 60w.	18pcs
75169-213997	<b>VK/01066/B</b> ■ Black. E27. Max 60w.	18pcs
75169-214997	<b>VK/01066/AN</b> ■ Anthracite. E27. Max 60w.	18pcs
75169-215997	<b>VK/01066/G</b> ■ Grey. E27. Max 60w.	18pcs
75169-282997	<b>VK/01066/BR</b> ■ Rust Brown. E27. Max 60w.	18pcs

Details

Voltage 240V. Max watt 60w. E27. Material Alu diecast/Glass.



IP54. E27.



VK/01086

## Product Models


Code	Model	Box
75169-349694	VK/01086/W □ White. G9. Max 40w.	1pc
75169-348694	VK/01086/AN ■ Anthracite. G9. Max 40w.	1pc


## Details

Voltage 240V. Max watt 40w. G9. Material Aluminium.



IP54. G9.

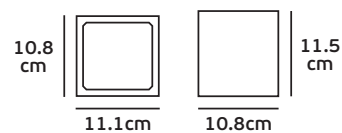



*outdoor floor lights*



VK/02131/45



Product Models


Code	Model	Box
75169-316131	VK/02131/G/W/45 ■ Grey. 3000K. 450lm. 6.5w.	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. Type of Led CREE 1304. No Dimmable. Working temperature -20°C→45°C. Material Concrete. 2 years guarantee.



IP65. 6.5w.

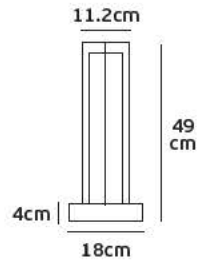

VK/02131/70



Product Models


Code	Model	Box
75169-317131	VK/02131/G/W/70 ■ Grey. 3000K. 450lm. 6.5w.	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. Type of Led CREE 1304. No Dimmable. Working temperature -20°C→45°C. Material Concrete. 2 years guarantee.



IP65. 6.5w.

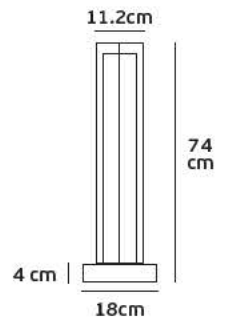

VK/02132/25



Product Models


Code	Model	Box
75169-318131	VK/02132/G/W/25 ■ Grey. 3000K. 450lm. 6.5w.	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. Type of Led CREE 1304. No Dimmable. Working temperature -20°C→45°C. Material Concrete. 2 years guarantee.




**IP65. 6.5w.**



VK/02132/45



Product Models


Code	Model	Box
75169-319131	VK/02132/G/W/45 ■ Grey. 3000K. 450lm. 6.5w.	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. Type of Led CREE 1304. No Dimmable. Working temperature -20°C→45°C. Material Concrete. 2 years guarantee.




**IP65. 6.5w.**

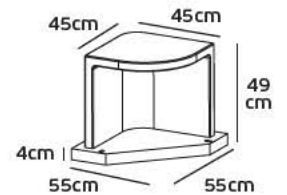



VK/02142/45



Product Models


Code	Model	Box
75169-320131	VK/02142/AN/W/45 ■ Grey. 3000K. 450lm. 6.5w. CRI>80	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. CRI>80. Type of Led CREE 1304.  
Working temperature -20°C→45°C. No Dimmable. Material Concrete. 2 years guarantee.



IP65. 6.5w.

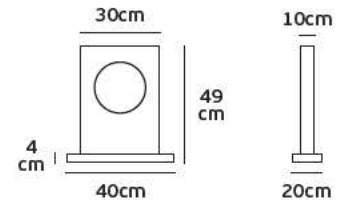

VK/02142/75



Product Models


Code	Model	Box
75169-321131	VK/02142/AN/W/75 ■ Grey. 3000K. 450lm. 6.5w. CRI>80	1pc

Details

AC Driver 220-240V (Included). Watt 6.5w. CRI>80. Type of Led CREE 1304.  
Working temperature -20°C→45°C. No Dimmable. Material Concrete. 2 years guarantee.



IP65. 6.5w.

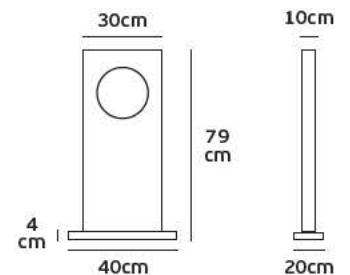

VK/02124



Product Models


Code	Model	Box
75169-353694	VK/02124/50/AN/W ■ Anthracite. 3000K. 500lm. 12w. Height (L) 50cm. 98°. CRI>83	1pcs
75169-354694	VK/02124/80/AN/W ■ Anthracite. 3000K. 561lm. 15w. Height (L) 80cm. 98°. CRI>83	1pcs

Details

AC Driver 200-240V (Included). Watt 12w. Beam Angle 98°. CRI>83. Type of Led SMD. Working temperature -20°C→45°C. Lifetime 30.000hrs. No Dimmable. Material Aluminium diecast. 2 years guarantee.



IP65. 12w/15w.

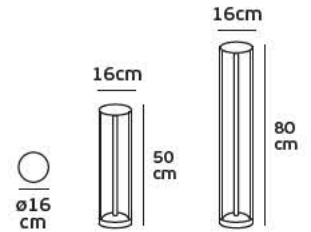

VK/02100



Product Models



Code	Model	Box
75169-326694	VK/02100/AN/40/W ■ Anthracite. 3000K. 317lm. 4w. Height (L) 40cm. 70°. CRI>84	12pcs
75169-327694	VK/02100/AN/65/W ■ Anthracite. 3000K. 317lm. 4w. Height (L) 65cm. 70°. CRI>84	8pcs

Details

AC Driver 100-240V (Included). Watt 4w. Beam Angle 70°. CRI>84. Type of Led CREE 1340. Working temperature -20°C→45°C. Lifetime 30.000hrs. No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 4w.

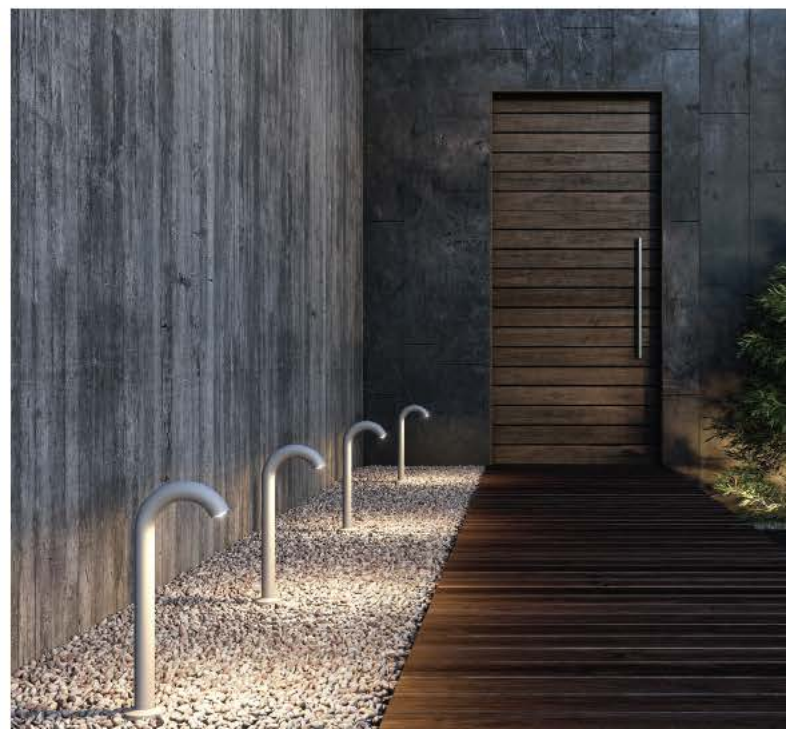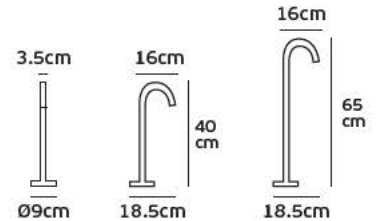

VK/02097




Product Models

Code	Model	Box
75169-323694	VK/02097/AN/W ■ Anthracite. 3000K. 218lm. 7w. PHILIPS led. 49°. CRI>82	4pcs

Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 49°. CRI>82.  
Type of Led SMD PHILIPS 3014. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 7w.



VK/02098




Product Models

Code	Model	Box
75169-324694	VK/02098/AN/W ■ Anthracite. 3000K. 218lm. 7w. PHILIPS led. 49°. CRI>82	6pcs

Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 49°. CRI>82.  
Type of Led SMD PHILIPS 3014. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 7w.



VK/02102

## Product Models


Code	Model	Box
75169-329694	VK/02102/AN/W ■ Anthracite. 3000K. 303lm. 7w. 50°. CRI>82	8pcs

## Details

AC Driver 100-240V (Included). Watt 7w. Beam Angle 50°. CRI>82.  
 Type of Led COB CREE 1304. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
 No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 7w.

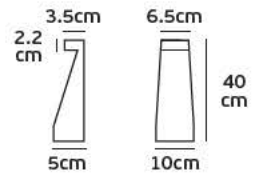

VK/02101




Product Models

Code	Model	Box
75169-328694	VK/02101/AN/W ■ Anthracite. 3000K. 278lm. 7w. 33°. CRI>82	4pcs

Details

AC Driver 100-240V (Included). Watt 7w. Beam Angle 33°. CRI>82.  
Type of Led CREE 13004. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   IP54. 7w.

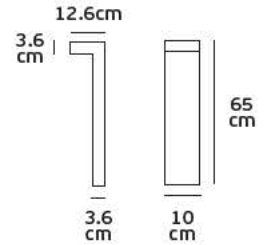

VK/02140







Product Models

Code	Model	Box
75169-373694	VK/02140/AN/W ■ Anthracite. 3000K. 420lm. 7w. 41°. CRI>82	6pcs

Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 41°. CRI>82.  
Type of Led CREE. Lifetime 30.000hrs. Working temperature -20°C→30°C.  
No Dimmable. Material Aluminium diecast. 2 years guarantee.

   IP54. 7w.



VK/02099

## Product Models


Code	Model	Box
75169-325694	VK/02099/AN/W ■ Anthracite. 3000K. 95lm. 3x3w. 70°. CRI>81	4pcs

## Details

AC Driver 100-240V (Included). Watt 3x3w. Beam Angle 70°. CRI>81.  
Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP54. 3x3w.

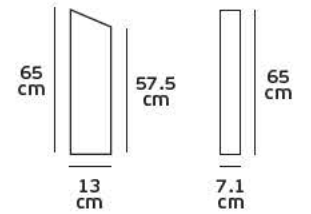

VK/02104

### Product Models

Code	Model	Box
75169-332694	VK/02104/AN/W ■ Anthracite. 3000K. 900lm. 16w. PHILIPS led. 35°. CRI>83	1pc

### Details


AC Driver 200-240V (Included). Watt 16w. Beam Angle 35°. CRI>83.  
Type of Led SMD PHILIPS 3030. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



A+



IP65. 16w.

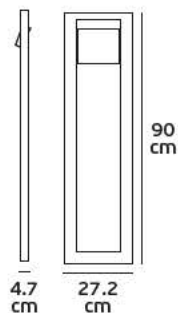

VK/02103

## Product Models


Code	Model	Box
75169-331694	VK/02103/AN/W ■ Anthracite. 3000K. 737lm. 18w. PHILIPS led. 81°. CRI>84	2pcs

## Details

AC Driver 200-240V (Included). Watt 18w. Beam Angle 81°. CRI>84.  
Type of Led SMD PHILIPS 3030. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.



IP65. 18w.





VK/02158



Product Models


Code	Model	Box
75169-496744	VK/02158/W/W □ White. 3000K. 500lm. 10w. CRI>80	1pc
75169-497744	VK/02158/AN/W ■ Anthracite. 3000K. 500lm. 10w. CRI>80	1pc
75169-498744	VK/02158/BR/W ■ Rust Brown. 3000K. 500lm. 10w. CRI>80	1pc

Details

AC 100-240V. Watt 10w. CRI>80. Type of Led COB CREE. Lifetime 20.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Aluminium+Iron+Anti-glare PC. 2 years guarantee.



IP54. 10w.



VK/02159



Product Models


Code	Model	Box
75169-499744	VK/02159/60/W/W □ White. 3000K. 500lm. 10w. 60cm. CRI>80	1pc
75169-500744	VK/02159/60/AN/W ■ Anthracite. 3000K. 500lm. 10w. 60cm. CRI>80	1pc
75169-501744	VK/02159/60/BR/W ■ Rust Brown. 3000K. 500lm. 10w. 60cm. CRI>80	1pc
75169-502744	VK/02159/80/W/W □ White. 3000K. 500lm. 10w. 80cm. CRI>80	1pc
75169-503744	VK/02159/80/AN/W ■ Anthracite. 3000K. 500lm. 10w. 80cm. CRI>80	1pc
75169-504744	VK/02159/80/BR/W ■ Rust Brown. 3000K. 500lm. 10w. 80cm. CRI>80	1pc

Details

AC 100-240V. Watt 10w. CRI>80. Type of Led COB CREE. Lifetime 20.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Aluminium+Iron+Anti-glare PC. 2 years guarantee.



IP54. 10w.





VK/02157

Product Models


Code	Model	Box
75169-493744	VK/02157/W/W □ White. 3000K. 500lm. 10w. 80cm CRI>80	1pc
75169-494744	VK/02157/AN/W ■ Anthracite. 3000K. 500lm. 10w. 80cm CRI>80	1pc
75169-495744	VK/02157/BR/W ■ Rust Brown. 3000K. 500lm. 10w. 80cm CRI>80	1pc


Details

AC 100-240V. Watt 10w. CRI>80. Type of Led COB CREE.  
Lifetime 20.000hrs. Working temperature -20°C→40°C.  
No Dimmable. Material Aluminium+Iron+Anti-glare PC.  
2 years guarantee.



IP54. 10w.

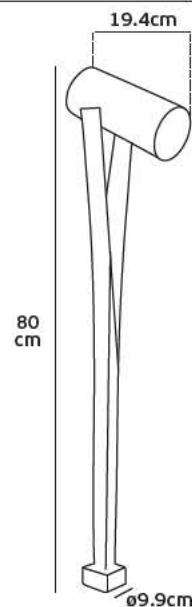

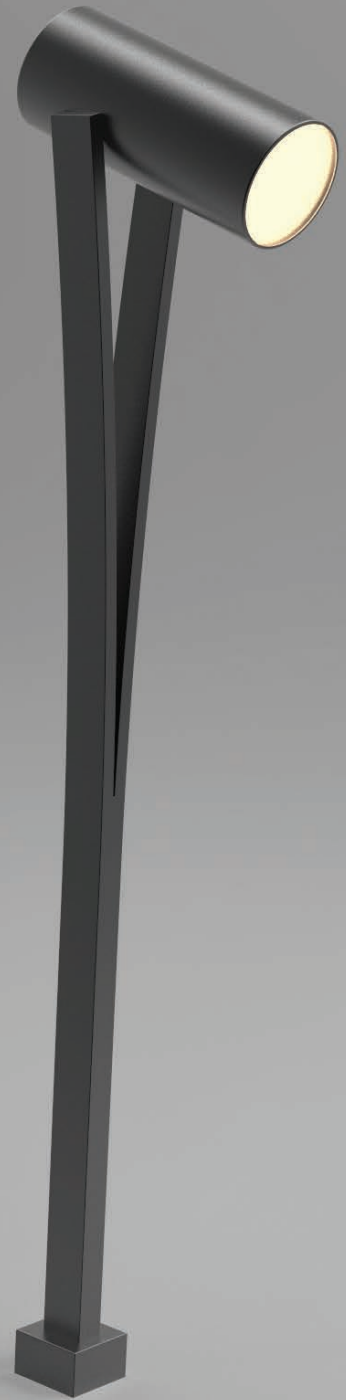

VK/02134

Product Models


Code	Model	Box
75169-366694	VK/02134/AN/W ■ Anthracite. 3000K. 565lm. 7w. 47°. CRI>84	4pcs
75169-365694	VK/02134/W/W □ White. 3000K. 565lm. 7w. 47°. CRI>84	4pcs

Details

AC Driver 220-240V (Included). Watt 7w. Beam Angle 47°. CRI>84. Type of Led CREE. Lifetime 30.000hrs. Working temperature -20°C→50°C. No Dimmable. Material Aluminium diecast, PC. 2 years guarantee.



IP65. 7w.

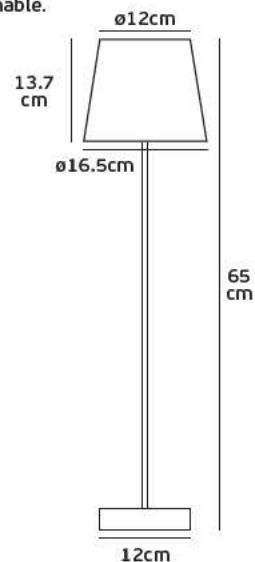

VK/02135

Product Models




Code	Model	Box
75169-367694	VK/02135/W □ White. E27x3. Max 3x15w.	1pc
75169-368694	VK/02135/AN ■ Anthracite. E27x3. Max 3x15w.	1pc

Details

Voltage 240V. Max watt 3x15w. E27x3. Material Aluminium diecast. Cable 2.5m.



IP54. E27x3.

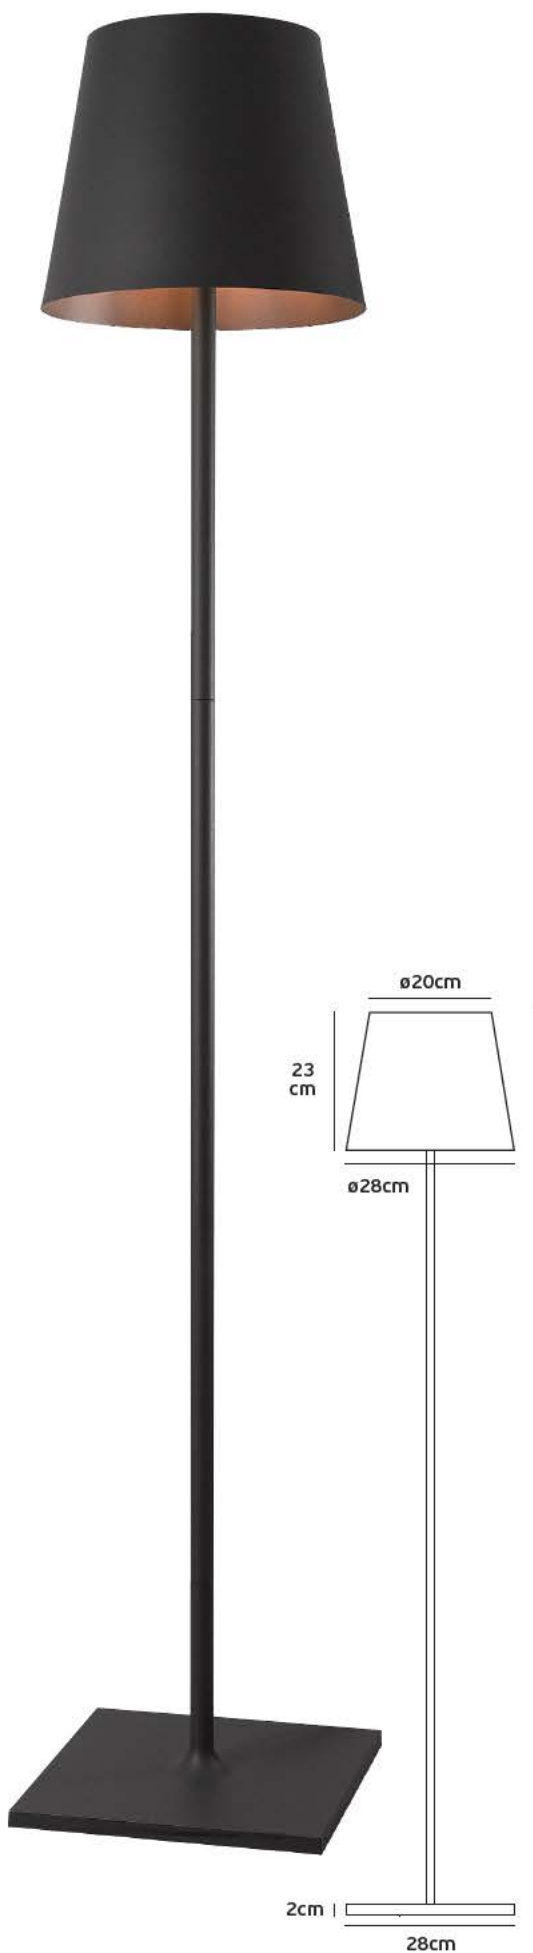

VK/01091/35



Product Models



Code	Model	Box
75169-295997	<b>VK/01091/W/35</b> □ White. E27. Max 20w.	6pcs
75169-296997	<b>VK/01091/AN/35</b> ■ Anthracite. E27. Max 20w.	6pcs
75169-297997	<b>VK/01091/G/35</b> ■ Grey. E27. Max 20w.	6pcs
75169-298997	<b>VK/01091/BR/35</b> ■ Rust Brown. E27. Max 20w.	6pcs

Details

Voltage 240V. Max watt 20w. E27. Material Alu diecast/Glass.



IP54. E27.



VK/01091/75



Product Models



Code	Model	Box
75169-299997	<b>VK/01091/W/75</b> □ White. E27. Max 20w.	4pcs
75169-300997	<b>VK/01091/AN/75</b> ■ Anthracite. E27. Max 20w.	4pcs
75169-301997	<b>VK/01091/G/75</b> ■ Grey. E27. Max 20w.	4pcs
75169-302997	<b>VK/01091/BR/75</b> ■ Rust Brown. E27. Max 20w.	4pcs

Details

Voltage 240V. Max watt 20w. E27. Material Alu diecast/Glass.



IP54. E27.



VK/01085



Product Models



Code	Model	Box
75169-330694	<b>VK/01085/AN</b> ■ Anthracite. E27. Max 20w.	4pcs

Details

Voltage 240V. Max watt 20w. E27. Material Aluminium.



IP54. E27.



## VK/01074



## Product Models


Code	Model	Box
75169-234269	VK/01074/MC ■ Brushed Chrome. E27. Max 50w.	6pcs
75169-235269	VK/01074/ABS ■ Bronze. E27. Max 50w.	6pcs
75169-236269	VK/01074/NB ■ Natural Brass. E27. Max 50w.	6pcs
75169-242269	VK/01074/TC ■ Terracotta. E27. Max 50w.	6pcs

## Details

Voltage 240V. Max watt 50w. E27. Material Brass/Glass.



IP65. E27.

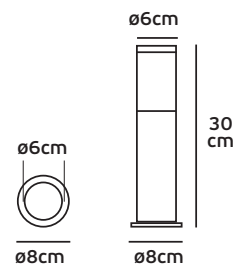

## VK/01075



## Product Models


Code	Model	Box
75169-237269	VK/01075/MC ■ Brushed Chrome. E27. Max 50w.	6pcs
75169-238269	VK/01075/ABS ■ Bronze. E27. Max 50w.	6pcs
75169-239269	VK/01075/NB ■ Natural Brass. E27. Max 50w.	6pcs
75169-244269	VK/01075/TC ■ Terracotta. E27. Max 50w.	6pcs

## Details

Voltage 240V. Max watt 50w. E27. Material Brass/Glass.



IP65. E27.

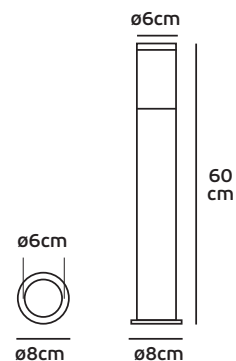



VK/03203/PE




Product Models

Code	Model	Box
75169-378694	VK/03203/PE/W □ White. E27. Max 60w.	1pc
75169-377694	VK/03203/PE/B ■ Black. E27. Max 60w.	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
Bottom open. 2 years guarantee.

  IP23. E27.



VK/03203/WA




Product Models

Code	Model	Box
75169-376694	VK/03203/WA/W □ White. E27. Max 60w.	1pc
75169-375694	VK/03203/WA/B ■ Black. E27. Max 60w.	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
Bottom open. 2 years guarantee.

  IP23. E27.

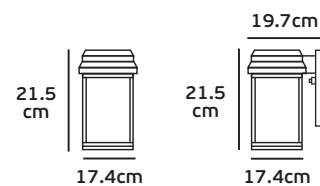

VK/03203



Product Models


Code	Model	Box
75169-380694	VK/03203/30/W □ White. E27. Max 60w. L29.4cm	1pc
75169-379694	VK/03203/30/B ■ Black. E27. Max 60w. L29.4cm	1pc
75169-382694	VK/03203/60/W □ White. E27. Max 60w. L60cm	1pc
75169-381694	VK/03203/60/B ■ Black. E27. Max 60w. L60cm	1pc
75169-384694	VK/03203/80/W □ White. E27. Max 60w. L80cm	1pc
75169-383694	VK/03203/80/B ■ Black. E27. Max 60w. L80cm	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
2 years guarantee.



IP23. E27.



VK/03203/100



Product Models


Code	Model	Box
75169-385694	VK/03203/100/B ■ Black. E27. Max 60w. L101cm	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
2 years guarantee.



IP23. E27.

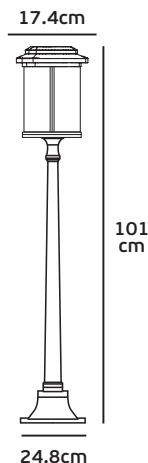

VK/03204/PE




Product Models

Code	Model	Box
75169-389694	VK/03204/PE/W □ White. E27. Max 60w.	1pc
75169-388694	VK/03204/PE/B ■ Black. E27. Max 60w.	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
Bottom open. 2 years guarantee.

  IP23. E27.



VK/03204/WA




Product Models

Code	Model	Box
75169-387694	VK/03204/WA/W □ White. E27. Max 60w.	1pc
75169-386694	VK/03204/WA/B ■ Black. E27. Max 60w.	1pc

Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
Bottom open. 2 years guarantee.

  IP23. E27.

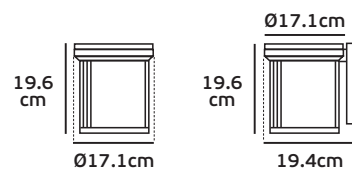

VK/03204

## Product Models

Code	Model	Box
75169-391694	VK/03204/25/W □ White. E27. Max 60w. L24.8cm	1pc
75169-390694	VK/03204/25/B ■ Black. E27. Max 60w. L24.8cm	1pc
75169-393694	VK/03204/60/W □ White. E27. Max 60w. L60cm	1pc
75169-392694	VK/03204/60/B ■ Black. E27. Max 60w. L60cm	1pc
75169-395694	VK/03204/80/W □ White. E27. Max 60w. L80cm	1pc
75169-394694	VK/03204/80/B ■ Black. E27. Max 60w. L80cm	1pc


## Details

Voltage 230V. Max watt 60w. Lampholder E27. Material Aluminium + clear glass.  
2 years guarantee.



IP23. E27.

Ø17.1cm



VK/02125




Product Models

Code	Model	Box
75169-355694	VK/02125/AN ■ Anthracite. E27. Max 15w.	1pc

Details

Voltage 200-240V. Max watt 15w. E27. Working temperature -20°C→40°C.  
Material Alu diecast/Glass.

  IP54. E27.

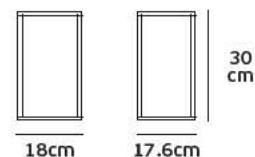

VK/02126




Product Models

Code	Model	Box
75169-356694	VK/02126/AN ■ Anthracite. E27. Max 15w.	1pc

Details

Voltage 200-240V. Max watt 15w. E27. Working temperature -20°C→40°C.  
Material Alu diecast/Glass.

  IP54. E27.



VK/02127




Product Models

Code	Model	Box
75169-357694	VK/02127/AN ■ Anthracite. E27x2. Max 2x15w.	1pc

Details

Voltage 200-240V. Max watt 2x15w. E27x2. Working temperature -20°C→40°C.  
Material Alu diecast/Glass.

  IP54. E27x2.

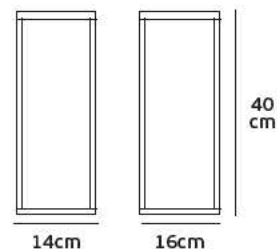



VK/03066/PE



Product Models


Code	Model	Box
75169-276694	VK/03066/PE/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP23. E27.

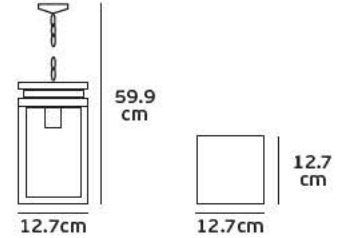

VK/03066/WA



Product Models


Code	Model	Box
75169-274694	VK/03066/WA/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass. Bottom open.



IP23. E27.

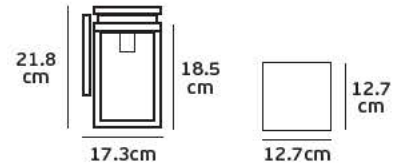

VK/03066/28



Product Models


Code	Model	Box
75169-275694	VK/03066/28/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP33. E27.

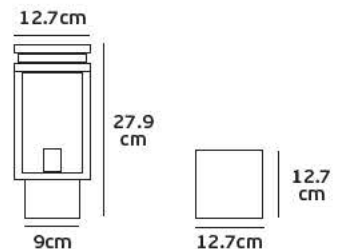

VK/03066/60



Product Models


Code	Model	Box
75169-277694	VK/03066/60/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP33. E27.

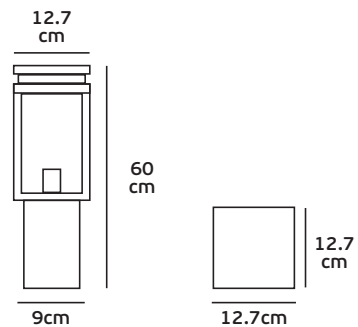

VK/03066/80



Product Models


Code	Model	Box
75169-278694	VK/03066/80/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP33. E27.

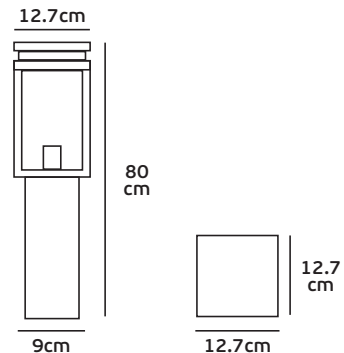



VK/03067/PE



Product Models


Code	Model	Box
75169-281694	VK/03067/PE/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP23. E27.

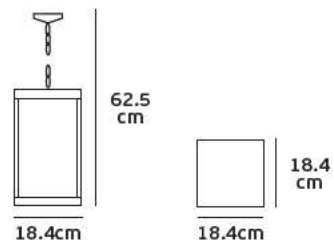

VK/03067/WA



Product Models


Code	Model	Box
75169-279694	VK/03067/WA/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP23. E27.

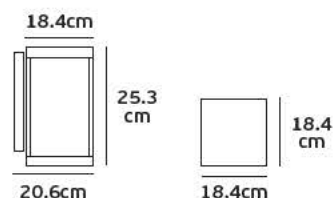

VK/03067/35



Product Models


Code	Model	Box
75169-280694	VK/03067/35/B ■ Black. E27. Max 60w.	6pcs

Details

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



IP33. E27.

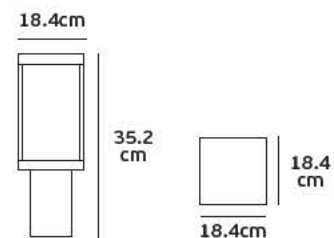

VK/03067/80

**Product Models**

**Code**  
75169-282694

**Model**  
VK/03067/80/B  
■ Black. E27. Max 60w.

**Box**  
4pcs


**Details**

Voltage 240V. Max watt 60w. E27. Material Aluminium/Glass.



**IP33. E27.**

18.4cm



80  
cm




18.4  
cm

10cm

18.4cm



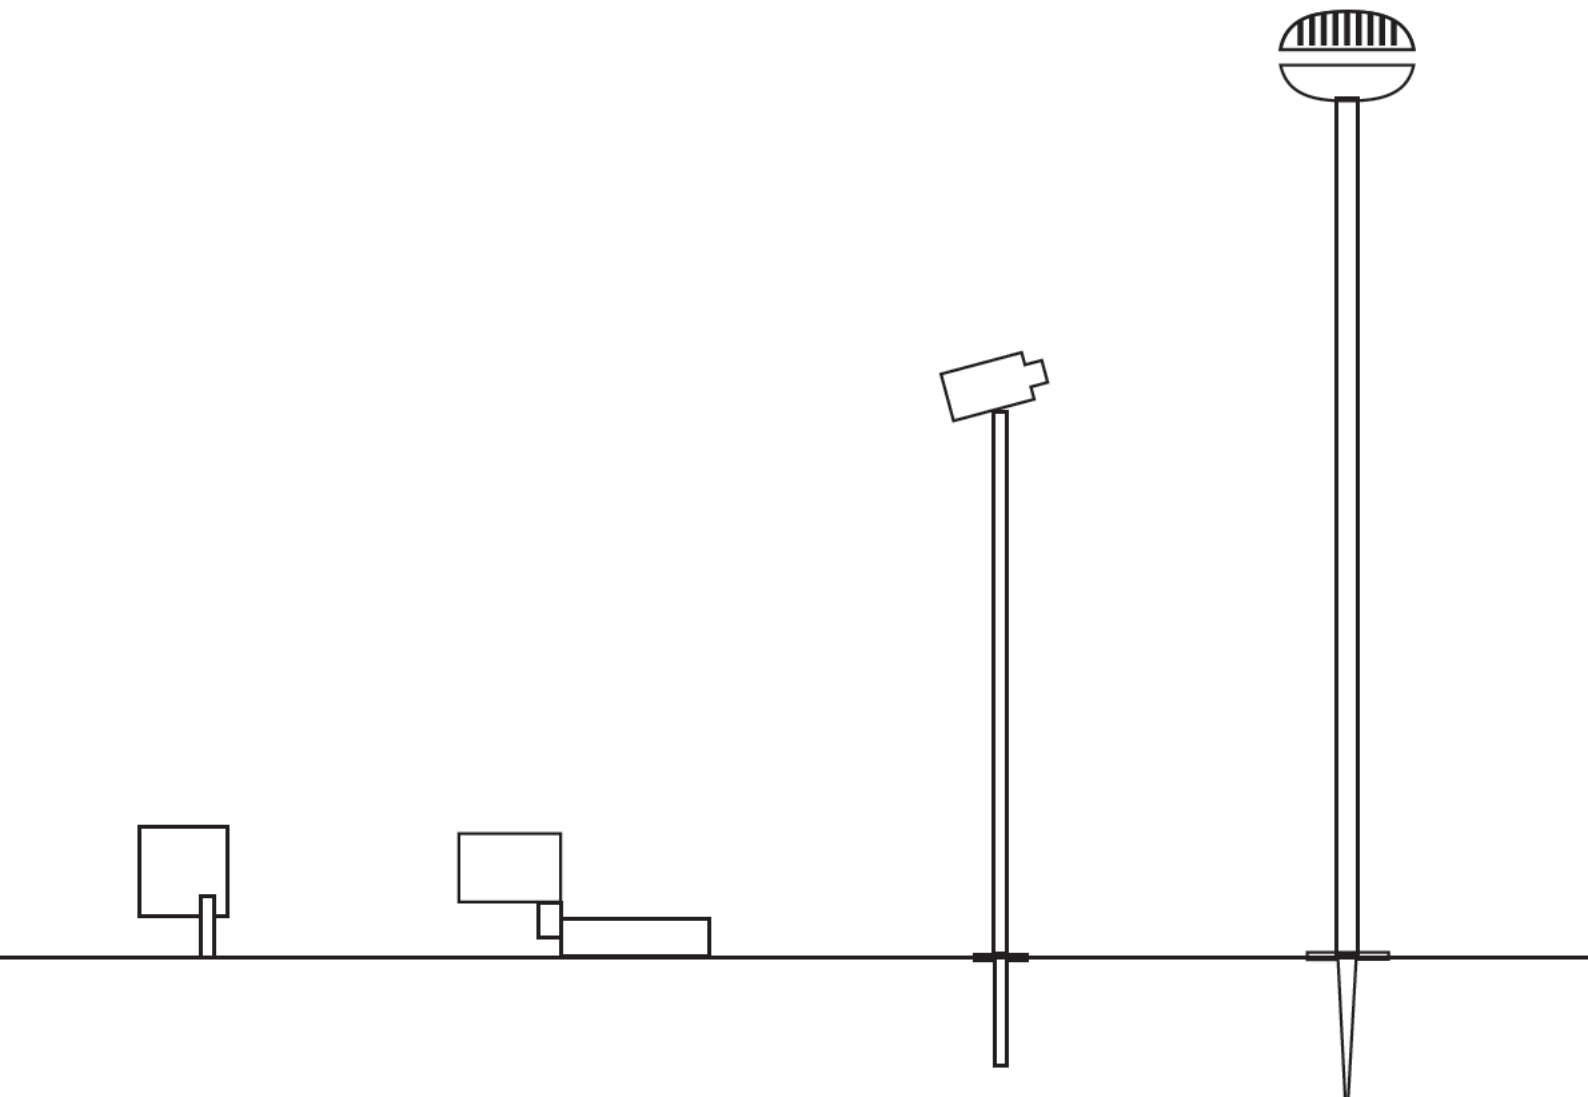

*outdoor garden lights*

VK/02136

Product Models

Code	Model	Box
75169-370694	VK/02136/AN/W ■ Anthracite. 3000K. 110lm. 1.3w. 28°. CRI>79	12pcs
75169-369694	VK/02136/W/W □ White. 3000K. 110lm. 1.3w. 28°. CRI>79	12pcs




Details

AC Driver DC 3.7V (Included). Watt 1.3w. Beam Angle 28°. CRI>79. Type of Led CREE. Panel 2watt. Charge 6-8h. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium diecast. Glass. 2 years guarantee.



IP65. 1.3w.

- » Automatically light up at night Work time >7
- » Plastic spike included



solar



VK/02042/P



Product Models

Code	Model	Box
75169-297692	VK/02042/AN/P/W ■ Anthracite. 3000K. 300lm. 6w. 25°. CRI>80	10pcs


Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 25°. CRI>80. Type of Led COB. Panel 2watt. Charge 6-8h. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. 2 years guarantee.





**IP65. 6w.**



VK/02042



Product Models

Code	Model	Box
75169-293692	VK/02042/AN/W ■ Anthracite. 3000K. 300lm. 6w. 25°. CRI>80	10pcs
75169-294692	VK/02042/AN/C ■ Anthracite. 4000K. 350lm. 6w. 25°. CRI>80	10pcs
75169-295692	VK/02042/W/W □ White. 3000K. 300lm. 6w. 25°. CRI>80	10pcs
75169-296692	VK/02042/W/C □ White. 4000K. 350lm. 6w. 25°. CRI>80	10pcs


Details

AC Driver 220-240V (Included). Watt 6w. Beam Angle 25°. CRI>80. Type of Led COB. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Aluminium. 2 years guarantee.





**IP65. 6w.**

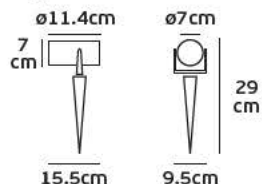

VK/02114



Product Models

Code	Model	Box
75169-345694	VK/02114/AN/W ■ Anthracite. 3000K. 613lm. 10w. 41°. CRI>82	6pcs


Details

AC Driver 200-240V (Included). Watt 10w. Beam Angle 41°. CRI>82.  
Type of Led COB SHINING ON. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.





**IP65. 10w.**



VK/02113



Product Models

Code	Model	Box
75169-344694	VK/02113/AN/W ■ Anthracite. 3000K. 613lm. 10w. 41°. CRI>82	8pcs


Details

AC Driver 200-240V (Included). Watt 10w. Beam Angle 41°. CRI>82.  
Type of Led COB SHINING ON. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.





**IP65. 10w.**

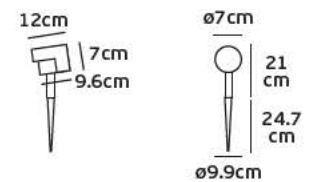



VK/02073

**Product Models**


Code	Model	Box
75169-344692	VK/02073/B/W ■ Black. 3000K. 80lm. 1w. 18°. CRI>80	10pcs

**Details**

AC Driver 12V (Included). Watt 1w. Beam Angle 18°. CRI>80. Type of Led SMD.  
Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable.  
Material Aluminium. 2 years guarantee.



IP67. 1w.

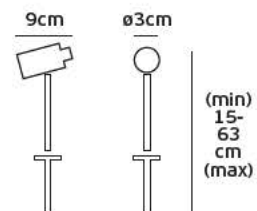





**VK/02096**


**Product Models**

Code	Model	Box
75169-322694	VK/02096/AN/W ■ Anthracite. 3000K. 467lm. 6w. 36°. CRI>81.	6pcs

**Details**

AC Driver 100-240V (Included). Watt 6w. Beam Angle 36°. CRI>81.  
Type of Led CREE XBD. Lifetime 30.000hrs. Working temperature -20°C→45°C.  
No Dimmable. Material Aluminium. 2 years guarantee.

   **IP54. 6w.**

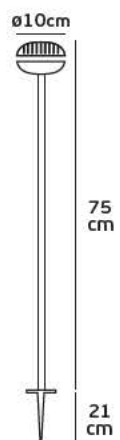



VK/02128



Product Models


Code	Model	Box
75169-358694	VK/02128/AN/W ■ Anthracite. 3000K. 90lm. 1w. 28°. CRI>83	36pcs
75169-359694	VK/02128/G/W ■ Grey. 3000K. 90lm. 1w. 28°. CRI>83	36pcs

Details

AC Driver 12-24V (Included). Watt 1w. Beam Angle 28°. CRI>83. Type of Led CREE. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Die-cast Aluminium. 2 years guarantee.



IP65. 1w.



VK/02123



Product Models


Code	Model	Box
75169-352694	VK/02123/AN/W ■ Anthracite. 3000K. 656lm. 10w. 26°. CRI>83	4pcs

Details

AC Driver 200-240V (Included). Watt 10w. Beam Angle 26°. CRI>83. Type of Led COB. Lifetime 30.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Die-cast Aluminium. 2 years guarantee.



IP65. 10w.

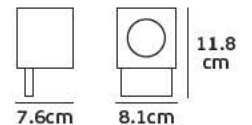



VK/02130



Product Models

Code	Model	Box
75169-278997	VK/02130/AN ■ Anthracite. GU10/PAR16. Max 35w.	20pcs

Details

Voltage 240V. Max watt 35w. GU10/PAR16. Material Stainless Steel.



IP54. GU10.



VK/01047



Product Models

Code	Model	Box
74168-179677	VK/01047/MC ■ Brushed Chrome. GU10. Max 35w.	10pcs
74168-203677	VK/01047/ABS ■ Bronze. GU10. Max 35w.	10pcs
74168-196677	VK/01047/NB ■ Natural Brass. GU10. Max 35w.	10pcs

Details

Voltage 240V. Max watt 35w. GU10. Material Brass.



IP65. GU10.



Mini lamp MR11-GU10 is placed, not included

VK/01094



Product Models


Code	Model	Box
74168-256677	VK/01094/MC ■ Brushed Chrome. GU10. Max 35w.	1pc
74168-258677	VK/01094/ABS ■ Bronze. GU10. Max 35w.	1pc
74168-257677	VK/01094/NB ■ Natural Brass. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10. Material Brass.



IP65. GU10.

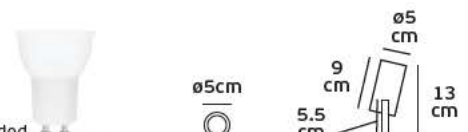

Mini lamp MR11-GU10 is placed, not included

VK/01047/SPIKE

Product Models


**Code**  
74168-194677



**Model**  
VK/01047/SPIKE  
■ Bronze.

**Box**  
10pcs



**Details**  
Material Brass.





*outdoor inground lights*



VK/02129/1

### Product Models




Code	Model	Box
75169-360694	VK/02129/AN/1/W ■ Anthracite. 3000K. 67lm. 7w. 110°. CRI>82	8pcs

### Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 110°. CRI>82. Type of Led CREE. Lifetime 30.000hrs. No Dimmable. Material Aluminium diecast. Static weight 500kg allowed. Included Recessed Plastic Box. 2 years guarantee.



IP67. 7w.

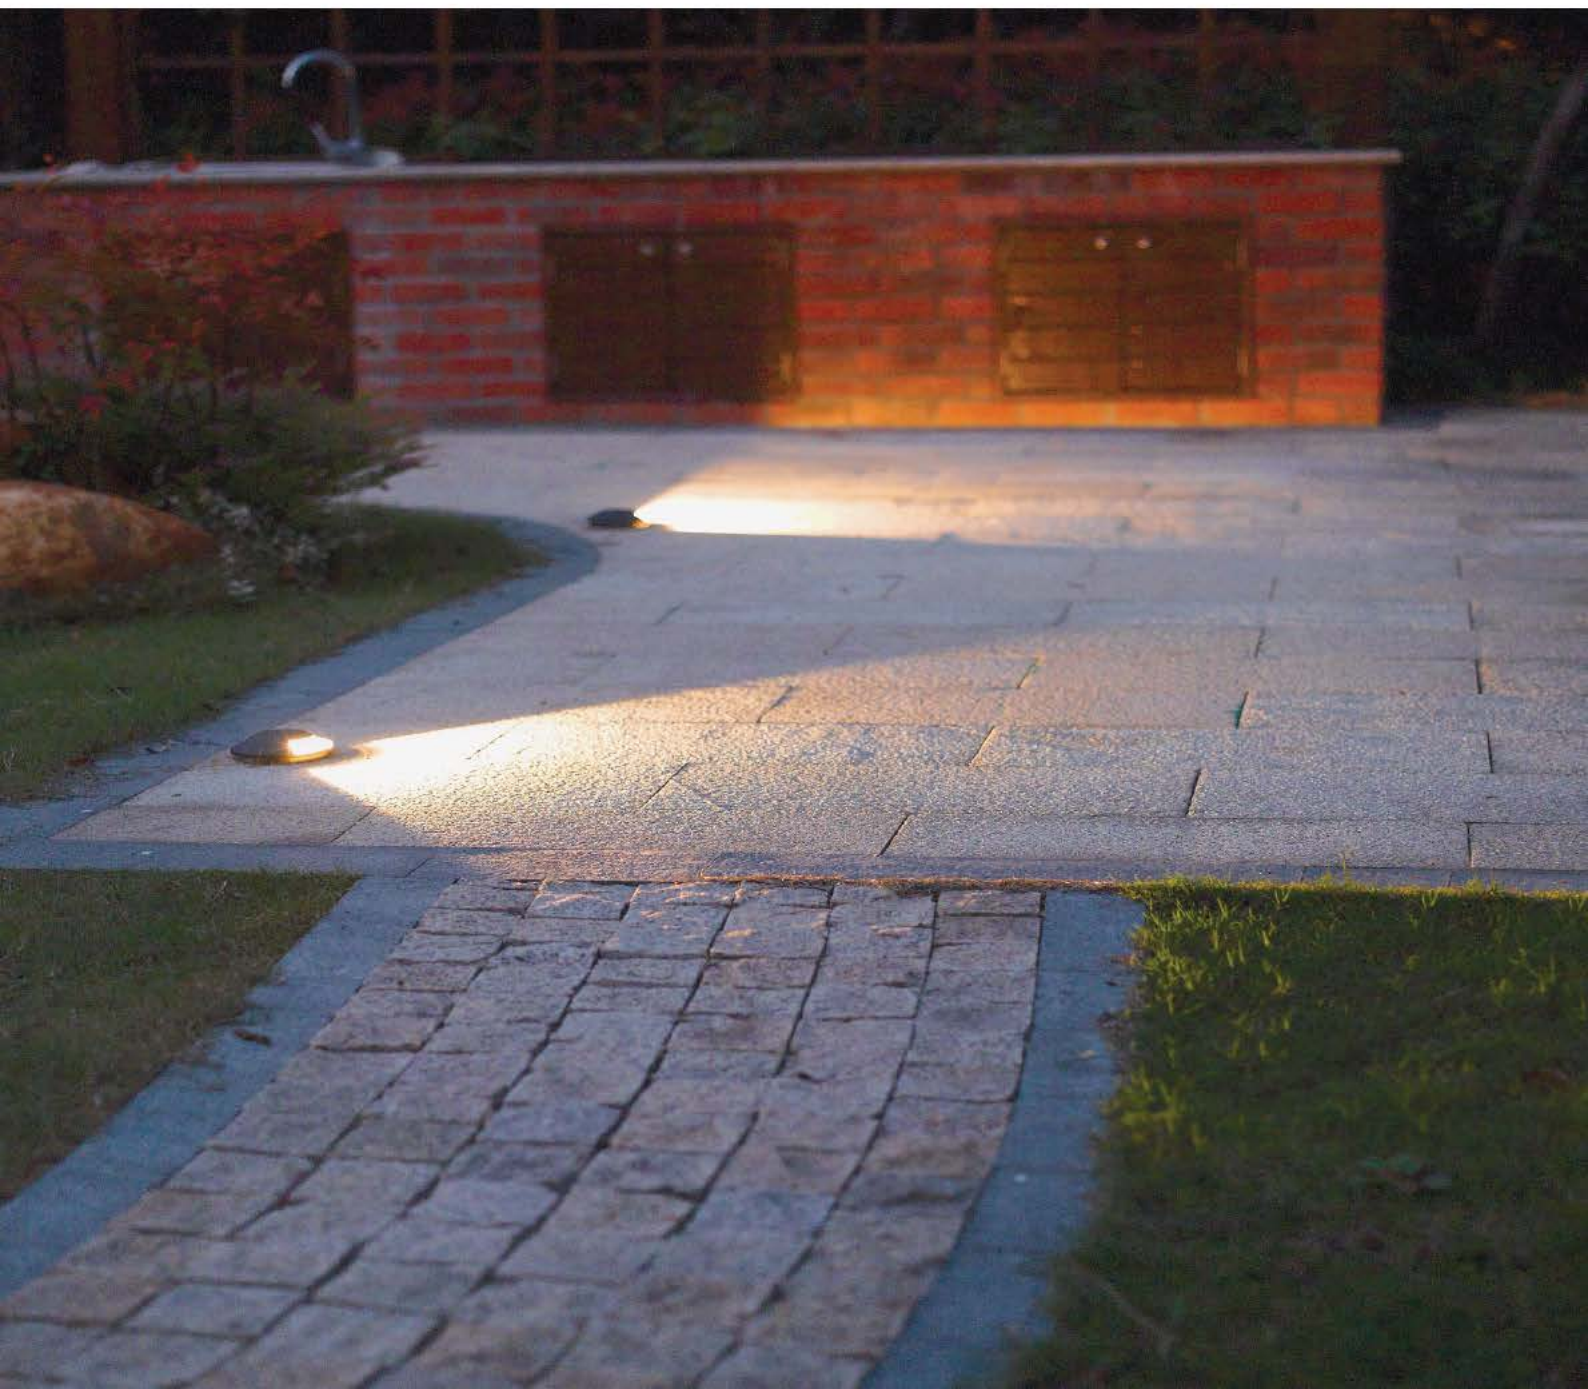

VK/02129/2



Product Models



Code	Model	Box
75169-361694	VK/02129/AN/2/W ■ Anthracite. 3000K. 135lm. 7w. 99°. CRI>82	8pcs

Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 99°. CRI>82. Type of Led CREE. Lifetime 30.000hrs. No Dimmable. Material Aluminium diecast. Static weight 500kg allowed. Included Recessed Plastic Box. 2 years guarantee.



IP67. 7w.



VK/02129/4



Product Models



Code	Model	Box
75169-362694	VK/02129/AN/4/W ■ Anthracite. 3000K. 188lm. 7w. 70°. CRI>82	8pcs

Details

AC Driver 200-240V (Included). Watt 7w. Beam Angle 70°. CRI>82. Type of Led CREE. Lifetime 30.000hrs. No Dimmable. Material Aluminium diecast. Static weight 500kg allowed. Included Recessed Plastic Box. 2 years guarantee.



IP67. 7w.



VK/02117



Product Models


Code	Model	Box
74168-234704	VK/02117/W/10 ■ Steel. 3000K. 180lm. 1w. 10°. CRI>80	54pcs
74168-235704	VK/02117/W/60 ■ Steel. 3000K. 180lm. 1w. 60°. CRI>80	54pcs

Details

AC Driver 85-265V (Included). Watt 1w. CRI>80. Type of Led EPistar. Lifetime 50.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Stainless steel. Location Ground/Pool. Included Recessed plastic box ø4cm. 2 years guarantee.



IP68. 1w.

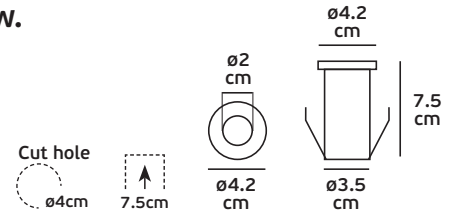

VK/02118



Product Models


Code	Model	Box
74168-236704	VK/02118/W/10 ■ Steel. 3000K. 200lm. 3w. 10°. CRI>80	54pcs
74168-237704	VK/02118/W/60 ■ Steel. 3000K. 200lm. 3w. 60°. CRI>80	54pcs

Details

AC Driver 85-265V (Included). Watt 3w. CRI>80. Type of Led EPistar. Lifetime 50.000hrs. Working temperature -20°C→45°C. No Dimmable. Material Stainless steel. Location Ground/Pool. Included Recessed plastic box ø4.5cm. 2 years guarantee.



IP68. 3w.

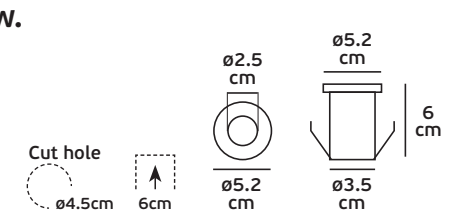

VK/02118/RGB



Product Models


Code	Model	Box
74168-238704	VK/02118/RGB/10 ■ Steel. RGB. 200lm. 3w. 10°. CRI>80	54pcs
74168-239704	VK/02118/RGB/60 ■ Steel. RGB. 200lm. 3w. 60°. CRI>80	54pcs

Details

3x350mA (driver not included). Watt 3w. CRI>80. Type of Led EPistar. Lifetime 50.000hrs. Working temperature -20°C→45°C. Dimmable. Material Stainless steel. Location Ground/Pool. Included Recessed plastic box ø4.5cm. 2 years guarantee.



IP68. 3w.

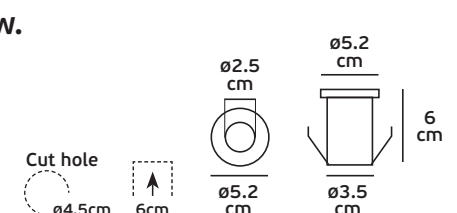



VK/01096

Product Models


Code	Model	Box
74168-264997	VK/01096/MC ■ Nickel Mat. GU10. Max 28w.	1pc

Details

Voltage 240V. Max watt 28w. Par16. Material Die casting aluminium + glass. Use In ground.



IP67. GU10.

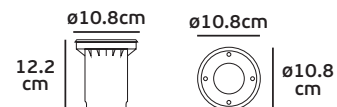

VK/01097

Product Models


Code	Model	Box
74168-265997	VK/01097/MC ■ Nickel Mat. GU10. Max 28w.	1pc

Details

Voltage 240V. Max watt 28w. Par16. Material Die casting aluminium + glass. Use In ground.



IP67. GU10.

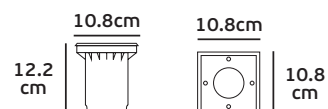



VK/01052



Product Models

Code	Model	Box
74168-170677	VK/01052/MC ■ Brushed Chrome. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10. Material Aluminium/Stainless 316.

⏚ ⚡ IP65. GU10.



VK/01054




Product Models

Code	Model	Box
74168-146677	VK/01054/MC ■ Brushed Chrome. Module Led (NOT included). Max 35w.	10pcs

Details

Voltage 350mA-700mA. Max watt 35w. Module Led. Material Aluminium/Stainless 316.

⏚ ⚡ IP65. Module Led



VK/01054/70



Product Models

Code	Model	Box
74168-240677	VK/01054/70/MC ■ Brushed Chrome. GU10. Max 35w.	10pcs

Details


Voltage 240V. Max watt 35w. GU10. Material Aluminium/Stainless 316.

⏚ ⚡ IP65. GU10



Mini lamp MR11-GU10 is placed, not included

VK/01053

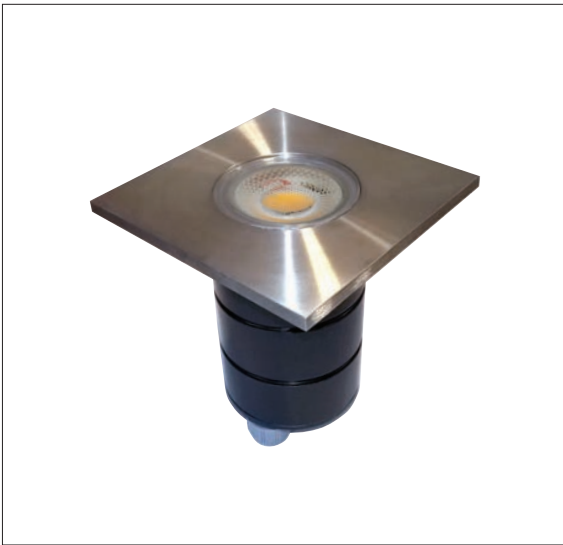


Product Models

Code	Model	Box
74168-141677	VK/01053/MC ■ Brushed Chrome. GU10. Max 35w.	1pc

Details

Voltage 240V. Max watt 35w. GU10. Material Aluminium/Stainless 316.

⏚ ⚡ IP65. GU10.



VK/01055




Product Models

Code	Model	Box
74168-143677	VK/01055/MC ■ Brushed Chrome. Module Led (NOT included). Max 35w.	10pcs

Details

Voltage 350mA-700mA. Max watt 35w. GU10. Material Aluminium.

⏚ ⚡ IP65. Module LED

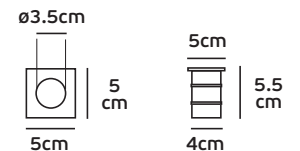

VK/01055/70




Product Models

Code	Model	Box
74168-241677	VK/01055/70/MC ■ Brushed Chrome. GU10. Max 35w.	10pcs

Details

Voltage 350mA-700mA. Max watt 35w. GU10. Material Aluminium.

⏚ ⚡ IP65. GU10

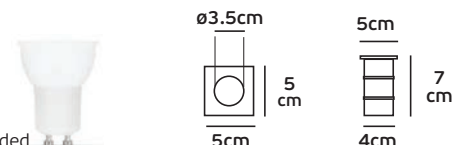

Mini lamp MR11-GU10 is placed, not included



VK/02012



Product Models


Code	Model	Box
62159-093106	VK/02012/D □ White. 6000K. 1.700lm. 18w. 120°.	10pcs
62159-094106	VK/02012/BL □ White. BLUE. 250lm. 18w. 120°.	10pcs

Details

AC Driver 12V (Included). Watt 18w. Beam Angle 120°. Type of Led SMD 2835. Lifetime 30.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Plastic. Included Cable 2m hrnf 07 - 2x1.5mm. 2 years guarantee.



IP68. 18w.



VK/02012/RGB



Product Models


Code	Model	Box
62159-095106	VK/02012/RGB □ White. RGB. 500lm. 18w. 120°.	10pcs

Details

AC Driver 12V (Included). Watt 18w. Beam Angle 120°. Type of Led SMD 2835. Lifetime 30.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Plastic. Included Cable 2m hrnf 07 - 2x1.5mm & remote control. 2 years guarantee.



IP68. 18w.



VK/05016



Product Models


Code	Model	Box
01026-015106	VK/05016/D ■ Grey. 6500K. 1.700lm. 18w. 120°. CRI>80	10pcs
01026-017106	VK/05016/BL ■ Grey. BLUE. 250lm. 18w. 120°. CRI>80	10pcs
01026-016106	VK/05016/RGB ■ Grey. RGB. 500lm. 18w. 120°. CRI>80	10pcs

Details

AC Driver 12V (Included). Watt 18w. Beam Angle 120°. Type of Led SMD 2835. Lampholder G53/PAR56. Lifetime 30.000hrs. Clicks 100.000. Working temperature -40°C→40°C. No Dimmable. Material Glass. Included Remote control for RGB color. 2 years guarantee.



IP68. 18w.



VK/ULFD-2

## Product Models



Code	Model	Box
62159-062291	VK/ULFD-2/WS ■ Black. 6000K. 350lm. 9w. 40°.	1pc
62159-063291	VK/ULFD-2/MS ■ Black. RGB. 220lm. 9w. 40°.	1pc

## Details

AC Driver 12V (Included). Watt 9w. Beam Angle 40°. Type of Led SMD. Lifetime 30.000hrs. Working temperature -20°C→40°C. No Dimmable. Material Plastic. Included Cable 1.65m hrnf 07 - 2x1mm. 2 years guarantee.



IP68. 9w.





*outdoor wall washers*



VK/02167/S/.../8




Product Models

Code	Model	Box
63158-002115	VK/02167/S/W/8 ■ Silver. 3000K. 217lm. 2w. 5.3°. 1 reflector. CRI>80	1pc
63158-003115	VK/02167/S/C/8 ■ Silver. 4000K. 217lm. 2w. 5.3°. 1 reflector. CRI>80	1pc

Details

Led light with 1 reflector. Voltage 24V. Watt 2w. Beam angle 5.3°. CRI>80. IP Rating IP66. Type of Led CREE XPG-3. No Dimmable. Lifetime 20.000 hrs. Working temperature -40° ~ 50°C. Material Aluminium. Driver JS. 3-5 years guarantee.

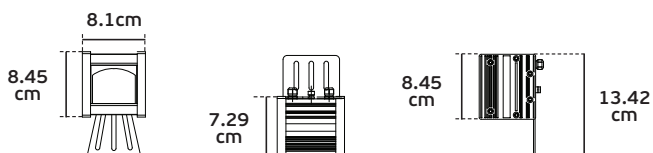

VK/02167/S/.../14




Product Models

Code	Model	Box
63158-004115	VK/02167/S/W/14 ■ Silver. 3000K. 445lm. 4w. 5.3°. 2 reflectors. CRI>80	1pc
63158-005115	VK/02167/S/C/14 ■ Silver. 4000K. 445lm. 4w. 5.3°. 2 reflectors. CRI>80	1pc

Details

Led light with 2 reflectors. Voltage 110-240V. Watt 4w. Beam angle 5.3°. CRI>80. IP Rating IP66. Type of Led CREE XPG-3. No Dimmable. Lifetime 20.000 hrs. Working temperature -40° ~ 50°C. Material Aluminium. Driver JS. 3-5 years guarantee.

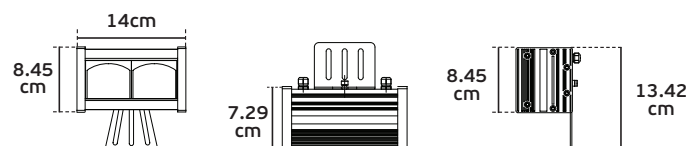





VK/02167/S/.../38

Product Models



Code	Model	Color	Temp	LM	Watt	Beam	Reflectors	Box
63158-006115	VK/02167/S/W/38	■ Silver	3000K	1.320lm	12w	5.3°	6 reflectors	1pc
63158-007115	VK/02167/S/C/38	■ Silver	4000K	1.320lm	12w	5.3°	6 reflectors	1pc

Details

Led light with 6 reflectors. Voltage 110-240V. Watt 12w. Beam angle 5.3°. CRI>80. IP Rating IP66. Type of Led CREE XP6-3. No Dimmable. Lifetime 20.000 hrs. Working temperature -40° ~ 50°C. Material Aluminium. Driver Meanwell. 3-5 years guarantee.



IP66. 12w.

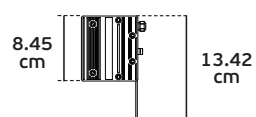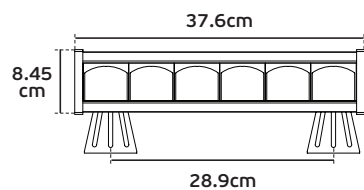









VK/02167/S/.../73

Product Models

Code	Model	Color	Temp	LM	Watt	Beam	Reflectors	Box
63158-008115	VK/02167/S/W/73	■ Silver	3000K	2.608lm	24w	5.3°	12 reflectors	1pc
63158-009115	VK/02167/S/C/73	■ Silver	4000K	2.608lm	24w	5.3°	12 reflectors	1pc

Details

Led light with 12 reflectors. Voltage 110-240V. Watt 24w. Beam angle 5.3°. CRI>80. IP Rating IP66. Type of Led CREE XPG-3. No Dimmable. Lifetime 20.000 hrs. Working temperature -40° ~ 50°C. Material Aluminium. Driver Meanwell. 3-5 years guarantee.

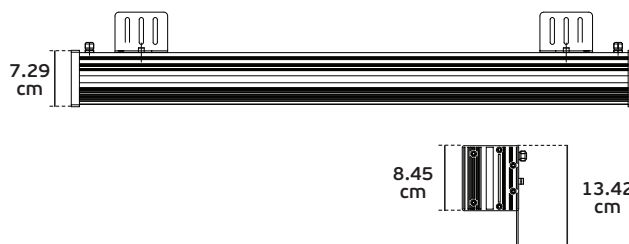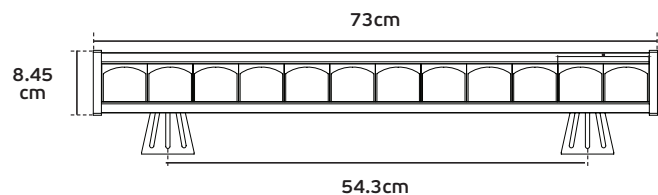



VK/02167/S/.../108

Product Models


Code	Model	Color	Temp	LM	Watt	Beam	Reflectors	Box
63158-010115	VK/02167/S/W/108	■ Silver	3000K	3.920lm	54w	5.3°	18 reflectors	1pc
63158-011115	VK/02167/S/C/108	■ Silver	4000K	3.920lm	54w	5.3°	18 reflectors	1pc

Details

Led light with 18 reflectors. Voltage 110-240V. Watt 54w. Beam angle 5.3°. CRI>80. IP Rating IP66. Type of Led CREE XPG-3. No Dimmable. Lifetime 20.000 hrs. Working temperature -40° ~ 50°C. Material Aluminium. Driver Meanwell. 3-5 years guarantee.



IP66. 54w.

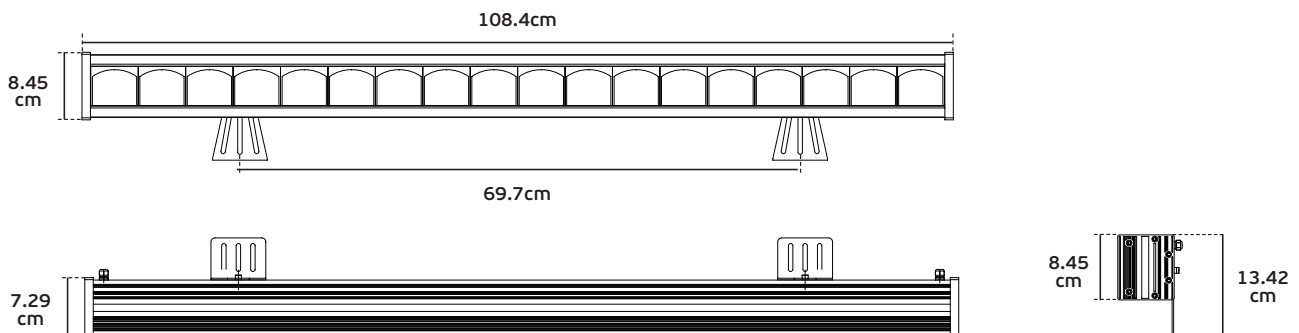

VK/02008



Product Models


Code	Model	Box
63158-107736	VK/02008/W/15 ■ Anthracite. 3000K. 340lm. 4w. 8°-10°. CRI>80	1pc
63158-108736	VK/02008/C/15 ■ Anthracite. 4000K. 360lm. 4w. 8°-10°. CRI>80	1pc
63158-105736	VK/02008/BL/15 ■ Anthracite. BLUE. 340lm. 4w. 8°-10°. CRI>80	1pc

Details

Driver 85-256V (Included). Watt 4w. Beam Angle 8°-10°. CRI>80. LED CREE High 4pcs. No Dimmable. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Aluminium. 2 years guarantee.



IP65. 4w.

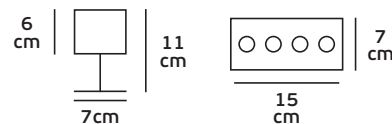

VK/02009



Product Models


Code	Model	Box
63158-109736	VK/02009/W/30 ■ Anthracite. 3000K. 800lm. 9w. 8°-10°. CRI>80	1pc
63158-104736	VK/02009/C/30 ■ Anthracite. 4000K. 820lm. 9w. 8°-10°. CRI>80	1pc
63158-106736	VK/02009/BL/30 ■ Anthracite. BLUE. 800lm. 9w. 8°-10°. CRI>80	1pc

Details

Driver 85-256V (Included). Watt 9w. Beam Angle 8°-10°. CRI>80. LED CREE High 9pcs. No Dimmable. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Aluminium. 2 years guarantee.



IP65. 9w.

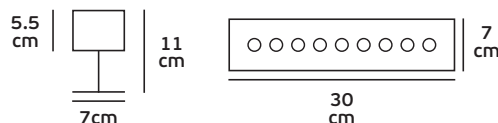



VK/02010


Product Models

Code	Model							Box
63158-101736	VK/02010/W/50	■ Anthracite	3000K	1.580lm	18w	85-265V		1pc
63158-180736	VK/02010/D/W/50	■ Anthracite	3000K	1.580lm	18w	85-265V.		1pc
63158-110736	VK/02010/C/50	■ Anthracite	4000K	1.600lm	18w	85-265V.		1pc
63158-111736	VK/02010/BL/50	■ Anthracite	BLUE	1.580lm	18w	85-265V.		1pc
63158-178736	VK/02010/AMB/50	■ Anthracite	AMBER	1.580lm	18w	85-265V.		1pc
63158-162736	VK/02010/RGB/50	■ Anthracite	RGB	1.580lm	18w	24V		1pc

Details

Driver 85-256V/24V (Included). Watt 18w. Beam Angle 8°-10°. CRI>80. LED CREE High. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Aluminium. 2 years guarantee.

IP65. 18w.

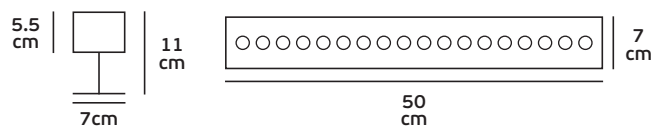



VK/02011


Product Models

Code	Model	■ Anthracite						Box
63158-102736	VK/02011/W/100	■ Anthracite	3000K	3.180lm	36w	85-265V		1pc
63158-177736	VK/02011/D/W/100	■ Anthracite	3000K	3.180lm	36w	85-265V		1pc
63158-112736	VK/02011/C/100	■ Anthracite	4000K	3.200lm	36w	85-265V		1pc
63158-114736	VK/02011/BL/100	■ Anthracite	BLUE	3.200lm	36w	85-265V		1pc
63158-179736	VK/02011/AMB/100	■ Anthracite	AMBER	3.200lm	36w	85-265V		1pc
63158-122736	VK/02011/RGB/100	■ Anthracite	RGB	3.180lm	36w	24V		1pc

Details

Driver 85-256V/24V (Included). Watt 36w. Beam Angle 8°-10°. CRI>80. LED CREE High. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Aluminium. 2 years guarantee.

IP65. 36w.

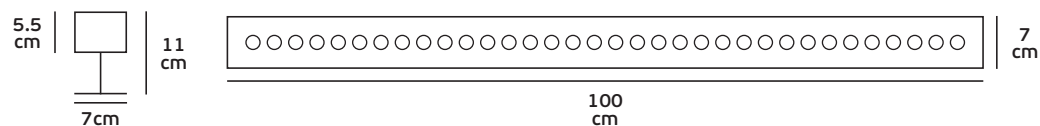



VK/02014R



Product Models


Code	Model	Box
63158-164736	VK/02014R/W/30 ■ Light Grey. 3000K. 800lm. 9w. 8°-10°. CRI>80.	1pc
63158-165736	VK/02014R/C/30 ■ Light Grey. 4000K. 820lm. 9w. 8°-10°. CRI>80.	1pc

Details


Driver 85-256V (Included). Watt 9w. Beam Angle 8°-10°. CRI>80. LED CREE High 9pcs. No Dimmable. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Steel. glass. 2 years guarantee.



IP67. 9w.



VK/02015R

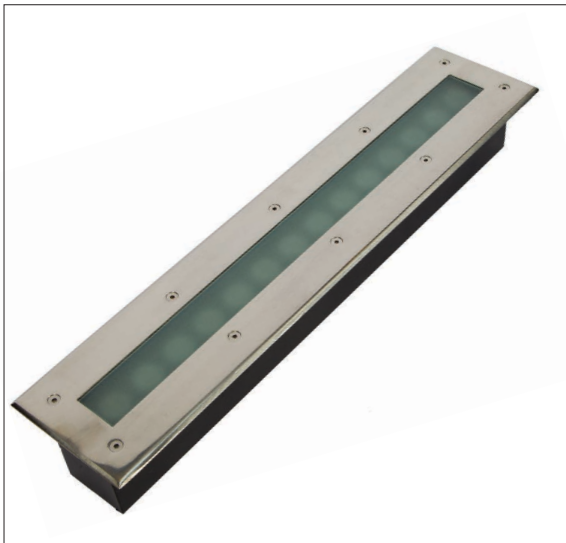

Product Models


Code	Model	Box
63158-166736	VK/02015R/W/50 ■ Light Grey. 3000K. 1.060lm. 12w. 8°-10°. CRI>80. 85-265V.	1pc
63158-167736	VK/02015R/C/50 ■ Light Grey. 4000K. 1.080lm. 12w. 8°-10°. CRI>80. 85-265V.	1pc
63158-168736	VK/02015R/RGB/50 ■ Light Grey. RGB. 1.060lm. 12w. 8°-10°. CRI>80. 24V.	1pc


Details

Driver 85-256V/24V (Included). Watt 12w. Beam Angle 8°-10°. CRI>80. LED CREE High 12pcs. No Dimmable. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Steel. glass. 2 years guarantee.



IP67. 12w.

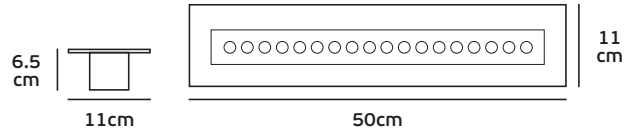

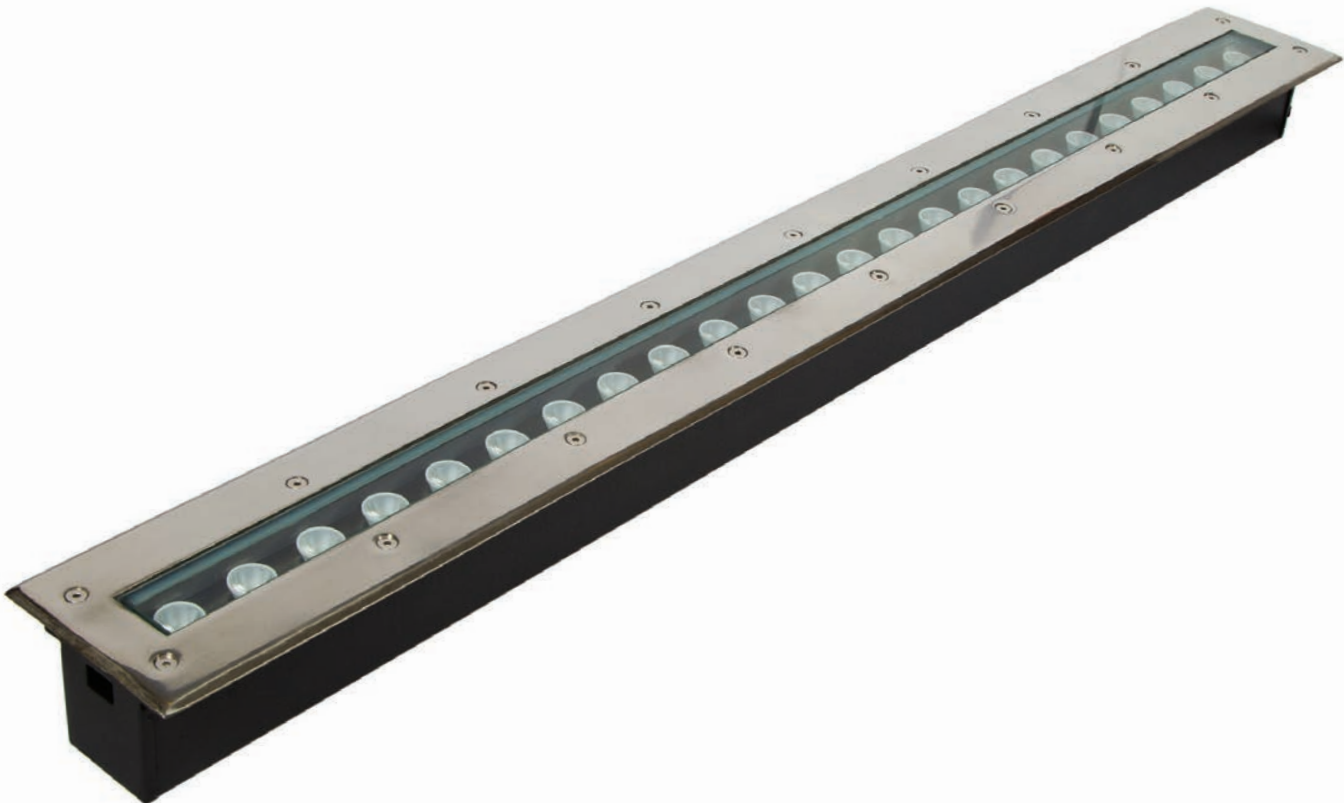

**VK/02016R** **Product Models**


Code	Model	Color	Temp	Beam	Power	Beam Angle	Voltage	Box
63158-169736	VK/02016R/W/100	Light Grey	3000K	2.130lm	24w	8°-10°	85-265V	1pc
63158-170736	VK/02016R/C/100	Light Grey	4000K	2.150lm	24w	8°-10°	85-265V	1pc
63158-171736	VK/02016R/RGB/100	Light Grey	RGB	2.130lm	24w	8°-10°	24V	1pc

**Details**

Driver 85-256V/24V (Included). Watt 24w. Beam Angle 8°-10°. CRI>80. LED CREE High 24pcs. No Dimmable. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Steel. glass. 2 years guarantee.




**IP67. 24w.**

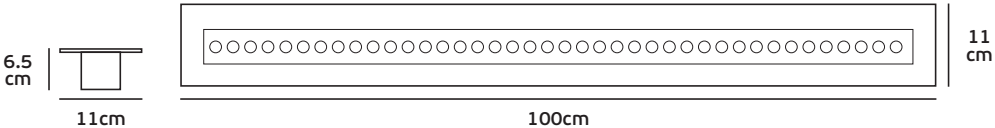





**VK/02137/30**

**Product Models**


Code	Model	■ Anthracite							Box
63158-239126	VK/02137/G/W/30	■ Anthracite	3000K	600lm	6w	10°-60°	CRI>80		1pc
63158-242126	VK/02137/G/C/30	■ Anthracite	4000K	600lm	6w	10°-60°	CRI>80		1pc
63158-245126	VK/02137/G/RGB/30	■ Anthracite	RGB	600lm	6w	10°-60°	CRI>80		1pc

**Details**

DC 24V (Included). Watt 6w. Beam Angle 10°-60°. CRI>80. LED High Power LED. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. No Dimmable. Material Aluminium. 2 years guarantee.



**IP65. 6w.**



**VK/02137/50**

**Product Models**


Code	Model	■ Anthracite							Box
63158-240126	VK/02137/G/W/50	■ Anthracite	3000K	1.200lm	12w	10°-60°	CRI>80		1pc
63158-243126	VK/02137/G/C/50	■ Anthracite	4000K	1.200lm	12w	10°-60°	CRI>80		1pc
63158-246126	VK/02137/G/RGB/50	■ Anthracite	RGB	1.200lm	12w	10°-60°	CRI>80		1pc

**Details**

DC 24V (Included). Watt 12w. Beam Angle 10°-60°. CRI>80. LED High Power LED. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. No Dimmable. Material Aluminium. 2 years guarantee.



**IP65. 12w.**





**VK/02137/100**


**Product Models**

Code	Model	Color	Temp	Beam	Power	Angle	Dimmable	Box
63158-241126	VK/02137/G/W/100	■ Anthracite	3000K	2.400lm	24w	10°-60°		1pc
63158-244126	VK/02137/G/C/100	■ Anthracite	4000K	2.400lm	24w	10°-60°		1pc
63158-247126	VK/02137/G/RGB/100	■ Anthracite	RGB	2.400lm	24w	10°-60°		1pc

*Details*

DC 24V (Included). Watt 24w. Beam Angle 10°-60°. CRI>80. LED High Power LED. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Material Aluminium. 2 years guarantee.

**IP65. 24w.**



VK/02138/G/RGB



Product Models


Code	Model	Box
63158-248126	VK/02138/G/RGB ■ Anthracite. RGB. 2.400lm. 24w. 10°. CRI>80	1pc

Details

DC Driver 24V (Included). Watt 24w. Beam Angle 10°. CRI>80. Type of Led High Power LED/ CREE. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Dimmable. Material Aluminium. 2 years guarantee.



IP65. 24w.

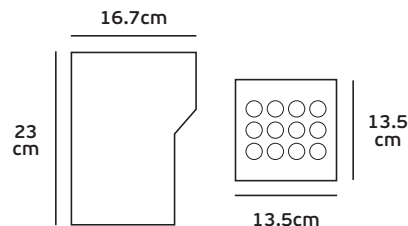

VK/02139/G/RGB



Product Models


Code	Model	Box
63158-249126	VK/02139/G/RGB ■ Anthracite. RGB. 4.800lm. 48w. 10°. CRI>80	1pc

Details

DC Driver 24V (Included). Watt 48w. Beam Angle 10°. CRI>80. Type of Led High Power LED/ CREE. Lifetime 50.000hrs. Clicks 50.000. Working temperature -40°C→60°C. Dimmable. Material Aluminium. 2 years guarantee.



IP65. 48w.

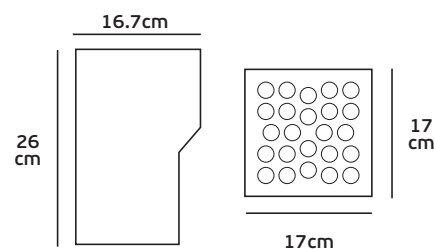






**VK/02120**

Code	Model	Box
63158-181736	VK/02120/W ■ Light Grey. 3000K. 900lm. 9w. 5°-8°. CRI>80.	1pc
63158-182736	VK/02120/C ■ Light Grey. 4000K. 900lm. 9w. 5°-8°. CRI>80.	1pc

**Product Models**




Included 2 x spikes





**Details**

Driver **85-256V (Included)**. Watt **9w**. Beam Angle **5°-8°**. CRI>80. LED **CREE High 9pcs**. **No Dimmable**. Lifetime **50.000hrs**. Clicks **50.000**. Working temperature **-40°C→60°C**. Material **Aluminium. glass**. 2 years guarantee.



**IP65. 9w.**





VK/02160

Product Models


Code	Model	Box
75169-242115	VK/02160/B/W ■ Black. 3000K. 950lm. 18w. 8-10°. CRI>80	1pc
75169-243115	VK/02160/B/C ■ Black. 4000K. 950lm. 18w. 8-10°. CRI>80	1pc

Details

Voltage 110-240V. Watt 18w. CRI>80. IP Rating IP66. Type of Led CREE XHP-50. No Dimmable. Lifetime 20.000 hrs. Working temperature -40 ~ 50°C. Material Aluminium. Driver Meanwell. 3-5 years guarantee.



IP66. 18w.

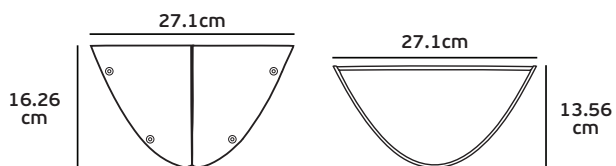



VK/02166

Product Models

**Code**  
63158-001115

**Model**  
VK/02166/B/D  
■ Black. 5000K. 8.298lm. 200w. 4°. CRI>80



**Box**  
1pc

Details

Led Focus Light. Voltage 110-240V. Watt 200w. CRI>80. IP Rating IP66.  
Type of Led Citizen048-2818C4. No Dimmable. Lifetime 20.000 hrs.  
Working temperature -40 ~ 50°C. Material Aluminium. Driver MOSO. 2 years guarantee.



**IP66. 200w.**

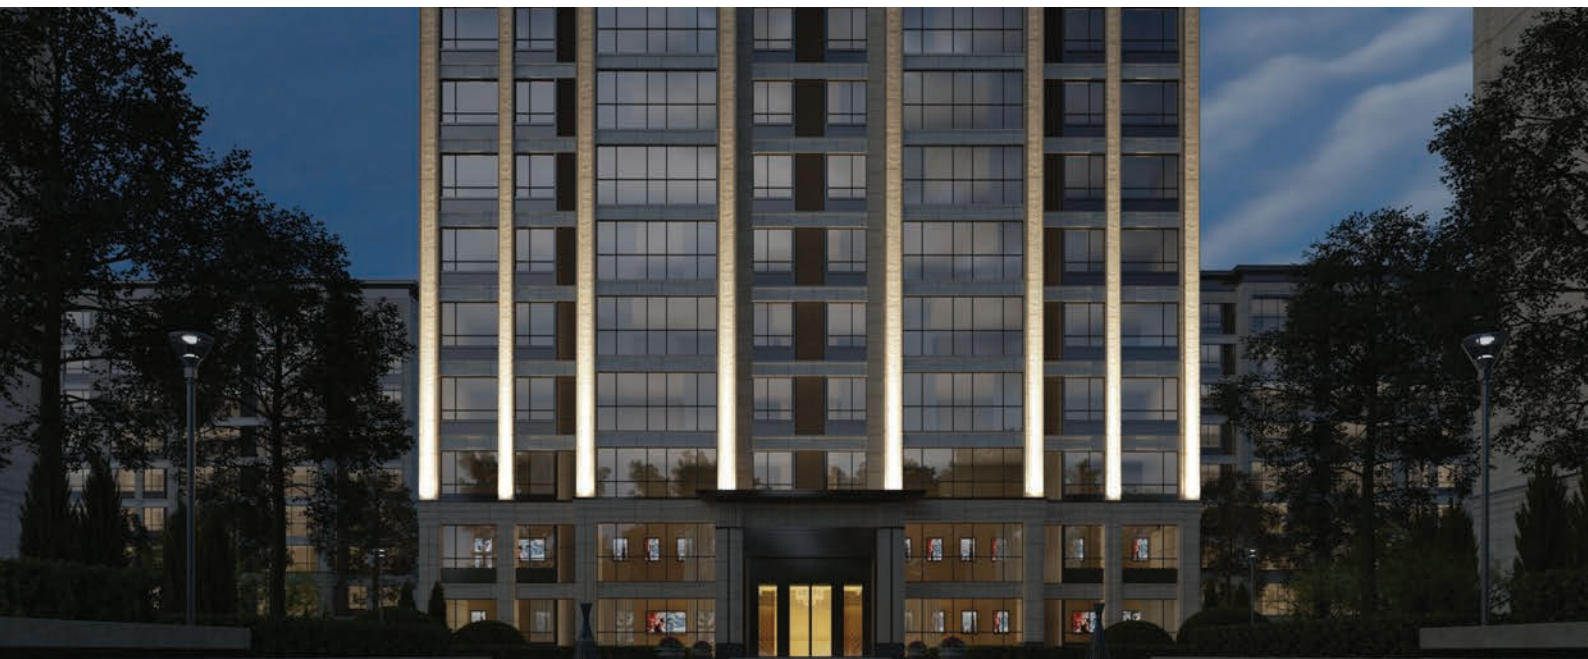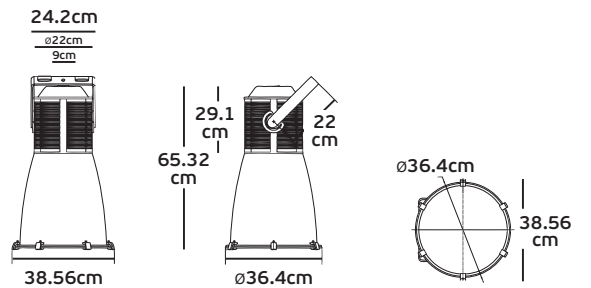







*solar street lights*

VK/02168

Product Models

Code	Model	Capacity Li-io battery	Color Temp	Lumen	Install Height	S. Power/F. Power*	S. ch. time**	Box
63158-304752	VK/02168/20/D	14.8V 153.92WH 2.6AH/PCS	5700K	4750lm	3m - 10m	25w/20w	6hours	1pc
63158-305752	VK/02168/40/D	14.8V 269.36WH 2.6AH/PCS	5700K	7125lm	4m - 15m	37.5w/40w	7hours	1pc
63158-306752	VK/02168/60/D	14.8V 423.28WH 2.6AH/PCS	5700K	11400lm	6m - 22m	60w/60w	7hours	1pc
63158-307752	VK/02168/80/D	14.8V 577.2WH 2.6AH/PCS	5700K	14250lm	8m - 28m	75w/80w	8hours	1pc

Details

PIR 120°, >5m. Type of Led SMD 3030 ~~3030~~ CRI>70+. Lighting time 7 nights +. Lighting time in ainday >10 days.  
 Control mode Button switch, ON/OFF Long Press 1.5s. Lighting mode M1: red light, M2: green light M3: orange light (press the button to switch between M1 (red) / M2 (green) / M3 (orange); 5S after mode indicates is power indicator Capacity indication Green: ≥70% ; Orange: 30%,-70% ; Red: <30%.  
 Core technology ALS 2.3/TCS 1.0 Technology for all night lighting even in cloudy or rainy day. Working temperature -20°C → 60°C.  
 Lithium power battery with long lifespan and high security 1500 life cycles. No Dimmable. Material/Color Aluminium alloy + tempered glass/ Aluminium.  
 IP IP65. IK Class IK10. 3 years guarantee.

\* S. Power/F. Power: Solar Power/Fixture Power

\*\* S. ch. time: Solar Charging time



10m

9m

8m

6m

4m

3m

VK/02168/20/D


VK/02168/40/D

VK/02168/60/D


VK/02168/80/D



High lumen LEDs  
190lm/w

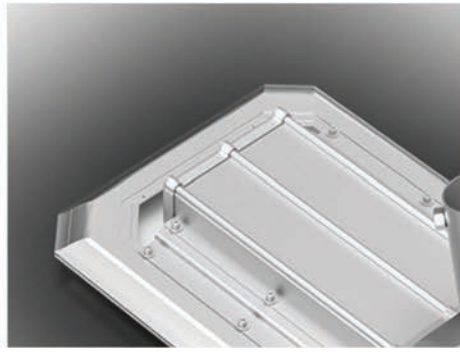

Battery Pack  
Easy to maintain

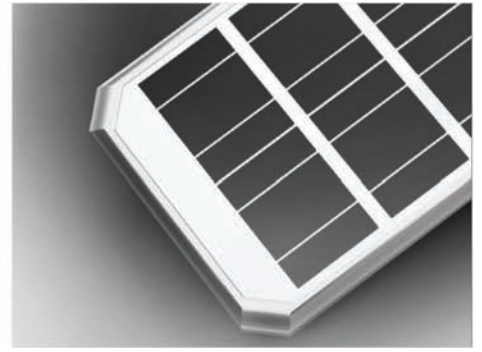

Monocrystalline  
Solar charging efficiency:>21%



High lumen LEDs  
190lm/w




Bracket  
Double Protection for rust-proof




High Sensitivity PIR Sensor

### Luminance distribution




VK/02168/20/D  
VK/02168/40/D




VK/02168/60/D  
VK/02168/80/D

### Dimensions

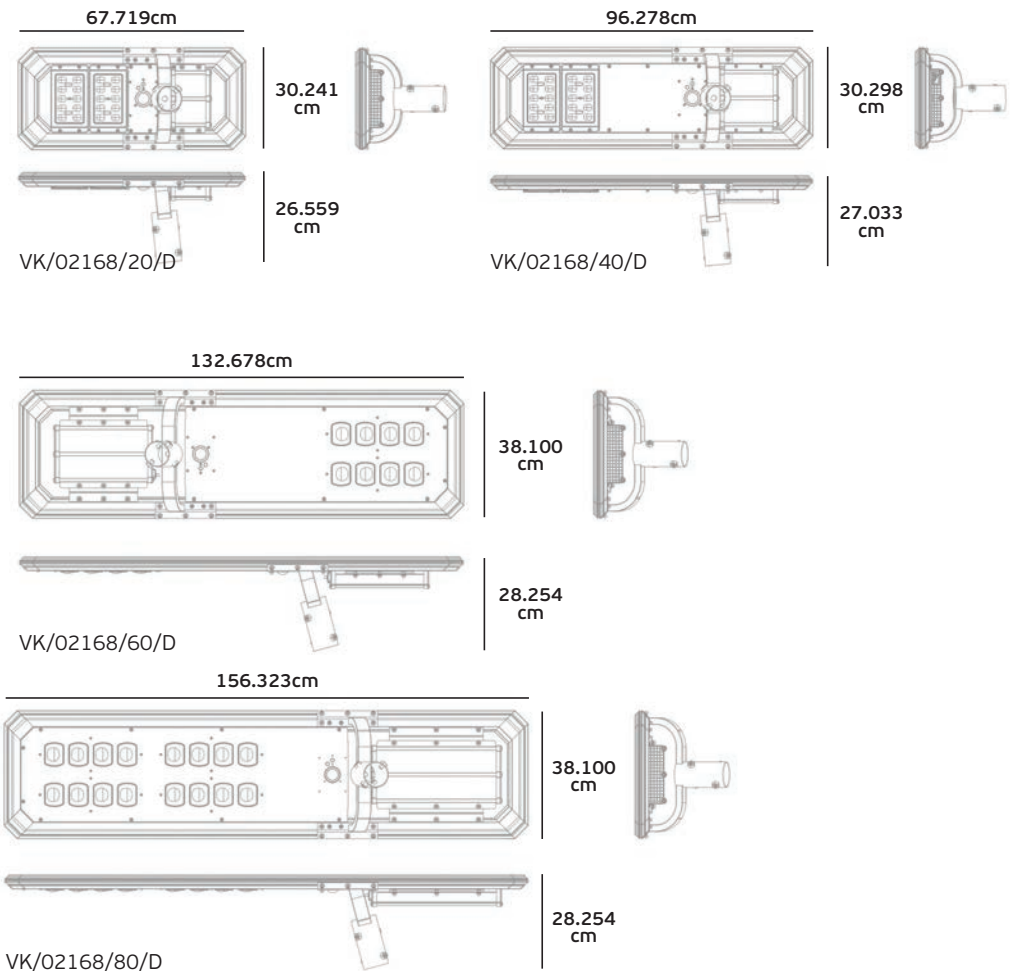




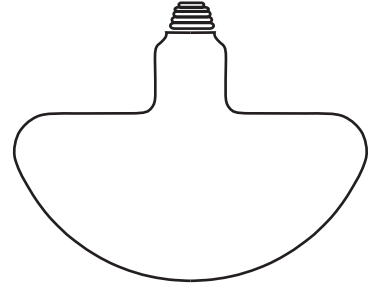

13

## *Lamps-modules-drivers*


Led lamps E27. Spiral. Filament.



**VK/05169** Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-001733	VK/05169/D/E/TM/WW	E27	3w		2200K	50lm	1


Voltage 220-240	Filament Spiral	330° 	CRI Ra>90	25k hrs	15kclks	A+ 	-20°C 45°C 	Glass 	Alu 	3W > 10W 	IP20 	2
--------------------	--------------------	----------	--------------	---------	---------	--------	-------------------	-----------	---------	--------------	----------	---



**VK/05170** Dark Grey

Model	Base	Watt	Dimm	Kelvin	Lumen	Box
33 VK/05170/D/E/TM/WW	E27	4w		2700K	120lm	1

330° 	CRI Ra>80	25k hrs	15kclks	A+ 	-20°C 45°C 	Glass 	Alu 	4W > 10W 	IP20 	2
----------	--------------	---------	---------	--------	-------------------	-----------	---------	--------------	----------	---



**VK/05171** Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-001733	VK/05171/D/E/TM/WW	E27	4w		2700K	120lm	1


330° 	CRI Ra>80	25k hrs	15kclks	A+ 	-20°C 45°C 	Glass 	Alu 	4W > 10W 	IP20 	2
----------	--------------	---------	---------	--------	-------------------	-----------	---------	--------------	----------	---

Led lamps *E27. Spiral. Filament.*





Led lamps E27. Spiral. Filament.

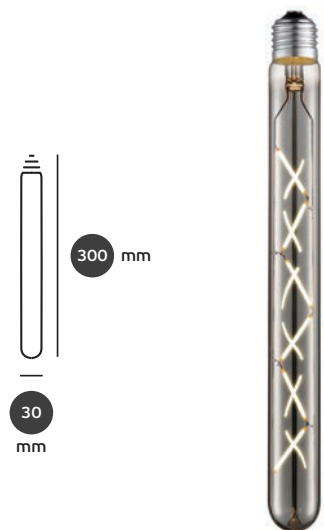

**VK/05172** Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-004733	VK/05172/D/E/TM/WW	E27	5w		2700K	200lm	1

Voltage 220-240	Filament Deco	330°	CRI Ra>90			A+	-20°C 45°C	Glass	Alu	5W > 20W	IP20	
--------------------	------------------	------	--------------	--	--	----	---------------	-------	-----	----------	------	--



**VK/05173** Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-005733	VK/05173/D/E/A/WW	E27	3w		2200K	140lm	1

Voltage 220-240	Filament Spiral	330°	CRI Ra>90			A+	-20°C 45°C	Glass	Alu	3W > 15W	IP20	
--------------------	--------------------	------	--------------	--	--	----	---------------	-------	-----	----------	------	--



**VK/05174** Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-006733	VK/05174/D/E/TM/WW	E27	3w		2200K	60lm	1

Voltage >240	Filament Spiral	330°	CRI Ra>90			A+	-20°C 45°C	Glass	Alu	3W > 10W	IP20	
-----------------	--------------------	------	--------------	--	--	----	---------------	-------	-----	----------	------	--

Led lamps *E27. Spiral. Filament.*



Led lamps E27. Spiral. Filament.




**VK/05155** Amber A60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-228664	VK/05155/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	A	-20°C 40°C	Glass	Alu	5W > 28W	IP20	2
--------------------	--------------------	------	--------------	------------	---------	---	---------------	-------	-----	----------	------	---

**VK/05160** Amber T45



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-233664	VK/05160/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	A	-20°C 40°C	Glass	Alu	5W > 25W	IP20	2
--------------------	--------------------	------	--------------	------------	---------	---	---------------	-------	-----	----------	------	---

**VK/05156** Amber ST64




Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-229664	VK/05156/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	A	-20°C 40°C	Glass	Alu	5W > 28W	IP20	2
--------------------	--------------------	------	--------------	------------	---------	---	---------------	-------	-----	----------	------	---

**VK/05157** Amber G80

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-230664	VK/05157/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80					Glass	Alu	5W > 27W	IP20	
--------------------	--------------------	------	--------------	--	--	--	--	-------	-----	----------	------	--

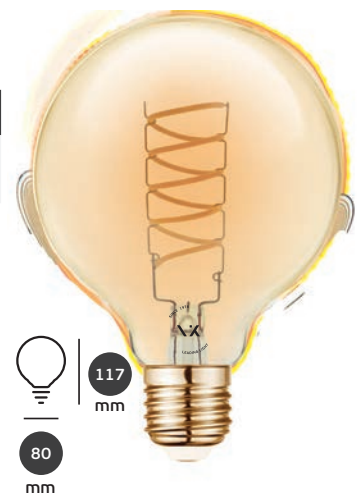

**VK/05158** Amber G95

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-231664	VK/05158/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80					Glass	Alu	5W > 28W	IP20	
--------------------	--------------------	------	--------------	--	--	--	--	-------	-----	----------	------	--




**VK/05159** Amber G125

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-232664	VK/05159/D/E/SP/A	E27	5w		2200K	300lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80					Glass	Alu	5W > 28W	IP20	
--------------------	--------------------	------	--------------	--	--	--	--	-------	-----	----------	------	--



## Led lamps E14-C37 Candle Filament



### VK/05104 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-171664	VK/05104/EI/CL/W	E14	4.3w		2700K	470lm	50
03045-172664	VK/05104/EI/CL/D	E14	4.3w		6500K	470lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1016	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	<b>A++</b> 	-20°C 40°C 	Glass 	Alu 	4.3W > 40W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	----------------	-------------------	-----------	---------	------------	------	---


### VK/05120 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-202664	VK/05120/D/EI/CL/W	E14	5w		2700K	470lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	<b>A++</b> 	-20°C 40°C 	Glass 	Alu 	5W > 40W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	----------------	-------------------	-----------	---------	----------	------	---

### VK/05104 Milky



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-173664	VK/05104/EI/MK/W	E14	3.5w		2700K	320lm	50
03045-174664	VK/05104/EI/MK/D	E14	3.5w		6500K	350lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1016	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	<b>A++</b> 	-20°C 40°C 	Glass 	Alu 	3.5W > 32W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	----------------	-------------------	-----------	---------	------------	------	---

### VK/05120 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-190664	VK/05120/EI/MK/W	E14	4.5w		2700K	470lm	50
03045-191664	VK/05120/EI/MK/D	E14	4w		6500K	420lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	<b>A++</b> 	-20°C 40°C 	Glass 	Alu 	4W > 40W 4.5W > 40W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	----------------	-------------------	-----------	---------	------------------------	------	---



## Led lamps E14-G45 Mini globe Filament



### VK/05105 VK/05121 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-175664	VK/05105/EI/CL/W	E14	4w		2700K	470lm	50
03045-176664	VK/05105/EI/CL/D	E14	4.3w		6500K	470lm	50
03045-203664	VK/05121/D/EI/CL/W	E14	5w		2700K	470lm	50

Voltage	COB	360°	CRI	15k hrs	30kclks	A++	-20°C 40°C	Glass	Alu	4W > 40W 4.5W > 40W 5W > 40W	IP20	2
---------	-----	------	-----	---------	---------	-----	---------------	-------	-----	------------------------------------	------	---



### VK/05105 VK/05121 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-177664	VK/05105/EI/MK/W	E14	3.5w		2700K	320lm	50
03045-178664	VK/05105/EI/MK/D	E14	3.5w		6500K	350lm	50
03045-192664	VK/05121/EI/MK/W	E14	4w		2700K	450lm	50
03045-193664	VK/05121/EI/MK/D	E14	4w		6500K	470lm	50

Voltage	COB	360°	CRI	15k hrs	30kclks	A++	-20°C 40°C	Glass	Alu	3.5W > 39W 4W > 39W	IP20	2
---------	-----	------	-----	---------	---------	-----	---------------	-------	-----	------------------------	------	---



### VK/05121 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-204664	VK/05121/D/EI/ST/W	E14	5w		2700K	350lm	50

Voltage	COB	360°	CRI	15k hrs	30kclks	A+	-20°C 40°C	Glass	Alu	4W > 32W	IP20	2
---------	-----	------	-----	---------	---------	----	---------------	-------	-----	----------	------	---



### VK/05121 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-222664	VK/05121/D/EI/PCT/W	E14	5w		2700K	350lm	50


  

Voltage	COB	360°	CRI	15k hrs	30kclks	A+	-20°C 40°C	Glass	Alu	4W > 32W	IP20	2
---------	-----	------	-----	---------	---------	----	---------------	-------	-----	----------	------	---

VK/05106 VK/05121 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-179664	VK/05106/E/CL/W	E27	4.3w		2700K	470lm	50
03045-180664	VK/05106/E/CL/D	E27	4.3w		6500K	470lm	50
03045-206664	VK/05121/D/E/CL/W	E27	5w		2700K	470lm	50

Voltage 220-240	COB 1016/ 1018	360° 	CRI Ra>80	15k hrs	30k clicks	A++ 	-20°C 40°C	Glass 	Alu 	4W > 40W 4.5W > 40W 5W > 40W	IP20 	2
--------------------	----------------------	----------	--------------	------------	---------------	---------	---------------	-----------	---------	------------------------------------	----------	---



VK/05106 VK/05121 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-181664	VK/05106/E/MK/W	E27	4w		2700K	470lm	50
03045-182664	VK/05106/E/MK/D	E27	4w		6500K	490lm	50
03045-194664	VK/05121/E/MK/W	E27	4w		2700K	400lm	50
03045-195664	VK/05121/E/MK/D	E27	4w		6500K	420lm	50

Voltage 220-240	COB 1016/ 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A++ 	-20°C 40°C	Glass 	Alu 	4W > 40W	IP20 	2
--------------------	----------------------	----------	--------------	------------	---------------	---------	---------------	-----------	---------	----------	----------	---



VK/05121 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-205664	VK/05121/D/E/ST/W	E27	5w		2700K	350lm	50

Voltage 220-240	COB 1018	360° 	CRI Ra>80	15k hrs	30k clicks	A+ 	-20°C 40°C	Glass 	Alu 	4W > 32W	IP20 	2
--------------------	-------------	----------	--------------	------------	---------------	--------	---------------	-----------	---------	----------	----------	---



VK/05121 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-223664	VK/05121/D/E/PCT/W	E27	5w		2700K	350lm	50

Voltage 220-240	COB 1018	360° 	CRI Ra>80	15k hrs	30k clicks	A+ 	-20°C 40°C	Glass 	Alu 	4W > 32W	IP20 	2
--------------------	-------------	----------	--------------	------------	---------------	--------	---------------	-----------	---------	----------	----------	---





## Led lamps E27-A60 Classic Filament



### VK/05103 VK/05124 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-168664	VK/05103/E/CL/W	E27	6.5w		2700K	650lm	50
03045-208664	VK/05124/D/E/CL/W	E27	7.5w		2700K	1.055lm	50

Voltage 220-240	COB 1016/1030	360°	CRI Ra>80	15k hrs	30kclk/s	A++	-20°C 40°C	Glass	Alu	6.5W > 60W 7.5W > 70W	IP20	2
-----------------	---------------	------	-----------	---------	----------	-----	------------	-------	-----	--------------------------	------	---



### VK/05103 VK/05122 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-169664	VK/05103/E/MK/W	E27	6.5w		2700K	680lm	50
03045-170664	VK/05103/E/MK/D	E27	6.5w		6500K	700lm	50
03045-196664	VK/05122/E/MK/W	E27	8w		2700K	806lm	50
03045-197664	VK/05122/E/MK/D	E27	8w		6500K	820lm	50

Voltage 220-240	COB 1016/1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	6.5W > 54W 8W > 61W	IP20	2
-----------------	---------------	------	-----------	---------	----------	----	------------	-------	-----	------------------------	------	---



### VK/05122 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-207664	VK/05122/D/E/ST/W	E27	6.5w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
-----------------	----------	------	-----------	---------	----------	----	------------	-------	-----	----------	------	---



### VK/05122 Pink Copper


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-224664	VK/05122/D/E/PCT/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
-----------------	----------	------	-----------	---------	----------	----	------------	-------	-----	----------	------	---

**VK/05009** Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-147664	VK/05009/E/W	E27	4w		3000K	350lm	50
03045-148664	VK/05009/E/D	E27	4w		6500K	400lm	50


Voltage 145-260	COB	360°	CRI Ra>80	15k hrs	100kclks	A+	-20°C 45°C	Plastic	4W > 40W	IP44	2
--------------------	-----	------	--------------	------------	----------	----	---------------	---------	----------	------	---



**VK/05046** Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-163664	VK/05046/D/E/W	E27	5w		3000K	400lm	50


Voltage 145-260	COB	360°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 45°C	Plastic	5W > 50W	IP44	2
--------------------	-----	------	--------------	------------	----------	----	---------------	---------	----------	------	---



**VK/05045** Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-161664	VK/05045/E/W	E27	6w		3000K	600lm	50
03045-162664	VK/05045/E/D	E27	6w		6500K	700lm	50

Voltage 145-260	COB	360°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 45°C	Plastic	6W > 60W	IP44	2
--------------------	-----	------	--------------	------------	----------	----	---------------	---------	----------	------	---



## Led lamps E27-ST64 Filament



### VK/05107 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-183664	VK/05107/E/CL/W	E27	6.5w		2700K	806lm	50

03045-215664	VK/05107/D/E/CL/W	E27	7w		2700K	806lm	50
--------------	-------------------	-----	----	--	-------	-------	----

Voltage 220-240	COB 1016/ 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A+	-20°C 40°C	Glass	Alu	6.5W > 60W 7W > 60W	IP20	2
--------------------	----------------------	----------	--------------	------------	---------------	----	---------------	-------	-----	------------------------	------	---



### VK/05126 Amber


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-225664	VK/05126/D/E/A/W	E27	7w		2200K	720lm	50

Voltage 220-240	COB 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A+	-20°C 40°C	Glass	Alu	8W > 60W	IP20	2
--------------------	-------------	----------	--------------	------------	---------------	----	---------------	-------	-----	----------	------	---

**VK/05109**    **VK/05110**    Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-187664	VK/05109/E/CL/W	E27	4.3w		2700K	470lm	50
03045-209664	VK/05110/D/E/CL/W	E27	7w		2700K	806lm	50


Voltage 220-240	COB 1016/ 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A++ 	-20°C 40°C 	Glass 	Alu 	4W > 39W 7W > 60W	IP20 	2
--------------------	----------------------	----------	--------------	------------	---------------	---------	-------------------	-----------	---------	----------------------	----------	---



**VK/05110**    Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-188664	VK/05110/E/MK/W	E27	7w		2700K	650lm	50
03045-198664	VK/05110/E/MK/D	E27	7w		6500K	670lm	50


Voltage 220-240	COB 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A+ 	-20°C 40°C 	Glass 	Alu 	7W > 52W	IP20 	2
--------------------	-------------	----------	--------------	------------	---------------	--------	-------------------	-----------	---------	----------	----------	---



**VK/05109**    **VK/05110**    Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-189664	VK/05109/E/ST/W	E27	4w		2700K	350lm	50
03045-210664	VK/05110/D/E/ST/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1016/ 1030	360° 	CRI Ra>80	15k hrs	30k clicks	A+ 	-20°C 40°C 	Glass 	Alu 	4W > 32W 7W > 51W	IP20 	2
--------------------	----------------------	----------	--------------	------------	---------------	--------	-------------------	-----------	---------	----------------------	----------	---





**VK/05123** Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-211664	VK/05123/D/E/CL/W	E27	7w		2700K	806lm	50

Voltage 220-240	COB 1030	360° 	CRI Ra>80	15k hrs	30kclks 	A+ 	-20°C 40°C 	Glass 	Alu 	8W > 60W 	IP20 	2 
--------------------	-------------	----------	--------------	------------	-------------	--------	-------------------	-----------	---------	--------------	----------	-------



**VK/05123** Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-217664	VK/05123/D/E/A/W	E27	7w		2200K	720lm	50

Voltage 220-240	COB 1030	360° 	CRI Ra>80	15k hrs	30kclks 	A+ 	-20°C 40°C 	Glass 	Alu 	7W > 51W 	IP20 	2 
--------------------	-------------	----------	--------------	------------	-------------	--------	-------------------	-----------	---------	--------------	----------	-------



**5123** Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-218664	VK/05123/D/E/DG/W	E27	8w		2700K	200lm	50

COB 1030	360° 	CRI Ra>80	15k hrs	30kclks 	B 	-20°C 40°C 	Glass 	Alu 	8W > 24W 	IP20 	2 
-------------	----------	--------------	------------	-------------	-------	-------------------	-----------	---------	--------------	----------	-------

**VK/05123 Milky**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-199664	VK/05123/E/MK/W	E27	7w		2700K	806lm	50
03045-200664	VK/05123/E/MK/D	E27	7w		6500K	826lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80			A+		Glass	Alu	7W > 60W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	-------	-----	----------	------	--



**VK/05123 Silver**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-212664	VK/05123/D/E/ST/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80			A+		Glass	Alu	7W > 51W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	-------	-----	----------	------	--



**VK/05123 Pink Copper**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-216664	VK/05123/D/E/PCT/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80			A+		Glass	Alu	7W > 51W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	-------	-----	----------	------	--



# Led lamps E27-G125 Globo Filament



## VK/05108 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-184664	VK/05108/E/CL/W	E27	6.5w		2700K	806lm	50
03045-213664	VK/05108/D/E/CL/W	E27	7w		2700K	806lm	50

Voltage	COB	360°	CRI	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	6.5W > 60W 8W > 60W	IP20	2
---------	-----	------	-----	---------	----------	----	---------------	-------	-----	------------------------	------	---



## VK/05108 Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-220664	VK/05108/D/E/A/W	E27	7w		2200K	720lm	50

Voltage	COB	360°	CRI	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------	-----	------	-----	---------	----------	----	---------------	-------	-----	----------	------	---



## VK/05108 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-221664	VK/05108/D/E/DG/W	E27	7w		2700K	200lm	50

Voltage	COB	360°	CRI	15k hrs	30kclk/s	B	-20°C 40°C	Glass	Alu	7W > 21W	IP20	2
---------	-----	------	-----	---------	----------	---	---------------	-------	-----	----------	------	---

**VK/05108 Milky**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-185664	VK/05108/E/MK/W	E27	7w		2700K	650lm	50
03045-201664	VK/05108/E/MK/D	E27	7w		6500K	670lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	-------	-----	----------	------	---



**VK/05108 Silver**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-214664	VK/05108/D/E/ST/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	-------	-----	----------	------	---




**VK/05108 Pink Copper**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-219664	VK/05108/D/E/PCT/W	E27	7w		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclk/s	A+	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	-------	-----	----------	------	---








### VK/05177

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-134742	VK/05177/EI/W	E14	9w		3000K	806lm	100
03045-135742	VK/05177/EI/C	E14	9w		4000K	806lm	100
03045-136742	VK/05177/EI/D	E14	9w		6000K	806lm	100


Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Plastic	Alu	9W > 90W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---



### VK/05177-VK/05168

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-146742	VK/05177/D/EI/W	E14	9w		3000K	806lm	100
03045-147742	VK/05177/D/EI/C	E14	9w		4000K	806lm	100
03045-148742	VK/05177/D/EI/D	E14	9w		6000K	806lm	100
03045-699126	VK/05168/D/EI/W	E14	7w		3000K	600lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Plastic	Alu	9W > 90W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---



### VK/05083

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-044742	VK/05083/EI/W	E14	6w		3000K	540lm	100
03045-045742	VK/05083/EI/C	E14	6w		4000K	540lm	100
03045-046742	VK/05083/EI/D	E14	6w		6000K	540lm	100

Voltage 180-250	SMD 2835	180°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	6W > 40W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	---------	-----	----------	------	---

VK/05178

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-137742	VK/05178/EI/W	E14	9w		3000K	806lm	100
03045-138742	VK/05178/EI/C	E14	9w		4000K	806lm	100
03045-139742	VK/05178/EI/D	E14	9w		6000K	806lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80			A+		Plastic	Alu	9W > 90W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	---------	-----	----------	------	--



VK/05178/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-149742	VK/05178/D/EI/W	E14	9w		3000K	806lm	100
03045-150742	VK/05178/D/EI/C	E14	9w		4000K	806lm	100
03045-151742	VK/05178/D/EI/D	E14	9w		6000K	806lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80			A+		Plastic	Alu	9W > 90W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	---------	-----	----------	------	--



VK/05084

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-047742	VK/05084/EI/W	E14	6w		3000K	540lm	100
03045-048742	VK/05084/EI/C	E14	6w		4000K	540lm	100
03045-049742	VK/05084/EI/D	E14	6w		6000K	540lm	100

Voltage 180-250	SMD 2835	160°	CRI Ra>80			A+		Plastic	Alu	6W > 40W	IP20	
--------------------	-------------	------	--------------	--	--	----	--	---------	-----	----------	------	--





### VK/05179

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-140742	VK/05179/E/W	E27	9w		3000K	806lm	100
03045-141742	VK/05179/E/C	E27	9w		4000K	806lm	100
03045-142742	VK/05179/E/D	E27	9w		6000K	806lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Plastic	Alu	9W > 90W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---



### VK/05179/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-152742	VK/05179/D/E/W	E27	9w		3000K	806lm	100
03045-153742	VK/05179/D/E/C	E27	9w		4000K	806lm	100
03045-154742	VK/05179/D/E/D	E27	9w		6000K	806lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Plastic	Alu	9W > 90W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---



### VK/05085

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-050742	VK/05085/E/W	E27	6w		3000K	540lm	100
03045-051742	VK/05085/E/C	E27	6w		4000K	540lm	100
03045-052742	VK/05085/E/D	E27	6w		6000K	540lm	100

Voltage 180-250	SMD 2835	160°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	6W > 40W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	---------	-----	----------	------	---

**VK/05088**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-059742	VK/05088/E/W	E27	9w		3000K	800lm	50
03045-060742	VK/05088/E/C	E27	9w		4000K	800lm	50
03045-061742	VK/05088/E/D	E27	9w		6000K	800lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	9W > 90W 11W > 100W	IP20	2
--------------------	----------------------	------	--------------	------------	----------	----	---------------	---------	-----	------------------------	------	---



**VK/05054**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-017742	VK/05054/E/W	E27	11w		3000K	1.055lm	50
03045-039742	VK/05054/E/C	E27	11w		4000K	1.055lm	50
03045-018742	VK/05054/E/D	E27	11w		6000K	1.055lm	50
03045-687140	VK/05054/D/E/W	E27	11w		2700K	1.000lm	50
03045-688140	VK/05054/D/E/C	E27	11w		4000K	1.000lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	9W > 90W 11W > 100W	IP20	2
--------------------	----------------------	------	--------------	------------	----------	----	---------------	---------	-----	------------------------	------	---



**VK/05054/B**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-105742	VK/05054/B/W	B22	11w		3000K	1.055lm	50
03045-106742	VK/05054/B/C	B22	11w		4000K	1.055lm	50
03045-107742	VK/05054/B/D	B22	11w		6000K	1.055lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	11W > 100W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	---------	-----	------------	------	---





118 mm  
60 mm

### VK/05111 - A60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-092742	VK/05111/E/W	E27	15w		3000K	1.500lm	50
03045-093742	VK/05111/E/C	E27	15w		4000K	1.560lm	50
03045-094742	VK/05111/E/D	E27	15w		6000K	1.620lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	15W > 150W	IP20	2
--------------------	----------------------	------	--------------	------------	----------	----	---------------	---------	-----	------------	------	---



135 mm

### VK/05125 - A65

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-682140	VK/05125/E/W	E27	18w		3000K	2.000lm	50
03045-111742	VK/05125/E/C	E27	18w		4000K	2.000lm	50
03045-683140	VK/05125/E/D	E27	18w		6000K	2.000lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	18W > 180W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	---------	-----	------------	------	---



120 mm  
70 mm

### VK/05132 - A70

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-108742	VK/05132/E/W	E27	20w		3000K	2.200lm	50
03045-109742	VK/05132/E/C	E27	20w		4000K	2.200lm	50
03045-110742	VK/05132/E/D	E27	20w		6000K	2.200lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	Plastic	Alu	20W > 200W	IP20	2
--------------------	-------------	------	--------------	------------	----------	----	---------------	---------	-----	------------	------	---

**VK/05113** With Sensor Day-Night

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-646140	VK/05113/S/W	E27	12w		3000K	1.000lm	50
03045-648140	VK/05113/S/C	E27	12w		4000K	1.000lm	50
03045-647140	VK/05113/S/D	E27	12w		6000K	1.000lm	50

Voltage 220-240	SMD 2835	270° 	CRI Ra>80	25k hrs	25klcks	A+ 	-20°C 45°C	Plastic 	Alu 	12W > 75W	IP20 		2
--------------------	-------------	----------	--------------	---------	---------	--------	---------------	-------------	---------	-----------	----------	--	---



**VK/05062** (One lamp with 3 different Volts 12, 24 & 42V)

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-275126	VK/05062/W	E27	10w		3000K	850lm	10
03045-274126	VK/05062/D	E27	10w		6500K	900lm	10

Voltage 12,24,42	SMD 5730	200° 	CRI Ra>80	30k hrs	25klcks	A+ 	-40°C 60°C	Plastic 	Alu 	10W > 100W	IP20 	2
---------------------	-------------	----------	--------------	---------	---------	--------	---------------	-------------	---------	------------	----------	---



**VK/05055** RGB

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-019742	VK/05055/E/RGB	E27	4w		RGB	N/A	50

Voltage 85-265	SMD 5050	270° 	CRI Ra>80	30k hrs	25klcks	A++ 	-20°C 40°C	Plastic 	Alu 	4W > 40W	IP20 	2
-------------------	-------------	----------	--------------	---------	---------	---------	---------------	-------------	---------	----------	----------	---



## Led lamps E14. E27 Long



### VK/05073/EI

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-290140	VK/05073/EI/W/120	E14	7w		2700K	600lm	50

03045-291140	VK/05073/EI/D/120	E14	7w		6500K	600lm	50
--------------	-------------------	-----	----	--	-------	-------	----

Voltage 100-250	SMD 2835	300°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 50°C	Plastic	Alu	7W > 70W	IP54	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---




### VK/05073/E

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-288140	VK/05073/E/W/120	E27	7w		2700K	630lm	50

03045-289140	VK/05073/E/D/120	E27	7w		6500K	630lm	50
--------------	------------------	-----	----	--	-------	-------	----

Voltage 180-250	SMD 2835	270°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 50°C	Plastic	Alu	7W > 70W	IP54	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	----------	------	---



### VK/05074

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-292140	VK/05074/E/W/138	E27	12w		2700K	1.000lm	50

03045-293140	VK/05074/E/D/138	E27	12w		6500K	1.000lm	50
--------------	------------------	-----	-----	--	-------	---------	----

Voltage 100-250	SMD 2835	300°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 50°C	Plastic	Alu	12W > 120W	IP54	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	-----	------------	------	---

VK/05051

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-007742	VK/05051/E/W	E27	12w		3000K	1.055lm	10
03045-008742	VK/05051/E/D	E27	12w		6000K	1.055lm	10

Voltage 180-250	SMD 2835	180°	CRI Ra>80			A+				12W > 120W		
--------------------	-------------	------	--------------	--	--	----	--	--	--	------------	--	--



VK/05052

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-009742	VK/05052/E/W	E27	15w		3000K	1.300lm	50
03045-010742	VK/05052/E/D	E27	15w		6000K	1.300lm	50

Voltage 180-250	SMD 2835	180°	CRI Ra>80			A+				15W > 150W		
--------------------	-------------	------	--------------	--	--	----	--	--	--	------------	--	--




VK/05139D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-670140	VK/05139D/E/W	E27	20w		3000K	1.600lm	50
03045-671140	VK/05139D/E/D	E27	20w		6000K	1.600lm	50

Voltage 180-250	SMD 2835	180°	CRI Ra>80			A+				20W > 200W		
--------------------	-------------	------	--------------	--	--	----	--	--	--	------------	--	--








### VK/05165

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-674685	VK/05165/W	G9	8w		3000K	760lm	350°	100
03045-680685	VK/05165/C	G9	8w		4000K	760lm	350°	100


Voltage	SMD	350°	CRI	25k hrs	12.5kclks	A+	-20°C 45°C	Ceramic	Plastic	8W > 50W	IP20	2
---------	-----	------	-----	---------	-----------	----	---------------	---------	---------	----------	------	---



### VK/05127

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-661685	VK/05127/W	G9	5w		2700K	400lm	350°	100
03045-678685	VK/05127/C	G9	5w		4000K	400lm	350°	100
03045-662685	VK/05127/D	G9	5w		6000K	420lm	350°	100


Voltage	SMD	350°	CRI	25k hrs	12.5kclks	A+	-20°C 45°C	Ceramic	Plastic	5W > 50W	IP20	2
---------	-----	------	-----	---------	-----------	----	---------------	---------	---------	----------	------	---



### VK/05127/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-651685	VK/05127/D/W	G9	5w		2700K	350lm	350°	100
03045-679685	VK/05127/D/C	G9	5w		4000K	350lm	350°	100
03045-652685	VK/05127/D/D	G9	5w		6000K	370lm	350°	100

Voltage	SMD	350°	CRI	25k hrs	12.5kclks	A+	-20°C 45°C	Ceramic	Plastic	5W > 50W	IP20	2
---------	-----	------	-----	---------	-----------	----	---------------	---------	---------	----------	------	---



### VK/05011

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-149664	VK/05011/W	G9	3w		3000K	190lm	270°	100
03045-150664	VK/05011/D	G9	3w		6000K	230lm	270°	100

Voltage	SMD	270°	CRI	25k hrs	15kclks	A+	-20°C 45°C	Silicon	3W > 30W	IP20	2
---------	-----	------	-----	---------	---------	----	---------------	---------	----------	------	---

### VK/05067

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-029742	VK/05067/W	G9	3w		3000K	220lm	180°	100
03045-030742	VK/05067/D	G9	3w		6000K	220lm	180°	100


Voltage 220-240	SMD 3030	180°	CRI Ra>80			A+	-20°C 45°C	Plastic	3W > 30W	IP20	
--------------------	-------------	------	--------------	--	--	----	---------------	---------	----------	------	--



### VK/05066

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-025742	VK/05066/W	G9	3.5w		3000K	280lm	270°	100
03045-026742	VK/05066/D	G9	3.5w		6000K	340lm	270°	100

Voltage 220-240	SMD 2835	270°	CRI Ra>80			A+	-20°C 45°C	Plastic	3.5W > 35W	IP20	
--------------------	-------------	------	--------------	--	--	----	---------------	---------	------------	------	--



### VK/05066/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-027742	VK/05066/D/W	G9	3w		3000K	220lm	270°	100
03045-028742	VK/05066/D/D	G9	3w		6000K	250lm	270°	100

Voltage 220-240	SMD 2835	270°	CRI Ra>80			A+	-20°C 45°C	Plastic	3W > 30W	IP20	
--------------------	-------------	------	--------------	--	--	----	---------------	---------	----------	------	--




### VK/05128

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-653685	VK/05128/D/W	G9	2w		2700K	210lm	320°	100
03045-654685	VK/05128/D/D	G9	2w		6000K	230lm	320°	100

Voltage 200-250	Filament	320°	CRI Ra>80			A+	-20°C 45°C	Ceramic	Plastic	2W > 30W	IP20	
--------------------	----------	------	--------------	--	--	----	---------------	---------	---------	----------	------	--






### VK/05129

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-655685	VK/05129/W	G4	3w		2700K	270lm	350°	50
03045-656685	VK/05129/D	G4	3w		6000K	290lm	350°	50

Voltage 12	SMD 2835	350°	CRI Ra>80	25k hrs	12.5kclks	A+	-20°C 45°C	Glass	3W > 35W	IP20	2
---------------	-------------	------	--------------	------------	-----------	----	---------------	-------	----------	------	---




### VK/05034

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-155664	VK/05034/W	G4	1.5w		2700K	90lm	360°	50
03045-156664	VK/05034/D	G4	1.5w		6000K	100lm	360°	50

Voltage 12	SMD 3014	360°	CRI Ra>80	25k hrs	12.5kclks	A+	-20°C 45°C	Silicon	1.5W > 15W	IP20	2
---------------	-------------	------	--------------	------------	-----------	----	---------------	---------	------------	------	---





### VK/05018

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-068664	VK/05018/WW	G4	3.5w		2700K	180lm	360°	50
03045-069664	VK/05018/DL	G4	3.5w		6000K	180lm	360°	50

Voltage 12	SMD 5050	360°	CRI Ra>80	25k hrs	10kclks	A++	-20°C 60°C	Plastic	3.5W > 35W	IP20	2
---------------	-------------	------	--------------	------------	---------	-----	---------------	---------	------------	------	---



### VK/05019

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-087664	VK/05019/WW	G4	1.5w		2700K	90lm	360°	50
03045-088664	VK/05019/DL	G4	1.5w		6500K	90lm	360°	50


  

Voltage 12	SMD 5050	360°	CRI Ra>80	25k hrs	10kclks	A++	-20°C 60°C	Plastic	1.5W > 15W	IP20	2
---------------	-------------	------	--------------	------------	---------	-----	---------------	---------	------------	------	---

### VK/05130

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-657685	VK/05130/W	G4	2w		2700K	200lm	330°	50
03045-658685	VK/05130/D	G4	2w		6000K	210lm	330°	50


Voltage 12	SMD 3020	330°	CRI Ra>80			A+		Silicon	2W > 20W	IP20	
---------------	-------------	------	--------------	--	--	----	--	---------	----------	------	--



### VK/05131

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-659685	VK/05131/D/W	G4	2w		2700K	200lm	330°	50
03045-660685	VK/05131/D/D	G4	2w		6000K	210lm	330°	50


Voltage 12	COB	330°	CRI Ra>80			A+		Silicon	2W > 20W	IP20	
---------------	-----	------	--------------	--	--	----	--	---------	----------	------	--

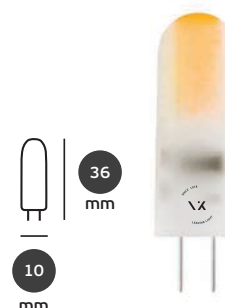

### VK/05166

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-675685	VK/05166/W	G4	1.5w		3000K	120lm	330°	50
03045-676685	VK/05166/D	G4	1.5w		6000K	130lm	330°	50


Voltage 12	COB	330°	CRI Ra>80			A+		Silicon	1.5W > 20W	IP20	
---------------	-----	------	--------------	--	--	----	--	---------	------------	------	--

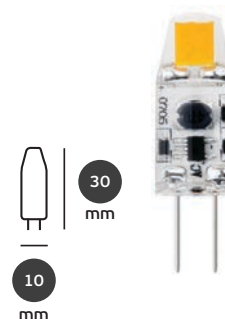

### VK/05020

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-060719	VK/05020/WW	G4	1.5w		3000K	105lm	360°	50
03045-061719	VK/05020/DL	G4	1.5w		6000K	105lm	360°	50

Voltage 12	SMD 5050	360°	CRI Ra>80			A		Alu	Plastic	1.5W > 15W	IP20	
---------------	-------------	------	--------------	--	--	---	--	-----	---------	------------	------	--

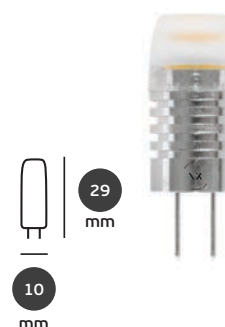



### VK/05140/E 42V

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-672140	VK/05140/E/W	E27	10w		3000K	1.000lm	50
03045-673140	VK/05140/E/D	E27	10w		6000K	1.000lm	50
03045-674140	VK/05140/E/GR	E27	10w		Green	N/A	50



Voltage 42	SMD 2835	30°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	PC Shell	Alu	10W > 100W	IP65	2
---------------	-------------	-----	--------------	------------	----------	----	---------------	----------	-----	------------	------	---



### VK/05141/E 240V

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-675140	VK/05141/E/W	E27	15w		3000K	1.200lm	50
03045-676140	VK/05141/E/D	E27	15w		6000K	1.200lm	50
03045-677140	VK/05141/E/R	E27	15w		Red	N/A	50
03045-678140	VK/05141/E/Y	E27	15w		Yellow	N/A	50
03045-684140	VK/05141/E/BL	E27	15w		Blue	N/A	50
03045-685140	VK/05141/E/GR	E27	15w		Green	N/A	50



Voltage 180-250	SMD 2835	30°	CRI Ra>80	25k hrs	100kclks	A+	-20°C 40°C	PC Shell	Alu	15W > 150W	IP65	2
--------------------	-------------	-----	--------------	------------	----------	----	---------------	----------	-----	------------	------	---

VK/05164 VK/05098

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-699140	VK/05164/W	GX53	4w		3000K	300lm	50
03045-700140	VK/05164/D	GX53	4w		6000K	300lm	50
03045-620140	VK/05098/W	GX53	7w		2700K	600lm	50
03045-621140	VK/05098/D	GX53	7w		6000K	600lm	50

Voltage 220-240	SMD 2835	100°	CRI Ra>80	25k hrs	100kclk	A+	-20°C 40°C	Plastic	4W > 40W 7W > 70W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	----------------------	------	---



VK/05023

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-004664	VK/05023/D	GX53	1.5w		6500K	130lm	50
03045-065664	VK/05023/R	GX53	1.5w		Red	130lm	50
03045-066664	VK/05023/GR	GX53	1.5w		Green	130lm	50

Voltage 220-240	SMD 3528	360°	CRI Ra>80	25k hrs	100kclk	A+	-20°C 40°C	Plastic	1.5W > 15W	IP20	2
--------------------	-------------	------	--------------	------------	---------	----	---------------	---------	------------	------	---





### VK/05180/G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-143742	VK/05180/G/W	GU10	9w		3000K	806lm	110°	50
03045-144742	VK/05180/G/C	GU10	9w		4000K	806lm	110°	50
03045-145742	VK/05180/G/D	GU10	9w		6000K	806lm	110°	50
03045-171742	VK/05180/G/D/W	GU10	9w		3000K	806lm	110°	50
03045-172742	VK/05180/G/D/C	GU10	9w		4000K	806lm	110°	50
03045-173742	VK/05180/G/D/D	GU10	9w		6000K	806lm	110°	50

<b>Voltage</b> 175-265	<b>SMD</b> 2835	110°	<b>CRI</b> Ra>80	 25k hrs	 15kclks	<b>A+</b>	-20°C 45°C	Plastic	9w > 90w	IP20	 2
---------------------------	--------------------	------	---------------------	-------------	-------------	-----------	---------------	---------	----------	------	-------



### VK/05119G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-100742	VK/05119G/W	GU10	6w		3000K	450lm	120°	50
03045-104742	VK/05119G/C	GU10	6w		4000K	450lm	120°	50
03045-101742	VK/05119G/D	GU10	6w		6000K	450lm	120°	50
03045-125742	VK/05119G/BL	GU10	6w		Blue	N/A	120°	50
03045-126742	VK/05119G/GR	GU10	6w		Green	N/A	120°	50
03045-127742	VK/05119G/Y	GU10	6w		Yellow	N/A	120°	50
03045-128742	VK/05119G/R	GU10	6w		Red	N/A	120°	50



  

<b>Voltage</b> 220-240	<b>SMD</b> 2835	120°	<b>CRI</b> Ra>80	 20k hrs	 20kclks	<b>A+</b>	-40°C 60°C	Plastic	6w > 60w	IP20	 2
---------------------------	--------------------	------	---------------------	-------------	-------------	-----------	---------------	---------	----------	------	-------

VK/05094G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-303126	VK/05094G/W/5	GU10	4w		3000K	200lm	5°	50
03045-304126	VK/05094G/D/5	GU10	4w		6000K	200lm	5°	50

Voltage 220-240	Cree	5° 	CRI Ra>85	50k hrs	15klcks	A++ 	-30°C 45°C	Plastic 	Alu 	4W > 40W	IP20 	2 
--------------------	------	--------	--------------	---------	---------	---------	---------------	-------------	---------	----------	----------	-------







### VK/05065G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-116742	VK/05065G/WW/38	GU10	7w		2700K	560lm	38°	50
03045-082742	VK/05065G/W/38	GU10	7w		3000K	560lm	38°	50
03045-083742	VK/05065G/C/38	GU10	7w		4000K	560lm	38°	50
03045-084742	VK/05065G/D/38	GU10	7w		6000K	560lm	38°	50
03045-123742	VK/05065G/WW/24	GU10	7w		2700K	560lm	24°	50
03045-085742	VK/05065G/W/24	GU10	7w		3000K	560lm	24°	50
03045-129742	VK/05065G/C/24	GU10	7w		4000K	560lm	24°	50
03045-130742	VK/05065G/D/24	GU10	7w		6000K	560lm	24°	50

Voltage 220-240	COB	38° & 24°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Glass	Alu	7W > 70W	IP20	2
--------------------	-----	-----------	--------------	------------	---------	----	---------------	-------	-----	----------	------	---



### VK/05065G/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-117742	VK/05065G/D/WW/38	GU10	7w		2700K	560lm	38°	50
03045-022742	VK/05065G/D/W/38	GU10	7w		3000K	560lm	38°	50
03045-023742	VK/05065G/D/C/38	GU10	7w		4000K	560lm	38°	50
03045-024742	VK/05065G/D/D/38	GU10	7w		6000K	560lm	38°	50
03045-124742	VK/05065G/D/WW/24	GU10	7w		2700K	560lm	24°	50
03045-118742	VK/05065G/D/W/24	GU10	7w		3000K	560lm	24°	50
03045-131742	VK/05065G/D/C/24	GU10	7w		4000K	560lm	24°	50
03045-132742	VK/05065G/D/D/24	GU10	7w		6000K	560lm	24°	50


Voltage 220-240	COB	38° & 24°	CRI Ra>80	25k hrs	15kclks	A+	-20°C 45°C	Glass	Alu	7W > 70W	IP20	2
--------------------	-----	-----------	--------------	------------	---------	----	---------------	-------	-----	----------	------	---

**VK/05148G**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-133742	VK/05148G/DT/WW/36	GU10	5.5w		1700-2700K	345lm	36°	50

<b>Voltage</b> 220-240	<b>SMD</b> 2835	36°	<b>CRI</b> Ra>90	15k hrs	50kclks	<b>A+</b>	-20°C 40°C			5.5W > 50W	IP20	2
---------------------------	--------------------	-----	---------------------	---------	---------	-----------	---------------	--	--	------------	------	---


1700K < Dimmable > 2700K



**VK/05161G**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-689140	VK/05161G/D/W/15	GU10	7w		2700K	450lm	15°	50
03045-690140	VK/05161G/D/C/15	GU10	7w		4000K	450lm	15°	50


<b>Voltage</b> 180-250	<b>COB</b> Sharp	15°	<b>CRI</b> Ra>80	25k hrs	100kclks	<b>A+</b>	-20°C 40°C		7W > 60W	IP20	2
---------------------------	---------------------	-----	---------------------	---------	----------	-----------	---------------	--	----------	------	---



**VK/05162G**

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-691140	VK/05162G/D/W/38	GU10	5w		2700K	400lm	38°	50
03045-692140	VK/05162G/D/C/38	GU10	5w		4000K	400lm	38°	50

<b>Voltage</b> 180-250	<b>SMD</b> 2835	38°	<b>CRI</b> Ra>80	25k hrs	100kclks	<b>A+</b>	-20°C 40°C		5W > 50W	IP20	2
---------------------------	--------------------	-----	---------------------	---------	----------	-----------	---------------	--	----------	------	---





### VK/05097G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-618140	VK/05097G/W/60	GU10	4w		2700K	300lm	60°	50
03045-619140	VK/05097G/D/60	GU10	4w		6500K	300lm	60°	50


Voltage 220-240	SMD 2835	60°	CRI Ra>80	25k hrs	100klks	A+	-20°C 40°C	Plastic	4W > 40W	IP20	2
--------------------	-------------	-----	--------------	------------	---------	----	---------------	---------	----------	------	---



### VK/05097

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-697140	VK/05097/W/38	G4	4w		2700K	300lm	38°	50
03045-698140	VK/05097/C/38	G4	4w		4000K	300lm	38°	50

Voltage 12	SMD 2835	38°	CRI Ra>80	25k hrs	100klks	A+	-20°C 40°C	Plastic	4W > 40W	IP20	2
---------------	-------------	-----	--------------	------------	---------	----	---------------	---------	----------	------	---



### VK/05162 VK/05163

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-693140	VK/05162/D/W/38	GU5.3	5w		2700K	400lm	38°	50
03045-694140	VK/05162/D/C/38	GU5.3	5w		4000K	400lm	38°	50
03045-695140	VK/05163/W/38	GU5.3	7.5w		2700K	600lm	38°	50
03045-696140	VK/05163/C/38	GU5.3	7.5w		4000K	600lm	38°	50

Voltage 12	SMD 2835	38°	CRI Ra>80	25k hrs	100klks	A+	-20°C 40°C	Plastic	5W > 50W 7.5W > 60W	IP20	2
---------------	-------------	-----	--------------	------------	---------	----	---------------	---------	------------------------	------	---





### VK/05112G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-632140	VK/05112G/W/10°	GU10	12w		2700K	880lm	10°	10
03045-633140	VK/05112G/C/10°	GU10	12w		4000K	900lm	10°	10


Voltage 220-240	COB	10°	CRI Ra>80	25k hrs	25kclks	A+	-20°C 45°C	Alu	14W > 75W	IP20	2
--------------------	-----	-----	--------------	------------	---------	----	---------------	-----	-----------	------	---



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-628140	VK/05112G/W/24°	GU10	12w		2700K	880lm	24°	10
03045-630140	VK/05112G/C/24°	GU10	12w		4000K	900lm	24°	10
03045-629140	VK/05112G/W/45°	GU10	12w		2700K	880lm	45°	10
03045-631140	VK/05112G/C/45°	GU10	12w		4000K	900lm	45°	10

Voltage 220-240	SMD 2835	24° & 45°	CRI Ra>80	25k hrs	25kclks	A+	-20°C 45°C	Alu	14W > 75W	IP20	2
--------------------	-------------	-----------	--------------	------------	---------	----	---------------	-----	-----------	------	---



### VK/05112GD

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-644140	VK/05112GD/W/10°	GU10	12w		2700K	880lm	10°	10
03045-645140	VK/05112GD/C/10°	GU10	12w		4000K	900lm	10°	10


Voltage 220-240	COB	10°	CRI Ra>80	25k hrs	25kclks	A+	-20°C 45°C	Alu	14W > 75W	IP20	2
--------------------	-----	-----	--------------	------------	---------	----	---------------	-----	-----------	------	---



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-640140	VK/05112GD/W/24°	GU10	12w		2700K	880lm	24°	10
03045-642140	VK/05112GD/C/24°	GU10	12w		4000K	900lm	24°	10
03045-641140	VK/05112GD/W/45°	GU10	12w		2700K	880lm	45°	10
03045-643140	VK/05112GD/C/45°	GU10	12w		4000K	900lm	45°	10

Voltage 220-240	SMD 2835	24° & 45°	CRI Ra>80	25k hrs	25kclks	A+	-20°C 45°C	Alu	14W > 75W	IP20	2
--------------------	-------------	-----------	--------------	------------	---------	----	---------------	-----	-----------	------	---



**VK/05112D**


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-634140	VK/05112D/W/10°	G53	14w		2700K	700lm	10°	10
03045-637140	VK/05112D/C/10°	G53	14w		4000K	700lm	10°	10

<b>Voltage</b> 12	<b>COB</b>	10°	<b>CRI</b> Ra>80			<b>A+</b>	-20°C 45°C	<b>Alu</b>	14W > 75W		
----------------------	------------	-----	---------------------	--	--	-----------	---------------	------------	-----------	--	--



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-635140	VK/05112D/W/24°	G53	14w		2700K	800lm	24°	10
03045-638140	VK/05112D/C/24°	G53	14w		4000K	800lm	24°	10
03045-636140	VK/05112D/W/45°	G53	14w		2700K	850lm	45°	10
03045-639140	VK/05112D/C/45°	G53	14w		4000K	850lm	45°	10


<b>Voltage</b> 12	<b>SMD</b> 2835	24° & 45°	<b>CRI</b> Ra>80			<b>A+</b>	-20°C 45°C	<b>Alu</b>	14W > 75W		
----------------------	--------------------	-----------	---------------------	--	--	-----------	---------------	------------	-----------	--	--




**VK/LVD1215** Using with lamps VK/05112D

Code	Model	Power	Input	Dimm	Output	Box
78000-684140	VK/LVD1215	1-15w	AC220-240V 50/60Hz		12V 1250mA	10

<b>A+</b>	<b>Alu</b>	14W > 75W	
-----------	------------	-----------	--




### VK/05146G



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-688126	VK/05146G/W/W	GU10	15w		3000K	1.200lm	38°	40
03045-689126	VK/05146G/W/C	GU10	15w		4000K	1.200lm	38°	40
03045-690126	VK/05146G/D/W/W	GU10	15w		3000K	1.200lm	38°	40
03045-691126	VK/05146G/D/W/C	GU10	15w		4000K	1.200lm	38°	40

Voltage 220-240	SMD High Power	38°	CRI Ra>80	25k hrs	25kclks	A+	-40°C 60°C	Plastic	15W>150W	IP20	2
--------------------	----------------------	-----	--------------	------------	---------	----	---------------	---------	----------	------	---

### VK/05145/E Par30



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-684126	VK/05145/E/W/W	E27	14w		3000K	1.000lm	40
03045-685126	VK/05145/E/W/C	E27	14w		4000K	1.000lm	40
03045-686126	VK/05145/E/D/W/W	E27	14w		3000K	1.000lm	40
03045-687126	VK/05145/E/D/W/C	E27	14w		4000K	1.000lm	40

Voltage 220-240	HIGH Power	38°	CRI Ra>80	25k hrs	25kclks	A+	-40°C 60°C	Plastic	Alu	14W > 140W	IP20	2
--------------------	---------------	-----	--------------	------------	---------	----	---------------	---------	-----	------------	------	---



**VK/05146G**

GU10. 15w. 1200lm. 38°



**VK/05145/E**

E27. 14w. 1000lm. 38°






**VK/PL-CN35-COB 600 G2**

**OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-394019	VK/PL-CN35-COB 600-927-24D-G2	5.9w		2700K	561lm	24°	20
03045-395019	VK/PL-CN35-COB 600-930-24D-G2	5.9w		3000K	590lm	24°	20
03045-396019	VK/PL-CN35-COB 600-940-24D-G2	5.9w		4000K	620lm	24°	20
03045-388019	VK/PL-CN35-COB 600-927-36D-G2	5.9w		2700K	596lm	36°	20
03045-389019	VK/PL-CN35-COB 600-930-36D-G2	5.9w		3000K	627lm	36°	20
03045-390019	VK/PL-CN35-COB 600-940-36D-G2	5.9w		4000K	659lm	36°	20

<b>Voltage</b> 32.6V DC/50Hz	<b>COB</b> <b>OSRAM</b>	24° & 36° 	<b>CRI</b> Ra>90	 50k hrs	 15kcliks	<b>A+</b> 	-25°C 40°C	 Alu	5.9W >60W	 IP20	 5
------------------------------------	----------------------------	---------------	---------------------	----------------	--------------	---------------	---------------	---------	-----------	----------	-------

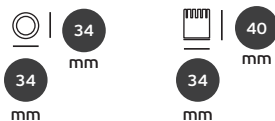


VK/OT FIT 8/180 CS I MINI

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-511019 4052899587946	VK/OT FIT 8/220- 240/180 CS I MINI	2.7- 7.6w	198-264 AC		90/120/150/ 180mA DC	20

	<b>Voltage</b> 30-42V					
--	--------------------------	--	--	--	--	--

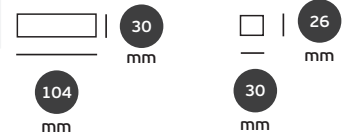

VK/OT FIT 8/180 CS PC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-753019 4062172007535	VK/OT FIT 8/220- 240/180 CS PC	7.2w	198-264 AC		100/120/155/ 180mA DC	20

	<b>Voltage</b> 27-40V					
--	--------------------------	--	--	--	--	--



VK/OTi DALI 10/700 NFC DIM

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-754019 4062172143899	VK/OTi DALI 10/220- 240/700 NFC DIM	10w	198-264 AC		150- 700mA DC	20

	<b>Voltage</b> 2.5-45V					
--	---------------------------	--	--	--	--	--



VK/PL-CN50DC-COB 900 G1

OSRAM




Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-382019	VK/PL-CN50DC-COB 900-927-15D-G1	12.3w		2700K	980lm	15°	20
03045-362019	VK/PL-CN50DC-COB 900-930-15D-G1	12.3w		3000K	1.040lm	15°	20
03045-393019	VK/PL-CN50DC-COB 900-940-15D-G1	12.3w		4000K	1.120lm	15°	20
03045-397019	VK/PL-CN50DC-COB 900-927-24D-G1	12.3w		2700K	960lm	24°	20
03045-356119	VK/PL-CN50DC-COB 900-930-24D-G1	12.3w		3000K	1.020lm	24°	20
03045-339019	VK/PL-CN50DC-COB 900-940-24D-G1	12.3w		4000K	1.090lm	24°	20
03045-377019	VK/PL-CN50DC-COB 900-927-40D-G1	12.3w		2700K	920lm	40°	20
03045-336019	VK/PL-CN50DC-COB 900-930-40D-G1	12.3w		3000K	980lm	40°	20
03045-337019	VK/PL-CN50DC-COB 900-940-40D-G1	12.3w		4000K	1.050lm	40°	20

Voltage 35.2V DC/50Hz	COB OSRAM	24° & 40° 	CRI Ra>90	50k hrs 	100kclks 	A+ 	-20°C 40°C 	Alu 	12.3W x50W	IP20 	5 
-----------------------------	--------------	---------------	--------------	----------------	--------------	--------	-------------------	---------	------------	----------	-------

VK/PL-CN50DC-COB 1.400 G1/G2

OSRAM



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-398019	VK/PL-CN50DC-COB 1.400-827-24D-G2	12.9w		2700K	1.378lm	24°	20
03045-333019	VK/PL-CN50DC-COB 1.400-830-24D-G1	12.9w		3000K	1.430lm	24°	20
03045-347019	VK/PL-CN50DC-COB 1.400-840-24D-G1	12.9w		4000K	1.510lm	24°	20
03045-399019	VK/PL-CN50DC-COB 1.400-827-40D-G2	12.9w		2700K	1.411lm	40°	20
03045-340019	VK/PL-CN50DC-COB 1.400-830-40D-G1	12.9w		3000K	1.360lm	40°	20
03045-341019	VK/PL-CN50DC-COB 1.400-840-40D-G1	12.9w		4000K	1.430lm	40°	20

Voltage 36.5V DC/50Hz	COB OSRAM	24° & 40° 	CRI Ra>80	50k hrs 	15kclks 	A+ 	-20°C 40°C 	Alu 	12.9W x50W	IP20 	5 
-----------------------------	--------------	---------------	--------------	----------------	-------------	--------	-------------------	---------	------------	----------	-------

VK/PL-CN50-COB 1.400 G2

OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-407019	VK/PL-CN50-COB 1.400-935-24D-G2	12.8w		3500K	1.277lm	24°	20
03045-408019	VK/PL-CN50-COB 1.400-935-40D-G2	12.8w		3500K	1.308lm	40°	20

Voltage 36.5V DC/50Hz	COB OSRAM	24° & 40° 	CRI Ra>90	50k hrs 	15kclks 	A+ 	-20°C 40°C 	Alu 	12.8W x50W	IP20 	5 
-----------------------------	--------------	---------------	--------------	----------------	-------------	--------	-------------------	---------	------------	----------	-------



VK/ELEMENT 12/220-240/300 G3

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-755019 4062172167451	VK/LEMENT 12/ 220-240/300 G3	7.2- 12.6w	198-264 AC		300mA DC	20

	<b>Voltage</b> 24-42V					
--	--------------------------	--	--	--	--	--



VK/ELEMENT 15/220-240/350 G3

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-530019 4062172167475	VK/ELEMENT 15/ 220-240/350 G3	8.4- 14.7w	198-264 AC		350mA DC	20

	<b>Voltage</b> 24-42V					
--	--------------------------	--	--	--	--	--



VK/OT FIT 18/220-240/450 CS PC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-756019 4062172007559	VK/OT FIT 18/220- 240/450 CS PC	18w	198-264 AC		225/325/350/ 450mA DC	20

	<b>Voltage</b> 27-40V					
--	--------------------------	--	--	--	--	--



VK/OTi DALI 15/220-240/1A0 NFC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-531019 4062172061766	VK/OTi DALI 15/220- 240/1A0 NFC	18w	198-264 AC		150-1050mA DC	20

	<b>Voltage</b> 7.5-54V					
--	---------------------------	--	--	--	--	--



**VK/PL-CN111DC-COB-1800-G1 OSRAM**




Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-391019	VK/PL-CN111DC-COB 1800-930-15D-G1	18w		3000K	1.840lm	15°	12
03045-357019	VK/PL-CN111DC-COB 1800-940-15D-G1	18w		4000K	1.940lm	15°	12
03045-400019	VK/PL-CN111DC-COB 1800-927-24D-G1	18w		2700K	1.770lm	24°	12
03045-348019	VK/PL-CN111DC-COB 1800-930-24D-G1	18w		3000K	1.880lm	24°	12
03045-350019	VK/PL-CN111DC-COB 1800-940-24D-G1	18w		4000K	1.990lm	24°	12
03045-381019	VK/PL-CN111DC-COB 1800-927-40D-G1	18w		2700K	1.700lm	40°	12
03045-349019	VK/PL-CN111DC-COB 1800-930-40D-G1	18w		3000K	1.800lm	40°	12
03045-351019	VK/PL-CN111DC-COB 1800-940-40D-G1	18w		4000K	1.910lm	40°	12

Voltage 35,6V DC/50Hz	COB OSRAM	15°, 24°, 40°	CRI Ra>90	50k hrs	100klcks	A+	-25°C 40°C	Alu	18W>100W	IP20	5
-----------------------------	--------------	------------------	--------------	------------	----------	----	---------------	-----	----------	------	---



**VK/PL-CN111DC-COB-2800-G1 OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-358019	VK/PL-CN111DC-COB 2800-830-15D-G1	25.9w		3000K	2.700lm	15°	12
03045-361019	VK/PL-CN111DC-COB 2800-840-15D-G1	25.9w		4000K	2.830lm	15°	12
03045-342019	VK/PL-CN111DC-COB 2800-830-24D-G1	25.9w		3000K	2.760lm	24°	12
03045-343019	VK/PL-CN111DC-COB 2800-840-24D-G1	25.9w		4000K	2.900lm	24°	12
03045-352019	VK/PL-CN111DC-COB 2800-830-40D-G1	25.9w		3000K	2.650lm	40°	12
03045-353019	VK/PL-CN111DC-COB 2800-840-40D-G1	25.9w		4000K	2.780lm	40°	12

Voltage 37V DC/50Hz	COB OSRAM	24° & 40°	CRI Ra>80	50k hrs	100klcks	A+	-25°C 40°C	Alu	25.9W>100W	IP20	5
---------------------------	--------------	-----------	--------------	------------	----------	----	---------------	-----	------------	------	---




**VK/PL-CN111-COB-2800-G2 OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-401019	VK/PL-CN111-COB 2800-935-15D-G2	25.3w		3500K	2.626lm	15°	12
03045-402019	VK/PL-CN111-COB 2800-935-24D-G2	25.3w		3500K	2.565lm	24°	12
03045-403019	VK/PL-CN111-COB 2800-935-40D-G2	25.3w		3500K	2.504lm	40°	12

Voltage 36,2V DC/50Hz	COB OSRAM	15, 24°, 40°	CRI Ra>90	5k hrs	15klcks	A+	-25°C 40°C	Alu	25.3W>100W	IP20	5
-----------------------------	--------------	-----------------	--------------	-----------	---------	----	---------------	-----	------------	------	---



VK/ELEMENT 28/220-240/700 G3

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-751019 4062172167536	VK/ELEMENT 28/ 220-240/700 G3	14.7- 28w	198-264 AC		700mA DC	20



<b>LED ON/OFF OSRAM</b>	Voltage 21-40V		Plastic			
-------------------------	----------------	--	---------	--	--	--



VK/OT FIT 30/220-240/700 CS PC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-757019 4052899617308	VK/OT FIT 30/220- 240/700 CS PC	13.5- 28w	198-264 AC		500/ 700mA DC	20



<b>LED Triac OSRAM</b>	Voltage 27-40V		Plastic			
------------------------	----------------	--	---------	--	--	--



VK/OTi DALI 25/220-240/700 NFC L

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-758019 4062172017909	VK/OTi DALI 25/220- 240/700 NFC L	2-28w	198-264 AC		180-700mA DC	20



<b>LED DALI-NFC OSRAM</b>	Voltage 15-54V		Metal			
---------------------------	----------------	--	-------	--	--	--




VK/PL-CN111DC-COB-4300-G1 **OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-344019	VK/PL-CN111DC-COB 4300-830-24D-G1	37.6w		3000K	4.550lm	24°	12
03045-355019	VK/PL-CN111DC-COB 4300-840-24D-G1	37.6w		4000K	4.780lm	24°	12
03045-338019	VK/PL-CN111DC-COB 4300-830-40D-G1	37.6w		3000K	4.340lm	40°	12
03045-345019	VK/PL-CN111DC-COB 4300-840-40D-G1	37.6w		4000K	4.560lm	40°	12
03045-354019	VK/PL-CN111DC-COB 4300-830-60D-G1	37.6w		3000K	4.240lm	60°	12
03045-356019	VK/PL-CN111DC-COB 4300-840-60D-G1	37.6w		4000K	4.450lm	60°	12

Voltage 35.8V DC/50Hz	COB <b>OSRAM</b>	24°, 40°, 60° 	CRI Ra>80	50k hrs	100kclks	A+	-25°C 40°C	Alu	37.6W>100W	IP20	5
-----------------------------	---------------------	----------------------	--------------	------------	----------	----	---------------	-----	------------	------	---




VK/PL-CN111-COB-4300-G2 **OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-404019	VK/PL-CN111-COB 4300-935-24D-G2	36.7w		3500K	4.094lm	24°	12
03045-405019	VK/PL-CN111-COB 4300-935-40D-G2	36.7w		3500K	3.998lm	40°	12
03045-406019	VK/PL-CN111-COB 4300-935-60D-G2	36.7w		3500K	3.949lm	60°	12

Voltage 35V DC/50Hz	COB <b>OSRAM</b>	24°, 40°, 60° 	CRI Ra>90	5k hrs	15kclks	A+	-25°C 40°C	Alu	36.7W>100W	IP20	5
---------------------------	---------------------	----------------------	--------------	-----------	---------	----	---------------	-----	------------	------	---



VK/ELEMENT 42/220-240/1050 G3

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-759019 4062172167611	VK/ELEMENT 42/ 220-240/1050 G3	22-42w	198-264 AC		1.050mA DC	20

	<b>Voltage</b> 21-40V					
--	--------------------------	--	--	--	--	--




VK/OT FIT 40/220-240/1A0 PC SC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-760019 4052899617261	VK/OT FIT 40/220- 240/1A0 PC SC	21.6- 42w	198-264 AC		800/900/950 1050mA DC	20

	<b>Voltage</b> 27-40V					
--	--------------------------	--	--	--	--	--




VK/OTi DALI 35/220-240/1A0 NFC TW

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-761019 4062172017923	VK/OTi DALI 35/220- 240/1A0 NFC TW	38w	198-264 AC		350-1050mA DC	20

	<b>Voltage</b> 15-54V					
--	--------------------------	--	--	--	--	--

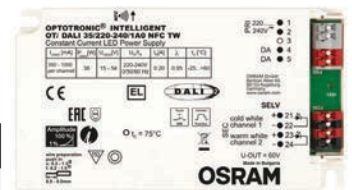





**0299** With PWM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-001702	<b>029908</b>	3w		RGB	N/A	6°	50
03045-002702	<b>029907</b>	3w		RGB	N/A	30°	50
03045-003702	<b>029917</b>	12w		RGB	N/A	30°	50

<b>LED MODULE</b>	6° & 30°	<b>CRI Ra&gt;80</b>	<b>Electric Current 350mA</b>			<b>A+</b>	-20°C 40°C		
-------------------	----------	---------------------	-------------------------------	--	--	-----------	---------------	--	--



**XR-E54**

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
78000-360618	<b>XR-E544785/40</b>	3.8/7.6w		2700K	-	40°	50
78000-361618	<b>XR-E54540401/20</b>	3.8/7.6w		2700K	-	20°	50
78000-363618	<b>XR-E546114/40</b>	3.8/7.6w		RGB	N/A	40°	50
78000-362618	<b>XR-E546113/20</b>	3.8/7.6w		RGB	N/A	20°	50

20° & 40°	<b>CRI Ra&gt;80</b>	<b>Electric Current 350 &amp; 700mA</b>			<b>A+</b>	-20°C 40°C		
-----------	---------------------	---	--	--	-----------	---------------	--	--



14 *Led linear  
accessories*

## VK/Fortimo/14




## Product Models

Code	Model	Box
78000-771112	VK/Fortimo/2.69/830/HV5/14 11.2V. 3000K. 2.69w. 465lm. CRI>80.	56pcs
78000-745112	VK/Fortimo/2.69/840/HV5/14 11.2V. 4000K. 2.69w. 490lm. CRI>80.	56pcs
78000-774112	VK/Fortimo/2.8/930/HV5/14 11.2V. 3000K. 2.8w. 465lm. CRI>90.	56pcs
78000-775112	VK/Fortimo/2.8/940/HV5/14 11.2V. 4000K. 2.8w. 465lm. CRI>90.	56pcs

## Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle 120°. Current 480mA.  
Working temperature -40°C → 70°C. Storage temperature -25°C → 60°C. Lifetime 50.000hrs.  
Number of modules in series per chain **Max 25**. Dimensions 14x2x0.16cm.



**5 years guarantee**

## VK/Fortimo/28




## Product Models

Code	Model	Box
78000-772112	VK/Fortimo/6/830/HV5/28 25.1V. 3000K. 6w. 1.045lm. CRI>80.	168pcs
78000-744112	VK/Fortimo/6/840/HV5/28 25.1V. 4000K. 6w. 1.100lm. CRI>80.	168pcs
78000-776112	VK/Fortimo/6/930/HV5/28 25.1V. 3000K. 6.3w. 1.045lm. CRI>90.	168pcs
78000-777112	VK/Fortimo/6/940/HV5/28 25.1V. 4000K. 6.3w. 1.100lm. CRI>90.	168pcs

## Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle 120°. Current 480mA.  
Working temperature -40°C → 70°C. Storage temperature -25°C → 60°C. Lifetime 50.000hrs.  
Number of modules in series per chain **Max 11**. Dimensions 27.9x2x0.16cm.



**5 years guarantee**

## VK/Fortimo/56




## Product Models

Code	Model	Box
78000-770112	VK/Fortimo/12/830/HV5/56 50.2V. 3000K. 12.1w. 2.090lm. CRI>80.	84pcs
78000-743112	VK/Fortimo/12/840/HV5/56 50.2V. 4000K. 12.1w. 2.200lm. CRI>80.	84pcs
78000-778112	VK/Fortimo/12/930/HV5/28 50.2V. 3000K. 12.7w. 2.090lm. CRI>90.	84pcs
78000-779112	VK/Fortimo/6/940/HV5/28 50.2V. 4000K. 12.7w. 2.200lm. CRI>90.	84pcs

## Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle 120°. Current 480mA.  
Working temperature -40°C → 70°C. Storage temperature -25°C → 60°C. Lifetime 50.000hrs.  
Number of modules in series per chain **Max 5**. Dimensions 55.92x2x0.16cm.



**5 years guarantee**

## VK/8183/56



## Product Models

Code	Model	Box
78000-718183	VK/8183/12/830/56 50.2V. 3000K. 9-12w. 1312-1725lm. CRI>80.	56pcs
78000-715183	VK/8183/12/840/56 50.2V. 4000K. 9-12w. 1312-1725lm. CRI>80.	56pcs

## Details

Led type **Edison 2835**. Beam Angle **120°**. Current 480mA. Working temperature **-25°C → 45°C**. Storage temperature **-25°C → 60°C**. Lifetime **50.000hrs**. Number of modules in series per chain **Max 4**. Dimensions **55.95x1.4x0.16cm**. 2 years guarantee.



IP20.

## VK/7183/111



## Product Models

Code	Model	Box
78000-717183	VK/7183/12/830/111 45.3V. 3000K. 18-24w. 2.624-3.450lm. CRI>80.	56pcs
78000-716183	VK/7183/12/840/111 45.3V. 4000K. 18-24w. 2.624-3.450lm. CRI>80.	56pcs


## Details

Led type **Edison 2835**. Beam Angle **120°**. Current 480mA. Working temperature **-25°C → 45°C**. Storage temperature **-25°C → 60°C**. Lifetime **50.000hrs**. Number of modules in series per chain **Max 2**. Dimensions **111.70x1.4x0.16cm**. 2 years guarantee.



IP20.

**VK/XITANIUM/35W/100V**

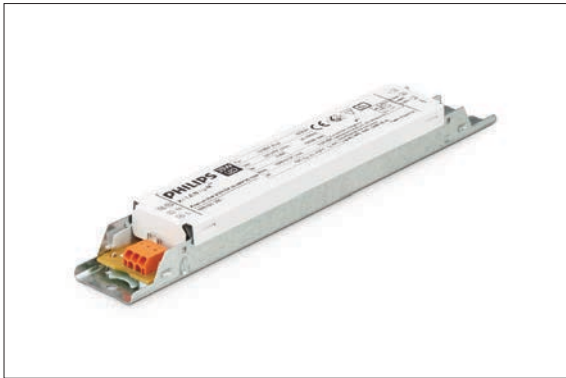


**Product Models**

Code	Model	Box
78000-780112 (9290 021 30006)	VK/XITANIUM/35W/100V 0.3/0.35A. 35w. 50-100V.	20pcs


**Details**

Voltage Input 220-240V. Output voltage 50-100V. Watt 35w. Driver Xitanium **PHILIPS** non-isolated Single current (two output). Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 100.000hrs Material Metal. 2 years guarantee.

 **IP20. 35w.**

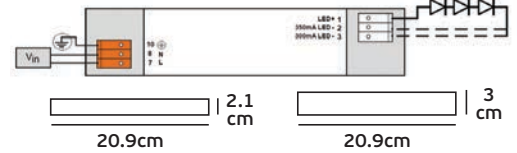

**VK/XITANIUM/35W/150V**

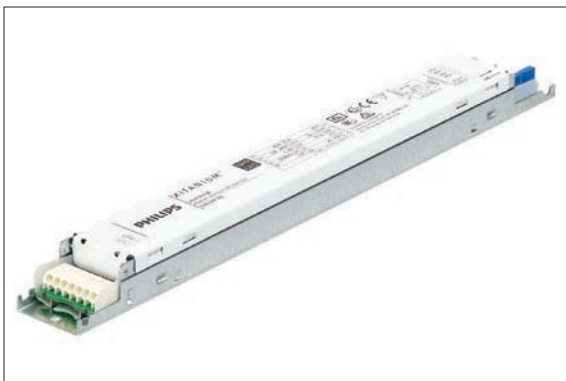


**Product Models**

Code	Model	Box
78000-781112 (9290 015 06406)	VK/XITANIUM/35W/150V 0.08/0.35A. 35w. 50-150V.	24pcs


**Details**

Voltage Input 220-240V. Output voltage 50-150V. Watt 35w. Driver Xitanium **PHILIPS** linear HV non-isolated. Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 50.000hrs Material Metal. 2 years guarantee.

 **IP20. 35w.**

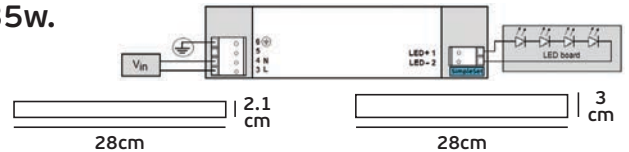

**VK/XITANIUM/36W/57V**

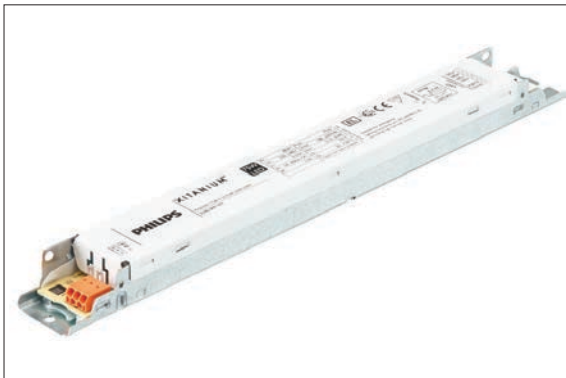


**Product Models**

Code	Model	Box
78000-742112 (9290 016 94106)	VK/XITANIUM/36W/54V 0.3/1.0A. 36w. 27-54V.	24pcs


**Details**

Voltage Input 220-240V. Output voltage 27-54V. Watt 36w. Driver Xitanium **PHILIPS** Isolated Fixed Output. Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 50.000hrs Material Metal. 2 years guarantee.

 **IP20. 36w.**

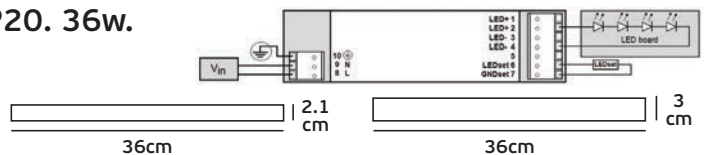

**VK/XITANIUM/60W/170V**

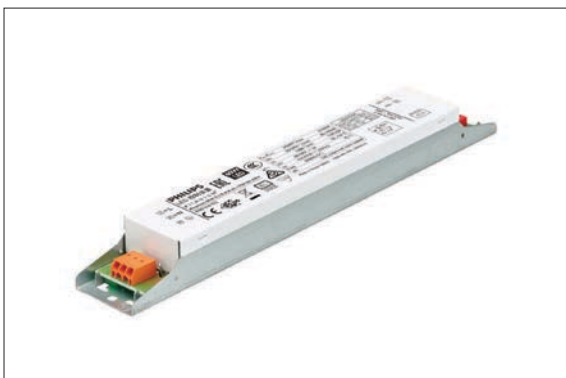


**Product Models**

Code	Model	Box
78000-782112 (9290 016 95206)	VK/XITANIUM/60W/170V 0.3/0.35A. 60w. 85-170V.	50pcs

**Details**

Voltage Input 220-240V. Output voltage 85-170V. Watt 60w. Driver Xitanium **PHILIPS** non-isolated Single Current (Dipswitch). Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 100.000hrs Material Metal. 2 years guarantee.

 **IP20. 60w.**

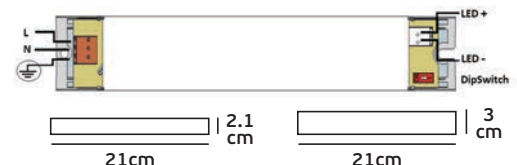

VK/XITANIUM/60W/220V



Product Models


Code	Model	Box
78000-783112 (9290 015 09106)	VK/XITANIUM/60W/220V 0.08/0.35A. 60w. 50-220V.	24pcs

Details

Voltage Input 220-240V. Output voltage 50-220V. Watt 60w. Driver Xitanium **PHILIPS** linear HV non-isolated. Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 50.000hrs Material **Metal**. 2 years guarantee.



IP20. 60w.

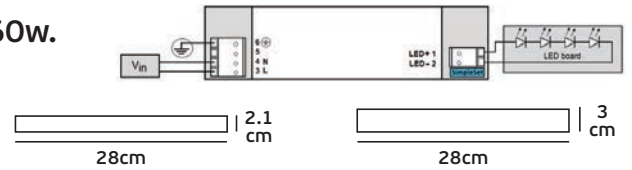

VK/XITANIUM/60W/DALI



Product Models


Code	Model	Box
78000-784112 (9290 016 81606)	VK/XITANIUM/60W/DALI/DIM 0.15/0.5A. 60w. 50-220V.	24pcs

Details

Voltage Input 220-240V. Output voltage 50-220V. Watt 60w. Driver Xitanium **PHILIPS** non-iso DALI dimmable & programmable (TD16 SimpleSet). Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 100.000hrs Material **Metal**. 2 years guarantee.



IP20. 60w.

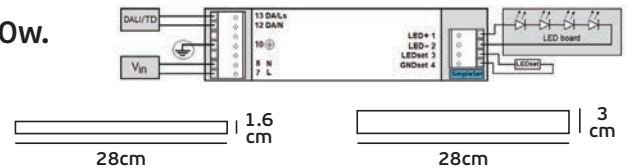

VK/XITANIUM/100W/220V



Product Models


Code	Model	Box
78000-746112 (9290 015 29506)	VK/XITANIUM/100W/220V 0.25/0.7A. 100w. 50-220V.	24pcs

Details

Voltage Input 220-240V. Output voltage 50-220V. Watt 100w. Driver Xitanium **PHILIPS** linear HV non-isolated. Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 50.000hrs Material **Metal**. 2 years guarantee.



IP20. 100w.

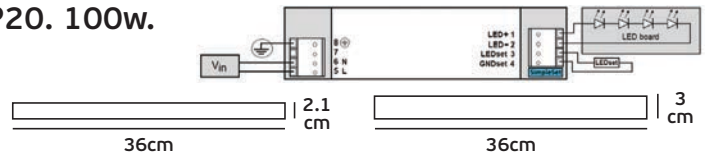

VK/XITANIUM/100W/DALI



Product Models


Code	Model	Box
78000-711112 (9290 015 47306)	VK/XITANIUM/100W/DALI/DIM 0.25/0.7A. 100w. 50-220V.	24pcs

Details

Voltage Input 220-240V. Output voltage 50-220V. Watt 100w. Driver Xitanium **PHILIPS** non-iso DALI dimmable & programmable. Working temperature -25°C → 50°C. Storage temperature -25°C → 85°C. Lifetime 100.000hrs Material **Metal**. 2 years guarantee.



IP20. 100w.

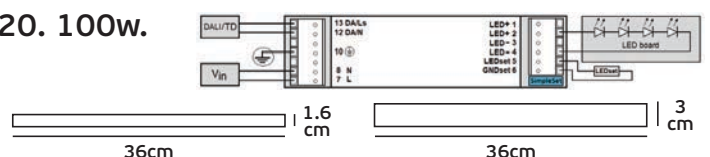

**VK/COV/14/56**




**Product Models**

Code	Model	Box
77161-597640	VK/COV/14/56	1pc
31.930.431.89	Diffusor for 14 mm LED-System. (1)	

**Details**

Transmission **92%**. Full width at half maximum (FWHM) **130°**. Material **PMMA**. Length **56.5cm**.



**VK/END/14/TR**





**Product Models**

Code	Model	Box
77161-598640	VK/END/14/TR	250pcs
31.930.313.89	End cap for 14 mm LED-System. (2)	

**Details**

Mounting method **Push through mount**. Material **PC**. Color **Transparent**.



**VK/HOLD/14/W**





**Product Models**

Code	Model	Box
77161-599640	VK/HOLD/14/W	500pcs
31.930.321.51	Diffusor holder for 14 mm LED-System. (3)	

**Details**

Mounting method **Snap-in mounting**. Material **PC**. Color **White**.

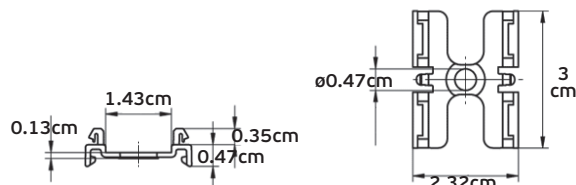

**VK/FIXEL/P2F**




**Product Models**

Code	Model	Box
77161-600640	VK/FIXEL/P2F	5000pcs
28.901.U166.10	P2F - Push to Fix - Fixing element for PCBs.	

**Details**

Mounting method **Push-in fixing for mounting PCBs**. Material **CrNi with silicone insulating ring**. Color **Blue**.

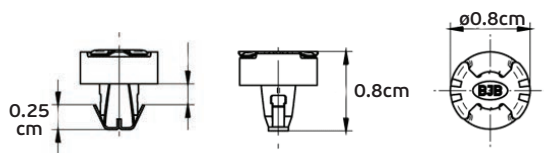

*product finder*



CODE	PAGE
01026-015106	768
01026-016106	768
01026-017106	768
03045-001702	848
03045-001733	798
03045-002702	848
03045-002733	798
03045-003702	848
03045-003733	798
03045-004664	829
03045-004733	800
03045-005733	800
03045-006733	800
03045-007742	823
03045-008742	823
03045-009742	823
03045-010742	823
03045-017742	819
03045-018742	819
03045-019742	821
03045-022742	832
03045-023742	832
03045-024742	832
03045-025742	825
03045-026742	825
03045-027742	825
03045-028742	825
03045-029742	825
03045-030742	825
03045-039742	819
03045-044742	816
03045-045742	816
03045-046742	816
03045-047742	817
03045-048742	817
03045-049742	817
03045-050742	818
03045-051742	818
03045-052742	818
03045-059742	819
03045-060719	827
03045-060742	819
03045-061719	827
03045-061742	819
03045-065664	829
03045-066664	829
03045-068664	826
03045-069664	826
03045-082742	832
03045-083742	832
03045-084742	832
03045-085742	832
03045-087664	826
03045-088664	826
03045-092742	820

CODE	PAGE
03045-093742	820
03045-094742	820
03045-100742	830
03045-101742	830
03045-104742	830
03045-105742	819
03045-106742	819
03045-107742	819
03045-108742	820
03045-109742	820
03045-110742	820
03045-111742	820
03045-116742	832
03045-117742	832
03045-118742	832
03045-123742	832
03045-124742	832
03045-125742	830
03045-126742	830
03045-127742	830
03045-128742	830
03045-129742	832
03045-130742	832
03045-131742	832
03045-132742	832
03045-133742	833
03045-134742	816
03045-135742	816
03045-136742	816
03045-137742	817
03045-138742	817
03045-139742	817
03045-140742	818
03045-141742	818
03045-142742	818
03045-143742	830
03045-144742	830
03045-145742	830
03045-146742	816
03045-147664	809
03045-147742	816
03045-148664	809
03045-148742	816
03045-149664	824
03045-149742	817
03045-150664	824
03045-150742	817
03045-151742	817
03045-152742	818
03045-153742	818
03045-154742	818
03045-155664	826
03045-156664	826
03045-161664	809
03045-162664	809

CODE	PAGE
03045-163664	809
03045-168664	808
03045-169664	808
03045-170664	808
03045-171664	804
03045-171742	830
03045-172664	804
03045-172742	830
03045-173664	804
03045-173742	830
03045-174664	804
03045-175664	806
03045-176664	806
03045-177664	806
03045-178664	806
03045-179664	807
03045-180664	807
03045-181664	807
03045-182664	807
03045-183664	810
03045-184664	814
03045-185664	815
03045-187664	811
03045-188664	811
03045-189664	811
03045-190664	804
03045-191664	804
03045-192664	806
03045-193664	806
03045-194664	807
03045-195664	807
03045-196664	808
03045-197664	808
03045-198664	811
03045-199664	813
03045-200664	813
03045-201664	815
03045-202664	804
03045-203664	806
03045-204664	806
03045-205664	807
03045-206664	807
03045-207664	808
03045-208664	808
03045-209664	811
03045-210664	811
03045-211664	812
03045-212664	813
03045-213664	814
03045-214664	815
03045-215664	810
03045-216664	813
03045-217664	812
03045-218664	812
03045-219664	815

CODE	PAGE
03045-220664	814
03045-221664	814
03045-222664	806
03045-223664	807
03045-224664	808
03045-225664	810
03045-228664	802
03045-229664	802
03045-230664	803
03045-231664	803
03045-232664	803
03045-233664	802
03045-274126	821
03045-275126	821
03045-288140	822
03045-289140	822
03045-290140	822
03045-291140	822
03045-292140	822
03045-293140	822
03045-303126	831
03045-304126	831
03045-333019	842
03045-336019	842
03045-337019	842
03045-338019	846
03045-339019	842
03045-340019	842
03045-341019	842
03045-342019	844
03045-343019	844
03045-344019	846
03045-345019	846
03045-347019	842
03045-348019	844
03045-349019	844
03045-350019	844
03045-351019	844
03045-352019	844
03045-353019	844
03045-354019	846
03045-355019	846
03045-356019	846
03045-356119	842
03045-357019	844
03045-358019	844
03045-361019	844
03045-362019	842
03045-377019	842
03045-381019	844
03045-382019	842
03045-388019	840
03045-389019	840
03045-390019	840
03045-391019	844

CODE	PAGE
03045-393019	842
03045-394019	840
03045-395019	840
03045-396019	840
03045-397019	842
03045-398019	842
03045-399019	842
03045-400019	844
03045-401019	844
03045-402019	844
03045-403019	844
03045-404019	846
03045-405019	846
03045-406019	846
03045-407019	842
03045-408019	842
03045-618140	834
03045-619140	834
03045-620140	829
03045-621140	829
03045-628140	836
03045-629140	836
03045-630140	836
03045-631140	836
03045-632140	836
03045-633140	836
03045-634140	837
03045-635140	837
03045-636140	837
03045-637140	837
03045-638140	837
03045-639140	837
03045-640140	836
03045-641140	836
03045-642140	836
03045-643140	836
03045-644140	836
03045-645140	836
03045-646140	821
03045-647140	821
03045-648140	821
03045-651685	824
03045-652685	824
03045-653685	825
03045-654685	825
03045-655685	826
03045-656685	826
03045-657685	827
03045-658685	827
03045-659685	827
03045-660685	827
03045-661685	824
03045-662685	824
03045-670140	823
03045-671140	823

CODE	PAGE
03045-672140	828
03045-673140	828
03045-674140	828
03045-674685	824
03045-675140	828
03045-675685	827
03045-676140	828
03045-676685	827
03045-677140	828
03045-678140	828
03045-678685	824
03045-679685	824
03045-680685	824
03045-682140	820
03045-683140	820
03045-684126	838
03045-684140	828
03045-685126	838
03045-685140	828
03045-686126	838
03045-687126	838
03045-687140	819
03045-688126	838
03045-688140	819
03045-689126	838
03045-689140	833
03045-690126	838
03045-690140	833
03045-691126	838
03045-691140	833
03045-692140	833
03045-693140	834
03045-694140	834
03045-695140	834
03045-696140	834
03045-697140	834
03045-698140	834
03045-699126	816
03045-699140	829
03045-700140	829
12083-919002	122
12083-920002	122
12083-921002	122
12084-020019	123
12084-023016	134
12084-027338	122
14184-116170	123
57610-136115	631
57610-137115	631
57610-139115	630
57610-140115	630
57610-141115	630
57610-142115	630
57610-143115	631
57610-144115	631

CODE	PAGE
58610-111739	620
58610-112739	620
58610-113728	623
58610-114728	623
58610-115728	621
58610-116728	621
58610-117728	622
58610-118728	622
58610-119728	622
58610-120728	622
61171-010724	618
61171-011724	618
61171-012724	619
61171-022733	617
61171-023733	617
61171-230747	616
61171-237694	640
61171-238694	640
61171-239694	640
61171-240694	641
61171-241694	641
61171-242694	641
61171-243694	636
61171-244694	636
61171-245694	636
61171-246694	636
61171-247694	642
61171-248694	642
61171-249694	643
61171-250694	643
61171-251694	638
61171-252694	638
61171-253694	638
62159-062291	769
62159-063291	769
62159-093106	768
62159-094106	768
62159-095106	768
63158-001115	791
63158-002115	772
63158-003115	772
63158-004115	772
63158-005115	772
63158-006115	774
63158-007115	774
63158-008115	776
63158-009115	776
63158-010115	777
63158-011115	777
63158-101736	779
63158-102736	780
63158-104736	778
63158-105736	778
63158-106736	778
63158-107736	778

CODE	PAGE
63158-108736	778
63158-109736	778
63158-110736	779
63158-111736	779
63158-112736	780
63158-114736	780
63158-122736	780
63158-162736	779
63158-164736	782
63158-165736	782
63158-166736	782
63158-167736	782
63158-168736	782
63158-169736	783
63158-170736	783
63158-171736	783
63158-177736	780
63158-178736	779
63158-179736	780
63158-180736	779
63158-181736	788
63158-182736	788
63158-212123	186
63158-213123	186
63158-214123	186
63158-215123	187
63158-216123	187
63158-217123	187
63158-218123	191
63158-219123	190
63158-220123	191
63158-221123	192
63158-222123	192
63158-223123	193
63158-224123	187
63158-225123	187
63158-226123	187
63158-239126	784
63158-240126	784
63158-241126	785
63158-242126	784
63158-243126	784
63158-244126	785
63158-245126	784
63158-246126	784
63158-247126	785
63158-248126	786
63158-249126	786
63158-260727	189
63158-288123	188
63158-291164	205
63158-292164	205
63158-293164	204
63158-294164	204
63158-295164	206

CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
63158-296164	206	64171-071126	416	64173-044115	198	64173-075121	214
63158-297164	206	64171-072126	419	64173-045115	198	64173-075123	200
63158-298164	206	64171-073126	419	64173-046115	200	64173-076121	214
63158-299164	204	64171-074126	173	64173-047115	200	64173-076123	200
63158-300164	204	64171-258727	406	64173-047121	210	64173-077121	214
63158-301164	205	64171-259727	406	64173-048115	200	64173-078121	214
63158-302164	205	64171-260727	408	64173-048121	211	64173-079121	214
63158-303164	207	64171-261727	408	64173-049121	210	64173-080121	226
63158-304164	207	64171-262727	408	64173-049123	198	64173-081121	226
63158-304752	794	64171-263727	408	64173-050121	210	64173-082121	224
63158-305164	207	64171-264727	410	64173-050123	198	64173-083121	224
63158-305752	794	64171-265727	410	64173-051121	210	64173-084121	224
63158-306164	207	64171-266727	621	64173-051123	198	64173-085121	224
63158-306752	794	64171-267727	621	64173-052121	210	64173-085123	198
63158-307752	794	64171-268727	418	64173-052123	198	64173-086121	225
64171-011171	422	64171-269727	418	64173-053121	213	64173-086123	198
64171-021171	422	64171-270727	407	64173-053123	198	64173-087121	225
64171-022171	422	64171-271727	407	64173-054121	213	64173-087123	198
64171-024126	422	64171-272727	409	64173-054123	198	64173-089121	219
64171-024171	424	64171-273727	409	64173-055121	216	64173-090121	219
64171-025171	424	64171-274727	409	64173-055123	198	64173-091121	218
64171-026126	422	64171-275727	409	64173-056121	216	64173-092121	218
64171-026171	424	64171-276727	411	64173-056123	198	64173-093121	220
64171-027126	422	64171-277727	411	64173-057121	216	64173-094121	220
64171-027171	424	64173-017121	228	64173-057123	198	64173-095121	221
64171-028126	423	64173-018121	228	64173-058121	216	64173-096121	221
64171-028171	425	64173-019121	229	64173-058123	198	64173-097121	230
64171-029171	425	64173-020121	229	64173-059121	216	64173-098121	230
64171-031126	423	64173-022121	212	64173-059123	198	64173-099121	230
64171-032126	423	64173-023121	210	64173-060121	216	64173-100121	230
64171-033126	423	64173-024121	210	64173-060123	198	64173-101121	230
64171-043126	173	64173-025121	210	64173-061121	217	64173-102121	231
64171-044126	173	64173-026121	210	64173-061123	198	64173-103121	230
64171-053126	419	64173-027121	210	64173-062121	217	64173-104121	231
64171-054126	419	64173-028121	210	64173-062123	198	64173-316622	226
64171-055126	412	64173-029121	211	64173-063121	217	64173-345622	226
64171-055697	563	64173-030121	211	64173-063123	200	64173-657622	226
64171-056126	412	64173-031121	211	64173-064121	217	64174-001108	604
64171-056697	563	64173-032121	228	64173-064123	200	64174-001126	179
64171-057126	413	64173-033121	228	64173-065121	217	64174-001700	175
64171-057738	172	64173-034121	228	64173-065123	200	64174-002108	604
64171-058126	413	64173-035121	212	64173-066121	217	64174-002126	179
64171-058738	172	64173-037115	198	64173-066123	200	64174-002700	175
64171-059126	413	64173-037118	526	64173-067121	228	64174-003108	605
64171-060126	412	64173-038115	198	64173-067123	200	64174-003123	604
64171-061126	412	64173-038118	526	64173-068121	228	64174-003126	179
64171-062126	415	64173-039115	198	64173-068123	200	64174-003700	176
64171-063126	415	64173-039118	526	64173-069121	228	64174-004108	605
64171-064126	414	64173-040115	200	64173-069123	200	64174-004123	604
64171-065126	414	64173-040118	526	64173-070123	200	64174-004126	179
64171-066126	417	64173-041115	200	64173-071123	200	64174-004700	176
64171-067126	417	64173-041118	526	64173-072123	200	64174-005108	605
64171-068126	416	64173-042115	200	64173-073123	200	64174-005123	227
64171-069126	416	64173-042118	526	64173-074121	214	64174-005126	179
64171-070126	416	64173-043115	198	64173-074123	200	64174-005700	176

CODE	PAGE
64174-006108	605
64174-006123	227
64174-006126	179
64174-006700	176
64174-007108	396
64174-007700	175
64174-008108	396
64174-008126	181
64174-008700	175
64174-009108	254
64174-009126	181
64174-009700	175
64174-010108	254
64174-010126	181
64174-010700	175
64174-011108	397
64174-011700	173
64174-012108	256
64174-012700	173
64174-013108	389
64174-013126	560
64174-013700	173
64174-014108	389
64174-014126	560
64174-014700	173
64174-015108	419
64174-015126	560
64174-015700	172
64174-016108	399
64174-016126	164
64174-016700	172
64174-017108	399
64174-017126	164
64174-017700	172
64174-018108	557
64174-018126	164
64174-018700	172
64174-019108	557
64174-019126	164
64174-019700	215
64174-020108	555
64174-020126	164
64174-020700	215
64174-021108	555
64174-021126	414
64174-021700	215
64174-022108	556
64174-022126	414
64174-022700	215
64174-023108	556
64174-023126	414
64174-023700	215
64174-024108	399
64174-024126	414
64174-024700	215

CODE	PAGE
64174-025108	399
64174-025700	216
64174-026108	262
64174-026126	426
64174-026700	216
64174-027108	262
64174-027126	426
64174-027700	222
64174-028108	623
64174-028126	426
64174-028700	222
64174-029108	602
64174-029126	426
64174-029700	223
64174-030108	602
64174-030126	426
64174-030700	223
64174-031108	602
64174-031126	426
64174-032108	602
64174-032126	426
64174-034721	170
64174-035721	170
64174-036721	171
64174-037721	171
64174-038721	174
64174-039721	166
64174-040721	166
64174-041721	166
64174-042721	166
64174-043721	166
64174-044721	166
64174-045721	166
64174-046721	166
64174-047721	168
64174-048721	168
64174-049721	168
64174-050721	168
64174-051721	168
64174-052721	168
64174-053721	168
64174-054721	168
64174-055721	165
64174-056721	165
64174-057721	165
64174-058721	165
64174-059721	152
64174-060721	152
64174-061721	152
64174-062721	152
64174-063721	152
64174-064721	152
64174-065721	152
64174-066721	152
64174-067721	153

CODE	PAGE
64174-068721	153
64174-069721	153
64174-070721	153
64174-071721	366
64174-072721	366
64174-073721	366
64174-074721	366
64174-075721	366
64174-076721	366
64174-077721	366
64174-078721	366
64174-079721	706
64174-080721	706
64174-081721	706
64174-082721	706
64174-083721	706
64174-084721	706
64174-085721	706
64174-086721	706
64174-087721	156
64174-088721	156
64174-089721	156
64174-090721	156
64174-091721	156
64174-092721	156
64174-093721	156
64174-094721	156
64174-095721	370
64174-096721	370
64174-097721	370
64174-098721	370
64174-099721	358
64174-100721	358
64174-101721	358
64174-102721	358
64174-103721	360
64174-104721	360
64174-105721	360
64174-106721	360
64174-107721	359
64174-108721	359
64174-109721	359
64174-110721	359
64174-111721	361
64174-112721	361
64174-113721	361
64174-114721	361
64174-115721	524
64174-116721	524
64174-117721	162
64174-118721	162
64174-119721	162
64174-120721	162
64174-121721	162
64174-122721	162

CODE	PAGE
64174-123721	162
64174-124721	162
64174-125721	160
64174-126721	160
64174-127721	160
64174-128721	160
64174-129721	160
64174-130721	160
64174-131721	160
64174-132721	160
64174-133721	160
64174-134721	160
64174-135721	160
64174-136721	160
64174-137721	142
64174-138721	142
64174-139721	142
64174-140721	142
64174-141721	143
64174-142721	143
64174-143721	144
64174-144721	144
64174-145721	144
64174-146721	144
64174-147721	148
64174-148721	148
64174-149721	148
64174-150721	148
64174-151721	148
64174-152721	148
64174-153721	148
64174-154721	148
64174-155721	148
64174-156721	148
64174-157721	148
64174-158721	148
64174-199128	242
64174-200128	242
64174-201128	242
64174-202128	242
64174-203128	242
64174-204128	242
64174-205128	242
64174-206128	242
64174-207128	242
64174-208128	242
64174-209128	242
64174-210128	242
64174-211128	243
64174-212128	243
64174-213128	243
64174-214128	243
64174-215128	243
64174-216128	243
64174-217128	265

CODE	PAGE
64174-218128	265
64174-219128	265
64174-220128	250
64174-220131	449
64174-221128	250
64174-221131	448
64174-222128	250
64174-222131	449
64174-223128	250
64174-223131	448
64174-224128	251
64174-224131	450
64174-225128	251
64174-225131	449
64174-226128	180
64174-226131	454
64174-227128	180
64174-227131	454
64174-228128	180
64174-228131	455
64174-229128	180
64174-229131	434
64174-230131	434
64174-231128	250
64174-231131	437
64174-232128	248
64174-232131	434
64174-233128	248
64174-233131	435
64174-234128	248
64174-234131	444
64174-235128	248
64174-235131	444
64174-236128	249
64174-236131	444
64174-237128	249
64174-237131	436
64174-238128	249
64174-238131	436
64174-239128	249
64174-239131	438
64174-240128	249
64174-240131	438
64174-241128	249
64174-241131	441
64174-242128	249
64174-242131	440
64174-243128	249
64174-243131	440
64174-244128	244
64174-244131	440
64174-245128	244
64174-245131	438
64174-246128	244
64174-246131	439

CODE	PAGE
64174-247128	244
64174-247131	439
64174-248128	244
64174-248131	448
64174-249128	244
64174-249131	455
64174-250128	244
64174-250131	447
64174-251128	244
64174-251131	447
64174-252128	245
64174-252131	447
64174-253128	245
64174-253131	456
64174-254128	245
64174-255128	245
64174-255131	456
64174-256128	245
64174-256131	456
64174-257128	245
64174-257131	456
64174-258128	245
64174-258131	456
64174-259128	245
64174-259131	435
64174-260128	246
64174-261128	246
64174-261131	441
64174-262128	246
64174-262131	436
64174-263128	246
64174-263131	435
64174-264128	246
64174-264131	442
64174-265128	246
64174-266128	246
64174-267128	246
64174-268128	247
64174-269128	247
64174-270128	248
64174-271128	248
64174-272128	247
64174-273128	238
64174-274128	238
64174-276128	250
64174-281128	247
64174-282128	247
64174-283128	247
64174-284128	247
64174-285128	250
64174-286128	250
64174-286131	456
64174-289131	451
64174-290131	451
64174-291131	451

CODE	PAGE
64174-292131	540
64174-293131	437
64174-294131	437
64174-295131	540
64174-296131	541
64174-297131	541
64174-298131	443
64174-298269	257
64174-299131	443
64174-299269	257
64174-300131	442
64174-300269	257
64174-301131	442
64174-302131	456
64174-302269	397
64174-303269	397
64174-304269	397
64174-305269	397
64174-307131	452
64174-310131	453
64174-310269	548
64174-311131	445
64174-311269	548
64174-312131	445
64174-312269	548
64174-313269	548
64174-314131	441
64174-315131	446
64174-316269	258
64174-317131	454
64174-317269	263
64174-318131	446
64174-318269	258
64174-319131	446
64174-319269	258
64174-320131	395
64174-320269	258
64174-321131	395
64174-321269	258
64174-322131	395
64174-322269	258
64174-323131	395
64174-323269	258
64174-324131	252
64174-324269	258
64174-325131	252
64174-325269	258
64174-326131	252
64174-326269	258
64174-327131	252
64174-327269	259
64174-328131	395
64174-328269	259
64174-329131	395
64174-330131	395

CODE	PAGE
64174-330269	259
64174-331131	395
64174-331269	259
64174-332269	396
64174-333269	396
64174-334269	396
64174-335269	396
64174-336269	396
64174-337269	380
64174-338269	380
64174-339131	439
64174-339269	380
64174-340269	380
64174-341269	380
64174-342269	380
64174-343269	380
64174-344269	380
64174-345269	380
64174-346269	380
64174-347269	548
64174-348269	263
64174-349269	263
64174-350269	263
64174-351269	263
64174-352269	264
64174-353269	264
64174-354269	264
64174-355269	264
64174-356269	264
64174-357269	398
64174-358269	398
64174-359269	398
64174-360269	398
64174-361269	398
64174-362269	398
64174-363269	398
64174-364269	398
64174-365269	398
64174-366269	398
64174-367269	549
64174-368269	549
64174-369269	549
64174-370269	549
64174-371269	549
64174-372269	264
64174-373269	264
64174-374269	264
64174-375269	264
64174-376269	264
64174-377269	264
64174-378269	381
64174-379269	381
64174-380269	381
64174-381269	381
64174-382269	262
64174-383269	262

CODE	PAGE
64174-384269	260
64174-385269	260
64174-386269	259
64174-390269	263
64174-391269	263
64174-392269	260
64174-393269	260
64174-394269	259
64174-420269	392
64174-421269	392
64174-422269	392
64174-423269	392
64174-424269	392
64174-511269	392
64174-512269	393
64174-513269	393
64174-699269	257
64174-700269	257
64174-701269	257
64174-703269	393
64174-704269	393
64174-705269	393
64174-706269	393
64174-707269	392
64174-708269	392
64174-876147	176
64174-877147	176
64174-878147	176
64174-879147	176
64174-880111	251
64174-881111	251
64174-882111	251
64174-883111	251
64174-884111	251
64174-885111	251
64174-886697	562
64174-887697	562
64174-896703	182
64174-897703	182
64174-898703	182
64174-899703	182
64174-900703	182
64174-901703	182
64174-902739	368
64174-903739	368
64174-904739	368
64174-905739	368
64174-906739	369
64174-907739	369
64174-908739	369
64174-909739	369
64174-910739	369
64174-911739	369
64174-912739	369
64174-913739	369

CODE	PAGE
64174-938121	394
64174-939121	394
64174-940121	394
64174-941121	394
64174-942121	255
64174-943121	255
64174-944121	265
64174-944724	418
64174-945121	265
64174-945128	254
64174-945724	601
64174-946121	255
64174-946128	254
64174-947121	255
64174-947128	254
64174-948128	256
64174-949128	256
64174-950121	255
64174-950128	256
64174-951121	379
64174-951128	261
64174-951724	178
64174-952121	387
64174-952128	261
64174-952724	178
64174-953121	394
64174-953128	261
64174-953724	178
64174-954128	261
64174-954724	178
64174-955128	261
64174-955724	178
64174-956724	178
64174-960115	627
64174-961115	627
64174-962115	628
64174-963115	628
64174-964115	629
64174-965115	629
71164-001108	504
71164-001111	234
71164-001115	476
71164-001122	203
71164-001702	490
71164-001721	298
71164-001724	502
71164-001755	522
71164-002108	504
71164-002111	234
71164-002115	476
71164-002122	203
71164-002126	239
71164-002702	490
71164-002721	298
71164-002724	502

CODE	PAGE
71164-002755	522
71164-003108	505
71164-003111	234
71164-003115	478
71164-003122	202
71164-003126	239
71164-003702	490
71164-003721	298
71164-003724	502
71164-003755	522
71164-004108	505
71164-004111	236
71164-004115	478
71164-004122	202
71164-004702	490
71164-004721	299
71164-004724	502
71164-004755	522
71164-005108	553
71164-005111	236
71164-005115	480
71164-005122	203
71164-005702	490
71164-005721	299
71164-005724	538
71164-005755	522
71164-006108	553
71164-006111	236
71164-006115	480
71164-006122	202
71164-006702	490
71164-006721	299
71164-006724	538
71164-006755	522
71164-007111	237
71164-007115	482
71164-007702	490
71164-007721	301
71164-007724	564
71164-007755	522
71164-008111	237
71164-008115	482
71164-008126	240
71164-008702	490
71164-008721	306
71164-008724	565
71164-008755	522
71164-009111	237
71164-009126	240
71164-009702	494
71164-009721	306
71164-009724	564
71164-009755	522
71164-010111	234
71164-010702	494

CODE	PAGE
71164-010721	306
71164-010755	522
71164-011111	234
71164-011126	239
71164-011702	494
71164-011721	307
71164-011755	522
71164-012111	234
71164-012126	239
71164-012702	494
71164-012721	307
71164-012755	522
71164-013111	236
71164-013702	489
71164-013721	304
71164-013724	558
71164-013755	464
71164-014111	236
71164-014702	489
71164-014721	304
71164-014724	601
71164-014755	492
71164-015111	236
71164-015702	489
71164-015721	304
71164-015755	492
71164-016111	235
71164-016702	489
71164-016721	308
71164-016724	462
71164-016755	498
71164-017111	235
71164-017126	240
71164-017702	489
71164-017721	308
71164-017724	458
71164-017755	498
71164-018111	235
71164-018126	240
71164-018702	489
71164-018721	308
71164-018724	460
71164-018755	498
71164-019111	236
71164-019702	489
71164-019721	309
71164-019755	498
71164-020111	236
71164-020126	240
71164-020702	489
71164-020721	310
71164-020755	498
71164-021111	236
71164-021126	240
71164-021702	484

CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
71164-021721	310	71164-043111	237	71164-086721	270	74168-235704	762
71164-021755	498	71164-043721	306	71164-087721	270	74168-236704	762
71164-022111	234	71164-044111	237	71164-088721	270	74168-237704	762
71164-022702	484	71164-044721	306	71164-089721	270	74168-238704	762
71164-022721	300	71164-045111	237	71164-090721	270	74168-239704	762
71164-022755	500	71164-045721	307	71164-091721	271	74168-240677	766
71164-023111	234	71164-046111	234	71164-092721	271	74168-241677	767
71164-023126	239	71164-046721	306	71164-093721	271	74168-250677	699
71164-023702	484	71164-047111	234	71164-094721	272	74168-251677	699
71164-023721	300	71164-047721	308	71164-095721	274	74168-252677	699
71164-023755	500	71164-048111	234	71164-096721	274	74168-253677	699
71164-024111	234	71164-048721	308	71164-097721	274	74168-254677	699
71164-024126	239	71164-049111	235	71164-098721	276	74168-255677	699
71164-024702	484	71164-049721	309	71164-099721	276	74168-256677	756
71164-024721	300	71164-050111	235	71164-100721	278	74168-257677	756
71164-024755	500	71164-050721	310	71164-101721	278	74168-258677	756
71164-025111	236	71164-051111	235	71164-102721	278	74168-264997	764
71164-025702	484	71164-051721	310	71164-103721	279	74168-265997	764
71164-025755	500	71164-052111	235	71164-104721	280	75165-001115	474
71164-026111	236	71164-052721	154	71164-105721	280	75165-002115	474
71164-026126	239	71164-053111	235	71164-106721	282	75165-039264	97, 101
71164-026702	484	71164-053721	154	71164-107721	282	75165-039264	97, 101
71164-026721	300	71164-054111	235	71164-108721	276	75165-062264	97, 101
71164-027111	236	71164-054721	154	71164-109721	284	75165-062264	97, 101
71164-027126	239	71164-055111	237	71164-110721	284	75165-130210	330
71164-027702	484	71164-055721	154	71164-111721	284	75165-132210	330
71164-027721	300	71164-056721	154	71164-112721	285	75165-137210	330
71164-028111	235	71164-057721	154	71164-113721	286	75165-137264	94
71164-028702	484	71164-058721	154	71164-114721	286	75165-144210	330
71164-028721	301	71164-059721	154	71164-115721	286	75165-161264	96
71164-029111	235	71164-061721	362	71164-116721	288	75165-162264	94
71164-029126	240	71164-062721	362	71164-117721	288	75165-164264	96
71164-029702	484	71164-063721	365	71164-118721	288	75165-165264	96
71164-030111	235	71164-064721	365	71164-119721	289	75165-166264	96
71164-030126	240	71164-065721	362	71164-120721	290	75165-167264	95
71164-030702	486	71164-066721	362	74168-141677	767	75165-168264	95
71164-030721	301	71164-067721	365	74168-143677	767	75165-173264	96
71164-031111	237	71164-068721	365	74168-146677	766	75165-176210	336
71164-031702	486	71164-069721	496	74168-156677	698	75165-177210	336
71164-031721	301	71164-070721	496	74168-158677	698	75165-189210	330
71164-032111	237	71164-071721	496	74168-170677	766	75165-195264	96
71164-032702	486	71164-072721	496	74168-179677	756	75165-198210	336
71164-032721	301	71164-073721	496	74168-193677	713	75165-199210	330
71164-033111	237	71164-074721	496	74168-194677	757	75165-215264	94
71164-033702	505	71164-075721	268	74168-196677	756	75165-216264	97
71164-033721	302	71164-076721	268	74168-199677	698	75165-217264	97
71164-034702	505	71164-077721	268	74168-200677	698	75165-223264	99
71164-038721	308	71164-078721	269	74168-201677	698	75165-224264	98
71164-039721	307	71164-079721	269	74168-202677	698	75165-225264	98
71164-040111	238	71164-080721	269	74168-203677	756	75165-229264	99
71164-040721	304	71164-081721	271	74168-205677	713	75165-233264	98
71164-041111	238	71164-082721	271	74168-206677	713	75165-236264	98
71164-041721	304	71164-083721	273	74168-225677	698	75165-241264	97
71164-042111	238	71164-084721	273	74168-227677	698	75165-242264	101
71164-042721	304	71164-085721	273	74168-234704	762	75165-246264	100

CODE	PAGE
75165-247264	100
75165-261264	93
75165-262264	92
75165-263210	330
75165-263264	98
75165-311210	330
75165-322210	336
75165-335210	336
75165-362210	342
75165-363210	342
75165-364210	342
75165-365210	342
75165-383210	328
75165-384210	328
75165-385210	328
75165-386210	328
75165-387210	328
75165-388210	328
75165-389210	328
75165-390210	328
75165-391210	328
75165-392210	328
75165-393210	328
75165-394210	328
75165-395210	329
75165-396210	329
75165-397210	329
75165-398210	329
75165-399210	329
75165-400210	329
75165-401210	328
75165-402210	328
75165-403210	328
75165-404210	328
75165-405210	328
75165-406210	328
75165-407210	328
75165-408210	328
75165-409210	328
75165-410210	328
75165-411210	328
75165-412210	328
75165-413210	329
75165-414210	329
75165-415210	329
75165-416210	329
75165-417210	329
75165-418210	329
75165-420210	330
75165-421210	330
75165-423210	334
75165-424210	334
75165-425210	334
75165-426210	334
75165-427210	334

CODE	PAGE
75165-428210	334
75165-429210	334
75165-430210	334
75165-431210	334
75165-432210	334
75165-433210	334
75165-434210	334
75165-435210	335
75165-436210	335
75165-437210	335
75165-438210	335
75165-439210	335
75165-440210	335
75165-441210	334
75165-442210	334
75165-443210	334
75165-444210	334
75165-445210	334
75165-446210	334
75165-447210	334
75165-448210	334
75165-449210	334
75165-450210	334
75165-451210	334
75165-452210	334
75165-453210	335
75165-454210	335
75165-455210	335
75165-456210	335
75165-457210	335
75165-458210	335
75165-459210	340
75165-460210	340
75165-461210	340
75165-462210	340
75165-463210	340
75165-464210	340
75165-465210	340
75165-466210	340
75165-467210	340
75165-468210	340
75165-469210	340
75165-470210	340
75165-471210	341
75165-472210	341
75165-473210	341
75165-474210	341
75165-475210	341
75165-476210	341
75165-477210	340
75165-478210	340
75165-479210	340
75165-480210	340
75165-481210	340
75165-482210	340

CODE	PAGE
75165-483210	340
75165-484210	340
75165-485210	340
75165-486210	340
75165-487210	340
75165-488210	340
75165-489210	341
75165-490210	341
75165-491210	341
75165-492210	341
75165-493210	341
75165-494210	341
75165-495210	346
75165-496210	346
75165-497210	346
75165-498210	346
75165-499210	346
75165-500210	346
75165-501210	346
75165-502210	346
75165-503210	346
75165-504210	346
75165-505210	346
75165-506210	346
75165-507210	347
75165-508210	347
75165-509210	347
75165-510210	347
75165-511210	347
75165-512210	347
75165-513210	346
75165-514210	346
75165-515210	346
75165-516210	346
75165-517210	346
75165-518210	346
75165-519210	346
75165-520210	346
75165-521210	346
75165-522210	346
75165-523210	346
75165-524210	346
75165-525210	347
75165-526210	347
75165-527210	347
75165-528210	347
75165-529210	347
75165-530210	347
75165-531210	352
75165-532210	352
75165-533210	352
75165-534210	352
75165-535210	352
75165-536210	352
75165-537210	352

CODE	PAGE
75165-538210	352
75165-539210	352
75165-540210	352
75165-541210	352
75165-542210	352
75165-543210	336
75165-544210	336
75165-545210	336
75165-546210	336
75165-547210	336
75165-548210	342
75165-549210	342
75165-550210	342
75165-551210	342
75165-552210	342
75165-553210	342
75167-023210	350
75167-024210	350
75167-025210	350
75167-026210	350
75167-027210	350
75167-028210	350
75167-029210	350
75167-030210	350
75167-031210	350
75167-032210	350
75167-033210	350
75167-034210	350
75167-035210	350
75167-036210	350
75167-037210	320
75167-038210	320
75167-039210	320
75167-040210	320
75167-041210	320
75167-042210	320
75167-043210	320
75167-044210	320
75167-045210	320
75167-046210	320
75167-047210	320
75167-048210	320
75167-049210	320
75167-050210	320
75167-051210	320
75167-052210	320
75167-053210	320
75167-054210	320
75167-055210	320
75167-056210	320
75167-057210	324
75167-058210	324
75167-059210	324
75167-060210	324
75167-061210	324



CODE	PAGE
75167-062210	324
75167-063210	324
75167-064210	324
75167-065210	324
75167-066210	324
75167-067210	324
75167-068210	324
75167-069210	324
75167-070210	324
75167-071210	324
75167-072210	324
75167-073210	324
75167-074210	324
75167-075210	324
75167-076210	324
75167-077210	324
75167-078210	324
75167-079210	324
75167-080210	324
75169-001741	512
75169-001997	703
75169-002741	512
75169-002997	703
75169-003741	512
75169-004741	512
75169-005741	528
75169-006741	528
75169-007733	549
75169-007741	614
75169-008733	550
75169-008741	608
75169-009733	550
75169-009741	612
75169-010733	550
75169-010741	610
75169-011733	550
75169-011741	510
75169-012733	550
75169-012741	510
75169-013741	508
75169-014741	508
75169-015741	508
75169-016741	508
75169-017741	536
75169-018733	542
75169-018741	536
75169-019733	544
75169-019741	532
75169-020733	542
75169-020741	532
75169-021733	544
75169-021741	532
75169-022741	532
75169-023741	534
75169-024741	534

CODE	PAGE
75169-025741	534
75169-026741	534
75169-039721	592
75169-040721	592
75169-041721	592
75169-042721	420
75169-043721	174, 421
75169-043721	174, 421
75169-044721	420
75169-045721	466
75169-046721	466
75169-048721	470
75169-049721	470
75169-163997	651
75169-164997	651
75169-165997	651
75169-173997	697
75169-174997	697
75169-175108	383
75169-176108	383
75169-177108	383
75169-177997	651
75169-178108	383
75169-178997	651
75169-179108	383
75169-179997	651
75169-180997	692
75169-181108	383
75169-181997	692
75169-182108	383
75169-182997	692
75169-183997	692
75169-184108	382
75169-184997	692
75169-185108	382
75169-185997	692
75169-186108	382
75169-186997	692
75169-187108	382
75169-187997	692
75169-188108	382
75169-188997	694
75169-189997	694
75169-190997	694
75169-191108	384
75169-191997	694
75169-192108	378
75169-192997	694
75169-193108	383
75169-193997	694
75169-194108	548
75169-194997	694
75169-195108	548
75169-195997	694
75169-196108	548

CODE	PAGE
75169-196997	712
75169-197108	383
75169-197997	712
75169-198108	383
75169-198997	712
75169-199108	382
75169-199997	712
75169-200108	382
75169-200997	712
75169-201108	382
75169-201997	712
75169-202108	382
75169-202997	712
75169-203108	382
75169-203997	712
75169-204108	594
75169-204997	695
75169-205108	384
75169-205997	695
75169-206108	384
75169-206997	695
75169-207108	378
75169-207997	695
75169-208108	378
75169-208997	695
75169-209108	594
75169-209997	695
75169-210108	594
75169-210997	695
75169-211108	379
75169-211997	695
75169-212108	379
75169-212997	714
75169-213108	387
75169-213997	714
75169-214108	387
75169-214997	714
75169-215108	381
75169-215997	714
75169-216108	381
75169-216997	693
75169-217108	386
75169-217997	693
75169-218108	386
75169-218997	693
75169-219997	693
75169-220108	596
75169-220997	693
75169-221108	596
75169-221997	693
75169-222108	596
75169-222115	574
75169-222997	693
75169-223108	597
75169-223115	574

CODE	PAGE
75169-223997	693
75169-224108	597
75169-224115	574
75169-224997	714
75169-225108	599
75169-225115	574
75169-225997	714
75169-226108	599
75169-226115	575
75169-226997	714
75169-227108	384
75169-227115	575
75169-227997	714
75169-228108	379
75169-228115	575
75169-228997	660
75169-229108	386
75169-229115	583
75169-229997	660
75169-230108	378
75169-230115	583
75169-230997	660
75169-231108	385
75169-231115	586
75169-231997	660
75169-232108	385
75169-232115	586
75169-232997	660
75169-233108	374
75169-233115	587
75169-233997	660
75169-234108	374
75169-234115	584
75169-234269	735
75169-234997	660
75169-235108	374
75169-235115	584
75169-235269	735
75169-235997	660
75169-236108	374
75169-236115	585
75169-236269	735
75169-236997	661
75169-237108	374
75169-237115	585
75169-237269	735
75169-237997	661
75169-238108	374
75169-238269	735
75169-238997	661
75169-239108	375
75169-239269	735
75169-239997	661
75169-240108	375
75169-240997	663

CODE	PAGE
75169-241108	375
75169-241997	663
75169-242108	388
75169-242115	790
75169-242269	735
75169-242997	663
75169-243108	388
75169-243115	790
75169-243997	663
75169-244108	388
75169-244269	735
75169-244997	663
75169-245108	376
75169-245997	663
75169-246108	376
75169-246997	663
75169-247108	376
75169-247997	663
75169-248108	376
75169-248997	662
75169-249997	662
75169-250997	662
75169-251997	662
75169-252108	546
75169-252997	662
75169-253108	546
75169-253997	662
75169-254108	546
75169-254997	662
75169-255108	546
75169-255997	662
75169-256108	547
75169-256997	665
75169-257108	547
75169-257997	665
75169-258108	593
75169-258997	665
75169-259108	593
75169-259997	665
75169-260108	402
75169-260997	664
75169-261108	402
75169-261997	664
75169-262108	402
75169-262997	664
75169-263108	402
75169-263997	664
75169-264108	403
75169-264997	664
75169-265108	403
75169-265997	664
75169-266108	390
75169-266997	664
75169-267108	390
75169-267997	664

CODE	PAGE
75169-268108	388
75169-268997	658
75169-269108	400
75169-269997	658
75169-270108	400
75169-270997	658
75169-271108	400
75169-271997	658
75169-272108	400
75169-272997	648
75169-273108	401
75169-273997	648
75169-274108	401
75169-274694	742
75169-274997	648
75169-275108	598
75169-275694	742
75169-275997	648
75169-276108	598
75169-276694	742
75169-276997	648
75169-277694	743
75169-277997	648
75169-278694	743
75169-278997	756
75169-279694	744
75169-279997	712
75169-280694	744
75169-280997	714
75169-281694	744
75169-281997	712
75169-282694	745
75169-282997	714
75169-283694	708
75169-283997	693
75169-284694	708
75169-284997	693
75169-285692	682
75169-285694	709
75169-285997	695
75169-286692	700
75169-286694	709
75169-286997	695
75169-287692	700
75169-287694	708
75169-287997	692
75169-288692	700
75169-288694	708
75169-288997	692
75169-289692	700
75169-289694	691
75169-289997	694
75169-290692	701
75169-290694	691
75169-290997	694

CODE	PAGE
75169-291692	701
75169-291694	687
75169-291997	700
75169-292692	701
75169-292694	687
75169-292997	700
75169-293692	749
75169-293694	687
75169-293997	700
75169-294692	749
75169-294694	687
75169-294997	700
75169-295692	749
75169-295694	686
75169-295997	734
75169-296692	749
75169-296694	686
75169-296997	734
75169-297692	749
75169-297694	690
75169-297997	734
75169-298692	678
75169-298694	690
75169-298997	734
75169-299692	678
75169-299694	691
75169-299997	734
75169-300692	677
75169-300694	691
75169-300997	734
75169-301692	677
75169-301694	702
75169-301997	734
75169-302692	676
75169-302694	702
75169-302997	734
75169-303692	676
75169-303694	681
75169-303997	660
75169-304692	680
75169-304694	668
75169-304997	661
75169-305692	680
75169-305694	668
75169-305997	658
75169-306692	670
75169-306694	666
75169-306997	662
75169-307692	670
75169-307694	666
75169-307997	662
75169-308692	670
75169-308694	673
75169-308997	663
75169-309692	670

CODE	PAGE
75169-309694	673
75169-309997	663
75169-310692	670
75169-310694	672
75169-310997	656
75169-311692	670
75169-311694	672
75169-311997	656
75169-312692	679
75169-312694	666
75169-312997	656
75169-313692	679
75169-313694	666
75169-313997	656
75169-314692	666
75169-314694	668
75169-314997	656
75169-315692	666
75169-315694	668
75169-315997	656
75169-316131	718
75169-316692	683
75169-316694	669
75169-316997	657
75169-317131	718
75169-317692	674
75169-317694	669
75169-317997	657
75169-318131	719
75169-318692	674
75169-318694	654
75169-318997	657
75169-319131	719
75169-319692	650
75169-319694	654
75169-319997	696
75169-320131	720
75169-320692	650
75169-320694	674
75169-320997	696
75169-321131	720
75169-321692	652
75169-321694	674
75169-321997	696
75169-322692	652
75169-322694	752
75169-322997	650
75169-323692	654
75169-323694	722
75169-323997	650
75169-324694	722
75169-324997	660
75169-325694	725
75169-325997	664
75169-326692	708

CODE	PAGE
75169-326694	721
75169-326997	664
75169-327692	708
75169-327694	721
75169-327997	665
75169-328692	710
75169-328694	724
75169-328997	653
75169-329692	710
75169-329694	723
75169-329997	653
75169-330692	710
75169-330694	734
75169-330997	653
75169-331692	711
75169-331694	727
75169-331997	653
75169-332692	711
75169-332694	726
75169-332997	696
75169-333692	688
75169-333694	686
75169-334692	688
75169-334694	648
75169-335692	689
75169-335694	649
75169-336692	689
75169-336694	647
75169-337692	689
75169-337694	647
75169-338692	689
75169-338694	646
75169-339692	702
75169-339694	646
75169-340694	646
75169-341694	646
75169-342694	650
75169-343694	683
75169-343997	713
75169-344692	751
75169-344694	750
75169-344997	713
75169-345692	682
75169-345694	750
75169-346692	679
75169-346694	671
75169-347692	678
75169-347694	669
75169-348694	715
75169-349694	715
75169-350694	666
75169-351694	690
75169-352694	754
75169-353694	721
75169-354694	721

CODE	PAGE
75169-355694	740
75169-355695	676
75169-356694	740
75169-356695	595
75169-357694	740
75169-357695	595
75169-358694	754
75169-358695	595
75169-359694	754
75169-359695	676
75169-360694	760
75169-361694	761
75169-362694	761
75169-363694	680
75169-364694	680
75169-365694	732
75169-366694	732
75169-367694	733
75169-368694	733
75169-369694	748
75169-370694	748
75169-371694	669
75169-372694	673
75169-373694	724
75169-374694	681
75169-375694	736
75169-376694	736
75169-377694	736
75169-378694	736
75169-379694	737
75169-380694	737
75169-381121	372
75169-381694	737
75169-382121	372
75169-382694	737
75169-383121	372
75169-383694	737
75169-384121	373
75169-384694	737
75169-385121	373
75169-385694	737
75169-386121	373
75169-386694	738
75169-387694	738
75169-388694	738
75169-389694	738
75169-390694	739
75169-391694	739
75169-392694	739
75169-393694	739
75169-394694	739
75169-395694	739
75169-396694	634
75169-397694	634
75169-398694	634

CODE	PAGE
75169-399694	634
75169-400694	684
75169-401694	684
75169-402694	684
75169-427271	354
75169-428271	354
75169-429271	354
75169-430271	354
75169-431271	354
75169-432271	354
75169-433271	354
75169-434271	354
75169-435271	354
75169-436271	354
75169-437271	354
75169-438271	354
75169-439271	354
75169-440271	354
75169-441271	354
75169-442271	354
75169-443271	354
75169-444271	354
75169-445271	355
75169-446271	355
75169-477724	588
75169-478724	588
75169-479724	589
75169-480724	591
75169-481724	590
75169-482724	581
75169-482730	573
75169-483724	577
75169-483730	570
75169-484724	579
75169-484730	570
75169-485730	566
75169-486730	600
75169-487730	567
75169-488730	568
75169-489730	567
75169-490730	568
75169-493744	730
75169-494744	730
75169-495744	730
75169-496744	728
75169-497724	514
75169-497744	728
75169-498724	514
75169-498744	728
75169-499724	514
75169-499744	728
75169-500724	514
75169-500744	728
75169-501724	514
75169-501744	728

CODE	PAGE
75169-502724	514
75169-502744	728
75169-503724	514
75169-503744	728
75169-504724	514
75169-504744	728
75169-505724	514
75169-506724	514
75169-507724	514
75169-508724	514
75169-509724	514
75169-510724	514
75169-511724	514
75169-512724	514
75169-513724	514
75169-514724	516
75169-515724	516
75169-516724	516
75169-517724	516
75169-518724	517
75169-519724	517
75169-520724	517
75169-521724	517
75169-522724	518
75169-523724	518
75169-524724	518
75169-525724	518
75169-526724	520
75169-527724	520
75169-528724	520
75169-529724	520
75169-530724	521
75169-531724	521
77161-128164	195
77161-131164	194
77161-133164	193
77161-135164	194
77161-147164	195
77161-474724	430
77161-476724	430
77161-477724	430
77161-597640	854
77161-598640	854
77161-599640	854
77161-600640	854
78000-050721	472
78000-051721	472
78000-052721	472
78000-360618	848
78000-361618	848
78000-362618	848
78000-363618	848
78000-364016	110
78000-365016	111
78000-366016	110

CODE	PAGE
78000-367016	110
78000-368016	118
78000-369016	118
78000-370016	118
78000-371016	110
78000-372016	111
78000-378016	111
78000-381016	118
78000-382016	119
78000-383016	111
78000-384016	111
78000-385016	110
78000-386016	110
78000-388016	110
78000-389016	110
78000-410663	138
78000-420016	138
78000-421016	138
78000-424019	191
78000-425016	138
78000-470663	132
78000-472019	136
78000-473019	136
78000-476019	136
78000-483019	137
78000-501663	134
78000-502663	134
78000-504019	136
78000-511019	841
78000-515016	119
78000-516016	111
78000-528016	138
78000-529016	111
78000-530016	118
78000-530019	843
78000-531016	111
78000-531019	843
78000-532016	119
78000-532663	132
78000-533016	119
78000-536016	139
78000-539016	139
78000-541016	139
78000-542016	135
78000-543016	139
78000-557663	138
78000-562719	108
78000-564719	108
78000-565719	109
78000-566719	109
78000-567719	109
78000-568719	109
78000-569719	109
78000-570719	109
78000-588016	139

CODE	PAGE
78000-589016	118
78000-589719	114
78000-590016	139
78000-590719	114
78000-591016	139
78000-591719	114
78000-592719	114
78000-593719	115
78000-594719	115
78000-595016	139
78000-595663	113, 303
78000-595663	113, 303
78000-595719	115
78000-596016	139
78000-597663	137
78000-598663	135
78000-599663	121
78000-605719	114
78000-606719	114
78000-607719	114
78000-608719	114
78000-609719	115
78000-610719	115
78000-611719	115
78000-614719	108
78000-615719	109
78000-616719	109
78000-617719	108
78000-618719	108
78000-619719	108
78000-620719	108
78000-621719	108
78000-623719	108
78000-624719	108
78000-625719	108
78000-626719	108
78000-627719	108
78000-628719	109
78000-629719	109
78000-633734	105
78000-634255	113
78000-634734	105
78000-635255	113, 303
78000-635255	113, 303
78000-637734	104
78000-639117	108
78000-646126	123
78000-646255	113
78000-647126	89
78000-649734	131
78000-653255	104
78000-660255	113, 303
78000-660255	113, 303
78000-662255	104
78000-666255	121

CODE	PAGE
78000-667255	121
78000-668255	112
78000-669255	112
78000-670255	112
78000-671255	112
78000-672255	113
78000-673255	104
78000-674255	104
78000-675255	104
78000-676255	106
78000-677255	106
78000-678255	105
78000-679255	105
78000-683255	112
78000-684140	837
78000-684255	112
78000-685255	112
78000-686255	112
78000-711112	853
78000-715183	851
78000-716183	851
78000-717183	851
78000-718183	851
78000-722126	128
78000-723126	128
78000-739719	117
78000-740719	117
78000-741719	117
78000-741720	137
78000-742112	852
78000-742719	117
78000-742720	133
78000-743112	850
78000-743719	117
78000-743720	133
78000-744112	850
78000-744719	117
78000-744720	120
78000-745112	850
78000-745719	117
78000-745720	120
78000-746112	853
78000-746719	117
78000-746720	135
78000-751019	845
78000-753019	841
78000-754019	841
78000-755019	843
78000-756019	843
78000-757019	845
78000-758019	845
78000-759019	847
78000-760019	847
78000-761019	847
78000-762019	136

CODE	PAGE
78000-763019	120
78000-770112	850
78000-771112	850
78000-772112	850
78000-774112	850
78000-775112	850
78000-776112	850
78000-777112	850
78000-778112	850
78000-779112	850
78000-780112	852
78000-781112	852
78000-782112	852
78000-783112	853
78000-784112	853
78001-033719	52
78001-034719	52
78001-035719	54
78001-036719	54
78001-037719	60
78001-038719	60
78001-039719	85
78001-040719	64
78001-041719	64
78001-042719	66
78001-043719	66
78001-044719	73
78001-045719	73
78001-046719	85
78001-047719	84
78001-048719	84
78001-049719	64
78001-050719	66
78001-051719	53
78001-052719	53
78001-053719	61
78001-054719	55
78001-055719	55
78001-056719	61
78001-057719	65
78001-058719	65
78001-059719	66
78001-060719	72
78001-061719	72
78001-067719	70
78001-072719	58
78001-074719	70
78001-075719	70
78001-076719	85
78001-079719	59
78001-080719	59
78001-081719	84
78001-082719	84
78001-083719	85
78001-098719	68

CODE	PAGE
78001-099719	57
78001-100719	73
78001-101719	58
78001-102719	70
78001-103719	70
78001-104719	52
78001-105719	52
78001-106719	52
78001-107719	52
78001-108719	54
78001-109719	56
78001-110719	56
78001-111719	57
78001-112719	60
78001-113719	60
78001-114719	60
78001-115719	60
78001-116719	64
78001-117719	64
78001-118719	64
78001-119719	68
78001-120719	68
78001-121719	68
78001-122719	73
78001-123719	73
78001-124719	73
78001-145719	56
78001-147719	57
78001-155719	68
78001-156719	68
78001-161719	56
78001-162719	58
78001-163719	58
78001-164719	59
78001-165719	68
78001-166719	68
78001-167719	70
78001-168719	70
78001-169719	70
78001-228123	74
78001-229123	74
78001-230123	74
78001-231123	74
78001-232123	80
78001-233123	80
78001-234123	80
78001-235123	80
78001-236123	85
78001-237123	57
78001-238123	53
78001-239123	61
78001-240123	59
78001-241123	74
78001-242123	80
78001-243123	52

CODE	PAGE
78001-244123	52
78001-245123	53
78001-246123	60
78001-247123	60
78001-248123	61
78001-249123	52
78001-250123	52
78001-251123	60
78001-252123	60
78001-253123	64
78001-254123	64
78001-255123	64
78001-256123	64
78001-257123	65
78001-258123	65
78001-259123	73
78001-260123	73
78001-261123	73
78001-262123	73
78001-263123	72
78001-264123	72
78001-265123	74
78001-266123	74
78001-267123	80
78001-268123	80
78001-269123	87
78001-269126	88
78001-270126	88
78001-274123	74
78001-275123	74
78001-276123	74
78001-277123	74
78001-278123	74
78001-279123	80
78001-280123	80
78001-281123	80
78001-282123	80
78001-283123	80
78001-284123	76
78001-285123	76
78001-286123	76
78001-287123	76
78001-288123	76
78001-289123	78
78001-290123	78
78001-291123	78
78001-292123	78
78001-293123	78
78001-294123	85
78001-600719	66
78001-606719	59
78001-607719	61
78001-611719	56
78001-622126	62
78001-623126	62

CODE	PAGE
78001-624126	62
78001-625126	62
78001-626126	53
78001-627126	63
78001-634126	87
78001-635126	36
78001-636126	36
78001-637126	36
78001-638126	37
78001-639126	37
78001-640126	37
78001-641126	38
78001-642126	38
78001-643126	38
78001-644126	38
78001-645126	38
78001-646126	57
78001-647126	58
78001-648126	59
78001-649126	61
78001-650126	63
78001-651126	65
78001-652126	68
78001-653126	68
78001-654126	70
78001-655126	70
78001-656126	72
78001-657126	76
78001-658126	76
78001-659126	76
78001-660126	76
78001-661126	76
78001-662126	78
78001-663126	78
78001-664126	78
78001-665126	78
78001-666126	78
78001-693724	82
78001-694115	40
78001-694724	82
78001-695115	40
78001-695724	44
78001-696115	40
78001-696724	44
78001-697115	40
78001-697724	44
78001-698115	40
78001-698724	45
78001-699115	40
78001-699724	45
78001-700724	45
78001-701724	46
78001-702724	46
78001-703724	46
78001-704724	47

CODE	PAGE
78001-705724	47
78001-706724	47
78001-710724	48
78001-711724	48
78001-712724	48
78001-713724	49
78001-714724	49
78001-715724	49
78001-716724	50
78001-717724	50
78001-718724	50
78001-719724	51
78001-720724	51
78001-721724	51
78001-725724	86
78001-726724	86
90004-029126	89
90004-029698	130
90004-030126	89
90004-031698	130
90004-032698	126
90004-033698	127
90004-034698	130
90004-037698	83, 126
90004-037698	83, 126
90004-039698	83, 131
90004-039698	83, 131

# Q-CERT

## ΠΙΣΤΟΠΟΙΗΤΙΚΟ/CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 9001 quality management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

**VK Hellas Electric S.A. - Vaios Karakostas S.A.**

**8, ARISTOTELOUS STR., GR-17778,  
TAVROS, ATHENS, GREECE**

with a scope of:

***Elaboration of Illumination Studies. Wholesale & Retail Sale of  
Illumination & Electrical Equipment.***

has established a quality management system that is in conformance with the  
International Standard

**EN ISO 9001:2015**

June 20<sup>th</sup>, 2019

Certification Period Ending

June 21<sup>st</sup>, 2016

Initial Certification Date

June 21<sup>st</sup>, 2016

Certification Date

IAF/EA Subsector: 29.3, 34.1

For the QMSCERT Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)



QMSCERT® No 210616-1 Rev.1

MS Certification  
Cert. No. 110-6

QMSCERT 26<sup>th</sup> OCTOBER Str. 90 - GR 546 27 - THESSALONIKI - HELLAS

# Q-CERT

ΠΙΣΤΟΠΟΙΗΤΙΚΟ / CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 14001 environmental management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

**VK Hellas Electric S.A. - Vaios Karakostas S.A.**

**8, ARISTOTELOUS STR., GR-17778,  
TAVROS, ATHENS, GREECE**

with a scope of:

***Elaboration of Illumination Studies. Wholesale & Retail Sale of  
Illumination & Electrical Equipment.***

has established an environmental management system that is in conformance with the  
International Standard

**EN ISO 14001:2015**

September 11<sup>th</sup>, 2020

Certification Period Ending

September 12<sup>th</sup>, 2017

Initial Certification Date

September 12<sup>th</sup>, 2017

Certification Date

NACE code: 46.69, 71.12

For the QMSCERT Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)



Inspection - Certification



QMSCERT® No. 120917-6 Rev.1

MS Certification  
Cert. No. 110-6

QMSCERT 26<sup>th</sup> OCTOBER Str. 90 - GR 546 27 - THESSALONIKI - HELLAS



# CERTIFICATE

## Q-CERT

Q-CERT, an accredited provider of third-party system certification  
attests that:

**VK LEADING LIGHT - VAIOS I. KARAKOSTAS S.A.**  
**8, ARISTOTELOUS STR., GR-17778, TAVROS, ATHENS, GREECE**

with a scope of:

***Elaboration of Illumination Studies. Wholesale & Retail Sale  
of Illumination & Electrical Equipment***

*has established an*  
**OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM**  
*that is in conformance with the requirements of the International Standard*

**ISO 45001:2018**

August 31, 2023

Certification Period Ending

September 01, 2020

Initial Certification Date

September 01, 2020

Certification Date

IAF/EA Sector: 29, 34

For Q-CERT's Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)

Q-CERT

Certificate No: 010920-3



MS Certification  
Cert. No. 110-6





2021 2022

8 Aristotelous St, Tavros, 177 78 Athens, Greece, T +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075, +30 210 99 58 374  
info@vked.gr, info@vk-hellaselectric.gr, vkled.gr, vk-hellaselectric.gr

